





Goldenwest St. & Graham St. Bridge Maintenance Project, CC-1713

September 19, 2023
City Council Meeting

Project Location Map

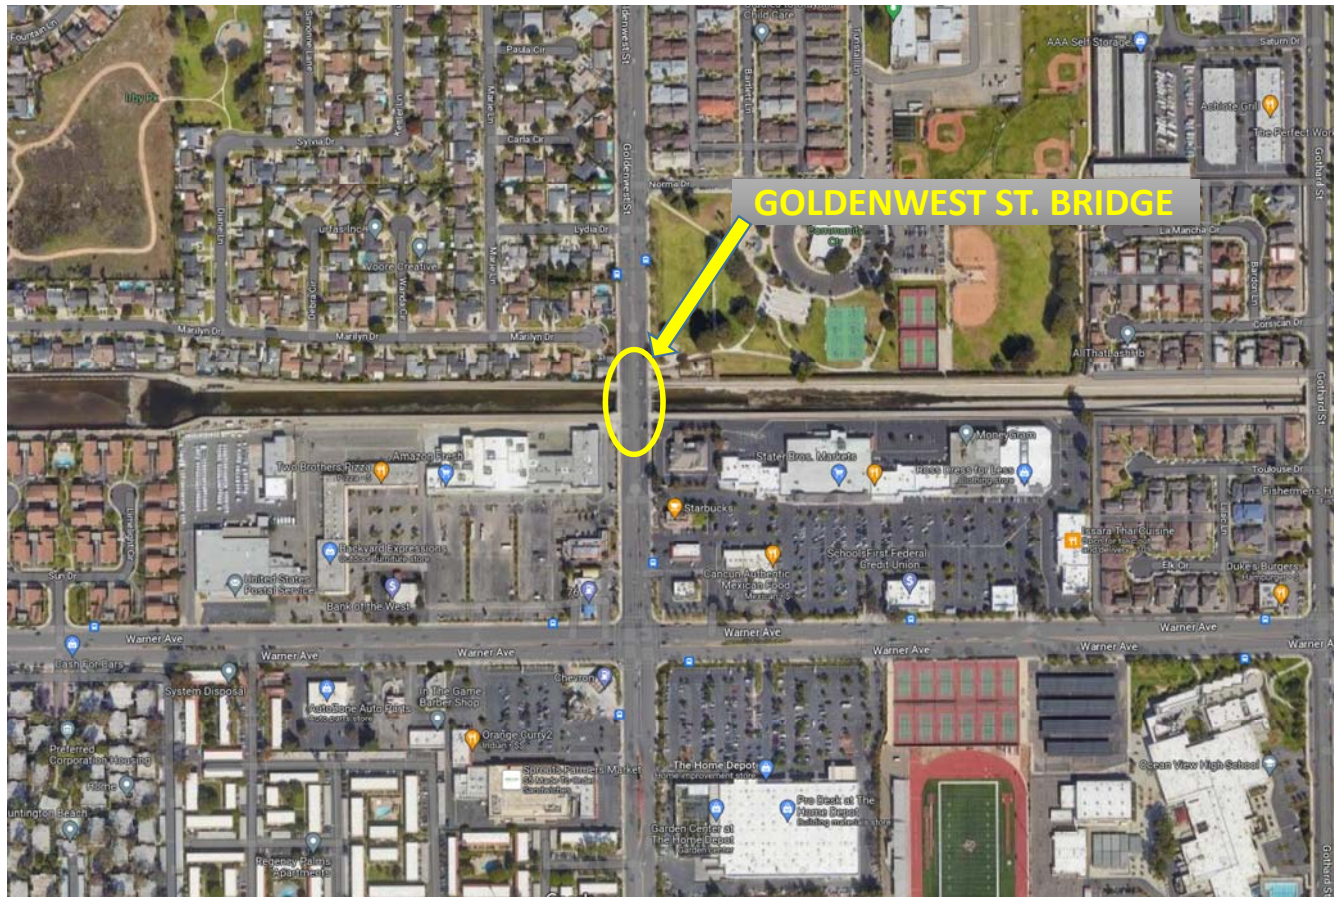

Project Location Map

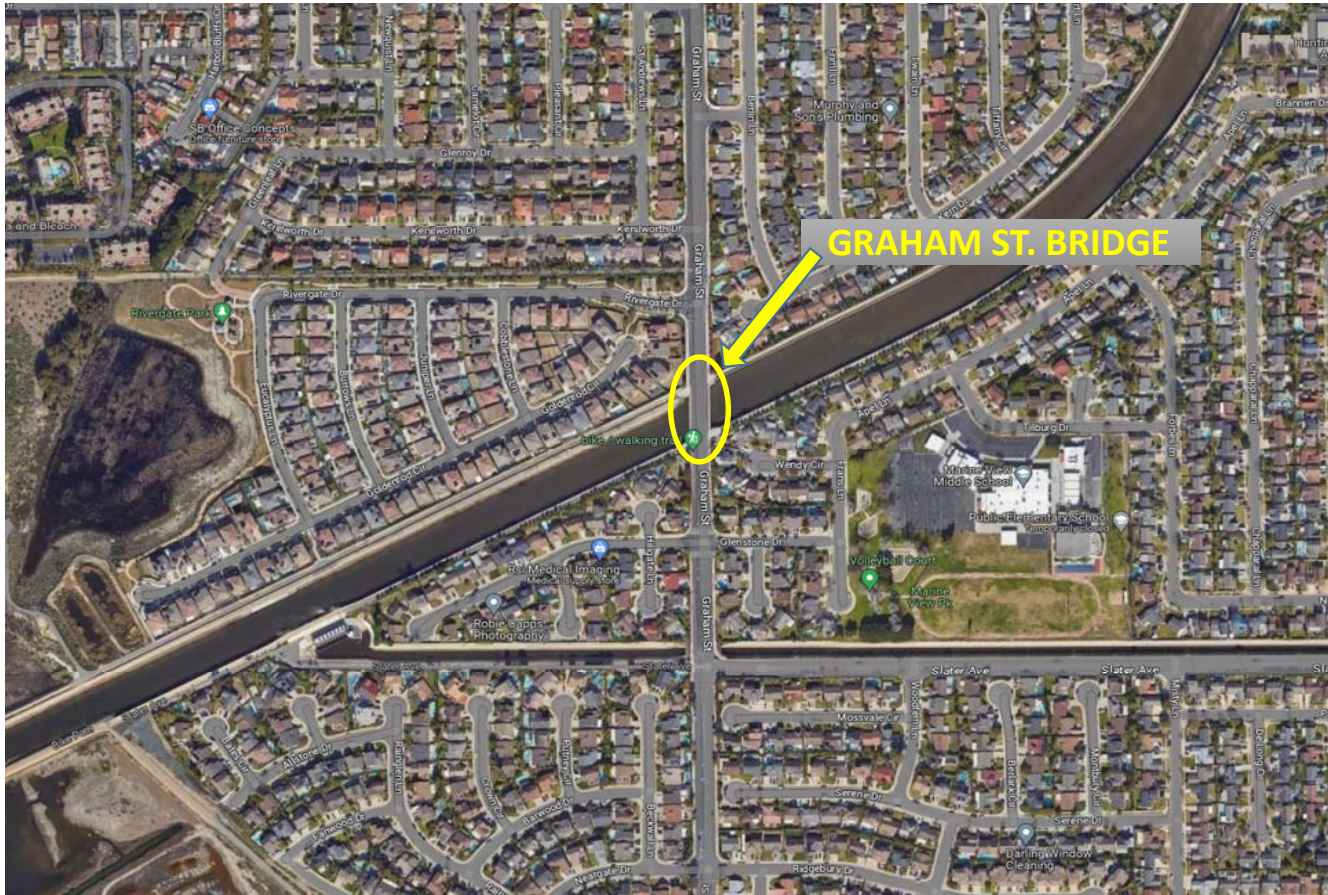

Goldenwest Bridge



- 2-span pre-cast/ pre-stressed concrete cored deck bridge with reinforced concrete pile bents and abutments
- Originally constructed 1959
- Length = 67'
- Width = 84'



Graham Bridge



- 4-span cast-in-place concrete bridge with reinforced concrete pier walls and abutments
- Originally constructed 1961
- Length = 152'
- Width = 62'



Scope of Work - Goldenwest



- Remove asphalt concrete (AC) pavement, seal deck, and reconstruct AC pavement.



Scope of Work - Goldenwest



- Repair existing wing wall



Scope of Work - Goldenwest



- Repair unsound concrete and damaged curb



Scope of Work - Goldenwest



- Remove graffiti



Scope of Work - Graham



- Remove and construct new concrete barrier and chain link fence



Scope of Work - Graham



- Remove unsound concrete and patch spalls on piers and abutments



Scope of Work - Graham



- Waterproof piers



Scope of Work - Graham



- Replace joint seals in sidewalk



Scope of Work - Graham



- Remove graffiti



Funding and Schedule

Current Funding

• Prop 42 Fund Account 21985202:	\$750,000.00
• FY 22-23 Prop 42 Fund Account 21985201:	<u>\$100,000.00</u>
	\$850,000.00
• Applied Restoration, Inc. Bid:	\$754,451.80
• 10% Contingency:	\$ 75,445.18
• Supplemental Costs:	<u>\$ 20,103.02</u>
	\$850,000.00

Recommended Action: Accept the lowest responsive and responsible bid submitted by Applied Restoration, Inc.

Begin Construction: 10/30/23

End Construction: 05/06/24



Questions?

