DRAFT FINAL REPORT

UPDATED CITYWIDE PAVEMENT MANAGEMENT PLAN OC Go

2024-2031



Submitted to:

City of Huntington Beach, CA

May 16, 2024

BUCKNAM INFRASTRUCTURE GROUP, INC

May 16, 2024

Mr. Joe Fuentes
Department of Public Works
CITY OF HUNTINGTON BEACH
2000 Main Street
Huntington Beach, CA 92648

Subject: City of Huntington Beach –OCTA Pavement Management Compliance Report 2024

Dear Joe:

As part of the 2024 Update of the Pavement Management Plan (PMP) for the City of Huntington Beach, *Bucknam Infrastructure Group, Inc.* is pleased to submit the PMP reporting required by the Orange County Transportation Authority (OCTA). This data/report will be submitted to OCTA as part of the City's required biennial PMP prior to June 30, 2024.

The information contained in this report was used to develop the recommended improvement program for the pavement network. The report covers the following categories:

- **Pavement Management Plan Certification**
- **Quality Assurance / Quality Control (QA/QC) Plan**
- **Pavement Management Data Files (electronic Huntington Beach.e70 file format)**
- **Pavement Management Plan that includes the following:**
    - **Average Pavement Conditions For Each Segment in the Network (PCI Report)**
      The Pavement Condition Index report shows the present condition of each street in the pavement network (Master Plan of Arterial Highway (MPAH) and Locals). In addition, the report shows the basic geometry of each street segment.
    - **Seven-year Projected PCI Under Existing Funding Levels**
      This report identifies the projected PCI's based on the local agencies current funding programs. This report details the PCI projects for the entire network, MPAH roadways and Local streets.
    - **Seven-year Plan for Road Maintenance and Rehabilitation (Forecasted Maintenance Report)**
      The Forecasted Maintenance Report projects the street maintenance activities required for the next seven years, broken down to show maintenance levels for all streets. This includes all scheduled projects provided by the City for fiscal years 2024 through 2031.

- **Alternative Funding Levels**

  OCTA has requested two reports indicating the necessary funding to maintain the City's current weighted average PCI as well as the necessary funding to improve the weighted average PCI by one PCI point over the next seven years.

- **Backlog by Fiscal Year (re: unfunded restoration, rehabilitation and reconstruction)**

- **Percentage of total network in each of the five condition categories based on centerline mileage**

- **Local Match Reduction Reporting**

  - ❖ In order to be eligible for Local Match Reduction of 10%, the following must be submitted:
    - Measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one PCI point.
    - No reduction in the overall weighted (by area) average PCI in the MPAH or local street categories

      - or –
    - Have road pavement conditions, for the overall network, during the previous reporting period within the highest twenty (20%) of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in "good condition".

These reports will be submitted to the City of Huntington Beach as part of the biennial Pavement Management Plan that is due prior to June 30, 2024. These reports will be packaged in a way that it will be easy for staff to review.

All comments received from the City have been incorporated in the reports that follow. All of the City's issues and needs that were brought to our attention are included in the report. It has been a pleasure working with you and the City on updating your Pavement Management Plan. We look forward to the continued success of this project and future teamwork with City staff.

Sincerely,

Bucknam Infrastructure Group, Inc.



Peter J. Bucknam
Project Manager
Infrastructure Management – GIS Services

BUCKNAM
INFRASTRUCTURE GROUP, INC
3548 Seagate Way, Suite 230
Oceanside, CA 92056
T: (760) 216-6529
www.bucknam-inc.com

AGENCY SUBMITTAL TABLE OF CONTENTS

I. Pavement Management Plan Certification 2

II. Executive Summary 3

III. Background 4

IV. Current Pavement Conditions (PCI) 7

V. Projected Pavement Conditions (PCI) 8

VI. Alternative Funding Levels 9
- a. Maintain Existing Average Network PCI 9
- b. Improve Average Network PCI 9

VII. Current and Projected Backlog by Year of Pavement Maintenance Needs 9

VIII. Centerline Mileage 10

IX. Percentage of Network in Each of Five Condition Categories Based on Centerline Miles 10

X. Reduction in M2 Local Match 11

XI. Appendix A – Seven-Year Road Maintenance and Rehabilitation Plan Based on Current or Expected Funding Level 12

XII. Appendix B – Complete Street Listing Current Conditions 13

XIII. Appendix C – GIS Digital Data 14

XIV. Appendix D – Quality Assurance / Quality Control Plan 16
- Introduction 16
- Objectives 16
- Structure of QA/QC Plan 16
- Condition Survey Procedures 17
- Accuracy Required for Data Collection 18
- Random and Systematic Re-Inspections 18
- PCI Comparison with Past Surveys 19
- Inspector Qualifications and Experience 19
- Safety Procedures 19

XV. Appendix E – Pavement Management Data Files 20

XVI. Appendix F – GIS Maps – Current Conditions 21

CITY OF HUNTINGTON BEACH PAVEMENT MANAGEMENT PLAN

- part of -

COUNTYWIDE PAVEMENT MANAGEMENT PLAN GUIDELINES

(OCTA Guideline – March 2024)

Prepared by: Bucknam Infrastructure Group, Inc.
Submitted to OCTA: June 30, 2024

I. Pavement Management Plan Certification

The City of Huntington Beach, CA certifies that is has a Pavement Management Plan in conformance with the criteria stated in the Orange County Transportation Authority Ordinance No. 3. This ordinance requires that a Pavement Management Plan be in place and maintained to qualify for allocation of revenues generated from renewed Measure M (M2).

The plan was developed by Bucknam Infrastructure Group, Inc. using MicroPAVER, a pavement management system conforming to American Society for Testing and Materials (ASTM) Standard D6433, and contains, at a minimum, the following elements:

- Inventory of Master Plan of Arterial Highway (MPAH) and Local routes reviewed and updated biennially. The last update of the inventory was completed on April, 2024 for the Arterial (MPAH) and April 2024 for the Local streets;
- Assessment of the pavement condition for all routes in the system, updated biennially. The last field review of the pavement condition was completed in April, 2024;
- Percentage of all section of pavement needing:
    - Preventive Maintenance = 25.3%;
    - Rehabilitation = 23.2%;
    - Reconstruction = 1.5%
- Budget needs for preventive maintenance, rehabilitation and/or reconstruction of deficient sections of pavement for:
    - Current biennial period $23,600,000;
    - following biennial period $23,600,000
- Funds budgeted or available for Preventive Maintenance, Rehabilitation and/or Reconstruction.
    - Current biennial period $23,600,000;
    - following biennial period $23,600,000
- Backlog by year of unfunded rehabilitation, restoration and reconstruction needs (see page 9);
- The Pavement Management Plan is consistent with countywide pavement condition assessment standards as described in the OCTA Countywide Pavement Management Plan Guidelines adopted by the OCTA Board of Directors.

*An electronic copy of the Pavement Management Plan (with MicroPAVER or StreetSaver compatible files) has been or will be submitted with the certification statement. A copy of this certification is being provided to the Orange County Transportation Authority.

Submitted by:

_____ City of Huntington Beach
Name (Print) Jurisdiction

_____ _____
Signed Date

___ Director of Public Works _____
Title

II. EXECUTIVE SUMMARY

2024 UPDATE OF PAVEMENT MANAGEMENT PLAN (PMP)

As the City of Huntington Beach's infrastructure continues to mature Public Works priorities such as Local street maintenance and Arterial rehabilitation are key projects to City staff. With the City mostly built-out, wear and tear on the infrastructure will occur at an ever increasing rate. Pavement aging through annual weathering, dynamic and static vehicle loading, and increased usage, compounded with the increased cost of performing maintenance and rehabilitation, add to the yearly operational budget of the pavement network. System sustainability can only be achieved through proactive scheduling and the implementation of cost-efficient pavement applications.

Over the past twenty years the City has made proactive and efficient improvement regarding its overall condition status as well as greatly reduced its deferred maintenance burdens. The City's overall weighted PCI is 82.3 which is one of the above average in the County and close to the optimal industry standard PCI range of 82 to 85. Funding the Huntington Beach PMP over the next ten years will be manageable and achievable based on city management proactivity, frequent inspections, and biennial budgetary review.

In the upcoming years as the City continues to build upon this study through future inspections and maintenance work history, Huntington Beach pavement data will continue to provide reliable data. This will enhance the PMP through detailed Orange County Transportation Authority (OCTA) OC Go funding analysis, City specific budgetary reporting and level of service reporting.

The Huntington Beach PMP has been developed to assist City personnel by providing current data on the City's street network and to develop cost-effective maintenance strategies to maintain a desirable level of pavement performance on a network scale, while optimizing the expenditure of limited fiscal resources. The project consisted of analyzing the City's 2022 dataset for quality and usability. In doing this, we were tasked to generate an updated Capital Improvement Program report that identified recommendations and deficiencies in the current operating and maintenance efforts put forth by the City.

We surveyed all designated arterial, collector (MPAH) routes this past winter to assist the City in being compliant with OCTA – OC Go March 2024 guidelines. Additionally, we updated the City's unique Pavement Management – GIS layer that will continue to assist the City in analyzing pavement conditions and other attribute information through the use of ESRI ArcMap.

Bucknam Infrastructure Group reviewed the City's previous maintenance efforts and the current 2024-25 proposed street improvements for pertinent pavement information in order to generate a CIP report that identified recommendations and opportunities for improvement in the current operating and maintenance efforts put forth by the City. The result of these work efforts is this report.

Additionally, with the current I-405 expansion and its impact to the Huntington Beach Arterial network conditions, future appropriated funds will be necessary to address the accelerated deterioration that will be caused by the OCTA / I-405 detour traffic quantity/load.

III. BACKGROUND

In late 1990, voters throughout Orange County approved a ½-cent sales tax for transportation improvements known as OC Go, formerly known as Measure M2. Funding for streets and roads are included within the sales tax and are distributed to locals agencies through both formula and a competitive method. In late 2006, the renewal of OC Go was approved by voters that would continue the ½-cent sales tax for thirty additional years, starting in 2011.

The primary of goal of this report is to comply with established guidelines from OCTA to ensure that field data collection and reporting efforts performed by outside consultants or local agency staff are consistent. This is required in order that funding allocations can be reviewed and based on agency comparable pavement conditions. Specifically, our findings and recommendations provide Public Works administrators, managers and field personnel with:

* *PMP report consistent with OCTA OC Go guidelines*
* *the present condition status of the pavement network (arterial, collector, residential and industrial streets), as a whole and of any grouping or individual component within the City;*
* *a ranked list of all streets, or segments of streets, by condition within the network;*
* *rehabilitation/maintenance needs of each street segment by year;*
* *an optimized priority maintenance and rehabilitation program based on cost/benefit analysis and various levels of funding;*
* *optimum annual pavement expenditure levels for pavement maintenance for the next seven (7) years;*
* *prediction of the life-cycle performance of the City's pavement network and each individual street section; and*
* *pavement condition data and analysis presented in GIS through MyRoads® and ESRI ArcMap*

Pavement is a dynamic structure where deterioration is constantly occurring; thus the pavement management system needs to be updated on a regular basis to reflect these changes in pavement conditions, pavement maintenance histories, and maintenance strategies based upon budgetary constraints. In our approach to develop the City's forecasted maintenance recommendations we worked with Huntington Beach Public Works/Engineering staff in identifying unit costs for all maintenance practices used on an annual basis. Currently, based upon the City's maintenance practices and their associated unit costs, the total replacement value of the Huntington Beach pavement network is $1,190,269,600. This value clearly indicates that the City's pavement network is the most valuable and essential asset to Huntington Beach. The City's use of slurry seal, AC Overlay and remove & replace (R&R) practices are typically applied at a five year, ten year and 25 year frequency respectively. These frequencies are typical but the City may see increases in deterioration rates due to environmental, load and high average daily traffic (ADT) volumes. For example, high ADT volumes along one of Huntington Beach's arterial streets will increase deterioration rates for a previously applied AC Overlay compared to a small local street. These deterioration rates are monitored through frequent inspections and functional class deterioration analysis within the City's PMP database.

FINDINGS AND RECOMMENDATIONS

Through our assessment of historical maintenance performed within the City and through our discussions with City staff the conditional data found across the network clearly shows that the City has applied strong, preventative maintenance strategies over the past decade. Pavement management involves frequent preventative maintenance; as pavement deteriorates through heavy traffic impacts, weathering and time, preventative maintenances (such as slurry seal, stop gap, etc.) have limited benefits. More aggressive maintenance applications have to be used.

Our study has shown that key overlay projects will be needed over the next seven years to maintain the network's high level of condition. Currently, the City's two major streets networks combined (Arterial & Local) hold average weighted PCI value of 82.3 ; it is our recommendation that a proactive overlay program and a continued slurry seal program be scheduled on the Local network over the next several fiscal years. This will ensure that the Local and citywide weighted PCI's will increase thus allowing for more frequent preventative maintenance in the near future. This can only happen if funding for the Local network is increased from $5.8 million per year to $6.0 million per year.

We have found and recommend the following detailed items which should be reviewed and considered for a proactive approach to the future management of the PMP:

ARTERIAL / COLLECTOR (MPAH) FINDINGS AND RECOMMENDATIONS

The actual workload requirements identified indicate that the Arterial (MPAH) street network is currently in "good" condition. To maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 9 to maintain a "good" network weighted average PCI value. Our MPAH findings for conditional data and recommendations for revenue expenditures are shown below:

- The MPAH network has a weighted PCI of 80.4
- The MPAH network consists of 167.9 centerline miles and 34,298,620 SF of pavement;
- Currently, 31% of the MPAH network (51.5 centerline miles) qualify for slurry seal/stop gap maintenance; 16% of the Arterial network (26.9 centerline miles) qualify for rehabilitation/reconstruction maintenance;
- At a minimum, MPAH maintenance projects should focus on the maintaining the current PCI above a weighted average of 81 over the next 7 years;
    - Fund the MPAH PMP CIP at an average annual level of $6,100,000/yr for the term of the CIP to generate the PCI identified on page 8;
- Develop a proactive fiscal and planned approach to identify MPAH overlay projects based on the deterioration modeling within MicroPAVER;
    - Demonstrated budget shown on page 9 is ample to increase the MPAH weighted PCI of

80.4 to 81.5 after seven years, additionally, the citywide deferred backlog decreases from a level of $53.5 million to $35.8 million after seven years; and

- Perform pavement inspections on the MPAH network every two years to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2.


LOCAL FINDINGS AND RECOMMENDATIONS

The actual workload requirements identified indicate that the Local street network is currently in "good" condition. To maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 9 to maintain a "good" network weighted average PCI value. Our Local network findings for conditional data and recommendations for revenue expenditures are shown below:

- The Local network has a weighted PCI of 83.3;
- The Local network consists of 318.9 centerline miles and 62,521,829 SF of pavement;
- Currently, 27% of the Local network (87.3 centerline miles) qualifies for slurry seal/stop gap maintenance; 17% of the Local network (53.6 centerline miles) qualify for rehabilitation/reconstruction maintenance;
- At a minimum, Local maintenance projects should focus on the maintaining the current PCI above a weighted average of 83 over the next 7 years;
- Develop a proactive fiscal and planned approach to identify local overlay projects based on the deterioration modeling within MicroPAVER;
    - Continue to utilize the City's twelve (12) Zone Maintenance Schedule;
        - Apply the proper Local budget to allow all streets within the selected zone to be addressed per year;
        - This policy and application will generate even greater ROI in the next several years;
    - Increase the Local revenues to an average annual level of $5,900,000/yr for the term of the CIP to generate a higher weighted PCI by FY 2030-31; and
    - Demonstrated budget shown on page 9 is ample to increase the Local weighted PCI of 83.3 to 84.5 after seven years, additionally, the citywide deferred backlog decreases from a level of $53.5 million to $35.8 million after seven years; and
- Perform pavement inspections on the Local network every six years to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2

IV. CURRENT PAVEMENT CONDITIONS (PCI)


Rank	Mi.	SF	PCI 2024	2022	2020	2018	2016
MPAH	167.9	34,298,620	80.4	81.6	80.2	76.1	74.7
Local	318.9	62,521,829	83.3	81.4	77.2	76.5	77.6
Citywide	**486.8**	**96,820,449**	**82.3**	**81.5**	**78.9**	**76.4**	**76.7**

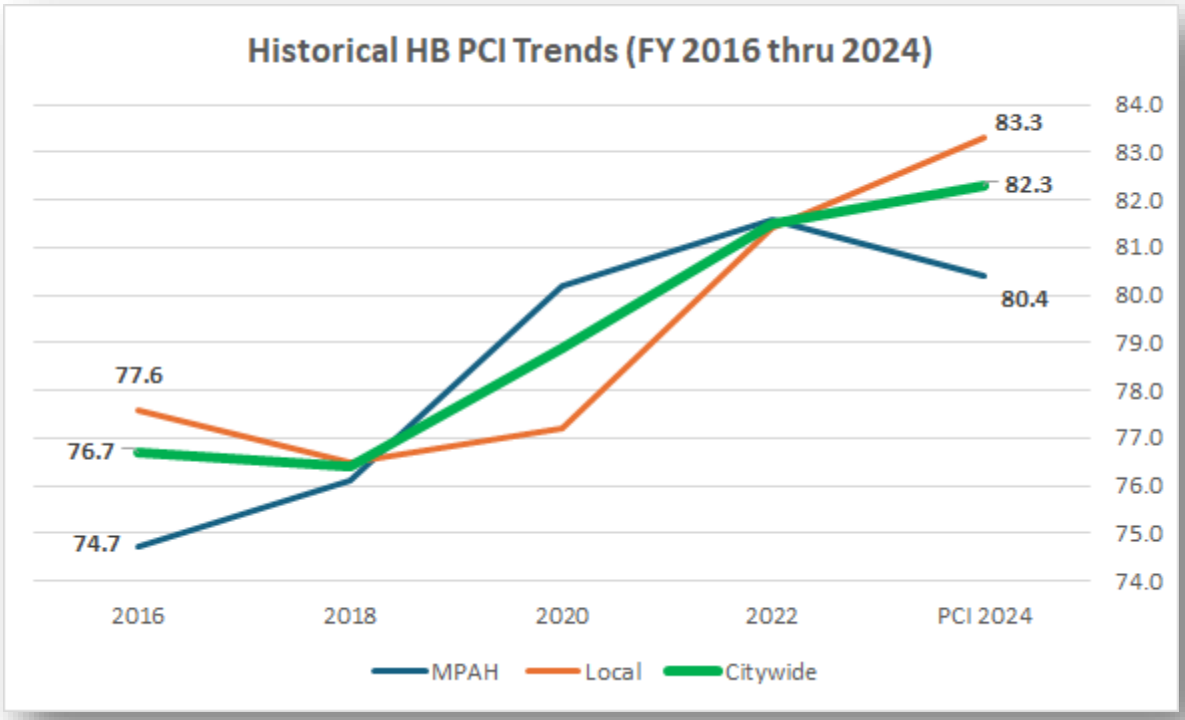

Condition	PCI Range	MPAH	Locals	Total Mi.	% of Network
Very Good	(86-100)	69.6	174.0	243.6	50.1%
Good	(75-85)	54.0	69.0	123.0	25.3%
Fair	(60-74)	30.1	45.3	75.4	15.5%
Poor	(41-59)	12.3	25.0	37.3	7.7%
Very Poor	(0-40)	1.9	5.6	7.5	1.5%
		167.9	**318.9**	**486.8**	

V. PROJECTED PAVEMENT CONDITIONS (PCI) – Current Funding

HB MPAH / Local Annual Budget Schedule				Network PCI	MPAH PCI	Local PCI
Fiscal Year	MPAH	Local	Total $	82.3	80.4	83.3
2024-25	$6,000,000	$5,800,000	$11,800,000	82.4	81.0	83.4
2025-26	$6,000,000	$5,800,000	$11,800,000	82.6	81.0	83.6
2026-27	$6,000,000	$5,800,000	$11,800,000	82.9	80.9	83.8
2027-28	$6,000,000	$5,800,000	$11,800,000	82.9	80.8	83.9
2028-29	$6,000,000	$5,800,000	$11,800,000	82.8	80.6	83.9
2029-30	$6,000,000	$5,800,000	$11,800,000	82.2	80.3	83.2
2030-31	$6,000,000	$5,800,000	$11,800,000	81.8	80.0	82.8
	$42,000,000	$40,600,000	$82,600,000			

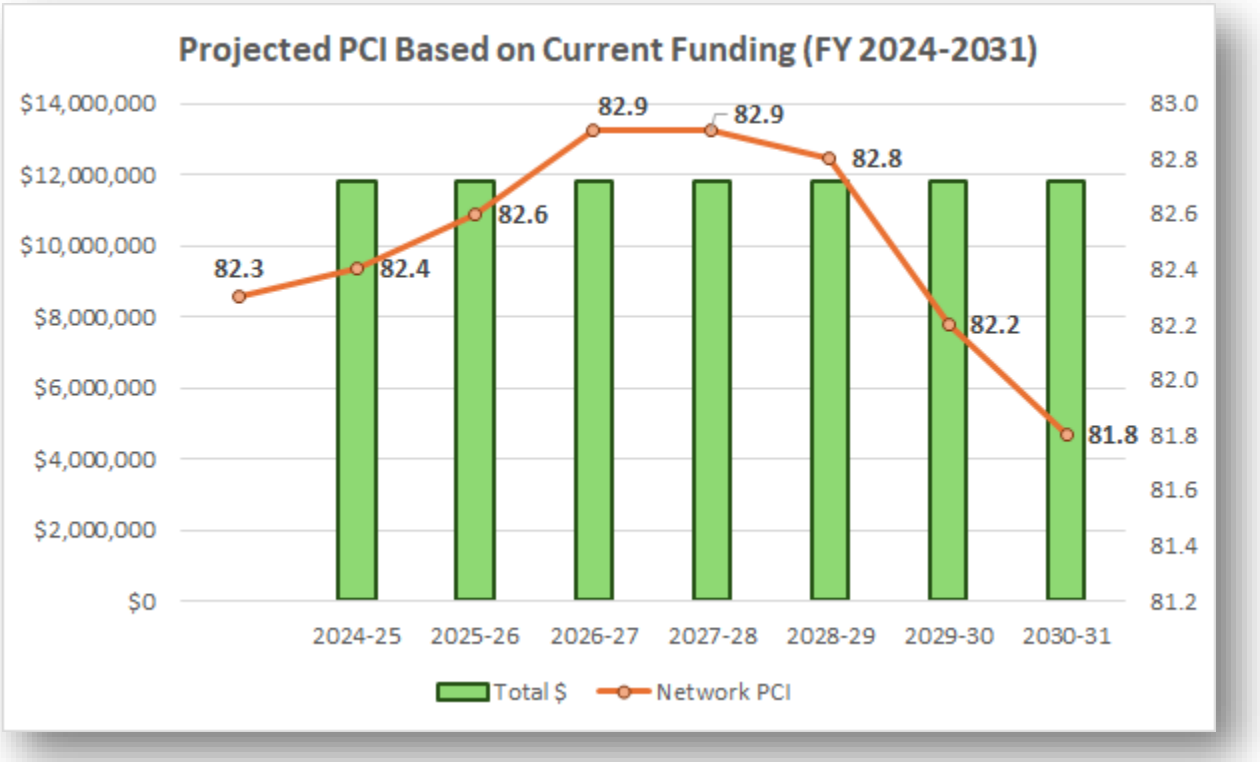

VI. ALTERNATIVE FUNDING LEVELS

Maintain Existing Average Network PCI

Fiscal Year	Maintain PCI Funding	Network PCI	MPAH PCI	Local PCI
Today	~	**82.3**	**80.4**	**83.3**
2024-25	$11,800,000	82.4	81.0	83.4
2025-26	$11,800,000	82.6	81.0	83.6
2026-27	$11,800,000	82.9	80.9	83.8
2027-28	$11,800,000	82.9	80.8	83.9
2028-29	$11,800,000	82.8	80.6	83.9
2029-30	$12,156,100	82.6	80.7	83.6
2030-31	$11,987,300	82.4	80.5	83.4
Total	**$83,143,400**			

Improve Average Network PCI

Fiscal Year	Increase PCI Funding	Network PCI	MPAH PCI	Local PCI
Today	~	**82.3**	**80.4**	**83.3**
2024-25	$11,800,000	82.4	81.0	83.4
2025-26	$11,800,000	82.6	81.0	83.6
2026-27	$11,800,000	82.9	80.9	83.8
2027-28	$11,800,000	82.9	80.8	83.9
2028-29	$11,800,000	82.8	80.6	83.9
2029-30	$12,875,300	83.0	81.1	84.0
2030-31	$12,614,900	83.4	81.5	84.5
Total	**$84,490,200**			

VII. CURRENT AND PROJECTED BACKLOG BY YEAR OF PAVEMENT MAINTENANCE NEEDS

Plan Year	Actual Funding Backlog	Maintain PCI Backlog	Increase PCI Backlog
Current	**$53,455,100**	**$53,455,100**	**$53,455,100**
2024-25	$44,245,100	$44,245,100	$44,245,100
2025-26	$38,517,300	$38,517,300	$38,517,300
2026-27	$35,509,500	$35,509,500	$35,509,500
2027-28	$32,370,700	$32,370,700	$32,370,700
2028-29	$29,346,800	$29,346,800	$29,346,800
2029-30	$33,455,500	$33,168,700	$32,244,500
2030-31	$36,495,600	$35,818,600	$34,912,300

DEFERRED MAINTENANCE

Delaying repairs on streets where pavement conditions indicate a need generates deferred maintenance or "backlog". Deferred maintenance is work that is postponed to a future budget cycle, or until funds are available. As maintenance is deferred, the opportunity to apply preventive, life extending pavement treatments is forfeited and the ultimate cost of rehabilitation multiplies (i.e. slurry seal costs to overlay costs). By using the City's pavement maintenance applications and their associated unit costs, when a budgetary model is exercised within the PMP software the amount of deferred maintenance is calculated. Based upon the available budget applied to the model, deferred maintenance will increase or decrease.

As maintenance is deferred, the opportunity to apply life extending preventive pavement applications is lost and the ultimate cost of rehabilitation multiples.

VIII. CENTERLINE MILEAGE

Rank	W. PCI	Mi.	SF
MPAH	80.4	167.9	34,298,620
Local	83.3	318.9	62,521,829
Citywide	82.3	486.8	96,820,449

IX. PERCENTAGE OF NETWORK IN EACH OF FIVE CONDITION CATEGORIES BASED ON CENTERLINE MILES

Condition	PCI Range	Network	Percent Area of Total Pavement	Area of Pavement (SF)	Percent Centerline Mi. of Network	Centerline Mileage of Network
Very Good	(86-100)	MPAH	14.6%	14,130,137	14.3%	69.6
		Local	35.1%	34,022,119	35.7%	174.0
Good	(75-85)	MPAH	11.5%	11,110,157	11.1%	54.0
		Local	14.0%	13,574,682	14.2%	69.0
Fair	(60-74)	MPAH	6.5%	6,267,631	6.2%	30.1
		Local	9.2%	8,862,856	9.3%	45.3
Poor	(41-59)	MPAH	2.6%	2,469,216	2.5%	12.3
		Local	5.1%	4,961,183	5.1%	25.0
Very Poor	(0-40)	MPAH	0.3%	321,479	0.4%	1.9
		Local	1.1%	1,100,989	1.2%	5.6
				96,820,449		486.8

X. REDUCTION IN M2 LOCAL MATCH

A local agency match reduction of 10% of the eligible cost for projects submitted for consideration of funding through the M2 Comprehensive Transportation Funding Programs (CTFP) call for projects is available if the local agency either:

a. Shows measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one Pavement Condition Index (PCI) point with no reduction in the overall weighted (by area) average PCI in the Master Plan of Arterial Highways (MPAH) or local categories:

or

b. Have road pavement conditions during the previous reporting period, within the highest 20% of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in "good condition".

Road conditions found through our 2024 PMP management study shows that the City is eligible for Local Match Reduction based on the current network weighted PCI of 82.3. Additionally, the City of Huntington Beach has demonstrated with the enclosed budget projection (page 8) that the City's weighted average PCI (by area) remains above a PCI of 75 after the seven year program.

XI. APPENDIX A – SEVEN YEAR ROAD MAINTENANCE AND REHABILITATION PLAN BASED ON CURRENT OR EXPECTED FUNDING LEVEL

XII. APPENDIX B – COMPLETE STREET LISTING CURRENT CONDITIONS

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
		Arterials / Collectors (MPAH)															
9	13120	ADAMS AVE	DERBYSHIRE LN	BUSHARD ST	A	AC	~	818	40	32,720	3/19/24	94	100	0	0	New Construction - Initial	01-01-1980
9	13122	ADAMS AVE	SUTTON LN	BROOKHURST ST	A	AC	~	1,161	40	46,440	3/19/24	79	23	0	77	New Construction - Initial	01-01-1980
9	280	ADAMS AVE	LAWSON LN	CITY LIMIT	A	AAC	~	1,229	40	49,160	5/8/24	84	38	12	50	Overlay - AC Structural	09-11-2007
9	281	ADAMS AVE	BROOKHURST ST	LAWSON LN	A	AAC	~	1,115	40	44,600	5/7/24	81	73	26	1	Overlay - AC Structural	09-11-2007
9	282	ADAMS AVE	MAGNOLIA ST	HARBOR ISLE LN	A	AAC	~	1,116	40	44,640	3/20/24	82	29	62	9	Overlay - AC Structural	09-11-2007
9	283	ADAMS AVE	CROWN REEF LN	MAGNOLIA ST	A	AAC	~	1,608	40	64,320	4/3/24	88	100	0	0	Overlay - AC Structural	08-01-2017
9	289	ADAMS AVE	HARBOR ISLE LN	BUSHARD ST	A	AAC	~	1,527	40	65,960	4/2/24	94	100	0	0	Overlay - AC Structural	09-11-2007
9	305	ADAMS AVE	DELAWARE ST	BEACH BL	A	AC	~	1,320	33	43,560	4/3/24	75	41	21	38	New Construction - Initial	01-01-1980
9	306	ADAMS AVE	BEACH BLVD	ROTHERT LN	A	AAC	~	1,562	40	62,480	4/3/24	88	30	0	70	Overlay - AC Structural	06-21-2016
9	313	ADAMS AVE	LAKE ST	DELAWARE ST	A	AC	~	1,517	32	48,544	4/3/24	71	63	37	0	New Construction - Initial	01-01-1980
9	500	ADAMS AVE	NEWLAND ST	ROTHERT LN	A	AAC	~	1,083	40	43,320	4/3/24	95	100	0	0	Overlay - AC Structural	08-01-2017
9	501	ADAMS AVE	CROWN REEF LN	NEWLAND ST	A	AAC	~	1,037	40	41,480	4/3/24	80	94	0	6	Overlay - AC Structural	08-01-2017
9	502	ADAMS AVE	SUTTON LN (N)	DERBYSHIRE LN	A	AAC	~	663	40	26,520	3/19/24	91	100	0	0	Overlay - AC Structural	09-11-2007
9	504	ADAMS AVE	BROOKHURST ST	SUTTON LN	A	AAC	~	1,161	40	46,440	3/19/24	72	32	42	26	Overlay - AC Structural	09-11-2007
9	58	ADAMS AVE	ROTHERT LN	NEWLAND ST	A	AAC	~	1,083	40	43,320	4/3/24	89	30	0	70	Overlay - AC Structural	06-21-2016
9	59	ADAMS AVE	NEWLAND ST	CROWN REEF LN	A	AAC	~	1,037	40	41,480	4/3/24	87	74	0	26	Overlay - AC Structural	08-01-2017
9	60	ADAMS AVE	DERBYSHIRE LN	SUTTON LN	A	AC	~	663	40	26,520	3/19/24	90	100	0	0	New Construction - Initial	01-01-1980
9	61	ADAMS AVE	BUSHARD ST	DERBYSHIRE LN	A	AAC	~	818	40	32,720	3/19/24	91	100	0	0	Overlay - AC Structural	10-29-2007
9	722	ADAMS AVE	CITY LIMIT	LAWSON LN	A	AAC	~	1,229	40	49,160	5/8/24	91	95	0	5	Overlay - AC Structural	09-11-2007
9	723	ADAMS AVE	LAWSON LN	BROOKHURST ST	A	AAC	~	1,115	40	44,600	5/8/24	78	37	62	1	Overlay - AC Structural	09-11-2007
9	724	ADAMS AVE	HARBOR ISLE LN	MAGNOLIA ST	A	AAC	~	1,116	40	44,640	3/20/24	87	71	0	29	Overlay - AC Structural	09-11-2007
9	725	ADAMS AVE	MAGNOLIA ST	CROWN REEF LN	A	AAC	~	1,608	40	64,320	4/3/24	81	98	0	2	Overlay - AC Structural	08-01-2017
9	731	ADAMS AVE	BUSHARD ST	HARBOR ISLE LN	A	AAC	~	1,527	40	61,080	3/20/24	91	100	0	0	Overlay - AC Structural	09-11-2007
9	747	ADAMS AVE	BEACH BLVD	DELAWARE ST	A	AC	~	1,320	33	43,560	4/3/24	80	83	0	17	New Construction - Initial	01-01-1980
9	748	ADAMS AVE	ROTHERT LN	BEACH BLVD	A	AAC	~	1,562	40	62,480	4/3/24	94	75	0	25	Overlay - AC Structural	08-01-2017
9	755	ADAMS AVE	DELAWARE ST	LAKE ST	A	AC	~	1,517	32	48,544	4/3/24	76	79	6	15	New Construction - Initial	01-01-1980
27	659	ALGONQUIN ST	WARNER AVE	PEARCE DR	C	AC	~	1,575	60	94,500	5/6/24	95	100	0	0	Overlay-Rubber Hot Mix	12-02-2019
27	842	ALGONQUIN ST	PEARCE DR	HEIL AVE	C	AC	~	1,321	60	79,260	5/6/24	96	100	0	0	Overlay-Rubber Hot Mix	12-02-2019
70	2	ARGOSY AVE	NEWSBOY CIR	GRAHAM ST	C	AAC	~	1,621	60	97,260	5/1/24	76	100	0	0	Overlay - AC Structural	07-22-2014
70	408	ARGOSY AVE	BOLSA CHICA ST	NEWSBOY CIR	C	AAC	~	1,096	60	65,760	5/1/24	79	100	0	0	Overlay - AC Structural	07-22-2014
85	327	ATLANTA AVE	ORANGE AVE	HUNTINGTON ST	A	AC	~	726	19	13,794	5/1/24	80	45	0	55	New Construction - Initial	01-01-1980
85	328	ATLANTA AVE	HUNTINGTON ST	DELAWARE ST	A	AC	~	701	21	14,721	5/1/24	97	80	0	20	New Construction - Initial	01-01-1980
85	329	ATLANTA AVE	DELAWARE ST	BEACH BL	A	AC	~	1,285	33	42,405	4/25/24	86	27	0	73	New Construction - Initial	01-01-1980
85	330	ATLANTA AVE	BEACH BL	SCHOONER LN	A	AAC	~	1,145	33	37,785	4/25/24	92	52	0	48	Overlay - AC Structural	06-21-2016
85	331	ATLANTA AVE	SCHOONER LN	NEWLAND ST	A	AAC	~	1,497	33	49,401	4/25/24	95	100	0	0	Overlay - AC Structural	06-21-2016
85	332	ATLANTA AVE	STRATHMOOR LN	BROOKHURST ST	A	AC	~	1,190	33	39,270	3/18/24	100	52	29	19	New Construction - Initial	01-01-1980
85	333	ATLANTA AVE	BUSHARD ST	STRATHMOOR LN	A	AC	~	1,450	33	47,850	3/18/24	95	100	0	0	New Construction - Initial	01-01-1980
85	509	ATLANTA AVE	MIRAMAR LN	NEWLAND ST	A	AAC	~	929	33	30,657	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017
85	510	ATLANTA AVE	LEASURE LN	MIRAMAR LN	A	AAC	~	849	33	28,017	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017
85	511	ATLANTA AVE	MAGNOLIA ST	LEASURE LN	A	AAC	~	863	33	28,479	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017
85	512	ATLANTA AVE	BEACHWOOD LN	MAGNOLIA ST	A	AC	~	868	33	28,644	4/25/24	95	100	0	0	Overlay-Rubber Hot Mix	07-01-2019
85	513	ATLANTA AVE	KIMBERWICK LN	BEACHWOOD LN	A	AC	~	978	33	32,274	4/25/24	90	41	0	59	Overlay-Rubber Hot Mix	07-01-2019
85	514	ATLANTA AVE	BUSHARD ST	KIMBERWICK LN	A	AC	~	797	33	26,301	4/2/24	95	100	0	0	Overlay-Rubber Hot Mix	07-01-2019
85	67	ATLANTA AVE	NEWLAND ST	MIRAMAR LN	A	AAC	~	929	33	30,657	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017
85	68	ATLANTA AVE	MIRAMAR LN	LEASURE LN	A	AAC	~	849	33	28,017	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017
85	69	ATLANTA AVE	LEASURE LN	MAGNOLIA ST	A	AAC	~	863	33	28,479	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017
85	70	ATLANTA AVE	MAGNOLIA ST	BEACHWOOD LN	A	AC	~	868	33	28,644	4/1/24	94	63	0	37	Overlay-Rubber Hot Mix	07-01-2019
85	71	ATLANTA AVE	BEACHWOOD LN	KIMBERWICK LN	A	AC	~	978	33	32,274	4/1/24	91	43	0	57	Overlay-Rubber Hot Mix	07-01-2019
85	72	ATLANTA AVE	KIMBERWICK LN	BUSHARD ST	A	AC	~	797	33	26,301	4/1/24	100	100	0	0	Overlay-Rubber Hot Mix	07-01-2019
85	769	ATLANTA AVE	HUNTINGTON ST	ORANGE AVE	A	AC	~	726	19	13,794	5/1/24	93	100	0	0	New Construction - Initial	01-01-1980
85	770	ATLANTA AVE	DELAWARE ST	HUNTINGTON ST	A	AC	~	701	40	28,040	4/25/24	98	100	0	0	New Construction - Initial	01-01-1980
85	771	ATLANTA AVE	BEACH BL	DELAWARE ST	A	AC	~	1,285	33	42,405	4/25/24	95	90	0	10	New Construction - Initial	01-01-1980
85	772	ATLANTA AVE	SCHOONER LN	BEACH BLVD	A	AAC	~	1,145	33	37,785	4/25/24	95	100	0	0	Overlay - AC Structural	06-21-2016
85	773	ATLANTA AVE	NEWLAND ST	SCHOONER LN	A	AAC	~	1,497	33	49,401	4/25/24	95	100	0	0	Overlay - AC Structural	06-21-2016
85	774	ATLANTA AVE	BROOKHUST ST	STRATHMOOR LN	A	AC	~	1,190	33	39,270	3/18/24	95	100	0	0	New Construction - Initial	01-01-1980
85	775	ATLANTA AVE	STRATHMOOR LN	BUSHARD LN	A	AC	~	1,450	33	47,850	3/18/24	95	100	0	0	New Construction - Initial	01-01-1980
111	342	BANNING AVE	MALIBU LN	BUSHARD ST	C	AC	~	1,086	61	66,246	3/26/24	100	0	0	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
111	343	BANNING AVE	MAGNOLIA ST	MALIBU LN	C	AC	~	1,658	61	101,138	3/26/24	100	0	0	0	New Construction - Initial	01-01-1980
111	440	BANNING AVE	BUSHARD ST	TIDE LN	C	AC	~	569	61	34,709	3/26/24	95	100	0	0	New Construction - Initial	01-01-1980
111	76	BANNING AVE	TIDE LN	BROOKHURST LN	C	AC	~	1,086	61	66,246	3/26/24	93	100	0	0	New Construction - Initial	01-01-1980
194	12	BOLSA AVE	BOLSA CHICA ST	GRAHAM ST	A	AC	~	2,718	38	103,284	4/27/24	55	47	28	25	New Construction - Initial	01-01-1980
194	15	BOLSA AVE	GRAHAM ST	TRAVELWAY	A	AC	~	648	38	24,624	4/27/24	28	29	63	8	New Construction - Initial	01-01-1980
194	16	BOLSA AVE	TRAVELWAY	DAN LN	A	AC	~	609	38	23,142	4/27/24	29	16	71	13	New Construction - Initial	01-01-1980
194	17	BOLSA AVE	DAN LN	SPRINGDALE ST	A	AC	~	1,325	38	50,350	4/27/24	24	20	58	22	New Construction - Initial	01-01-1980
194	17009	BOLSA AVE	DAN LN	TRAVELWAY	A	AC	~	609	38	23,142	4/27/24	30	18	62	20	New Construction - Initial	01-01-1980
194	17010	BOLSA AVE	EDWARDS ST	DRAKE LN	A	AC	~	1,165	34	39,610	4/27/24	43	37	48	15	New Construction - Initial	01-01-1980
194	173	BOLSA AVE	SPRINGDALE ST	DRAKE LN	A	AC	~	1,481	34	50,354	4/27/24	25	27	69	4	New Construction - Initial	01-01-1980
194	20	BOLSA AVE	DRAKE LN	EDWARDS ST	A	AC	~	1,165	34	39,610	4/27/24	32	25	64	11	New Construction - Initial	01-01-1980
194	24	BOLSA AVE	EDWARDS ST	VICTORIA LN	A	AAC	~	1,316	34	44,744	4/27/24	41	27	73	0	Overlay - AC Structural	07-01-2011
194	25	BOLSA AVE	VICTORIA LN	GOLDENWEST ST	A	AAC	~	1,330	36	47,880	4/27/24	47	16	63	21	Overlay - AC Structural	07-01-2011
194	454	BOLSA AVE	GRAHAM ST	BOLSA CHICA ST	A	AC	~	2,718	38	103,284	4/27/24	97	11	0	89	New Construction - Initial	01-01-1980
194	457	BOLSA AVE	TRAVELWAY	GRAHAM ST	A	AC	~	648	38	24,624	4/27/24	97	16	0	84	New Construction - Initial	01-01-1980
194	459	BOLSA AVE	SPRINGDALE ST	DAN LN	A	AC	~	1,325	38	50,350	4/27/24	55	62	35	3	New Construction - Initial	01-01-1980
194	466	BOLSA AVE	VICTORIA LN	EDWARDS ST	A	AAC	~	1,316	46	60,536	4/27/24	45	29	71	0	Overlay - AC Structural	07-01-2011
194	467	BOLSA AVE	GOLDENWEST ST	VICTORIA LN	A	AAC	~	1,330	46	61,180	4/27/24	68	55	45	0	Overlay - AC Structural	07-01-2011
194	615	BOLSA AVE	DRAKE LN	SPRINGDALE ST	A	AC	~	1,481	34	50,354	4/27/24	37	30	66	4	New Construction - Initial	01-01-1980
195	11	BOLSA CHICA ST	BOLSA AVE	ARGOSY AVE	A	AAC	~	1,200	36	43,200	5/8/24	86	58	18	24	Overlay - AC Structural	09-11-2007
195	13	BOLSA CHICA ST	ARGOSY AVE	TASMAN AVE	A	AAC	~	587	36	21,132	5/8/24	92	100	0	0	Overlay - AC Structural	09-11-2007
195	14	BOLSA CHICA ST	TASMAN DR	MCFADDEN AVE	A	AAC	~	854	36	30,744	5/8/24	94	100	0	0	Overlay - AC Structural	09-11-2007
195	209	BOLSA CHICA ST	OAHU DR	HEIL AVE	A	AAC	~	1,098	38	41,724	5/10/24	80	70	30	0	Overlay - AC Structural	09-11-2007
195	29	BOLSA CHICA ST	DOVEWOOD DR	ROBINWOOD DR	A	AAC	~	1,040	36	37,440	5/8/24	91	75	25	0	Overlay - AC Structural	09-11-2007
195	30	BOLSA CHICA ST	ROBINWOOD DR	EDINGER AVE	A	AAC	~	780	36	28,080	5/8/24	91	77	23	0	Overlay - AC Structural	09-11-2007
195	401	BOLSA CHICA ST	EDINGER AVE	OAHU DR	A	AAC	~	1,543	41	63,263	5/10/24	82	83	0	17	Overlay - AC Structural	09-11-2007
195	405	BOLSA CHICA ST	PEARCE ST	WARNER AVE	A	AAC	~	1,321	38	50,198	5/10/24	76	41	25	34	Overlay - AC Structural	09-11-2007
195	407	BOLSA CHICA ST	MCFADDEN AVE	DOVEWOOD DR	A	AAC	~	822	36	29,592	5/8/24	93	100	0	0	Overlay - AC Structural	09-11-2007
195	453	BOLSA CHICA ST	ARGOSY AVE	BOLSA AVE	A	AAC	~	1,200	36	43,200	5/9/24	88	58	42	0	Overlay - AC Structural	09-11-2007
195	455	BOLSA CHICA ST	TASMAN DR	ARGOSY AVE	A	AAC	~	587	36	21,132	5/9/24	90	56	44	0	Overlay - AC Structural	09-11-2007
195	456	BOLSA CHICA ST	MCFADDEN AVE	TASMAN DR	A	AAC	~	854	36	30,744	5/9/24	87	46	51	3	Overlay - AC Structural	09-11-2007
195	471	BOLSA CHICA ST	ROBINWOOD DR	DOVEWOOD DR	A	AAC	~	1,040	36	37,440	5/9/24	91	64	36	0	Overlay - AC Structural	09-11-2007
195	472	BOLSA CHICA ST	EDINGER AVE	ROBINWOOD DR	A	AAC	~	780	36	28,080	5/9/24	75	22	78	0	Overlay - AC Structural	09-11-2007
195	522	BOLSA CHICA ST	SKYLAB WEST	RANCHO RD	A	AAC	~	702	36	25,272	5/9/24	91	100	0	0	Overlay - AC Structural	09-11-2007
195	523	BOLSA CHICA ST	BOLSA AVE	SKYLAB WEST	A	AAC	~	1,432	36	51,552	5/9/24	82	30	46	24	Overlay - AC Structural	09-11-2007
195	531	BOLSA CHICA ST	PEARCE ST	HEIL AVE	A	AAC	~	1,321	38	50,198	5/10/24	76	57	43	0	Overlay - AC Structural	09-11-2007
195	651	BOLSA CHICA ST	HEIL AVE	OAHU DR	A	AAC	~	1,098	38	41,724	5/10/24	71	46	53	1	Overlay - AC Structural	09-11-2007
195	80	BOLSA CHICA ST	RANCHO RD	SKYLAB WEST	A	AAC	~	702	36	25,272	5/8/24	87	82	18	0	Overlay - AC Structural	09-11-2007
195	81	BOLSA CHICA ST	SKYLAB WEST	BOLSA AVE	A	AAC	~	1,432	36	51,552	5/8/24	84	56	44	0	Overlay - AC Structural	09-11-2007
195	843	BOLSA CHICA ST	OAHU DR	EDINGER AVE	A	AAC	~	1,543	37	57,091	5/10/24	73	34	58	8	Overlay - AC Structural	09-11-2007
195	847	BOLSA CHICA ST	WARNER AVE	PEARCE ST	A	AAC	~	1,321	38	50,198	5/10/24	82	81	19	0	Overlay - AC Structural	03-01-2007
195	849	BOLSA CHICA ST	DOVEWOOD DR	MCFADDEN AVE	A	AAC	~	822	36	29,592	5/9/24	92	67	33	0	Overlay - AC Structural	03-01-2007
195	89	BOLSA CHICA ST	HEIL AVE	PEARCE ST	A	AC	~	1,321	38	50,198	5/10/24	80	59	37	4	New Construction - Initial	01-01-1980
240	101	BROOKHURST ST	YORKTOWN AVE	CONSTITUTION DR	A	AC	~	950	39	39,050	3/6/24	95	100	0	0	New Construction - Initial	01-01-1980
240	286	BROOKHURST ST	GARFIELD AVE	TRAVELWAY	A	AC	~	1,336	39	53,354	3/6/24	96	46	0	54	New Construction - Initial	01-01-1980
240	287	BROOKHURST ST	TRAVELWAY	YORKTOWN AVE	A	AC	~	1,300	39	53,200	3/6/24	95	100	0	0	New Construction - Initial	01-01-1980
240	295	BROOKHURST ST	ADAMS AVE	PECK AVE	A	AC	~	1,649	39	66,811	3/6/24	83	75	0	25	New Construction - Initial	01-01-1980
240	296	BROOKHURST ST	PECK DR	INDIANAPOLIS AVE	A	AC	~	1,000	39	40,250	3/6/24	81	63	0	37	New Construction - Initial	01-01-1980
240	338	BROOKHURST ST	HAMILTON AVE	TRAVELWAY	A	AC	~	1,316	39	54,824	5/10/24	71	39	31	30	New Construction - Initial	01-01-1980
240	339	BROOKHURST ST	TRAVELWAY	BANNING AVE	A	AC	~	1,578	43	69,854	4/17/24	88	95	0	5	New Construction - Initial	01-01-1980
240	344	BROOKHURST ST	EFFINGHAM DR	HAMILTON AVE	A	AC	~	1,446	39	56,394	3/6/24	80	27	36	37	New Construction - Initial	01-01-1980
240	348	BROOKHURST ST	INDIANAPOLIS AVE	CLIFF DR	A	AC	~	1,295	39	53,005	3/6/24	88	61	14	25	New Construction - Initial	01-01-1980
240	349	BROOKHURST ST	CLIFF DR	ATLANTA AVE	A	AC	~	1,348	39	55,072	3/6/24	93	74	0	26	New Construction - Initial	01-01-1980
240	439	BROOKHURST ST	ATLANTA AVE	EFFINGHAM DR	A	AC	~	1,196	39	49,644	3/6/24	85	82	18	0	New Construction - Initial	01-01-1980
240	505	BROOKHURST ST	CONTINENTAL DR	CONSTITUTION DR	A	AC	~	768	39	32,952	4/8/24	95	100	0	0	New Construction - Initial	01-01-1980
240	50510	BROOKHURST ST	TRAVELWAY	HAMILTON AVE	A	AC	~	1,316	41	56,956	3/27/24	83	54	0	46	New Construction - Initial	01-01-1980
240	506	BROOKHURST ST	ADAMS AVE	CONTINENTAL DR	A	AC	~	917	39	36,763	4/2/24	68	10	62	28	New Construction - Initial	01-01-1980
240	519	BROOKHURST ST	BUSHARD ST	BANNING AVE	A	AC	~	2,434	43	106,662	3/27/24	82	100	0	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
240	520	BROOKHURST ST	PCH	BUSHARD ST	A	AC	~	1,235	45	55,575	5/6/24	84	87	13	0	New Construction - Initial	01-01-1980
240	543	BROOKHURST ST	CONSTITUTION DR	YORKTOWN DR	A	AC	~	950	39	39,300	4/8/24	95	100	0	0	New Construction - Initial	01-01-1980
240	63	BROOKHURST ST	CONSTITUTION DR	CONTINENTAL DR	A	AC	~	768	39	29,952	3/6/24	95	100	0	0	New Construction - Initial	01-01-1980
240	64	BROOKHURST ST	CONTINENTAL DR	ADAMS AVE	A	AC	~	917	39	38,763	3/6/24	95	100	0	0	New Construction - Initial	01-01-1980
240	728	BROOKHURST ST	TRAVELWAY	GARFIELD AVE	A	AC	~	1,336	39	55,104	4/8/24	95	100	0	0	New Construction - Initial	01-01-1980
240	729	BROOKHURST ST	YORKTOWN AVE	TRAVELWAY	A	AC	~	1,300	39	51,700	4/8/24	95	100	0	0	New Construction - Initial	01-01-1980
240	737	BROOKHURST ST	PECK DR	ADAMS AVE	A	AC	~	1,649	39	64,311	3/18/24	83	47	0	53	New Construction - Initial	01-01-1980
240	738	BROOKHURST ST	INDIANAPOLIS AVE	PECK DR	A	AC	~	1,000	39	39,000	3/18/24	77	69	0	31	New Construction - Initial	01-01-1980
240	77	BROOKHURST ST	BANNING AVE	BUSHARD ST	A	AC	~	2,434	43	108,412	4/17/24	86	92	0	8	New Construction - Initial	01-01-1980
240	78	BROOKHURST ST	BUSHARD ST	PCH	A	AC	~	1,235	45	55,575	4/17/24	89	68	0	32	New Construction - Initial	01-01-1980
240	781	BROOKHURST ST	BANNING AVE	TRAVELWAY	A	AC	~	1,578	43	69,854	3/27/24	72	53	23	24	New Construction - Initial	01-01-1980
240	786	BROOKHURST ST	HAMILTON AVE	EFFINGHAM DR	A	AC	~	1,446	41	61,786	3/6/24	80	48	15	37	New Construction - Initial	01-01-1980
240	790	BROOKHURST ST	CLIFF DR	INDIANAPOLIS AVE	A	AC	~	1,295	39	53,005	3/18/24	83	100	0	0	New Construction - Initial	01-01-1980
240	791	BROOKHURST ST	ATLANTA AVE	CLIFF DR	A	AC	~	1,345	39	52,455	3/18/24	82	100	0	0	New Construction - Initial	01-01-1980
240	881	BROOKHURST ST	EFFINGHAM DR	ATLANTA AVE	A	AC	~	1,196	41	51,036	3/19/24	78	100	0	0	New Construction - Initial	01-01-1980
258	284	BUSHARD ST	GARFIELD AVE	FLOUNDER DR	C	AAC	~	1,450	60	87,000	5/7/24	82	78	0	22	Overlay - AC Structural	02-01-2007
258	285	BUSHARD ST	FLOUNDER DR	YORKTOWN AVE	C	AAC	~	1,190	60	71,400	5/7/24	87	86	14	0	Overlay - AC Structural	02-01-2007
258	293	BUSHARD ST	WOODLAWN DR	PETTSWOOD DR	C	AAC	~	1,025	60	61,500	5/7/24	90	52	22	26	Overlay - AC Structural	02-01-2007
258	294	BUSHARD ST	PETTSWOOD DR	ADAMS AVE	C	AAC	~	903	60	54,180	5/7/24	77	63	0	37	Overlay - AC Structural	02-01-2007
258	297	BUSHARD ST	ADAMS AVE	YELLOWSTONE DR	C	AAC	~	1,354	60	81,240	3/20/24	77	64	0	36	Overlay - AC Structural	09-01-2006
258	298	BUSHARD ST	YELLOWSTONE DR	INDIANAPOLIS AVE	C	AAC	~	1,288	60	77,280	3/20/24	79	100	0	0	Overlay - AC Structural	09-01-2006
258	340	BUSHARD ST	BANNING AVE	BROOKHURST ST	C	AC	~	1,968	60	118,080	3/27/24	87	68	0	32	New Construction - Initial	01-01-1980
258	341	BUSHARD ST	MOKIHANA DR	BANNING AVE	C	AC	~	1,450	60	87,000	3/27/24	91	100	0	0	New Construction - Initial	01-01-1980
258	345	BUSHARD ST	ATLANTA AVE	PANACEA DR	C	AAC	~	1,190	60	71,400	4/1/24	83	45	40	15	Overlay - AC Structural	09-01-2006
258	346	BUSHARD ST	PANACEA DR	HAMILTON AVE	C	AC	~	1,450	60	87,000	4/1/24	81	40	60	0	New Construction - Initial	01-01-1980
258	350	BUSHARD ST	INDIANAPOLIS AVE	ERSKINE DR	C	AAC	~	1,182	60	70,920	3/19/24	87	100	0	0	Overlay - AC Structural	09-01-2006
258	351	BUSHARD ST	ERSKINE DR	ATLANTA AVE	C	AAC	~	1,460	60	87,600	3/19/24	88	95	0	5	Overlay - AC Structural	09-01-2006
258	438	BUSHARD ST	HAMILTON AVE	MOKIHANA DR	C	AC	~	1,190	60	71,400	3/27/24	90	94	0	6	New Construction - Initial	01-01-1980
258	441	BUSHARD ST	YORKTOWN AVE	WOODLAWN DR	C	AAC	~	712	60	42,720	5/7/24	87	85	15	0	Overlay - AC Structural	02-01-2007
330	145	CENTER AVE	GOTHARD ST	HUNTINGTON VILLAGE	C	AAC	~	1,355	61	82,655	5/8/24	84	88	12	0	Overlay - AC Structural	06-21-2016
330	146	CENTER AVE	FITNESS CENTER ENTRANCE	BEACH BLVD	C	AAC	~	1,322	61	80,642	5/8/24	88	87	13	0	Overlay - AC Structural	04-01-2012
330	181	CENTER AVE	HUNTINGTON VILLAGE	ONE PACIFIC PLAZA	C	AAC	~	667	61	40,687	5/8/24	74	78	13	9	Overlay - AC Structural	04-01-2012
330	50490	CENTER AVE	ONE PACIFIC PLAZA	FITNESS CENTER ENTRANCE	C	AAC	~	333	60	19,980	5/8/24	74	84	9	7	Overlay - AC Structural	04-01-2012
500	14998	DELAWARE ST	ATLANTA AVE	END	C	AC	~	874	30	26,220	5/1/24	72	36	0	64	New Construction	01-01-1980
500	160	DELAWARE ST	UTICA AVE	YORKTOWN AVE	C	AC	~	1,321	60	79,260	4/15/24	78	61	12	27	New Construction - Initial	01-01-1980
500	318	DELAWARE ST	INDIANAPOLIS AVE	MEMPHIS AVE	C	AC	~	1,319	51	67,269	4/15/24	51	20	70	10	New Construction - Initial	01-01-1980
500	319	DELAWARE ST	FRANKFORT AVE	INDIANAPOLIS AVE	C	AC	~	991	51	50,541	4/15/24	45	53	28	19	New Construction - Initial	01-01-1980
500	320	DELAWARE ST	ATLANTA AVE	FRANKFORT AVE	C	AC	~	1,671	60	100,260	4/15/24	70	58	27	15	New Construction - Initial	01-01-1980
500	355	DELAWARE ST	ADAMS AVE	UTICA AVE	C	AC	~	1,320	60	79,200	4/15/24	76	98	0	2	New Construction - Initial	01-01-1980
500	383	DELAWARE ST	GARFIELD AVE	CLAY AVE	C	AAC	~	1,320	60	79,200	4/9/24	86	68	0	32	Overlay - AC Structural	07-01-2011
500	384	DELAWARE ST	YORKTOWN AVE	CLAY AVE	C	AAC	~	1,320	60	79,200	4/9/24	88	97	0	3	Overlay - AC Structural	07-01-2011
500	385	DELAWARE ST	MAIN ST	GARFIELD AVE	C	AAC	~	1,405	60	84,300	4/9/24	73	25	15	60	Overlay - AC Structural	07-01-2011
500	431	DELAWARE ST	MEMPHIS AVE	ADAMS AVE	C	AC	~	1,321	60	79,260	4/15/24	77	88	0	12	New Construction - Initial	01-01-1980
500	50240	DELAWARE ST	ELLIS AVE	MAIN ST	C	AC	~	1,240	60	74,400	4/9/24	93	67	0	33	Overlay-Rubber Hot Mix	12-02-2019
566	100	EDINGER AVE	BEACH BL	NEWLAND ST	A	AC	~	2,638	31	81,778	4/29/24	100	100	0	0	New Construction - Initial	01-01-1980
566	182	EDINGER AVE	SHER LN	BEACH BL	A	AC	~	1,590	31	49,290	5/9/24	80	55	27	18	New Construction - Initial	01-01-1980
566	183	EDINGER AVE	GOTHARD ST	SHER LN	A	AC	~	1,711	31	53,041	5/9/24	72	59	35	6	New Construction - Initial	01-01-1980
566	193	EDINGER AVE	SPRINGDALE ST	BALLANTINE LN	A	AC	~	1,444	39	56,316	4/27/24	97	77	0	23	Overlay-Rubber Hot Mix	07-01-2019
566	194	EDINGER AVE	BALLANTINE LN	EDWARDS ST	A	AC	~	1,201	39	46,839	4/27/24	96	69	31	0	Overlay-Rubber Hot Mix	07-01-2019
566	195	EDINGER AVE	EDWARDS ST	SHERBECK LN	A	AC	~	1,452	39	56,628	4/29/24	72	92	8	0	New Construction - Initial	01-01-1980
566	196	EDINGER AVE	SHERBECK LN	GOLDENWEST ST	A	AC	~	1,192	39	46,488	4/29/24	69	83	0	17	New Construction - Initial	01-01-1980
566	202	EDINGER AVE	WARREN LN	GRAHAM ST	A	AC	~	1,523	62	94,426	4/27/24	98	100	0	0	Overlay-Rubber Hot Mix	12-02-2019
566	205	EDINGER AVE	SAYBROOK LN	FANTASIA LN	A	AC	~	1,491	72	107,352	5/7/24	76	50	42	8	New Construction - Initial	01-01-1980
566	206	EDINGER AVE	MELODY LN	BOLSA CHICA ST	A	AC	~	1,451	60	87,060	5/7/24	62	29	66	5	New Construction - Initial	01-01-1980
566	210	EDINGER AVE	BONAIRE CIR	SAYBROOK LN	A	AC	~	1,417	72	102,024	5/6/24	56	55	44	1	New Construction - Initial	01-01-1980
566	211	EDINGER AVE	TRINIDAD LN	BONAIRE CIR	A	AC	~	1,644	44	72,336	5/6/24	53	54	44	2	New Construction - Initial	01-01-1980
566	212	EDINGER AVE	TRINIDAD LN	END	A	AC	~	1,801	44	79,244	5/6/24	58	47	53	0	New Construction - Initial	01-01-1980
566	533	EDINGER AVE	GOTHARD ST	GOLDENWEST ST	A	AC	~	1,982	39	77,298	5/9/24	88	46	50	4	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
566	542	EDINGER AVE	NEWLAND ST	BEACH BLVD	A	AC	~	2,638	31	81,778	4/29/24	100	100	0	0	New Construction - Initial	01-01-1980
566	624	EDINGER AVE	BEACH BLVD	SHER LN	A	AC	~	1,590	31	49,290	5/8/24	75	67	28	5	New Construction - Initial	01-01-1980
566	625	EDINGER AVE	SHER LN	GOTHARD ST	A	AC	~	1,711	31	53,041	5/8/24	76	67	17	16	New Construction - Initial	01-01-1980
566	635	EDINGER AVE	BALLANTINE LN	SPRINGDALE ST	A	AC	~	1,444	39	56,316	4/27/24	97	73	27	0	Overlay-Rubber Hot Mix	07-01-2019
566	636	EDINGER AVE	EDWARDS ST	BALLANTINE LN	A	AC	~	1,201	39	46,839	4/27/24	97	100	0	0	Overlay-Rubber Hot Mix	07-01-2019
566	637	EDINGER AVE	SHERBECK LN	EDWARDS ST	A	AC	~	1,452	39	56,628	5/9/24	69	79	10	11	New Construction - Initial	01-01-1980
566	638	EDINGER AVE	GOLDENWEST ST	SHERBECK LN	A	AC	~	1,192	39	46,488	5/9/24	71	75	25	0	New Construction - Initial	01-01-1980
566	85	EDINGER AVE	CLUBHOUSE LN	SPRINGDALE ST	A	AAC	~	1,371	64	87,744	4/27/24	92	100	0	0	Overlay - AC Structural	06-21-2016
566	86	EDINGER AVE	GRAHAM ST	CLUBHOUSE LN	A	AAC	~	1,210	65	78,650	4/27/24	91	98	0	2	Overlay - AC Structural	06-21-2016
566	87	EDINGER AVE	BOLSA CHICA ST	WARREN LN	A	AC	~	1,194	62	74,028	4/27/24	98	100	0	0	Overlay-Rubber Hot Mix	12-02-2019
566	88	EDINGER AVE	FANTASIA LN	MELODY AVE	A	AC	~	1,060	60	63,600	5/7/24	74	48	44	8	New Construction - Initial	01-01-1980
566	91	EDINGER AVE	GOLDENWEST ST	GOTHARD ST	A	AC	~	1,982	39	77,298	4/29/24	86	46	40	14	New Construction - Initial	01-01-1980
569	159	EDWARDS ST	TALBERT AVE	ELLIS AVE	A	AC	~	1,576	25	39,400	5/3/24	75	52	0	48	New Construction - Initial	01-01-1980
569	200	EDWARDS ST	MCFADDEN AVE	DOWN DR	A	AC	~	1,210	60	72,600	5/7/24	64	46	54	0	New Construction - Initial	01-01-1980
569	201	EDWARDS ST	DOWN DR	EDINGER AVE	A	AC	~	1,431	60	85,860	5/7/24	54	37	63	0	New Construction - Initial	01-01-1980
569	21	EDWARDS ST	BOLSA AVE	ALEXANDRIA DR	A	AC	~	569	60	35,390	5/7/24	62	33	59	8	New Construction - Initial	01-01-1980
569	22	EDWARDS ST	ALEXANDRA DR	CORNELL DR	A	AC	~	781	60	46,860	5/7/24	62	33	66	1	New Construction - Initial	01-01-1980
569	227	EDWARDS ST	SHIELDS DR	WARNER DR	A	AC	~	917	60	55,020	5/7/24	70	81	0	19	New Construction - Initial	01-01-1980
569	228	EDWARDS ST	CRANDALL DR	SHIELDS DR	A	AC	~	863	28	24,164	5/7/24	71	72	28	0	New Construction - Initial	01-01-1980
569	229	EDWARDS ST	HEIL AVE	CRANDALL DR	A	AC	~	859	28	24,052	5/7/24	53	34	66	0	New Construction - Initial	01-01-1980
569	23	EDWARDS ST	CORNELL DR	HALIFAX DR	A	AC	~	520	60	31,200	5/7/24	56	39	61	0	New Construction - Initial	01-01-1980
569	235	EDWARDS ST	WARNER AVE	WRENFIELD DR	A	AAC	~	1,197	30	35,910	5/3/24	80	100	0	0	Overlay - AC Structural	07-01-2011
569	236	EDWARDS ST	FREEBORN DR	SLATER AVE	A	AAC	~	1,444	30	43,320	5/3/24	77	100	0	0	Overlay - AC Structural	07-01-2011
569	250	EDWARDS ST	CENTRAL PARK DR	TALBERT AVE	A	AAC	~	1,070	30	32,100	5/3/24	74	76	6	18	Overlay - AC Structural	07-01-2011
569	375	EDWARDS ST	ELLIS AVE	OVERLOOK DR	A	AC	~	691	30	20,730	5/3/24	71	55	0	45	New Construction - Initial	01-01-1980
569	376	EDWARDS ST	CROSSWIND DR	GARFIELD AVE	A	AC	~	1,068	30	32,040	5/3/24	83	100	0	0	New Construction - Initial	01-01-1980
569	377	EDWARDS ST	OVERLOOK DR	CROSSWIND DR	A	AC	~	880	30	26,400	5/3/24	79	70	0	30	New Construction - Initial	01-01-1980
569	396	EDWARDS ST	ARMADA DR	CENTRAL PARK DR	A	AAC	~	1,657	30	49,710	5/3/24	82	100	0	0	Overlay - AC Structural	07-01-2011
569	414	EDWARDS ST	EDINGER AVE	LENNOX DR	A	AC	~	892	28	26,476	5/7/24	76	76	24	0	New Construction - Initial	01-01-1980
569	448	EDWARDS ST	EDGEMONT DR	LENNOX DR	A	AC	~	1,058	28	30,624	5/7/24	64	46	54	0	New Construction - Initial	01-01-1980
569	449	EDWARDS ST	HEIL AVE	EDGEMONT DR	A	AC	~	690	28	19,320	5/7/24	64	39	61	0	New Construction - Initial	01-01-1980
569	538	EDWARDS ST	ARMADA DR	SLATER AVE	A	AAC	~	990	30	29,700	5/3/24	77	100	0	0	Overlay - AC Structural	07-01-2011
569	6	EDWARDS ST	LENNOX DR	EDGEMONT DR	A	AC	~	1,058	28	29,624	5/7/24	73	56	44	0	New Construction - Initial	01-01-1980
569	601	EDWARDS ST	ELLIS AVE	TALBERT AVE	A	AC	~	1,576	25	39,400	5/3/24	92	100	0	0	New Construction - Initial	01-01-1980
569	670	EDWARDS ST	SHIELDS DR	CRANDALL DR	A	AC	~	863	28	24,164	5/7/24	79	100	0	0	New Construction - Initial	01-01-1980
569	671	EDWARDS ST	CRANDALL DR	HEIL AVE	A	AC	~	859	28	30,552	5/7/24	80	100	0	0	New Construction - Initial	01-01-1980
569	677	EDWARDS ST	FREEBORN DR	WARNER DR	A	AAC	~	1,197	30	35,910	5/3/24	79	97	3	0	Overlay - AC Structural	07-01-2011
569	678	EDWARDS ST	SLATER AVE	FREEBORN DR	A	AAC	~	1,444	30	43,320	5/3/24	82	100	0	0	Overlay - AC Structural	07-01-2011
569	692	EDWARDS ST	TALBERT AVE	CENTRAL PARK DR	A	AAC	~	1,070	30	32,100	5/3/24	78	100	0	0	Overlay - AC Structural	07-01-2011
569	7	EDWARDS ST	EDGEMONT DR	HEIL AVE	A	AC	~	690	28	25,820	5/7/24	85	89	11	0	New Construction - Initial	01-01-1980
569	817	EDWARDS ST	OVERLOOK DR	ELLIS AVE	A	AC	~	691	30	20,730	5/3/24	83	46	0	54	New Construction - Initial	01-01-1980
569	818	EDWARDS ST	GARFIELD AVE	CROSSWIND DR	A	AC	~	1,068	30	32,040	5/3/24	82	78	0	22	New Construction - Initial	01-01-1980
569	819	EDWARDS ST	CROSSWIND DR	OVERLOOK DR	A	AC	~	880	30	26,400	5/3/24	85	79	16	5	New Construction - Initial	01-01-1980
569	82	EDWARDS ST	CITY LIMIT NORTH	ROYAL OAK DR	A	AAC	~	394	13	5,122	5/7/24	54	50	50	0	Overlay - AC Structural	07-01-2011
569	83	EDWARDS ST	ROYAL OAK DR	MAR VISTA DR	A	AAC	~	1,287	13	16,731	5/7/24	61	54	46	0	Overlay - AC Structural	07-01-2011
569	838	EDWARDS ST	CENTRAL PARK DR	ARMADA DR	A	AAC	~	1,657	30	49,710	5/3/24	77	91	9	0	Overlay - AC Structural	07-01-2011
569	84	EDWARDS ST	MAR VISTA DR	BOLSA AVE	A	AAC	~	631	13	8,203	5/7/24	59	53	47	0	Overlay - AC Structural	07-01-2011
569	853	EDWARDS ST	MC FADDEN AVE	HALIFAX DR	A	AC	~	772	60	46,320	5/7/24	64	48	52	0	New Construction - Initial	01-01-1980
569	856	EDWARDS ST	LENNOX DR	EDINGER AVE	A	AC	~	892	28	27,226	5/7/24	56	35	64	1	New Construction - Initial	01-01-1980
569	96	EDWARDS ST	SLATER AVE	ARMADA DR	A	AAC	~	990	30	29,700	5/3/24	79	96	0	4	Overlay - AC Structural	07-01-2011
589	10	ELLIS AVE	ASHLEY DR	REPAIR LN	A	AC	~	674	36	24,264	5/9/24	73	93	0	7	New Construction - Initial	01-01-1980
589	259	ELLIS AVE	DELAWARE ST	MAIN ST	A	AAC	~	1,109	60	66,540	5/9/24	79	28	69	3	Overlay - AC Thin	07-01-2006
589	260	ELLIS AVE	GOTHARD ST	HUNTINGTON ST	A	AAC	~	1,346	36	48,456	5/10/24	87	43	54	3	Overlay - AC Structural	07-01-2006
589	261	ELLIS AVE	HUNTINGTON ST	DELAWARE ST	A	AAC	~	699	60	41,940	5/10/24	74	37	62	1	Overlay - AC Structural	07-01-2006
589	265	ELLIS AVE	MAIN ST	CHAPEL LN	A	AC	~	1,321	47	62,087	5/10/24	80	91	0	9	New Construction - Initial	01-01-1980
589	266	ELLIS AVE	CHAPEL LN	NEWLAND ST	A	AC	~	1,321	47	62,087	5/7/24	68	95	0	5	New Construction - Initial	01-01-1980
589	386	ELLIS AVE	GOLDENWEST ST	ASHLEY DR	A	AC	~	763	36	27,468	5/9/24	75	100	0	0	New Construction - Initial	01-01-1980
589	387	ELLIS AVE	REPAIR LN	GOTHARD ST	A	AC	~	545	36	19,620	5/9/24	81	88	0	12	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
589	39	ELLIS AVE	EDWARDS ST	GOLDENWEST ST	A	AC	~	2,640	40	105,600	5/7/24	85	75	0	25	New Construction - Initial	01-01-1980
589	452	ELLIS AVE	REPAIR LN	ASHLEY DR	A	AC	~	674	36	24,264	5/9/24	77	90	10	0	New Construction - Initial	01-01-1980
589	702	ELLIS AVE	HUNTINGTON ST	GOTHARD ST	A	AAC	~	1,346	36	48,456	5/10/24	86	82	15	3	Overlay - AC Structural	07-01-2006
589	828	ELLIS AVE	ASHLEY DR	GOLDENWEST ST	A	AC	~	763	36	27,468	5/9/24	77	100	0	0	New Construction - Initial	01-01-1980
589	829	ELLIS AVE	GOTHARD ST	REPAIR LN	A	AC	~	545	36	19,620	5/9/24	78	70	30	0	New Construction - Initial	01-01-1980
653	434	FIRST ST	PCH	ORANGE AVE	A	AAC	~	1,132	36	40,752	5/1/24	96	100	0	0	Overlay - AC Structural	03-01-2010
653	876	FIRST ST	ORANGE AVE	PCH	A	AC	~	1,132	36	43,252	5/1/24	82	100	0	0	New Construction - Initial	01-01-1980
703	104	GARFIELD AVE	EDWARDS ST(S)	SADDLEBACK LN	A	AC	~	1,320	40	52,800	3/11/24	88	100	0	0	New Construction - Initial	01-01-1980
703	105	GARFIELD AVE	SADDLEBACK LN	GOLDENWEST ST	A	AC	~	1,320	40	52,800	3/11/24	86	81	0	19	New Construction - Initial	01-01-1980
703	106	GARFIELD AVE	SEAPOINT AVE	EDWARDS ST	A	AC	~	1,261	40	50,440	3/11/24	88	100	0	0	New Construction - Initial	01-01-1980
703	155	GARFIELD AVE	BUSHARD ST (N)	BLUEFIN LN	A	AC	~	585	33	19,305	5/7/24	71	100	0	0	New Construction - Initial	01-01-1980
703	156	GARFIELD AVE	BROOKHURST ST	KIPAHULU DR	A	AC	~	681	33	22,473	4/8/24	89	64	0	36	New Construction - Initial	01-01-1980
703	158	GARFIELD AVE	WARD ST	END	A	AC	~	1,505	22	33,110	4/2/24	47	43	38	19	New Construction - Initial	01-01-1980
703	270	GARFIELD AVE	GOLDENWEST ST	GOTHARD ST	A	AC	~	1,320	38	50,160	5/9/24	72	62	17	21	New Construction - Initial	01-01-1980
703	271	GARFIELD AVE	GOTHARD ST	MAIN ST	A	AC	~	1,238	45	55,710	3/5/24	44	60	30	10	New Construction - Initial	01-01-1980
703	272	GARFIELD AVE	MAIN ST	DELAWARE ST	A	AC	~	1,403	45	63,135	3/5/24	95	100	0	0	New Construction - Initial	01-01-1980
703	273	GARFIELD AVE	DELAWARE ST	BEACH BL	A	AAC	~	1,321	40	52,840	3/5/24	78	26	5	69	Overlay - AC Structural	06-12-2012
703	274	GARFIELD AVE	BEACH BL	LISTER LN	A	AC	~	1,363	38	51,794	3/5/24	82	70	0	30	New Construction - Initial	01-01-1980
703	275	GARFIELD AVE	LISTER LN	NEWLAND ST	A	AC	~	1,281	39	49,959	4/8/24	80	97	0	3	New Construction - Initial	01-01-1980
703	43	GARFIELD AVE	NEWLAND ST	PLUM TREE LN	A	AAC	~	532	33	17,556	4/3/24	89	100	0	0	Overlay - AC Structural	07-01-2010
703	44	GARFIELD AVE	PLUM TREE LN	LINDSAY LN	A	AAC	~	1,335	33	44,055	5/10/24	87	96	0	4	Overlay - AC Structural	07-01-2010
703	45	GARFIELD AVE	LINDSAY LN	MAGNOLIA ST	A	AAC	~	778	33	25,674	4/3/24	87	92	0	8	Overlay - AC Structural	07-01-2010
703	46	GARFIELD AVE	MAGNOLIA ST	RANDI LN	A	AAC	~	820	33	27,060	3/5/24	95	100	0	0	Overlay - AC Structural	06-21-2013
703	47	GARFIELD AVE	RANDI LN	PAULINE LN	A	AAC	~	935	33	30,855	3/5/24	87	29	0	71	Overlay - AC Structural	06-21-2013
703	48	GARFIELD AVE	PAULINE LN	BUSHARD ST	A	AAC	~	890	33	29,370	3/5/24	92	100	0	0	Overlay - AC Structural	06-21-2013
703	485	GARFIELD AVE	PLUM TREE LN	NEWLAND ST	A	AAC	~	532	15	7,980	3/11/24	91	90	0	10	Overlay - AC Structural	07-01-2010
703	486	GARFIELD AVE	LINDSAY LN	PLUM TREE LN	A	AAC	~	1,335	15	20,025	3/11/24	93	100	0	0	Overlay - AC Structural	07-01-2010
703	487	GARFIELD AVE	MAGNOLIA ST	LINDSAY LN	A	AAC	~	778	15	11,670	3/11/24	79	24	76	0	Overlay - AC Structural	07-01-2010
703	488	GARFIELD AVE	RANDI LN (S)	MAGNOLIA ST	A	AAC	~	820	21	17,220	3/11/24	94	100	0	0	Overlay - AC Structural	06-21-2013
703	489	GARFIELD AVE	PAULINE LN	RANDI LN	A	AAC	~	935	21	19,635	3/11/24	95	100	0	0	Overlay - AC Structural	06-21-2013
703	490	GARFIELD AVE	BUSHARD ST	PAULINE LN	A	AAC	~	890	21	18,690	3/11/24	93	100	0	0	Overlay - AC Structural	06-21-2013
703	493	GARFIELD AVE	BROOKFIELD MANOR	BLUEFIN LN	A	AC	~	1,213	33	40,029	3/11/24	77	50	0	50	New Construction - Initial	01-01-1980
703	494	GARFIELD AVE	BROOKHURST ST	BROOKFIELD MANOR	A	AC	~	839	33	27,687	3/11/24	71	47	18	35	New Construction - Initial	01-01-1980
703	496	GARFIELD AVE	SUVA LN	KIPAHULU DR	A	AC	~	1,118	33	36,894	4/8/24	88	93	0	7	New Construction - Initial	01-01-1980
703	497	GARFIELD AVE	WARD ST	SUVA LN	A	AC	~	844	33	27,852	4/8/24	78	96	0	4	New Construction - Initial	01-01-1980
703	51	GARFIELD AVE	BLUEFIN LN	BROOKFIELD MANOR	A	AC	~	1,213	33	40,029	5/7/24	73	88	0	12	New Construction - Initial	01-01-1980
703	52	GARFIELD AVE	BROOKFIELD MANOR	BROOKHURST ST	A	AC	~	839	33	27,687	5/8/24	64	22	68	10	New Construction - Initial	01-01-1980
703	54	GARFIELD AVE	KIPAHULU DR	SUVA LN	A	AC	~	1,118	33	36,894	4/8/24	94	100	0	0	New Construction - Initial	01-01-1980
703	546	GARFIELD AVE	SADDLEBACK LN	EDWARDS ST	A	AC	~	1,320	40	52,800	3/11/24	82	45	0	55	New Construction - Initial	01-01-1980
703	547	GARFIELD AVE	GOLDENWEST ST	SADDLEBACK LN	A	AC	~	1,320	40	52,800	3/11/24	87	97	0	3	New Construction - Initial	01-01-1980
703	548	GARFIELD AVE	EDWARDS ST	SEAPOINT AVE	A	AC	~	1,261	40	50,440	3/11/24	91	47	0	53	New Construction - Initial	01-01-1980
703	55	GARFIELD AVE	SUVA LN	WARD ST	A	AC	~	844	33	27,852	4/8/24	90	100	0	0	New Construction - Initial	01-01-1980
703	597	GARFIELD AVE	BLUEFIN LN	BUSHARD ST	A	AC	~	585	33	19,305	3/11/24	62	25	0	75	New Construction - Initial	01-01-1980
703	598	GARFIELD AVE	KIPAHULU DR	BROOKHURST ST	A	AC	~	681	33	22,473	4/8/24	87	91	0	9	New Construction - Initial	01-01-1980
703	712	GARFIELD AVE	GOTHARD ST	GOLDENWEST ST	A	AC	~	1,320	43	56,760	3/11/24	81	61	6	33	New Construction - Initial	01-01-1980
703	713	GARFIELD AVE	MAIN ST	GOTHARD ST	A	AC	~	1,238	45	55,710	3/11/24	60	76	0	24	New Construction - Initial	01-01-1980
703	714	GARFIELD AVE	DELAWARE ST	MAIN ST	A	AC	~	1,403	45	63,135	3/5/24	93	65	0	35	New Construction - Initial	01-01-1980
703	715	GARFIELD AVE	BEACH BL	DELWARE ST	A	AAC	~	1,321	39	51,519	3/5/24	93	100	0	0	Overlay - AC Structural	06-12-2012
703	716	GARFIELD AVE	LISTER LN	BEACH BL	A	AC	~	1,363	38	51,794	3/5/24	75	95	5	0	New Construction - Initial	01-01-1980
703	717	GARFIELD AVE	NEWLAND ST	LISTER LN	A	AC	~	1,281	38	48,678	4/8/24	77	100	0	0	New Construction - Initial	01-01-1980
743	103	GOLDENWEST ST	SUMMIT DR	YORKTOWN AVE	A	AC	~	1,424	42	66,308	5/10/24	66	32	33	35	New Construction - Initial	01-01-1980
743	138	GOLDENWEST ST	RIO VISTA DR	CENTRAL PARK	A	AC	~	1,478	40	62,870	5/6/24	70	47	27	26	New Construction - Initial	01-01-1980
743	139	GOLDENWEST ST	CENTRAL PARK	EQUESTRIAN CENTER	A	AC	~	1,959	40	82,360	5/6/24	73	53	47	0	New Construction - Initial	01-01-1980
743	141	GOLDENWEST ST	GARFIELD AVE	SUMMIT DR	A	AC	~	1,236	41	52,676	5/9/24	68	78	15	7	New Construction - Initial	01-01-1980
743	239	GOLDENWEST ST	BETTY DR	SLATER AVE	A	AC	~	1,193	39	46,527	5/6/24	74	29	71	0	New Construction - Initial	01-01-1980
743	26	GOLDENWEST ST	BOLSA AVE	OXFORD DR	A	AC	~	797	40	31,880	5/6/24	100	0	0	0	New Construction - Initial	01-01-1980
743	27	GOLDENWEST ST	OXFORD DR	BRUNSWICK DR	A	AC	~	1,104	40	44,160	5/6/24	56	38	60	2	New Construction - Initial	01-01-1980
743	28	GOLDENWEST ST	BRUNSWICK DR	MCFADDEN AVE	A	AC	~	740	40	29,600	5/6/24	70	41	51	8	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
743	35	GOLDENWEST ST	MCFADDEN AVE	BLUEBONNET DR	A	AAC	~	828	40	33,120	5/6/24	86	66	28	6	Overlay - AC Structural	10-29-2007
743	36	GOLDENWEST ST	BLUEBONNET DR	BREELAND DR	A	AAC	~	1,170	40	46,800	5/6/24	81	47	34	19	Overlay - AC Structural	10-29-2007
743	361	GOLDENWEST ST	PCH	ORANGE AVE	A	AAC	~	1,239	44	58,516	4/30/24	93	78	0	22	Overlay - AC Structural	06-21-2013
743	366	GOLDENWEST ST	ORANGE AVE	PALM AVE	A	AAC	~	1,236	44	57,884	4/30/24	93	89	11	0	Overlay - AC Structural	06-21-2013
743	37	GOLDENWEST ST	BREELAND DR	EDINGER AVE	A	AAC	~	643	40	25,720	5/6/24	81	57	20	23	Overlay - AC Structural	09-11-2007
743	381	GOLDENWEST ST	YORKTOWN AVE	DEEP HARBOR LN	A	AAC	~	1,393	42	60,756	4/30/24	94	83	0	17	Overlay - AC Structural	06-21-2013
743	382	GOLDENWEST ST	DEEP HARBOR LN	PALM AVE	A	AAC	~	1,360	42	59,370	4/30/24	94	89	0	11	Overlay - AC Structural	06-21-2013
743	391	GOLDENWEST ST	WARNER AVE	BETTY DR	A	AC	~	1,452	40	58,080	5/6/24	57	11	77	12	New Construction - Initial	01-01-1980
743	41	GOLDENWEST ST	ELLIS AVE	ERNEST AVE	A	AC	~	1,585	40	65,650	5/9/24	79	100	0	0	New Construction - Initial	01-01-1980
743	416	GOLDENWEST ST	EDINGER AVE	LAURELHURST DR	A	AAC	~	1,190	40	47,600	5/6/24	79	58	34	8	Overlay - AC Structural	09-11-2007
743	417	GOLDENWEST ST	LAURELHURST DR	HEIL AVE	A	AAC	~	1,450	40	58,000	5/6/24	77	68	20	12	Overlay - AC Structural	09-11-2007
743	42	GOLDENWEST ST	ERNEST AVE	GARFIELD AVE	A	AC	~	1,055	38	46,390	5/9/24	91	41	0	59	New Construction - Initial	01-01-1980
743	421	GOLDENWEST ST	NORMA DR	WARNER AVE	A	AAC	~	1,316	40	52,640	5/6/24	76	30	64	6	Overlay - AC Structural	09-11-2007
743	450	GOLDENWEST ST	RIO VISTA DR	SLATER AVE	A	AC	~	1,166	40	46,640	5/6/24	74	41	59	0	New Construction - Initial	01-01-1980
743	451	GOLDENWEST ST	ELLIS AVE	EQUESTRIAN CENTER	A	AC	~	681	40	27,240	5/6/24	78	97	0	3	New Construction - Initial	01-01-1980
743	468	GOLDENWEST ST	OXFORD DR	BOLSA AVE	A	AC	~	797	40	36,880	5/6/24	100	0	0	0	New Construction - Initial	01-01-1980
743	469	GOLDENWEST ST	BRUNSWICK DR	OXFORD DR	A	AC	~	1,104	40	44,160	5/6/24	64	32	68	0	New Construction - Initial	01-01-1980
743	470	GOLDENWEST ST	MC FADDEN AVE	BRUNSWICK DR	A	AC	~	740	40	28,750	5/6/24	61	37	49	14	New Construction - Initial	01-01-1980
743	477	GOLDENWEST ST	BLUEBONNET DR	MC FADDEN AVE	A	AAC	~	828	40	33,120	5/6/24	68	28	67	5	Overlay - AC Structural	09-11-2007
743	478	GOLDENWEST ST	BREELAND DR	BLUEBONNET DR	A	AAC	~	1,170	40	46,800	5/6/24	74	40	58	2	Overlay - AC Structural	09-11-2007
743	483	GOLDENWEST ST	ERNEST AVE	ELLIS AVE	A	AC	~	1,585	40	65,900	5/9/24	85	62	8	30	New Construction - Initial	01-01-1980
743	484	GOLDENWEST ST	GARFIELD AVE	ERNEST AVE	A	AC	~	1,055	38	40,090	5/9/24	90	62	0	38	New Construction - Initial	01-01-1980
743	534	GOLDENWEST ST	NORMA DR	MADDOX DR	A	AAC	~	787	40	31,480	5/6/24	82	88	12	0	Overlay - AC Structural	09-11-2007
743	545	GOLDENWEST ST	YORKTOWN AVE	SUMMIT DR	A	AC	~	1,424	42	61,808	5/9/24	76	68	32	0	New Construction - Initial	01-01-1980
743	580	GOLDENWEST ST	CENTRAL PARK	RIO VISTA DR	A	AC	~	1,478	40	62,620	5/6/24	73	68	32	0	New Construction - Initial	01-01-1980
743	581	GOLDENWEST ST	EQUESTRIAN CENTER	CENTRAL PARK	A	AC	~	1,959	40	81,860	5/6/24	68	63	31	6	New Construction - Initial	01-01-1980
743	583	GOLDENWEST ST	SUMMIT DR	GARFIELD AVE	A	AC	~	1,236	42	59,012	5/9/24	73	82	13	5	New Construction - Initial	01-01-1980
743	681	GOLDENWEST ST	SLATER AVE	BETTY DR	A	AC	~	1,193	39	46,527	5/6/24	84	70	28	2	New Construction - Initial	01-01-1980
743	7000	GOLDENWEST ST	MADDOX DR	HEIL AVE	A	AAC	~	533	40	21,320	5/6/24	78	73	17	10	Overlay - AC Structural	09-11-2007
743	7001	GOLDENWEST ST	EDINGER AVE	BREELAND DR	A	AAC	~	643	40	25,720	5/6/24	81	58	42	0	Overlay - AC Structural	09-11-2007
743	803	GOLDENWEST ST	ORANGE AVE	PCH	A	AAC	~	1,239	42	55,038	4/30/24	94	75	0	25	Overlay - AC Structural	06-21-2012
743	808	GOLDENWEST ST	PALM AVE	ORANGE AVE	A	AAC	~	1,236	42	54,412	4/30/24	94	84	16	0	Overlay - AC Structural	06-21-2013
743	823	GOLDENWEST ST	DEEP HARBOR LN	YORKTOWN AVE	A	AAC	~	1,393	42	60,756	4/30/24	94	74	14	12	Overlay - AC Structural	06-21-2013
743	824	GOLDENWEST ST	PALM AVE	DEEP HARBOR LN	A	AAC	~	1,360	44	62,840	4/30/24	95	100	0	0	Overlay - AC Structural	06-21-2013
743	833	GOLDENWEST ST	BETTY DR	WARNER AVE	A	AC	~	1,452	40	60,330	5/6/24	64	37	42	21	New Construction - Initial	01-01-1980
743	858	GOLDENWEST ST	LAURELHURST DR	EDINGER AVE	A	AAC	~	1,190	40	47,600	5/6/24	80	70	30	0	Overlay - AC Structural	09-11-2007
743	859	GOLDENWEST ST	HEIL AVE	LAURELHURST DR	A	AAC	~	1,450	40	58,000	5/6/24	81	89	11	0	Overlay - AC Structural	09-11-2007
743	863	GOLDENWEST ST	WARNER AVE	NORMA DR	A	AAC	~	1,316	40	52,640	5/6/24	75	82	0	18	Overlay - AC Structural	09-11-2007
743	90	GOLDENWEST ST	HEIL AVE	MADDOX DR	A	AAC	~	533	40	21,320	5/6/24	73	100	0	0	Overlay - AC Structural	09-11-2007
743	92	GOLDENWEST ST	MADDOX DR	NORMA DR	A	AAC	~	787	40	31,480	5/6/24	84	53	21	26	Overlay - AC Structural	09-11-2007
743	9908	GOLDENWEST ST	SLATER AVE	RIO VISTA DR	A	AC	~	1,168	40	46,720	5/6/24	56	50	48	2	New Construction - Initial	01-01-1980
743	9909	GOLDENWEST ST	EQUESTRIAN CENTER	ELLIS AVE	A	AC	~	681	40	30,740	5/6/24	66	58	42	0	New Construction - Initial	01-01-1980
746	150	GOTHARD ST	PROMENADE PARKWAY DR	ERNEST DR	A	AC	~	819	27	22,113	5/9/24	84	94	0	6	New Construction - Initial	01-01-1980
746	151	GOTHARD ST	ERNEST AVE	GARFIELD AVE	A	AC	~	1,053	32	33,696	5/9/24	88	69	1	30	New Construction - Initial	01-01-1980
746	161	GOTHARD ST	SLATER AVE	BELVA DR	A	AC	~	1,320	30	39,600	5/9/24	59	58	42	0	New Construction - Initial	01-01-1980
746	162	GOTHARD ST	BELVA DR	TALBERT AVE	A	AC	~	1,320	30	39,600	5/9/24	71	93	7	0	New Construction - Initial	01-01-1980
746	163	GOTHARD ST	ELLIS AVE	PROMENADE PARKWAY DR	A	AC	~	949	27	27,123	5/9/24	74	75	0	25	New Construction - Initial	01-01-1980
746	240	GOTHARD ST	CEDAR AVE	SLATER AVE	A	AC	~	1,652	30	49,560	5/9/24	58	54	31	15	New Construction - Initial	01-01-1980
746	241	GOTHARD ST	WARNER AVE	CEDAR AVE	A	AC	~	990	30	31,700	5/9/24	62	69	23	8	New Construction - Initial	01-01-1980
746	262	GOTHARD ST	TALBERT AVE	PRODAN DR	A	AC	~	1,020	30	30,600	5/9/24	63	57	18	25	New Construction - Initial	01-01-1980
746	263	GOTHARD ST	PRODAN DR	MOUNTJOY DR	A	AC	~	1,054	30	31,620	5/9/24	65	54	16	30	New Construction - Initial	01-01-1980
746	264	GOTHARD ST	MOUNTJOY DR	ELLIS AVE	A	AC	~	561	30	16,830	5/9/24	69	62	38	0	New Construction - Initial	01-01-1980
746	371	GOTHARD ST	GARFIELD AVE	MAIN ST	A	AC	~	1,320	32	42,240	5/9/24	83	76	0	24	New Construction - Initial	01-01-1980
746	443	GOTHARD ST	CENTER AVE	MC FADDEN AVE	A	AAC	~	1,425	60	85,500	5/9/24	89	88	7	5	Overlay - AC Structural	03-21-2016
746	586	GOTHARD ST	EDINGER AVE	CENTER AVE	A	AAC	~	1,321	60	79,260	5/9/24	90	74	26	0	Overlay - AC Structural	03-21-2016
746	592	GOTHARD ST	ERNEST AVE	PROMENADE PARKWAY DR	A	AC	~	819	27	23,863	3/11/24	93	100	0	0	New Construction - Initial	01-01-1980
746	593	GOTHARD ST	GARFIELD AVE	ERNEST AVE	A	AC	~	1,053	32	33,696	3/11/24	80	36	0	64	New Construction - Initial	01-01-1980
746	603	GOTHARD ST	BELVA DR	SLATER AVE	A	AC	~	1,320	30	39,600	5/9/24	60	54	32	14	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
746	604	GOTHARD ST	TABLERT AVE	BELVA DR	A	AC	~	1,320	30	39,600	5/9/24	67	92	0	8	New Construction - Initial	01-01-1980
746	605	GOTHARD ST	PROMENADE PARKWAY DR	ELLIS AVE	A	AC	~	949	27	27,873	5/9/24	88	56	0	44	New Construction - Initial	01-01-1980
746	626	GOTHARD ST	HEIL AVE	390' S/O MURDY	A	AAC	~	1,085	60	65,100	5/9/24	74	91	2	7	Overlay - AC Structural	07-01-2010
746	682	GOTHARD ST	SLATER AVE	CEDAR AVE	A	AC	~	1,652	30	49,560	5/9/24	63	50	29	21	New Construction - Initial	01-01-1980
746	683	GOTHARD ST	CEDAR AVE	WARNER AVE	A	AC	~	990	30	29,700	5/9/24	64	78	7	15	New Construction - Initial	01-01-1980
746	704	GOTHARD ST	PRODAN DR	TALBERT AVE	A	AC	~	1,020	30	30,600	5/9/24	60	48	30	22	New Construction - Initial	01-01-1980
746	705	GOTHARD ST	MOUNTJOY DR	PRODAN DR	A	AC	~	1,054	30	31,620	5/9/24	65	55	14	31	New Construction - Initial	01-01-1980
746	706	GOTHARD ST	ELLIS AVE	MOUNTJOY DR	A	AC	~	561	30	16,830	5/9/24	61	46	39	15	New Construction - Initial	01-01-1980
746	813	GOTHARD ST	MAIN ST	GARFIELD AVE	A	AC	~	1,320	32	42,240	5/9/24	84	34	0	66	New Construction - Initial	01-01-1980
746	857	GOTHARD ST	390' S/O MURDY	EDINGER AVE	A	AAC	~	1,556	60	93,360	5/9/24	72	68	30	2	Overlay - AC Structural	07-01-2010
746	860	GOTHARD ST	PRINCE DR	HEIL AVE	A	AC	~	1,330	60	79,800	5/9/24	61	56	44	0	New Construction - Initial	01-01-1980
746	861	GOTHARD ST	WARNER AVE	PRINCE DR	A	AC	~	1,310	60	78,600	5/9/24	59	52	48	0	New Construction - Initial	01-01-1980
751	175	GRAHAM ST	BOLSA AVE	ARGOSY AVE	A	AC	~	1,200	60	72,000	5/1/24	81	46	11	43	New Construction - Initial	01-01-1980
751	176	GRAHAM ST	ARGOSY AVE	MC FADDEN AVE	A	AC	~	1,441	60	86,460	5/1/24	84	62	0	38	New Construction - Initial	01-01-1980
751	199	GRAHAM ST	RESEARCH DR	EDINGER AVE	A	AC	~	1,525	28	47,700	5/1/24	81	57	0	43	New Construction - Initial	01-01-1980
751	221	GRAHAM ST	WARNER AVE	KENILWORTH DR	A	AC	~	1,190	30	35,700	5/3/24	99	100	0	0	New Construction - Initial	01-01-1980
751	222	GRAHAM ST	KENILWORTH DR	SLATER AVE	A	AC	~	1,450	30	43,500	5/3/24	99	100	0	0	New Construction - Initial	01-01-1980
751	31	GRAHAM ST	MC FADDEN AVE	RESEARCH DR	A	AC	~	1,116	28	35,248	5/1/24	77	37	0	63	New Construction - Initial	01-01-1980
751	402	GRAHAM ST	EDINGER AVE	MEADOWLARK DR	A	AC	~	1,485	60	89,100	5/3/24	75	59	27	14	New Construction - Initial	01-01-1980
751	403	GRAHAM ST	MEADOWLARK DR	HEIL AVE	A	AC	~	1,161	60	69,660	5/3/24	82	98	0	2	New Construction - Initial	01-01-1980
751	404	GRAHAM ST	HEIL AVE	OLD PIRATE LN	A	AC	~	1,178	60	55,680	5/3/24	51	19	58	23	New Construction - Initial	01-01-1980
751	406	GRAHAM ST	OLD PIRATE LN	WARNER AVE	A	AC	~	1,466	60	61,960	5/3/24	57	12	59	29	New Construction - Initial	01-01-1980
751	473	GRAHAM ST	RESEARCH DR	MCFADDEN AVE	A	AC	~	1,116	28	34,248	5/1/24	90	72	15	13	New Construction - Initial	01-01-1980
751	641	GRAHAM ST	EDINGER AVE	RESEARCH DR	A	AC	~	1,525	28	43,950	5/1/24	86	68	0	32	New Construction - Initial	01-01-1980
751	663	GRAHAM ST	KENILWORTH DR	WARNER AVE	A	AC	~	1,190	30	35,700	5/3/24	99	100	0	0	New Construction - Initial	01-01-1980
751	664	GRAHAM ST	SLATER AVE	KENILWORTH DR	A	AC	~	1,450	30	43,500	5/3/24	99	100	0	0	New Construction - Initial	01-01-1980
789	102	HAMILTON AVE	SURVEYOR CIR	MAGNOLIA ST	C	AC	~	1,570	50	78,500	4/1/24	95	100	0	0	New Construction - Initial	01-01-1980
789	334	HAMILTON AVE	NEWLAND ST	SURVEYOR CIR	C	AC	~	1,070	40	42,800	4/25/24	95	100	0	0	New Construction - Initial	01-01-1980
789	336	HAMILTON AVE	BUSHARD ST	VIA STRAITS LN	C	AC	~	1,067	31	33,077	3/26/24	57	28	69	3	New Construction - Initial	01-01-1980
789	337	HAMILTON AVE	VIA STRAITS LN	BROOKHURST ST	C	AC	~	1,573	31	48,763	3/26/24	64	42	56	2	New Construction - Initial	01-01-1980
789	437	HAMILTON AVE	NORTHSHORE LN	BUSHARD ST	C	AC	~	714	31	22,134	4/1/24	73	36	20	44	New Construction - Initial	01-01-1980
789	515	HAMILTON AVE	NORTHSHORE LN	POLYNESIAN LN	C	AC	~	1,338	31	41,478	4/1/24	87	69	12	19	New Construction - Initial	01-01-1980
789	516	HAMILTON AVE	POLYNESIAN LN	MAGNOLIA ST	C	AC	~	590	31	18,290	4/1/24	53	45	51	4	New Construction - Initial	01-01-1980
789	60890	HAMILTON AVE	BROOKHURST ST	BRIDGE	C	AC	~	345	31	10,695	5/8/24	62	75	24	1	New Construction - AC	01-01-1980
789	60900	HAMILTON AVE	BRIDGE	BROOKHURST ST	C	AC	~	345	32	11,040	5/10/24	65	43	43	14	New Construction - AC	01-01-1980
789	73	HAMILTON AVE	POLYNESIAN LN	NORTHSHORE LN	A	AC	~	1,338	31	41,478	3/26/24	63	28	34	38	New Construction - Initial	01-01-1980
789	74	HAMILTON AVE	MAGNOLIA ST	POLYNESIAN LN	C	AC	~	590	31	18,290	3/26/24	62	58	41	1	New Construction - Initial	01-01-1980
789	776	HAMILTON AVE	SURVEYOR CIR	NEWLAND ST	C	AC	~	1,070	27	28,890	4/25/24	95	100	0	0	New Construction - Initial	01-01-1980
789	778	HAMILTON AVE	VIA STRAITS LN	BUSHARD ST	C	AC	~	1,067	31	33,077	5/8/24	73	65	35	0	New Construction - Initial	01-01-1980
789	779	HAMILTON AVE	BROOKHURST ST	VIA STRAITS LN	C	AC	~	1,573	31	48,763	5/8/24	62	77	16	7	New Construction - Initial	01-01-1980
789	879	HAMILTON AVE	BUSHARD ST	NORTHSHORE LN	C	AC	~	714	31	22,134	5/8/24	70	67	33	0	New Construction - Initial	01-01-1980
825	17013	HEIL AVE	SEAVIEW LN	SAYBROOK LN	A	AC	~	1,321	61	80,581	5/10/24	82	100	0	0	New Construction - Initial	01-01-1980
825	17014	HEIL AVE	BLACKBEARD LN	SEAVIEW LN	A	AC	~	1,358	61	82,838	5/10/24	82	83	0	17	New Construction - Initial	01-01-1980
825	17015	HEIL AVE	BOLSA CHICA ST	BLACKBEARD LN	A	AC	~	1,282	61	78,202	5/10/24	87	39	61	0	New Construction - Initial	01-01-1980
825	446	HEIL AVE	CLUBHOUSE LN	GRAHAM ST	A	AC	~	1,257	61	76,677	5/7/24	93	100	0	0	Surface Treatment - Slurry Seal	02-14-2019
825	447	HEIL AVE	SABOT LN	GOLDENWEST ST	A	AC	~	828	61	50,508	5/8/24	57	44	33	23	New Construction - Initial	01-01-1980
825	627	HEIL AVE	RHONE LN	GOTHARD ST	A	AC	~	815	61	49,715	5/8/24	79	100	0	0	New Construction - Initial	01-01-1980
825	628	HEIL AVE	BEACH BLVD	SILVER LN	A	AAC	~	1,320	61	80,520	5/8/24	82	43	57	0	Overlay - AC Structural	09-11-2007
825	629	HEIL AVE	LANDAU LN	NEWLAND ST	C	AC	~	1,332	34	45,288	5/8/24	77	79	18	3	New Construction - Initial	01-01-1980
825	630	HEIL AVE	NEWLAND ST	MONROE LN	A	AC	~	1,397	60	83,820	5/8/24	81	58	42	0	New Construction - Initial	01-01-1980
825	631	HEIL AVE	MONROE LN	BEACH BL	A	AC	~	1,240	60	74,400	5/8/24	83	67	33	0	New Construction - Initial	01-01-1980
825	632	HEIL AVE	GOLDENWEST ST	FOUNTAIN LN	A	AAC	~	1,452	61	88,572	5/7/24	94	100	0	0	Overlay - AC Structural	06-21-2016
825	633	HEIL AVE	EDWARDS ST	TRUDY LN	A	AC	~	1,310	61	79,910	5/7/24	95	88	0	12	New Construction - Initial	01-01-1980
825	634	HEIL AVE	TRUDY LN	SPRINGDALE ST	A	AC	~	1,334	61	81,374	5/7/24	95	100	0	0	New Construction - Initial	01-01-1980
825	645	HEIL AVE	GRAHAM ST	DEL MAR LN	A	AC	~	997	61	60,817	5/9/24	93	100	0	0	Overlay-Rubber Hot Mix	02-14-2019
825	646	HEIL AVE	SPRINGDALE ST	CLUBHOUSE LN	A	AC	~	1,391	61	84,851	5/7/24	95	100	0	0	Surface Treatment - Slurry Seal	02-14-2019
825	658	HEIL AVE	DEL MAR LN	BOLSA CHICA ST	A	AC	~	1,654	61	100,894	5/9/24	93	100	0	0	Overlay-Rubber Hot Mix	02-14-2019
825	862	HEIL AVE	FOUNTAIN LN	EDWARDS ST	A	AAC	~	1,191	61	72,651	5/7/24	95	100	0	0	Overlay - AC Structural	06-21-2016

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
825	864	HEIL AVE	GOTHARD ST	SABOT LN	A	AC	~	1,154	61	70,394	5/8/24	48	44	40	16	New Construction - Initial	01-01-1980
825	865	HEIL AVE	SILVER LN	RHONE LN	A	AC	~	1,165	61	71,065	5/8/24	83	85	12	3	New Construction - Initial	01-01-1980
887	154	INDIANAPOLIS AVE	NEWLAND ST	IVES LN	C	AAC	~	1,362	24	32,688	5/1/24	95	100	0	0	Overlay - AC Structural	07-01-2017
887	299	INDIANAPOLIS AVE	TITAN LN	BUSHARD ST	C	AC	~	988	24	23,712	3/20/24	92	100	0	0	New Construction - Initial	01-01-1980
887	300	INDIANAPOLIS AVE	BUSHARD ST	EVERGLADES LN	C	AC	~	1,451	24	34,824	3/19/24	92	100	0	0	New Construction - Initial	01-01-1980
887	301	INDIANAPOLIS AVE	EVERGLADES LN	BROOKHURST LN	A	AC	~	1,190	24	28,560	3/19/24	94	100	0	0	New Construction - Initial	01-01-1980
887	309	INDIANAPOLIS AVE	DELAWARE ST	BEACH BLVD	C	AC	~	1,320	33	43,560	5/1/24	78	35	0	65	New Construction - Initial	01-01-1980
887	310	INDIANAPOLIS AVE	BEACH BLVD	FARNSWORTH LN	C	AC	~	1,325	24	31,800	5/1/24	88	81	19	0	Overlay-Rubber Hot Mix	02-14-2019
887	311	INDIANAPOLIS AVE	FARNSWORTH LN	NEWLAND ST	C	AC	~	1,325	24	31,800	5/1/24	88	100	0	0	Overlay-Rubber Hot Mix	02-14-2019
887	312	INDIANAPOLIS AVE	LAKE ST	DELAWARE ST	C	AC	~	1,517	19	28,823	5/1/24	43	19	62	19	New Construction - Initial	01-01-1980
887	436	INDIANAPOLIS AVE	KELVINGROVE LN	TITAN LN	C	AC	~	775	24	18,600	3/20/24	92	100	0	0	New Construction - Initial	01-01-1980
887	507	INDIANAPOLIS AVE	MAGNOLIA ST	IVES LN	A	AAC	~	1,281	24	30,744	5/1/24	95	100	0	0	Overlay - AC Structural	07-01-2017
887	508	INDIANAPOLIS AVE	KELVINGROVE LN	MAGNOLIA ST	A	AC	~	880	24	21,120	3/20/24	89	100	0	0	New Construction - Initial	01-01-1980
887	596	INDIANAPOLIS AVE	IVES LN	NEWLAND ST	C	AAC	~	1,362	24	32,688	5/1/24	95	100	0	0	Overlay - AC Structural	07-01-2017
887	65	INDIANAPOLIS AVE	IVES LN	MAGNOLIA ST	A	AAC	~	1,281	24	30,744	5/1/24	95	100	0	0	Overlay - AC Structural	07-01-2017
887	66	INDIANAPOLIS AVE	MAGNOLIA ST	KELVINGROVE LN	C	AC	~	880	24	21,120	3/20/24	93	100	0	0	New Construction - Initial	01-01-1980
887	741	INDIANAPOLIS AVE	BUSHARD ST	TITAN LN	A	AC	~	988	24	23,712	3/20/24	92	100	0	0	New Construction - Initial	01-01-1980
887	742	INDIANAPOLIS AVE	EVERGLADES LN	BUSHARD ST	C	AC	~	1,451	24	34,824	3/19/24	90	100	0	0	New Construction - Initial	01-01-1980
887	743	INDIANAPOLIS AVE	BROOKHURST ST	EVERGLADES LN	A	AC	~	1,190	24	28,560	3/19/24	91	100	0	0	New Construction - Initial	01-01-1980
887	752	INDIANAPOLIS AVE	FARNSWORTH LN	BEACH BLVD	C	AC	~	1,325	24	31,800	5/1/24	89	100	0	0	Overlay-Rubber Hot Mix	02-14-2019
887	753	INDIANAPOLIS AVE	NEWLAND ST	FARNSWORTH LN	C	AC	~	1,325	24	31,800	5/1/24	87	84	0	16	Overlay-Rubber Hot Mix	02-14-2019
887	754	INDIANAPOLIS AVE	DELAWARE ST	LAKE ST	C	AC	~	1,517	19	28,823	5/1/24	36	7	86	7	New Construction - Initial	01-01-1980
887	878	INDIANAPOLIS AVE	TITAN LN	KELVINGROVE LN	C	AC	~	775	24	18,600	3/20/24	91	57	0	43	New Construction - Initial	01-01-1980
1017	307	LAKE ST	UTICA AVE	YORKTOWN AVE	A	AC	~	1,012	29	29,348	4/15/24	89	69	31	0	Surface Treatment - Slurry Seal	07-22-2014
1017	308	LAKE ST	ADAMS AVE	UTICA AVE	A	AC	~	1,321	29	38,309	5/1/24	83	45	55	0	New Construction - Initial	01-01-1980
1017	317	LAKE ST	ELEVENTH ST	ADAMS AVE	A	AAC	~	1,320	29	38,280	5/1/24	96	56	27	17	Overlay - AC Structural	07-22-2014
1017	322	LAKE ST	SIXTH ST	INDIANAPOLIS AVE	A	AC	~	1,107	29	32,103	5/1/24	77	37	50	13	New Construction - Initial	01-01-1980
1017	323	LAKE ST	ALLEY ORANGE AVE	SIXTH ST	A	AC	~	1,015	29	29,435	5/1/24	85	90	10	0	New Construction - Initial	01-01-1980
1017	430	LAKE ST	INDIANAPOLIS AVE	ELEVENTH ST	A	AAC	~	1,320	29	38,280	5/1/24	96	47	26	27	Overlay - AC Structural	07-22-2014
1017	50420	LAKE ST	ORANGE AVE	ALLEY ORANGE AVE	A	AC	~	322	40	12,880	5/1/24	86	44	52	4	New Construction - Initial	01-01-1980
1017	749	LAKE ST	YORKTOWN AVE	UTICA AVE	A	AC	~	1,012	29	29,348	4/15/24	92	100	0	0	New Construction - Initial	01-01-1980
1017	750	LAKE ST	UTICA AVE	ADAMS AVE	A	AC	~	1,321	29	38,309	5/1/24	88	65	31	4	Surface Treatment - Slurry Seal	07-22-2014
1017	759	LAKE ST	ADAMS AVE	ELEVENTH ST	A	AAC	~	1,320	29	38,280	5/1/24	97	74	0	26	Overlay - AC Structural	07-22-2014
1017	764	LAKE ST	INDIANAPOLIS AVE	SIXTH ST	A	AC	~	1,107	29	32,103	5/1/24	82	55	33	12	New Construction - Initial	01-01-1980
1017	765	LAKE ST	SIXTH ST	ALLEY ORANGE AVE	A	AAC	~	1,015	29	29,435	5/1/24	79	69	31	0	Overlay - AC Structural	11-01-2006
1017	872	LAKE ST	ELEVENTH ST	INDIANAPOLIS AVE	A	AAC	~	1,320	29	38,280	5/1/24	97	83	0	17	Overlay - AC Structural	07-22-2014
1127	108	MAGNOLIA ST	GARFIELD AVE	HYDE PARK DR	A	AC	~	970	40	38,800	3/5/24	88	57	20	23	New Construction - Initial	01-01-1980
1127	109	MAGNOLIA ST	HYDE PARK DR	SEAHURST DR	A	AC	~	825	40	33,000	3/5/24	86	32	68	0	New Construction - Initial	01-01-1980
1127	110	MAGNOLIA ST	SEAHURST DR	YORKTOWN AVE	A	AC	~	845	40	33,800	5/7/24	89	72	28	0	New Construction - Initial	01-01-1980
1127	111	MAGNOLIA ST	YORKTOWN AVE	MADELINE DR	A	AC	~	998	40	39,920	5/8/24	93	100	0	0	New Construction - Initial	01-01-1980
1127	112	MAGNOLIA ST	MADELINE DR	PIONEER DR	A	AC	~	763	40	30,520	5/8/24	91	92	0	8	New Construction - Initial	01-01-1980
1127	113	MAGNOLIA ST	ADAMS AVE	MEDITERRANEAN DR	A	AAC	~	895	33	31,535	3/20/24	92	81	0	19	Overlay - AC Structural	06-13-2012
1127	114	MAGNOLIA ST	BEDEL DR	INDIANAPOLIS AVE	A	AAC	~	794	33	29,952	3/20/24	93	100	0	0	Overlay - AC Structural	06-13-2012
1127	115	MAGNOLIA ST	ATLANTA AVE	STILWELL DR	A	AC	~	1,346	33	49,668	5/9/24	72	93	7	0	New Construction - Initial	01-01-1980
1127	116	MAGNOLIA ST	HAMILTION AVE	BERMUDA DR	A	AC	~	1,447	32	46,304	3/27/24	78	100	0	0	New Construction - Initial	01-01-1980
1127	117	MAGNOLIA ST	BERMUDA DR	BANNING AVE	A	AC	~	1,150	32	38,550	3/27/24	84	100	0	0	New Construction - Initial	01-01-1980
1127	118	MAGNOLIA ST	BANNING AVE	PCH	C	AC	~	1,468	33	48,444	4/17/24	85	100	0	0	New Construction - Initial	01-01-1980
1127	147	MAGNOLIA ST	MEDITERRANEAN DR	BEDEL DR	A	AAC	~	955	33	33,515	3/20/24	92	100	0	0	Overlay - AC Structural	06-13-2012
1127	292	MAGNOLIA ST	PIONEER DR	ADAMS AVE	A	AC	~	880	40	35,200	5/8/24	91	89	0	11	New Construction - Initial	01-01-1980
1127	347	MAGNOLIA ST	STILWELL DR	HAMILTON AVE	A	AC	~	1,293	40	51,720	5/9/24	78	91	0	9	New Construction - Initial	01-01-1980
1127	352	MAGNOLIA ST	INDIANAPOLIS AVE	CARROLTOWN DR	A	AC	~	1,524	40	60,960	5/10/24	61	42	58	0	New Construction - Initial	01-01-1980
1127	353	MAGNOLIA ST	CARROLLTOWN DR	ATLANTA DR	A	AC	~	1,117	40	44,680	5/10/24	62	35	61	4	New Construction - Initial	01-01-1980
1127	50550	MAGNOLIA ST	WARNER AVE	BRIDGE	A	AC	~	1,280	60	86,600	5/13/24	100	0	0	0	New Construction - AC	01-01-1980
1127	550	MAGNOLIA ST	HYDE PARK DR	GARFIELD AVE	A	AC	~	970	40	38,800	3/5/24	93	67	0	33	New Construction - Initial	01-01-1980
1127	551	MAGNOLIA ST	SEAHURST DR	HYDE PARK DR	A	AC	~	825	40	33,000	3/5/24	93	60	0	40	New Construction - Initial	01-01-1980
1127	552	MAGNOLIA ST	YORKTOWN AVE	SEAHURST DR	A	AC	~	845	40	33,800	5/7/24	88	76	0	24	New Construction - Initial	01-01-1980
1127	553	MAGNOLIA ST	MADELINE DR	YORKTOWN AVE	A	AC	~	998	40	39,920	5/8/24	91	46	43	11	New Construction - Initial	01-01-1980
1127	554	MAGNOLIA ST	PIONEER DR	MADELINE DR	A	AC	~	763	40	30,520	3/20/24	95	100	0	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1127	555	MAGNOLIA ST	MEDITERRANEAN DR	ADAMS DR	A	AAC	~	895	33	31,785	3/20/24	90	55	0	45	Overlay - AC Structural	06-13-2012
1127	556	MAGNOLIA ST	INDIANAPOLIS AVE	BEDEL DR	A	AC	~	794	33	28,202	3/20/24	95	100	0	0	New Construction - Initial	01-01-1980
1127	557	MAGNOLIA ST	STILWELL DR	ATLANTA AVE	A	AC	~	1,346	40	53,840	4/1/24	91	100	0	0	New Construction - Initial	01-01-1980
1127	558	MAGNOLIA ST	BERMUDA DR	HAMILTON AVE	A	AC	~	1,447	33	47,751	3/26/24	91	67	0	33	New Construction - Initial	01-01-1980
1127	559	MAGNOLIA ST	BANNING AVE	BERMUDA DR	A	AC	~	1,150	33	39,950	3/26/24	94	90	0	10	New Construction - Initial	01-01-1980
1127	560	MAGNOLIA ST	PCH	BANNING AVE	C	AC	~	1,468	33	48,444	4/17/24	90	77	23	0	New Construction - Initial	01-01-1980
1127	589	MAGNOLIA ST	BEDEL DR	MEDITERRANEAN DR	A	AAC	~	955	33	33,015	3/20/24	91	100	0	0	Overlay - AC Structural	06-13-2012
1127	734	MAGNOLIA ST	ADAMS AVE	PIONEER DR	A	AC	~	880	40	35,200	5/8/24	88	68	0	32	New Construction - Initial	01-01-1980
1127	789	MAGNOLIA ST	HAMILTON AVE	STILWELL DR	A	AC	~	1,293	40	51,720	4/1/24	88	100	0	0	New Construction - Initial	01-01-1980
1127	794	MAGNOLIA ST	CARROLLTOWN DR	INDIANAPOLIS AVE	A	AC	~	1,524	40	60,960	5/10/24	41	22	72	6	New Construction - Initial	01-01-1980
1127	795	MAGNOLIA ST	ATLANTA AVE	CARROLLTOWN DR	A	AC	~	1,117	40	44,680	5/10/24	68	46	41	13	New Construction - Initial	01-01-1980
1130	143	MAIN ST	HOLLY ST	CLAY AVE	A	AAC	~	834	40	35,610	3/12/24	94	38	0	62	Overlay - AC Structural	07-11-2014
1130	268	MAIN ST	ELLIS AVE	DELAWARE ST	A	AAC	~	1,824	44	83,256	3/12/24	95	100	0	0	Overlay - AC Structural	08-06-2018
1130	269	MAIN ST	DELAWARE ST	PROMENADE PKWY	A	AC	~	1,243	40	49,720	3/12/24	92	100	0	0	New Construction - Initial	01-01-1980
1130	358	MAIN ST	PROMENADE PKWY	GARFIELD AVE	A	AAC	~	742	39	31,188	3/11/24	95	100	0	0	Overlay - AC Structural	06-21-2016
1130	359	MAIN ST	GARFIELD AVE	HOLLY ST	A	AC	~	819	40	33,510	3/12/24	93	100	0	0	New Construction - Initial	01-01-1980
1130	372	MAIN ST	SEVENTEENTH ST	YORKTOWN AVE	A	AAC	~	1,445	33	50,185	3/12/24	91	73	21	6	Overlay - AC Structural	06-13-2012
1130	379	MAIN ST	YORKTOWN AVE	CLAY AVE	A	AAC	~	1,370	33	49,210	3/12/24	85	20	0	80	Overlay - AC Structural	06-01-2015
1130	50230	MAIN ST	ELLIS AVE	BEACH BLVD	A	AAC	~	251	60	15,060	5/10/24	96	100	0	0	Overlay - AC Structural	08-06-2018
1130	585	MAIN ST	CLAY AVE	HOLLY ST	A	AAC	~	834	39	32,526	3/12/24	95	100	0	0	Overlay - AC Structural	07-21-2014
1130	710	MAIN ST	DELAWARE ST	ELLIS AVE	A	AAC	~	1,824	38	69,312	3/12/24	91	39	0	61	Overlay - AC Structural	08-06-2018
1130	711	MAIN ST	PROMENADE PKWY	DELAWARE ST	A	AAC	~	1,243	40	51,220	3/12/24	95	100	0	0	Overlay - AC Structural	06-21-2016
1130	800	MAIN ST	GARFIELD AVE	PROMENADE PKWY	A	AAC	~	742	37	27,454	3/12/24	95	100	0	0	Overlay - AC Structural	06-21-2016
1130	801	MAIN ST	HOLLY ST	GARFIELD AVE	A	AAC	~	819	41	36,579	3/12/24	95	100	0	0	Overlay - AC Structural	07-22-2014
1130	814	MAIN ST	YORKTOWN AVE	SEVENTEENTH ST	A	AAC	~	1,445	33	49,185	3/12/24	89	100	0	0	Overlay - AC Structural	06-13-2012
1130	821	MAIN ST	CLAY AVE	YORKTOWN AVE	A	AAC	~	1,370	33	48,360	3/12/24	92	85	0	15	Overlay - AC Structural	07-22-2014
1185	177	MC FADDEN AVE	GRAHAM ST	COMPUTER LN	A	AAC	~	925	60	55,500	5/3/24	90	89	0	11	Overlay - AC Structural	09-11-2007
1185	178	MC FADDEN AVE	COMPUTER LN	ELECTRONIC LN	A	AAC	~	923	60	55,380	5/3/24	91	93	0	7	Overlay - AC Structural	09-11-2007
1185	179	MC FADDEN AVE	ELECTRONIC LN	SPRINGDALE ST	A	AAC	~	734	60	44,040	5/3/24	87	68	0	32	Overlay - AC Structural	09-11-2007
1185	180	MC FADDEN AVE	SPRINGDALE ST	LA SALLE LN	A	AAC	~	1,481	60	88,860	4/29/24	87	75	25	0	Overlay - AC Structural	09-11-2007
1185	409	MC FADDEN AVE	LA SALLE LN	EDWARDS ST	A	AAC	~	1,165	60	69,900	4/29/24	76	31	69	0	Overlay - AC Structural	09-11-2007
1185	410	MC FADDEN AVE	EDWARDS ST	SALISBURY LN	A	AC	~	1,835	60	110,100	5/13/24	78	48	35	17	New Construction - Initial	01-01-1980
1185	412	MC FADDEN AVE	SALISBURY LN	GOLDENWEST ST	A	AC	~	810	60	48,600	5/13/24	71	54	25	21	New Construction - Initial	01-01-1980
1185	413	MC FADDEN AVE	GOTHARD ST	SUGAR AVE	A	AC	~	1,787	40	71,480	5/13/24	85	45	44	11	New Construction - Initial	01-01-1980
1185	99	MC FADDEN AVE	GOLDENWEST ST	GOTHARD ST	A	AC	~	2,341	60	140,460	5/13/24	62	39	61	0	New Construction - Initial	01-01-1980
1290	120	NEWLAND ST	TALBERT AVE	SPRINGHURST AVE	A	AC	~	900	30	27,000	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	121	NEWLAND ST	SPRINGHURST AVE	NEWGATE DR	A	AC	~	1,207	30	36,210	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	122	NEWLAND ST	NEWGATE DR	ELLIS AVE	A	AC	~	534	30	16,020	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	123	NEWLAND ST	FRIESLAND DR.(W)	SLATER AVE	A	AC	~	1,175	30	35,250	4/29/24	77	43	4	53	New Construction - Initial	01-01-1980
1290	124	NEWLAND ST	MODALE DR	KINGSPORT DR	A	AAC	~	937	30	28,110	4/8/24	72	100	0	0	Overlay - AC Structural	07-01-2011
1290	125	NEWLAND ST	KINGSPORT DR	GARFIELD AVE	A	AAC	~	385	30	11,550	4/8/24	76	100	0	0	Overlay - AC Structural	07-01-2011
1290	126	NEWLAND ST	BRIDGEPORT DR	YORKTOWN AVE	A	AC	~	1,156	60	69,360	5/7/24	96	100	0	0	New Construction - Initial	01-01-1980
1290	127	NEWLAND ST	DEEPVIEW DR	ADAMS AVE	A	AAC	~	1,193	60	71,580	4/3/24	80	60	38	2	Overlay - AC Structural	09-11-2007
1290	128	NEWLAND ST	ADAMS AVE	KELSO DR	A	AAC	~	959	60	57,540	5/7/24	78	93	0	7	Overlay - AC Structural	09-11-2007
1290	129	NEWLAND ST	INDIANAPOLIS AVE	PUERTO DR	A	AAC	~	1,931	60	115,860	5/8/24	83	86	11	3	Overlay - AC Structural	09-11-2007
1290	130	NEWLAND ST	PUERTO DR	ATLANTA AVE	A	AAC	~	720	60	43,200	5/8/24	75	77	7	16	Overlay - AC Structural	09-11-2007
1290	131	NEWLAND ST	EDINGER AVE	END	A	AC	~	1,321	60	79,260	4/29/24	96	0	0	100	New Construction - Initial	01-01-1980
1290	152	NEWLAND ST	HAMILTON AVE	EDISON AVE	A	AAC	~	848	48	40,704	5/8/24	76	48	50	2	Overlay - AC Structural	09-11-2007
1290	255	NEWLAND ST	WARNER AVE	FRIESLAND DR	A	AC	~	1,466	30	43,980	4/29/24	65	28	54	18	New Construction - Initial	01-01-1980
1290	256	NEWLAND ST	SLATER AVE	PASEO CIR	A	AC	~	1,346	30	40,380	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	257	NEWLAND ST	PASEO CIR	TALBERT AVE	A	AC	~	1,287	30	38,610	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	267	NEWLAND ST	ELLIS AVE	MODALE DR	A	AAC	~	1,322	30	39,660	5/9/24	70	91	9	0	Overlay - AC Structural	07-01-2011
1290	290	NEWLAND ST	YORKTOWN AVE	DEEPVIEW DR	A	AAC	~	1,447	60	86,820	4/3/24	86	98	0	2	Overlay - AC Structural	09-11-2007
1290	335	NEWLAND ST	EDISON AVE	PCH	A	AAC	~	1,524	42	54,008	5/8/24	72	28	69	3	Overlay - AC Structural	09-11-2007
1290	354	NEWLAND ST	KELSO DR	INDIANAPOLIS AVE	A	AAC	~	1,683	60	100,980	5/8/24	80	84	0	16	Overlay - AC Structural	09-11-2007
1290	398	NEWLAND ST	GARFIELD AVE	BRIDGEPORT DR	A	AC	~	1,485	60	89,100	5/7/24	96	100	0	0	New Construction - Initial	01-01-1980
1290	424	NEWLAND ST	HEIL AVE	LAMAR DR	A	AC	~	931	60	55,860	4/29/24	71	48	52	0	New Construction - Initial	01-01-1980
1290	425	NEWLAND ST	ARNETT DR	WARNER AVE	A	AC	~	866	60	51,960	4/29/24	76	44	47	9	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1290	429	NEWLAND ST	LAMAR DR	ARNETT DR	A	AC	~	844	60	50,640	4/29/24	79	61	37	2	New Construction - Initial	01-01-1980
1290	432	NEWLAND ST	ATLANTA AVE	ST AUGUSTINE DR	A	AC	~	1,454	60	87,240	5/8/24	86	42	27	31	New Construction - Initial	01-01-1980
1290	435	NEWLAND ST	ST AUGUSTINE DR	HAMILTON AVE	A	AC	~	1,185	60	71,100	5/8/24	84	71	19	10	New Construction - Initial	01-01-1980
1290	562	NEWLAND ST	SPRINGHURST AVE	TALBERT AVE	A	AC	~	900	27	24,300	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	563	NEWLAND ST	NEWGATE DR	SPRINGHURST AVE	A	AC	~	1,207	27	32,589	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	564	NEWLAND ST	ELLIS AVE	NEWGATE DR	A	AC	~	534	27	14,418	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	565	NEWLAND ST	SLATER AVE	FRIESLAND DR	A	AC	~	1,175	27	31,725	4/29/24	78	74	26	0	New Construction - Initial	01-01-1980
1290	566	NEWLAND ST	KINGSPORT DR	MODALE DR	A	AAC	~	937	27	25,299	5/10/24	74	100	0	0	Overlay - AC Structural	07-01-2011
1290	567	NEWLAND ST	GARFIELD AVE	KINGSPORT DR	A	AAC	~	385	27	10,395	5/8/24	76	100	0	0	Overlay - AC Structural	07-01-2011
1290	697	NEWLAND ST	FRIESLAND DR	WARNER AVE	A	AC	~	1,466	27	39,582	4/29/24	69	38	44	18	New Construction - Initial	01-01-1980
1290	698	NEWLAND ST	PASEO CIR	SLATER AVE	A	AC	~	1,346	27	36,342	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	699	NEWLAND ST	TALBERT AVE	PASEO CIR	A	AC	~	1,287	27	34,749	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	709	NEWLAND ST	MODALE DR	ELLIS AVE	A	AAC	~	1,322	27	35,694	5/9/24	75	99	0	1	Overlay - AC Structural	07-01-2011
1351	314	ORANGE AVE	NINTH ST	THIRTEENTH ST	C	AC	~	1,302	25	32,550	3/13/24	81	35	41	24	New Construction - Initial	01-01-1980
1351	315	ORANGE AVE	SIXTH ST	NINTH ST	C	AC	~	974	25	24,350	3/13/24	58	45	34	21	New Construction - Initial	01-01-1980
1351	316	ORANGE AVE	THIRTEENTH ST	SEVENTEENTH ST	C	AC	~	1,307	25	32,675	3/13/24	84	63	23	14	New Construction - Initial	01-01-1980
1351	325	ORANGE AVE	THIRD ST	SIXTH ST	C	AC	~	952	25	23,800	3/13/24	90	60	19	21	New Construction - Initial	01-01-1980
1351	326	ORANGE AVE	ATLANTA AVE	THIRD ST	C	AC	~	657	25	16,425	5/1/24	50	36	53	11	New Construction - Initial	01-01-1980
1351	362	ORANGE AVE	SEVENTEENTH ST	GOLDENWEST ST	C	AC	~	1,965	25	49,125	3/13/24	56	15	41	44	New Construction - Initial	01-01-1980
1351	756	ORANGE AVE	THIRTEENTH ST	NINTH ST	C	AC	~	1,302	25	32,550	3/13/24	73	27	44	29	New Construction - Initial	01-01-1980
1351	757	ORANGE AVE	NINTH ST	SIXTH ST	C	AC	~	974	25	24,350	3/13/24	76	37	37	26	New Construction - Initial	01-01-1980
1351	758	ORANGE AVE	SEVENTEENTH ST	THIRTEENTH ST	C	AC	~	1,307	25	32,675	3/13/24	63	28	45	27	New Construction - Initial	01-01-1980
1351	767	ORANGE AVE	SIXTH ST	THIRD ST	C	AAC	~	952	25	22,390	3/13/24	84	51	49	0	Overlay - AC Structural	09-11-2007
1351	768	ORANGE AVE	THIRD ST	ATLANTA AVE	C	AC	~	657	25	16,425	5/1/24	60	39	59	2	New Construction - Initial	01-01-1980
1351	804	ORANGE AVE	GOLDENWEST ST	SEVENTEENTH ST	C	AC	~	1,965	25	49,125	3/13/24	58	28	38	34	New Construction - Initial	01-01-1980
1472	14610	PACIFIC VIEW	TWIN DOLPHIN DR	BEACH BLVD	A	AC	~	1,262	30	37,860	4/30/24	88	100	0	0	New Construction	01-01-1980
1472	17003	PACIFIC VIEW	HUNTINGTON ST	TWIN DOLPHIN DR	A	AC	~	972	30	29,160	4/30/24	93	100	0	0	New Construction	01-01-1980
1472	50530	PACIFIC VIEW	TWIN DOLPHIN DR (W)	HUNTINGTON ST	A	AC	~	972	30	29,160	4/30/24	91	100	0	0	New Construction - Initial	01-01-1980
1472	50540	PACIFIC VIEW	BEACH BLVD	TWIN DOLPHIN DR	A	AC	~	1,262	30	37,860	4/30/24	88	71	0	29	New Construction - Initial	01-01-1980
1472	60830	PACIFIC VIEW	HUNTINGTON ST	FIRST ST	C	AC	~	1,334	22	34,400	4/30/24	96	48	52	0	New Construction - AC	01-01-2016
1472	60840	PACIFIC VIEW	FIRST ST	HUNTINGTON ST	C	AC	~	1,334	15	27,150	4/30/24	98	100	0	0	New Construction - AC	01-01-2016
1385	140	PALM AVE	SURF DR	CHERRYHILL LN	C	AC	~	2,090	22	47,480	4/30/24	80	74	26	0	New Construction - Initial	01-01-1980
1385	363	PALM AVE	SEVENTEENTH ST	GOLDENWEST ST	C	AC	~	1,965	24	47,160	4/30/24	65	61	39	0	New Construction - Initial	01-01-1980
1385	367	PALM AVE	OFELIA LN	GOLDENWEST ST	C	AC	~	1,476	29	48,804	4/30/24	78	64	36	0	New Construction - Initial	01-01-1980
1385	368	PALM AVE	CHERRYHILL LN (N)	OFELIA LN	C	AC	~	2,210	29	66,840	4/30/24	81	75	25	0	New Construction - Initial	01-01-1980
1385	399	PALM AVE	SEAPOINT DR	SURF DR	C	AC	~	665	28	19,370	4/30/24	76	68	32	0	New Construction - Initial	01-01-1980
1385	582	PALM AVE	CHERRYHILL LN	SURF DR	C	AC	~	2,090	22	48,480	4/30/24	77	96	0	4	New Construction - Initial	01-01-1980
1385	805	PALM AVE	GOLDENWEST ST	SEVENTEENTH ST	C	AC	~	1,965	24	47,160	4/30/24	76	58	42	0	New Construction - Initial	01-01-1980
1385	809	PALM AVE	GOLDENWEST ST	OFELIA LN	A	AC	~	1,476	31	45,756	4/30/24	70	21	79	0	New Construction - Initial	01-01-1980
1385	810	PALM AVE	OFELIA LN	CHERRYHILL LN	C	AC	~	2,210	31	68,510	4/30/24	83	87	13	0	New Construction - Initial	01-01-1980
1385	841	PALM AVE	SURF DR	SEAPOINT DR	C	AC	~	665	31	22,865	4/30/24	73	77	14	9	New Construction - Initial	01-01-1980
1503	133	RANCHO RD	ASTRONAUTICS LN	BOLSA CHICA ST	C	AC	~	1,220	18	21,960	5/8/24	84	60	40	0	New Construction - Initial	01-01-1980
1503	360	RANCHO RD	SPA DR	ASTRONAUTICS LN	C	AC	~	1,445	18	26,010	5/8/24	73	49	51	0	New Construction - Initial	01-01-1980
1503	521	RANCHO RD	SPA DR	GRAHAM ST	C	AC	~	777	26	20,202	5/8/24	93	100	0	0	New Construction - Initial	01-01-1980
1503	575	RANCHO RD	BOLSA CHICA ST	ASTRONAUTICS LN	C	AC	~	1,220	22	26,840	5/8/24	88	95	0	5	New Construction - Initial	01-01-1980
1503	79	RANCHO RD	GRAHAM ST	SPA DR	C	AC	~	777	16	12,432	5/8/24	64	13	87	0	New Construction - Initial	01-01-1980
1503	802	RANCHO RD	ASTRONAUTICS LN	SPA DR	C	AC	~	1,445	22	31,790	5/8/24	75	44	39	17	New Construction - Initial	01-01-1980
1631	17011	SAYBROOK LN	HEIL AVE	SANTA BARBARA LN	A	AC	~	1,317	60	79,020	5/6/24	100	0	0	0	New Construction - Initial	01-01-1980
1631	17012	SAYBROOK LN	SANTA BARBARA LN	EDINGER AVE	A	AC	~	1,326	60	79,560	5/6/24	100	0	0	0	New Construction - Initial	01-01-1980
1655	148	SEAPOINT AVE	DORAL DR	CHERRHILL LN	A	AC	~	830	32	28,060	5/9/24	86	100	0	0	New Construction - Initial	01-01-1980
1655	149	SEAPOINT AVE	CHERRHILL LN	PALM AVE	A	AC	~	1,218	32	41,476	5/9/24	78	25	69	6	New Construction - Initial	01-01-1980
1655	369	SEAPOINT AVE	PALM AVE	PCH	A	AC	~	1,206	33	42,798	5/9/24	84	100	0	0	New Construction - Initial	01-01-1980
1655	370	SEAPOINT AVE	GARFIELD AVE	DORAL DR	A	AC	~	1,637	32	54,384	5/9/24	82	68	32	0	New Construction - Initial	01-01-1980
1655	590	SEAPOINT AVE	CHERRHILL LN	DORAL DR	A	AC	~	830	32	26,560	5/9/24	74	14	80	6	New Construction - Initial	01-01-1980
1655	591	SEAPOINT AVE	PALM AVE	CHERRHILL LN	A	AC	~	1,218	32	38,976	5/9/24	71	42	51	7	New Construction - Initial	01-01-1980
1655	811	SEAPOINT AVE	PCH	PALM AVE	A	AC	~	1,206	33	42,048	5/9/24	82	90	0	10	New Construction - Initial	01-01-1980
1655	812	SEAPOINT AVE	DORAL DR	GARFIELD AVE	A	AC	~	1,637	32	54,134	5/9/24	83	54	43	3	New Construction - Initial	01-01-1980
1670	364	SEVENTEENTH ST	PCH	ORANGE AVE	A	AC	~	1,239	28	34,692	3/13/24	76	93	7	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1670	365	SEVENTEENTH ST	ORANGE AVE	PALM AVE	A	AC	~	1,237	28	34,636	3/13/24	69	79	4	17	New Construction - Initial	01-01-1980
1670	373	SEVENTEENTH ST	ADAMS AVE	MAIN ST	A	AC	~	976	26	25,376	3/13/24	56	13	79	8	New Construction - Initial	01-01-1980
1670	374	SEVENTEENTH ST	PALM AVE	ADAMS AVE	A	AC	~	1,625	27	43,875	3/13/24	88	100	0	0	New Construction - Initial	01-01-1980
1670	806	SEVENTEENTH ST	ORANGE AVE	PCH	A	AC	~	1,239	28	34,692	3/13/24	88	100	0	0	New Construction - Initial	01-01-1980
1670	807	SEVENTEENTH ST	PALM AVE	ORANGE AVE	A	AC	~	1,237	28	34,636	3/12/24	78	74	25	1	New Construction - Initial	01-01-1980
1670	815	SEVENTEENTH ST	MAIN ST	ADAMS AVE	A	AC	~	976	38	37,088	3/12/24	42	14	70	16	New Construction - Initial	01-01-1980
1670	816	SEVENTEENTH ST	ADAMS AVE	PALM AVE	A	AC	~	1,625	35	56,875	3/12/24	50	10	88	2	New Construction - Initial	01-01-1980
1716	321	SIXTH ST	ORANGE AVE	LAKE ST	C	AC	~	1,068	25	26,100	4/30/24	81	62	23	15	New Construction - Initial	01-01-1980
1716	324	SIXTH ST	PCH	ORANGE AVE	C	AC	~	1,260	25	32,400	4/30/24	82	90	10	0	New Construction - Initial	01-01-1980
1716	763	SIXTH ST	LAKE ST	ORANGE AVE	C	AC	~	1,068	25	26,100	4/30/24	78	51	21	28	New Construction - Initial	01-01-1980
1716	766	SIXTH ST	ORANGE AVE	PCH	C	AC	~	1,260	25	31,500	4/30/24	83	88	0	12	New Construction - Initial	01-01-1980
1724	166	SLATER AVE	GRAHAM ST	WOODFERN LN	A	AAC	~	646	30	19,380	5/2/24	83	100	0	0	Overlay - AC Structural	07-01-2010
1724	167	SLATER AVE	WOODFERN LN	MISTY LN	A	AAC	~	807	30	24,210	5/2/24	85	84	16	0	Overlay - AC Structural	07-01-2010
1724	17006	SLATER AVE	GOLDENWEST ST	FLOWER LN	A	AC	~	1,149	30	34,470	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	17007	SLATER AVE	FLOWER LN	GOTHARD ST	A	AC	~	834	30	25,020	3/25/24	98	76	0	24	New Construction - Initial	01-01-1980
1724	17008	SLATER AVE	GOTHARD ST	FLOWER LN	A	AC	~	834	30	25,020	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	242	SLATER AVE	CORONADO LN	EDWARDS ST	A	AAC	~	1,466	30	43,980	5/2/24	84	100	0	0	Overlay - AC Structural	07-01-2010
1724	243	SLATER AVE	EDWARDS ST	MAYOR LN	A	AAC	~	1,293	30	38,790	3/25/24	89	100	0	0	Overlay - AC Structural	07-01-2010
1724	244	SLATER AVE	MAYOR LN	GOLDENWEST ST	A	AAC	~	1,345	30	40,350	3/25/24	89	100	0	0	Overlay - AC Structural	07-01-2010
1724	253	SLATER AVE	GOTHARD ST	NICHOLS ST	A	AC	~	1,320	30	39,600	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	254	SLATER AVE	NICHOLS ST	QUEENS LN	A	AC	~	1,155	30	34,650	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	390	SLATER AVE	BEACH BLVD	JEFFERSON LN	A	AC	~	1,550	30	46,500	3/25/24	82	100	0	0	New Construction - Initial	01-01-1980
1724	394	SLATER AVE	QUEENS LN	BEACH BLVD	A	AC	~	825	30	24,750	3/25/24	98	76	0	24	New Construction - Initial	01-01-1980
1724	395	SLATER AVE	JEFFERSON LN	NEWLAND ST	A	AC	~	1,088	30	32,640	3/25/24	73	62	35	3	New Construction - Initial	01-01-1980
1724	535	SLATER AVE	SPRINGDALE ST	MISTY LN	A	AC	~	1,193	24	28,632	5/2/24	81	70	30	0	Overlay - AC Structural	07-01-2010
1724	536	SLATER AVE	CORONADO LN	SPRINGDALE ST	A	AAC	~	1,173	30	35,190	5/2/24	82	62	36	2	Overlay - AC Structural	07-01-2010
1724	609	SLATER AVE	MISTY LN	WOODFERN LN	A	AAC	~	807	24	19,368	5/2/24	81	80	20	0	Overlay - AC Structural	07-01-2010
1724	684	SLATER AVE	EDWARDS ST	CORONADO LN	A	AAC	~	1,466	30	43,980	5/2/24	82	77	20	3	Overlay - AC Structural	07-01-2010
1724	685	SLATER AVE	MAYOR LN	EDWARDS ST	A	AAC	~	1,293	30	38,790	3/25/24	92	88	0	12	Overlay - AC Structural	07-01-2010
1724	686	SLATER AVE	GOLDENWEST ST	MAYOR LN	A	AAC	~	1,345	30	40,350	3/25/24	87	93	0	7	Overlay - AC Structural	07-01-2010
1724	687	SLATER AVE	FLOWER LN	GOLDENWEST ST	A	AC	~	1,149	30	34,470	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	695	SLATER AVE	NICHOLS ST	GOTHARD ST	A	AC	~	1,320	30	39,600	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	696	SLATER AVE	QUEENS LN	NICHOLS ST	A	AC	~	1,155	30	34,650	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	7003	SLATER AVE	WOODFERN LN	GRAHAM ST	A	AAC	~	646	24	15,504	5/2/24	78	88	12	0	Overlay - AC Structural	07-01-2010
1724	832	SLATER AVE	JEFFERSON LN	BEACH BLVD	A	AC	~	1,550	30	46,500	3/25/24	87	92	0	8	New Construction - Initial	01-01-1980
1724	836	SLATER AVE	BEACH BLVD	QUEENS LN	A	AC	~	825	30	24,750	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	837	SLATER AVE	NEWLAND ST	JEFFERSON LN	A	AC	~	1,088	30	32,640	3/25/24	84	100	0	0	New Construction - Initial	01-01-1980
1724	93	SLATER AVE	MISTY LN	SPRINGDALE ST	A	AAC	~	1,193	30	35,790	5/2/24	85	84	16	0	Overlay - AC Structural	07-01-2010
1724	94	SLATER AVE	SPRINGDALE ST	CORONADO LN	A	AAC	~	1,173	30	35,190	5/2/24	81	100	0	0	Overlay - AC Structural	07-01-2010
1751	170	SPRINGDALE ST	SKYLAB RD	BOLSA AVE	A	AAC	~	1,435	33	54,855	4/29/24	77	86	3	11	Overlay - AC Structural	06-21-2012
1751	171	SPRINGDALE ST	BRIARCLIFF DR	SKYLAB RD	A	AAC	~	1,084	33	35,772	4/29/24	75	91	9	0	Overlay - AC Structural	06-21-2012
1751	172	SPRINGDALE ST	CHINOOK DR	BRIARCLIFF DR	A	AAC	~	1,048	42	44,016	4/29/24	76	90	10	0	Overlay - AC Structural	06-21-2012
1751	174	SPRINGDALE ST	BOLSA AVE	ENGINEER DR	A	AAC	~	685	39	26,715	4/29/24	73	38	24	38	Overlay - AC Structural	06-21-2012
1751	18	SPRINGDALE ST	ENGINEER DR	MACHINE DR	A	AAC	~	1,142	39	44,538	4/29/24	78	65	9	26	Overlay - AC Structural	06-21-2012
1751	19	SPRINGDALE ST	MACHINE DR	MC FADDEN AVE	A	AAC	~	817	39	31,863	4/29/24	79	60	0	40	Overlay - AC Structural	06-21-2012
1751	197	SPRINGDALE ST	EDINGER AVE	MEADOWLARK DR	A	AAC	~	1,455	39	56,745	5/2/24	77	100	0	0	Overlay - AC Structural	06-21-2013
1751	198	SPRINGDALE ST	MEADOWLARK DR	HEIL AVE	A	AAC	~	1,185	39	46,215	5/2/24	79	100	0	0	Overlay - AC Structural	06-21-2013
1751	225	SPRINGDALE ST	HEIL AVE	DOYLE DR	A	AAC	~	1,450	33	49,100	5/2/24	82	81	0	19	Overlay - AC Structural	06-21-2013
1751	226	SPRINGDALE ST	DOYLE DR	WARNER AVE	A	AAC	~	1,191	40	53,140	5/2/24	80	68	4	28	Overlay - AC Structural	06-21-2013
1751	237	SPRINGDALE ST	WARNER AVE	PALO ALTO DR	A	AC	~	1,450	40	58,000	5/2/24	99	100	0	0	New Construction - Initial	01-01-1980
1751	238	SPRINGDALE ST	PALO ALTO DR	SLATER AVE	A	AC	~	1,190	40	47,600	5/2/24	99	100	0	0	New Construction - Initial	01-01-1980
1751	247	SPRINGDALE ST	SLATER AVE	FRITCH DR	A	AC	~	1,462	40	58,480	5/2/24	42	41	43	16	New Construction - Initial	01-01-1980
1751	248	SPRINGDALE ST	FRITCH DR	TALBERT AVE	A	AC	~	1,185	40	47,400	5/2/24	45	53	37	10	New Construction - Initial	01-01-1980
1751	32	SPRINGDALE ST	MC FADDEN AVE	PRISCILLA DR	A	AAC	~	961	38	36,518	5/2/24	49	14	72	14	Overlay - AC Structural	06-21-2012
1751	33	SPRINGDALE ST	PRISCILLA DR	ROYALIST DR	A	AAC	~	1,040	38	39,520	5/2/24	53	18	80	2	Overlay - AC Structural	06-21-2012
1751	34	SPRINGDALE ST	ROYALIST DR (E)	EDINGER AVE	A	AAC	~	641	39	24,999	5/2/24	80	58	42	0	Overlay - AC Structural	06-21-2013
1751	460	SPRINGDALE ST	MACHINE DR	ENGINEER DR	A	AAC	~	1,142	39	44,538	4/29/24	82	100	0	0	Overlay - AC Structural	06-21-2012
1751	461	SPRINGDALE ST	MC FADDEN AVE	MACHINE DR	A	AAC	~	817	39	31,863	4/29/24	83	100	0	0	Overlay - AC Structural	06-21-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1751	474	SPRINGDALE ST	PRISCILLA (E)	MC FADDEN AVE	A	AAC	~	961	38	36,518	5/2/24	65	31	68	1	Overlay - AC Structural	06-21-2012
1751	475	SPRINGDALE ST	ROYALIST DR	PRISCILLA DR	A	AAC	~	1,040	38	39,520	5/2/24	50	19	68	13	Overlay - AC Structural	06-21-2013
1751	476	SPRINGDALE ST	EDINGER AVE	ROYALIST DR	A	AAC	~	641	39	24,999	5/2/24	68	26	71	3	Overlay - AC Structural	06-21-2013
1751	612	SPRINGDALE ST	BOLSA AVE	SKYLAB RD	A	AAC	~	1,435	33	50,855	4/29/24	80	83	4	13	Overlay - AC Structural	06-21-2012
1751	613	SPRINGDALE ST	SKYLAB RD	BRIARCLIFF DR	A	AAC	~	1,084	33	35,772	4/29/24	76	84	16	0	Overlay - AC Structural	06-21-2012
1751	614	SPRINGDALE ST	BRIARCLIFF DR (W)	CHINOOK DR	A	AAC	~	1,048	42	44,016	4/29/24	78	100	0	0	Overlay - AC Structural	06-12-2012
1751	616	SPRINGDALE ST	ENGINEER DR	BOLSA AVE	A	AAC	~	685	39	26,715	4/29/24	81	72	12	16	Overlay - AC Structural	06-21-2012
1751	639	SPRINGDALE ST	MEADOWLARK DR	EDINGER AVE	A	AAC	~	1,455	39	56,745	5/2/24	79	98	0	2	Overlay - AC Structural	06-21-2013
1751	640	SPRINGDALE ST	HEIL AVE	MEADOWLARK DR	A	AAC	~	1,185	39	46,215	5/2/24	80	100	0	0	Overlay - AC Structural	06-21-2013
1751	667	SPRINGDALE ST	DOYLE DR	HEIL AVE	A	AAC	~	1,450	33	51,350	5/2/24	84	100	0	0	Overlay - AC Structural	06-21-2013
1751	668	SPRINGDALE ST	WARNER AVE	DOYLE DR	A	AAC	~	1,191	40	47,640	5/2/24	83	96	0	4	Overlay - AC Structural	06-21-2013
1751	679	SPRINGDALE ST	PALO ALTO DR	WARNER AVE	A	AC	~	1,450	40	58,000	5/2/24	99	100	0	0	New Construction - Initial	01-01-1980
1751	680	SPRINGDALE ST	SLATER AVE	PALO ALTO DR	A	AC	~	1,190	40	47,600	5/2/24	99	100	0	0	New Construction - Initial	01-01-1980
1751	689	SPRINGDALE ST	FRITCH DR	SLATER AVE	A	AC	~	1,462	40	58,480	5/2/24	71	76	0	24	New Construction - Initial	01-01-1980
1751	690	SPRINGDALE ST	TALBERT AVE	FRITCH DR	A	AC	~	1,185	40	47,400	5/2/24	58	59	41	0	New Construction - Initial	01-01-1980
1838	153	TALBERT AVE	BEACH BLVD	CEMETERY	A	AAC	~	1,411	33	46,563	4/27/24	85	75	19	6	Overlay - AC Structural	11-01-2016
1838	249	TALBERT AVE	SPRINGDALE ST	END	A	AC	~	1,566	30	46,980	5/2/24	64	31	68	1	New Construction - Initial	01-01-1980
1838	258	TALBERT AVE	CEMETERY	NEWLAND ST	A	AAC	~	1,228	33	40,524	4/27/24	85	56	6	38	Overlay - AC Structural	11-01-2016
1838	388	TALBERT AVE	GOTHARD ST	KOVACS LN	A	AAC	~	1,663	40	66,520	4/27/24	88	77	23	0	Overlay - AC Structural	06-21-2016
1838	389	TALBERT AVE	KOVACS LN	BEACH BLVD	A	AAC	~	1,637	40	65,480	4/27/24	89	87	6	7	Overlay - AC Structural	06-21-2016
1838	537	TALBERT AVE	IVORYCREST LN	SPRINGDALE ST	A	AC	~	1,036	30	31,080	5/2/24	53	37	45	18	New Construction - Initial	01-01-1980
1838	539	TALBERT AVE	FIELDBURY LN	IVORYCREST LN	A	AC	~	1,106	30	33,180	5/2/24	46	17	53	30	New Construction - Initial	01-01-1980
1838	540	TALBERT AVE	EDWARDS ST	FIELDBURY LN	A	AC	~	770	30	23,100	5/2/24	48	9	91	0	New Construction - Initial	01-01-1980
1838	595	TALBERT AVE	CEMETERY	BEACH BLVD	A	AAC	~	1,411	29	40,919	4/27/24	87	57	42	1	Overlay - AC Structural	11-01-2016
1838	700	TALBERT AVE	NEWLAND ST	CEMETERY	A	AAC	~	1,228	33	40,524	4/27/24	88	73	0	27	Overlay - AC Structural	11-01-2016
1838	830	TALBERT AVE	KOVACS LN	GOTHARD ST	A	AAC	~	1,663	40	66,520	4/27/24	89	81	19	0	Overlay - AC Structural	06-21-2016
1838	831	TALBERT AVE	BEACH BLVD	KOVACS LN	A	AAC	~	1,637	40	65,480	4/27/24	89	100	0	0	Overlay - AC Structural	06-21-2016
1838	95	TALBERT AVE	SPRINGDALE ST	IVORYCREST LN	A	AC	~	1,036	30	31,080	5/2/24	39	14	81	5	New Construction - Initial	01-01-1980
1838	97	TALBERT AVE	IVORYCREST LN	FIELDBURY LN	A	AC	~	1,106	30	33,180	5/2/24	45	22	50	28	New Construction - Initial	01-01-1980
1838	98	TALBERT AVE	FIELDBURY LN	EDWARDS ST	A	AC	~	770	30	23,100	5/2/24	70	18	82	0	New Construction - Initial	01-01-1980
4060	50400	TWIN DOLPHIN DR	PCH	PACIFIC VIEW AVE	C	AC	~	490	65	24,500	8/30/23	90	100	0	0	New Construction - Initial	01-01-1980
1994	433	WALNUT AVE	SIXTH ST	FIRST ST	C	AC	~	1,654	18	34,552	4/30/24	91	66	0	34	Surface Treatment - Slurry Seal	07-27-2022
1994	875	WALNUT AVE	FIRST ST	SIXTH ST	C	AC	~	1,654	18	34,820	4/30/24	89	59	0	41	Surface Treatment - Slurry Seal	07-27-2022
1995	157	WARD ST	GARFIELD AVE	TANA DR	C	AC	~	703	16	11,248	4/2/24	60	39	61	0	New Construction - Initial	01-01-1980
1995	276	WARD ST	SUNDAY DR	YORKTOWN AVE	C	AC	~	935	25	23,375	4/2/24	88	100	0	0	New Construction - Initial	01-01-1980
1995	499	WARD ST	SUNDAY DR	TANA DR	C	AC	~	1,002	16	16,032	4/2/24	88	85	0	15	New Construction - Initial	01-01-1980
1995	57	WARD ST	TANA DR	SUNDAY DR	C	AC	~	1,002	16	16,032	4/2/24	65	32	67	1	New Construction - Initial	01-01-1980
1995	599	WARD ST	TANA DR	GARFIELD AVE	C	AC	~	703	16	11,248	4/2/24	85	100	0	0	New Construction - Initial	01-01-1980
1995	718	WARD ST	YORKTOWN AVE	SUNDAY DR	C	AC	~	935	25	23,375	4/2/24	89	100	0	0	New Construction - Initial	01-01-1980
1997	134	WARNER AVE	GOLDENWEST ST	SCULPIN LN	A	AC	~	1,123	43	56,763	5/10/24	83	88	11	1	New Construction - Initial	01-01-1980
1997	135	WARNER AVE	BEACH BLVD	ASH ST	A	AC	~	874	43	41,522	5/10/24	79	70	29	1	New Construction - Initial	01-01-1980
1997	136	WARNER AVE	LARK LN	SPRINGDALE ST	A	AC	~	1,173	42	51,516	5/10/24	63	33	59	8	New Construction - Initial	01-01-1980
1997	137	WARNER AVE	GOLDENWEST ST	GOTHARD ST	A	AC	~	1,982	43	99,988	5/10/24	63	56	40	4	New Construction - Initial	01-01-1980
1997	164	WARNER AVE	LOS PATOS AVE	SANDRA LEE LN	A	AC	~	1,238	40	55,384	5/13/24	99	100	0	0	New Construction - Initial	01-01-1980
1997	165	WARNER AVE	SCEPTRE LN	LOS PATOS AVE	A	AC	~	1,714	67	114,838	5/13/24	62	25	71	4	New Construction - Initial	01-01-1980
1997	218	WARNER AVE	LYNN ST	BOLSA CHICA ST	A	AC	~	1,320	42	59,940	5/13/24	66	94	6	0	New Construction - Initial	01-01-1980
1997	219	WARNER AVE	PLAZA LN	BOLSA CHICA ST	A	AC	~	1,454	42	64,068	5/13/24	73	75	3	22	New Construction - Initial	01-01-1980
1997	220	WARNER AVE	PLAZA LN	GRAHAM ST	A	AC	~	1,202	42	52,984	5/13/24	75	77	6	17	New Construction - Initial	01-01-1980
1997	224	WARNER AVE	GRAHAM ST	LARK LN	A	AC	~	1,473	42	63,366	5/10/24	79	63	18	19	New Construction - Initial	01-01-1980
1997	230	WARNER AVE	SANDRA LEE LN	LYNN ST	A	AC	~	1,185	42	52,770	5/13/24	69	74	26	0	New Construction - Initial	01-01-1980
1997	231	WARNER AVE	PCH	SCEPTRE LN	A	AC	~	1,807	67	121,069	5/13/24	65	27	73	0	New Construction - Initial	01-01-1980
1997	232	WARNER AVE	SPRINGDALE ST	SEA AIRA	A	AC	~	1,351	42	60,376	5/10/24	77	79	19	2	New Construction - Initial	01-01-1980
1997	233	WARNER AVE	SCULPIN LN	EDWARDS ST	A	AC	~	1,290	42	61,914	5/10/24	78	96	4	0	New Construction - Initial	01-01-1980
1997	234	WARNER AVE	EDWARDS ST	SCULPIN LN	A	AC	~	1,518	43	71,606	5/10/24	78	96	4	0	New Construction - Initial	01-01-1980
1997	251	WARNER AVE	NICHOLS ST	ASH ST	A	AC	~	1,106	50	49,192	5/10/24	77	63	37	0	New Construction - Initial	01-01-1980
1997	252	WARNER AVE	GOTHARD ST	NICHOLS ST	A	AC	~	1,321	50	60,492	5/10/24	69	63	37	0	New Construction - Initial	01-01-1980
1997	392	WARNER AVE	BEACH BLVD	ROTTERDAM LN	A	AAC	~	1,449	37	59,771	5/10/24	83	95	5	0	Overlay - AC Structural	06-21-2016
1997	393	WARNER AVE	ROTTERDAM LN	NEWLAND ST	A	AAC	~	1,188	37	49,516	5/10/24	87	74	26	0	Overlay - AC Structural	06-21-2016

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1997	40200	WARNER AVE	SEA AIRA	EDWARDS ST	A	AC	~	1,351	42	56,742	5/10/24	78	88	12	0	New Construction - Initial	01-01-1980
1997	426	WARNER AVE	MAGNOLIA ST	ROSS LN	A	AC	~	1,450	37	62,282	5/10/24	70	33	49	18	New Construction - Initial	01-01-1980
1997	427	WARNER AVE	ROSS LN	NEWLAND ST	A	AC	~	1,189	37	49,641	5/10/24	47	14	63	23	New Construction - Initial	01-01-1980
1997	576	WARNER AVE	SCULPIN LN	GOLDENWEST ST	A	AC	~	1,123	43	48,289	5/10/24	76	64	34	2	New Construction - Initial	01-01-1980
1997	577	WARNER AVE	ASH ST	BEACH BLVD	A	AC	~	874	38	33,212	5/10/24	77	33	65	2	New Construction - Initial	01-01-1980
1997	578	WARNER AVE	SPRINGDALE ST	LARK LN	A	AC	~	1,173	42	49,266	5/10/24	71	48	22	30	New Construction - Initial	01-01-1980
1997	579	WARNER AVE	GOTHARD ST	GOLDENWEST ST	A	AC	~	1,982	43	85,226	5/10/24	69	59	36	5	New Construction - Initial	01-01-1980
1997	606	WARNER AVE	SANDRA LEE LN	LOS PATOS AVE	A	AC	~	1,238	36	44,568	5/13/24	99	100	0	0	New Construction - Initial	01-01-1980
1997	60920	WARNER AVE	LOOP	LOOP	P	AC	~	275	28	11,300	5/13/24	93	100	0	0	New Construction - AC	01-01-1980
1997	660	WARNER AVE	BOLSA CHICA ST	LYNN ST	A	AC	~	1,320	42	55,440	5/13/24	65	90	8	2	New Construction - Initial	01-01-1980
1997	661	WARNER AVE	BOLSA CHICA ST	PLAZA LN	A	AC	~	1,454	42	61,068	5/13/24	68	62	36	2	New Construction - Initial	01-01-1980
1997	662	WARNER AVE	GRAHAM ST	PLAZA LN	A	AC	~	1,202	42	50,484	5/13/24	72	62	22	16	New Construction - Initial	01-01-1980
1997	666	WARNER AVE	LARK LN	GRAHAM ST	A	AC	~	1,473	42	61,866	5/10/24	77	41	30	29	New Construction - Initial	01-01-1980
1997	672	WARNER AVE	LYNN ST	SANDRA LEE LN	A	AAC	~	1,185	42	49,770	5/13/24	69	75	7	18	Overlay - AC Structural	09-01-2006
1997	674	WARNER AVE	SEA AIRA	SPRINGDALE ST	A	AC	~	1,351	42	56,742	5/10/24	82	86	10	4	New Construction - Initial	01-01-1980
1997	675	WARNER AVE	EDWARDS ST	SEA AIRA	A	AC	~	1,290	42	54,180	5/10/24	84	86	14	0	New Construction - Initial	01-01-1980
1997	693	WARNER AVE	ASH ST	NICHOLS ST	A	AC	~	1,106	50	55,300	5/10/24	69	71	17	12	New Construction - Initial	01-01-1980
1997	694	WARNER AVE	NICHOLS ST	GOTHARD ST	A	AC	~	1,321	50	66,050	5/10/24	60	50	48	2	New Construction - Initial	01-01-1980
1997	70000	WARNER AVE	PCH	LOOP	P	AC	~	375	40	13,500	5/13/24	69	9	91	0	New Construction - AC	01-01-1980
1997	834	WARNER AVE	ROTTERDAM LN	BEACH BLVD	A	AAC	~	1,449	37	53,613	5/10/24	88	94	6	0	Overlay - AC Structural	06-21-2016
1997	835	WARNER AVE	NEWLAND ST	ROTTERDAM LN	A	AAC	~	1,188	37	43,956	5/10/24	88	60	17	23	Overlay - AC Structural	06-21-2016
1997	868	WARNER AVE	ROSS LN	MAGNOLIA ST	A	AC	~	1,450	37	53,650	5/10/24	66	38	45	17	New Construction - Initial	01-01-1980
1997	869	WARNER AVE	NEWLAND ST	ROSS LN	A	AC	~	1,189	37	43,993	5/10/24	65	49	31	20	New Construction - Initial	01-01-1980
2082	142	YORKTOWN AVE	GOLDENWEST ST	MAIN ST	C	AAC	~	1,417	40	56,680	4/15/24	87	91	0	9	Overlay - AC Structural	07-22-2014
2082	277	YORKTOWN AVE	CANBERRA LN	WARD ST	C	AC	~	1,414	33	46,662	4/2/24	93	100	0	0	New Construction - Initial	01-01-1980
2082	278	YORKTOWN AVE	BROOKHURST ST (S)	CANBERRA LN	C	AC	~	1,236	33	40,788	4/9/24	88	100	0	0	New Construction - Initial	01-01-1980
2082	279	YORKTOWN AVE	SALMON LN (N)	BROOKHURST ST	C	AC	~	1,450	33	47,850	4/10/24	68	28	44	28	Surface Treatment - Slurry Seal	07-01-2011
2082	288	YORKTOWN AVE	MAGNOLIA ST (S)	WATERBURY LN	A	AC	~	1,521	33	50,193	4/10/24	91	59	0	41	Surface Treatment - Slurry Seal	07-01-2011
2082	291	YORKTOWN AVE	HARDING LN (S)	NEWLAND ST	C	AAC	~	782	33	25,806	4/10/24	84	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	302	YORKTOWN AVE	DELAWARE ST	BEACH BLVD	C	AC	~	1,321	33	43,593	4/15/24	91	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	303	YORKTOWN AVE	NEWLAND ST (S)	WINDWARD LN	C	AAC	~	1,452	33	47,916	4/10/24	87	96	0	4	Surface Treatment - Slurry Seal	07-01-2011
2082	304	YORKTOWN AVE	WINDWARD LN (S)	MAGNOLIA ST	C	AAC	~	1,192	33	39,336	4/10/24	93	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	356	YORKTOWN AVE	BEACH BLVD (S)	VASILE CIR	C	AAC	~	927	33	30,591	4/10/24	86	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	357	YORKTOWN AVE	VASILE CIR (S)	HARDING LN	C	AAC	~	936	33	30,888	4/10/24	91	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	380	YORKTOWN AVE	MAIN ST	LAKE ST	A	AC	~	1,174	31	36,394	4/15/24	80	33	24	43	New Construction - Initial	01-01-1980
2082	397	YORKTOWN AVE	LAKE ST	DELAWARE ST	C	AC	~	1,601	31	49,631	4/15/24	84	64	0	36	New Construction - Initial	01-01-1980
2082	442	YORKTOWN AVE	BUSHARD ST	SALMON LN	C	AC	~	1,190	33	39,270	4/10/24	83	40	58	2	Surface Treatment - Slurry Seal	07-01-2011
2082	492	YORKTOWN AVE	BUSHARD ST (N)	WATERBURY LN	C	AC	~	1,123	33	37,059	4/9/24	91	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	50	YORKTOWN AVE	WATERBURY LN (S)	BUSHARD ST	C	AC	~	1,123	33	37,059	4/10/24	90	92	0	8	Surface Treatment - Slurry Seal	07-01-2011
2082	584	YORKTOWN AVE	MAIN ST	GOLDENWEST ST	C	AC	~	1,417	40	56,680	4/15/24	83	77	0	23	Surface Treatment - Slurry Seal	07-22-2014
2082	7002	YORKTOWN AVE	WINDWARD LN	NEWLAND ST	A	AAC	~	1,452	33	47,916	4/10/24	93	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	719	YORKTOWN AVE	WARD ST	CANBERRA LN	C	AC	~	1,414	33	46,662	4/2/24	92	100	0	0	New Construction - Initial	01-01-1980
2082	720	YORKTOWN AVE	CANBERRA LN	BROOKHURST ST	C	AC	~	1,236	33	40,788	4/2/24	93	100	0	0	New Construction - Initial	01-01-1980
2082	721	YORKTOWN AVE	BROOKHURST ST	SALMON LN	C	AC	~	1,450	33	47,850	4/9/24	45	40	49	11	Surface Treatment - Slurry Seal	07-01-2011
2082	730	YORKTOWN AVE	WATERBURY LN	MAGNOLIA ST	C	AC	~	1,521	33	50,193	4/9/24	86	97	0	3	Surface Treatment - Slurry Seal	07-01-2011
2082	733	YORKTOWN AVE	NEWLAND ST	HARDING LN	C	AAC	~	782	33	25,806	4/10/24	85	45	0	55	Surface Treatment - Slurry Seal	07-01-2011
2082	744	YORKTOWN AVE	BEACH BLVD	DELAWARE ST	C	AC	~	1,321	33	43,593	4/15/24	88	53	0	47	Surface Treatment - Slurry Seal	07-01-2011
2082	746	YORKTOWN AVE	MAGNOLIA ST	WINDWARD LN	C	AAC	~	1,192	33	39,336	4/9/24	90	95	0	5	Surface Treatment - Slurry Seal	07-01-2011
2082	798	YORKTOWN AVE	VASILE CIR	BEACH BLVD	C	AAC	~	927	33	30,591	4/10/24	84	42	0	58	Surface Treatment - Slurry Seal	07-01-2011
2082	799	YORKTOWN AVE	HARDING LN	VASILE CIR	C	AAC	~	936	33	30,888	4/10/24	87	67	0	33	Surface Treatment - Slurry Seal	07-01-2011
2082	822	YORKTOWN AVE	LAKE ST	MAIN ST	C	AC	~	1,174	31	36,394	4/15/24	78	42	0	58	New Construction - Initial	01-01-1980
2082	839	YORKTOWN AVE	DELAWARE ST	LAKE ST	C	AC	~	1,601	31	49,631	4/15/24	77	63	0	37	New Construction - Initial	01-01-1980
2082	884	YORKTOWN AVE	SALMON LN	BUSHARD ST	C	AC	~	1,190	33	39,270	4/9/24	55	29	63	8	Surface Treatment - Slurry Seal	07-01-2011
								167.9		**34,298,620**							
		Locals															
5290	60440	10TH ST	PCH	END	E	AC	2	403	25	10,075	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5300	60455	11TH ST	PACIFIC N	PCH	E	AC	2	167	20	3,340	5/21/20	89	50	30	20	New Construction - Initial	01-01-1980
5300	60460	11TH ST	PACIFIC S	END	E	AC	2	64	31	1,984	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
5310	60470	12TH ST	PCH	PACIFIC N	E	AC	2	207	25	5,175	5/6/20	94	100	0	0	New Construction - Initial	01-01-1980
5310	60480	12TH ST	PACIFIC S	END	E	AC	2	46	30	1,380	5/21/20	79	19	0	81	New Construction - Initial	01-01-1980
5330	60500	14TH ST	PCH	PACIFIC N	E	AC	2	156	28	4,368	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5330	60510	14TH ST	PACIFIC S	END	E	AC	2	90	30	2,700	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5340	60520	15TH ST	PCH	PACIFIC N	E	AC	2	160	29	4,640	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5340	60530	15TH ST	PACIFIC S	END	E	AC	2	80	22	1,760	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5350	60540	16TH ST	PCH	PACIFIC AVE N	E	AC	2	158	22	3,476	5/21/20	30	2	77	21	New Construction - Initial	01-01-1980
5350	60545	16TH ST	PACIFIC AVE N	END	E	AC	2	188	24	4,950	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5350	60990	16TH ST	END N	PCH	E	AC	2	77	26	2,002	5/6/24	48	100	0	0	New Construction - AC	01-01-1980
5350	61000	16TH ST	BAYVIEW DR	END	E	AC	2	78	30	2,340	5/6/24	78	100	0	0	New Construction - AC	01-01-1980
5360	60550	17TH ST	PCH	PACIFIC N	E	AC	2	156	28	4,368	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5360	60560	17TH ST	PACIFIC S	END	E	AC	2	90	30	2,700	5/21/20	85	29	0	71	New Construction - Initial	01-01-1980
5370	60570	18TH ST	PCH	PACIFIC N	E	AC	2	106	29	3,074	5/6/20	85	100	0	0	New Construction - Initial	01-01-1980
5370	60580	18TH ST	PACIFIC S	END	E	AC	2	54	26	1,404	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5380	60590	19TH ST	PCH	END	E	AC	2	330	26	8,580	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5390	60600	20TH ST	PCH	PACIFIC N	E	AC	2	87	23	2,001	5/6/20	83	75	0	25	New Construction - Initial	01-01-1980
5390	60610	20TH ST	PACIFIC S	END	E	AC	2	81	26	2,106	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5400	60620	21ST ST	PCH	PACIFIC N	E	AC	2	106	25	2,650	5/6/20	94	100	0	0	New Construction - Initial	01-01-1980
5410	60630	22ND ST	PCH	END	E	AC	2	363	30	10,890	5/6/20	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
5420	60640	23RD ST	PCH	PACIFIC N	E	AC	2	207	30	6,210	5/6/20	91	48	42	10	New Construction - Initial	01-01-1980
5420	60650	23RD ST	PACIFIC S	END	E	AC	2	27	22	594	5/21/20	96	100	0	0	New Construction - Initial	01-01-1980
5430	60660	24TH ST	PCH	PACIFIC N	E	AC	2	228	29	6,612	5/6/20	93	100	0	0	New Construction - Initial	01-01-1980
5430	60670	24TH ST	PACIFIC S	END	E	AC	2	58	27	1,566	5/21/20	93	79	0	21	New Construction - Initial	01-01-1980
5440	60680	25TH ST	PCH	PACIFIC AVE N	E	AC	2	215	22	4,730	5/21/20	50	26	42	32	New Construction - Initial	01-01-1980
5440	60685	25TH ST	PACIFIC AVE N	END	E	AC	2	215	22	4,730	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5450	60690	26TH ST	PCH	PACIFIC N	E	AC	2	207	30	6,210	5/6/20	91	100	0	0	New Construction - Initial	01-01-1980
5450	60700	26TH ST	PACIFIC S	END	E	AC	2	28	30	840	5/21/20	74	18	0	82	New Construction - Initial	01-01-1980
5200	60350	2ND ST	NORTH PACIFIC	SOUTH PACIFIC	E	AC	2	200	25	5,000	5/6/20	72	52	29	19	New Construction - Initial	01-01-1980
5210	60360	3RD ST	PACIFIC S	END	E	AC	2	24	15	360	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5220	60370	4TH ST	PACIFIC N	PCH	E	AC	2	182	23	4,186	5/6/20	83	49	51	0	New Construction - Initial	01-01-1980
5230	60380	5TH ST	PCH	PACIFIC S	E	AC	2	276	23	6,348	5/6/20	57	24	76	0	New Construction - Initial	01-01-1980
5250	60400	6TH ST	PACIFIC N	PCH	E	AC	2	197	25	4,925	5/6/20	71	34	66	0	New Construction - Initial	01-01-1980
5250	60415	6TH ST	PACIFIC S	END	E	AC	2	34	37	1,258	5/6/20	85	100	0	0	New Construction - Initial	01-01-1980
5260	60410	7TH ST	PCH	END	E	AC	2	264	23	6,072	5/6/20	95	95	0	5	New Construction - Initial	01-01-1980
5270	60420	8TH ST	PACIFIC N	PCH	E	AC	2	180	21	3,780	5/6/20	62	10	77	13	New Construction - Initial	01-01-1980
5270	60430	8TH ST	PACIFIC S	END	E	AC	2	23	27	621	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5280	60445	9TH ST	PACIFIC N	PCH	E	AC	2	211	21	4,431	5/6/20	89	100	0	0	New Construction - Initial	01-01-1980
5280	60450	9TH ST	PACIFIC S	END	E	AC	2	66	30	1,980	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
1	14829	A ST	ROBIDOUX DR	WARNER AVE	E	AC	4	644	36	23,184	3/31/22	82	39	0	61	Surface Treatment - Slurry Seal	07-29-2020
1	14830	A ST	WARNER AVE	BLAYLOCK DR	E	AC	4	660	34	22,440	3/31/22	90	54	46	0	Surface Treatment - Slurry Seal	07-29-2020
2	15132	ABBOTT DR	CDS	END	E	AC	3	475	36	18,452	3/18/22	90	44	56	0	Surface Treatment - Slurry Seal	07-29-2020
3	14587	ABERDEEN DR	INVERNESS LN	KINGSWOOD LN	E	AAC	8	170	24	4,080	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
3	15643	ABERDEEN DR	KESWICK LN	COVENTRY LN	E	AAC	8	258	24	6,012	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
3	15644	ABERDEEN DR	CLAREMONT LN	CAMBRIDGE LN	E	AAC	8	204	24	4,716	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
4	14533	ABLE LN	SKYLAB RD	BOLSA AVE	E	AC	1	1,434	60	86,040	2/10/20	76	13	85	2	New Construction	01-01-1980
5	12873	ACACIA AVE	ELEVENTH ST	FOURTEENTH ST	E	AC	6	865	36	31,140	6/23/21	81	16	40	44	Surface Treatment - Slurry Seal	05-03-2021
5	12879	ACACIA AVE	EIGHTH ST	ELEVENTH ST	E	AC	6	930	36	33,480	6/23/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
5	12882	ACACIA AVE	PECAN AVE	SEVENTH ST	E	AAC	6	315	35	11,025	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
5	13102	ACACIA AVE	TWENTIETH ST	GOLDENWEST ST	E	AC	6	781	36	28,116	6/23/21	92	51	0	49	Surface Treatment - Slurry Seal	07-27-2022
5	13103	ACACIA AVE	SEVENTEENTH ST	TWENTIETH ST	E	AC	6	828	36	29,808	6/23/21	93	81	0	19	Surface Treatment - Slurry Seal	07-27-2022
5	13111	ACACIA AVE	FOURTEENTH ST	SEVENTEENTH ST	E	AC	6	880	36	31,680	6/23/21	92	71	0	29	Surface Treatment - Slurry Seal	07-27-2022
5	15842	ACACIA AVE	LAKE ST	ALABAMA ST	E	AC	9	372	36	13,392	8/24/23	61	8	77	15	New Construction	01-01-1980
5	15843	ACACIA AVE	MAIN ST	LAKE ST	E	AC	6	270	36	9,720	7/8/21	91	76	0	24	Surface Treatment - Slurry Seal	07-27-2022
5	16030	ACACIA AVE	SEVENTH ST.	EIGHTH ST	E	AAC	6	280	38	10,640	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
6	13946	ACAPULCO CIR	SAUSALITO LN	CDS	E	AC	7	654	34	23,486	2/19/20	86	18	45	37	Surface Treatment - Slurry Seal	07-15-2021
7	14072	ACCESSWAY	BUSHARD ST	BUSHARD ST FRONTAGE	E	AC	7	54	55	2,970	4/6/22	95	100	0	0	New Construction	01-01-1980
7	14445	ACCESSWAY	SHOREWOOD CIR	ADAMS AVE	E	AC	7	77	45	3,465	4/6/22	95	100	0	0	New Construction	01-01-1980
7	14456	ACCESSWAY	BEACH BLVD	BEACH BLVD	E	AC	9	102	28	2,856	8/24/23	94	100	0	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
8	13246	ACE LN	VENTURI DR	MARSHALL DR	E	AC	3	257	36	9,502	3/23/22	51	30	70	0	New Construction	01-01-1980
9	13061	ADAMS AVE	MAIN ST	SEVENTEENTH ST	E	AC	6	745	46	36,075	6/30/21	86	54	0	46	Surface Treatment - Slurry Seal	07-27-2022
9	13117	ADAMS AVE	PARK ST	MAIN ST	E	AAC	0	365	37	13,505	4/3/24	95	100	0	0	Overlay - AC Structural	07-27-2022
9	13118	ADAMS AVE	LAKE ST	PARK ST	E	AAC	0	650	37	24,050	4/3/24	95	100	0	0	Overlay - AC Structural	07-27-2022
2288	17018	ADAMS AVE FRONTAGE	LOTUS LN	WEST END	E	AC	7	398	32	14,236	2/18/20	84	51	49	0	Surface Treatment - Slurry Seal	07-15-2021
2288	17019	ADAMS AVE FRONTAGE	MARINA LN	BUSHARD ST FRONTAGE	E	AAC	7	1,050	28	29,400	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2288	17020	ADAMS AVE FRONTAGE	DERBYSHIRE LN	SIDCUP LN	E	AC	8	672	28	18,816	3/11/22	56	30	70	0	New Construction - Initial	01-01-1980
2288	17021	ADAMS AVE FRONTAGE	SUTTON LN	DERBYSHIRE LN	E	AAC	8	663	28	18,564	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
2288	17022	ADAMS AVE FRONTAGE	SUTTON LN	EAST END	E	AC	8	120	28	3,360	3/11/22	76	88	12	0	New Construction - Initial	01-01-1980
2288	17023	ADAMS AVE FRONTAGE	SHOREWOOD CIR	HAPPY ISLE LN	E	AAC	7	260	28	7,280	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2288	50300	ADAMS AVE FRONTAGE	CARMANIA LN	END	E	AC	8	123	25	3,075	3/3/22	84	81	0	19	Surface Treatment - Slurry Seal	02-08-2023
2288	50310	ADAMS AVE FRONTAGE	CARMANIA LN (N)	RANGER LN	E	AC	8	520	25	13,000	3/3/22	71	29	50	21	Surface Treatment - Slurry Seal	02-08-2023
2288	50320	ADAMS AVE FRONTAGE	RANGER LN	PICCADILLY LN	E	AC	8	479	25	11,975	3/3/22	95	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
2288	50330	ADAMS AVE FRONTAGE	PICCADILLY LN	END	E	AC	8	348	25	8,700	3/3/22	67	49	44	7	New Construction - Initial	01-01-1980
2288	50340	ADAMS AVE FRONTAGE	BUSHARD ST FRONTAGE	GLOUCESTER LN	E	AAC	7	506	30	15,180	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2288	50350	ADAMS AVE FRONTAGE	GLOUCESTER LN	CHESAPEAKE LN	E	AAC	7	530	30	15,900	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2288	50360	ADAMS AVE FRONTAGE	ISTHMUS LN	FELCLIFF LN	E	AAC	7	674	30	20,220	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2288	50370	ADAMS AVE FRONTAGE	VINTAGE LN	CROWN REEF LN	E	AC	7	505	30	15,150	2/12/20	42	23	76	1	Surface Treatment - Slurry Seal	07-15-2021
2288	50380	ADAMS AVE FRONTAGE	CROWN REEF LN	MAYPORT LN	E	AC	7	683	30	20,490	2/12/20	49	20	80	0	Surface Treatment - Slurry Seal	07-15-2021
10	14372	ADELIA CIR	CDS	POLYNESIAN LN	E	AC	9	480	36	18,780	3/26/24	71	41	59	0	New Construction	01-01-1980
11	13190	ADMIRRALTY DR	CHANNEL LN	CDS	E	AC	2	299	32	11,068	4/9/22	91	65	0	35	New Construction	01-01-1980
11	14959	ADMIRRALTY DR	PCH	CHANNEL LN	E	AC	2	796	60	40,240	4/9/22	86	66	31	3	New Construction	01-01-1980
12	14164	ADRIAN CIR	END	HAZELBROOK DR	E	AC	7	496	36	19,356	2/10/20	69	35	52	13	Surface Treatment - Slurry Seal	07-15-2021
13	14120	AFTON CIR	CDS	VINTAGE LN	E	AAC	7	435	32	15,720	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
14	15859	AHSANTE DR	DELAWARE ST	ALSUNA LN	E	AAC	6	285	36	11,517	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
15	14534	AIRPORT CIR	CDS	WARNER AVE	E	AC	2	664	36	25,154	4/5/22	64	30	67	3	New Construction	01-01-1980
16	14624	ALABAMA ST	ALLEY FRANKFORT AVE.	FRANKFORT AVE	E	AC	9	167	37	6,179	8/14/23	56	22	47	31	New Construction	01-01-1980
16	14625	ALABAMA ST	ATLANTA AVE	ALLEY BALTIMORE AVE	E	AC	9	166	36	5,976	8/14/23	76	28	62	10	New Construction	01-01-1980
16	14653	ALABAMA ST	ALLEY ADAMS AVE	ADAMS AVE	E	AC	6	190	36	6,840	8/15/23	79	27	73	0	Surface Treatment - Slurry Seal	03-01-2011
16	14654	ALABAMA ST	MEMPHIS AVE	NASHVILLE AVE	E	AC	6	329	37	12,173	8/14/23	63	27	54	19	New Construction	01-01-1980
16	14655	ALABAMA ST	ALLEY MEMPHIS AVE	MEMPHIS AVE	E	AC	6	165	37	6,105	8/14/23	64	36	59	5	New Construction	01-01-1980
16	15659	ALABAMA ST	HARTFORD AVE	INDIANAPOLIS AVE	E	AC	9	330	38	12,540	8/14/23	53	14	86	0	New Construction	01-01-1980
16	15660	ALABAMA ST	GENEVA AVE	HARTFORD AVE	E	AC	9	330	36	11,880	8/15/23	70	24	59	17	New Construction	01-01-1980
16	15661	ALABAMA ST	FRANKFORT AVE	GENEVA AVE	E	AC	9	328	37	12,136	8/14/23	74	30	40	30	New Construction	01-01-1980
16	15662	ALABAMA ST	PECAN AVE	ALLEY FRANKFORT AVE	E	AC	9	246	37	9,102	8/14/23	67	21	72	7	New Construction	01-01-1980
16	15663	ALABAMA ST	DETROIT AVE	PECAN AVE	E	AC	9	250	37	9,250	8/14/23	76	44	56	0	New Construction	01-01-1980
16	15664	ALABAMA ST	CHICAGO AVE	DETROIT AVE	E	AC	9	329	37	12,173	8/14/23	69	18	67	15	New Construction	01-01-1980
16	15665	ALABAMA ST	ALLEY BALTIMORE AVE	CHICAGO AVE	E	AC	9	494	37	18,278	8/14/23	54	8	64	28	New Construction	01-01-1980
16	15674	ALABAMA ST	UTICA AVE.	WITCHITA AVE	E	AC	6	650	36	23,400	6/29/21	78	20	70	10	Surface Treatment - Slurry Seal	07-27-2022
16	15675	ALABAMA ST	SPRINGFIELD AVE	UTICA AVE	E	AAC	6	660	36	23,625	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
16	15676	ALABAMA ST	ADAMS AVE	SPRINGFIELD AVE	E	AAC	6	618	35	22,355	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
16	15677	ALABAMA ST	OSWEGO AVE	ALLEY ADAMS AVE	E	AC	6	470	36	16,920	8/15/23	65	16	83	1	Surface Treatment - Slurry Seal	03-01-2011
16	15678	ALABAMA ST	NASHVILLE AVE	OSWEGO AVE	E	AC	6	330	36	11,880	8/15/23	58	15	59	26	Surface Treatment - Slurry Seal	03-01-2011
16	15679	ALABAMA ST	ALLEY LINCOLN AVE	ALLEY MEMPHIS AVE	E	AC	6	330	37	12,210	8/14/23	74	40	51	9	New Construction	01-01-1980
16	15680	ALABAMA ST	ALLEY KNOXVILLE AVE	ALLEY LINCOLN AVE	E	AC	6	330	37	12,210	8/14/23	72	41	42	17	Surface Treatment - Slurry Seal	03-01-2011
16	15681	ALABAMA ST	INDIANAPOLIS AVE	ALLEY KNOXVILLE AVE	E	AC	6	495	37	18,315	8/14/23	57	29	63	8	Surface Treatment - Slurry Seal	03-01-2011
17	13620	ALADDIN DR	WEATHERLY LN	SCEPTRE LN	E	AC	2	720	36	25,920	4/9/22	76	33	67	0	New Construction	01-01-1980
18	15393	ALBACORE DR	CDS	STINGRAY LN	E	AC	8	784	36	29,474	3/7/22	93	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
19	14253	ALBANY CIR	HOPETOWN LN	CDS	E	AAC	9	244	32	9,608	5/9/24	77	50	9	41	Overlay - AC Structural	05-11-2018
20	14043	ALBATROSS DR	WINDWARD LN	WESTWINDS LN	E	AC	7	1,012	36	36,432	2/19/20	85	52	48	0	Surface Treatment - Slurry Seal	07-15-2021
21	14765	ALBERTA DR	HUNTINGTON ST	MANITOBA LN	E	AAC	4	574	36	20,076	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
22	13843	ALBION DR	PLYMOUTH LN	ALDEN LN	E	AC	1	780	36	28,080	5/8/24	37	12	76	12	New Construction	01-01-1980
23	13840	ALDEN LN	END	WINSLOW DR	E	AC	1	339	36	13,454	5/7/24	95	100	0	0	New Construction	01-01-1980
23	13842	ALDEN LN	WINSLOW DR	ALBION DR	E	AC	1	260	36	9,860	5/7/24	95	100	0	0	New Construction	01-01-1980
24	13494	ALDRICH ST	PARKSIDE LN	BEACH BLVD	E	AAC	4	665	36	23,940	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
25	13775	ALEXANDRIA DR	EDWARDS ST	HANOVER LN	E	AC	1	536	36	19,008	2/26/20	95	100	0	0	New Construction	01-01-1980
25	15310	ALEXANDRIA DR	DRAKE LN	COLUMBIA LN	E	AC	1	520	36	19,220	5/6/20	86	47	53	0	New Construction	01-01-1980
25	15311	ALEXANDRIA DR	COLUMBIA LN	EDWARDS ST	E	AC	1	645	36	22,644	3/30/22	95	100	0	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
25	15320	ALEXANDRIA DR	VICTORIA LN.	SUSSEX CIR	E	AC	1	536	36	19,796	2/26/20	95	100	0	0	New Construction	01-01-1980
25	15931	ALEXANDRIA DR	HANOVER LN	VICTORIA LN	E	AC	1	781	36	28,116	2/26/20	95	100	0	0	New Construction	01-01-1980
26	14948	ALFAWN CIR	SELKIRK DR	END	E	AC	5	102	36	5,172	3/12/20	95	100	0	0	New Construction	01-01-1980
28	13492	ALHAMBRA AVE	SILVER LN	BEACH BLVD	E	AC	4	1,320	36	47,520	3/18/22	91	43	0	57	Surface Treatment - Slurry Seal	07-29-2020
28	15226	ALHAMBRA AVE	RHONE LN	SILVER LN	E	AC	4	1,154	36	41,544	3/18/22	87	33	67	0	Surface Treatment - Slurry Seal	07-29-2020
29	14237	ALICANTE LN	KINGFISHER DR	ALVARADO DR.	E	AC	9	482	36	17,352	8/23/23	72	100	0	0	New Construction	01-01-1980
30	14392	ALII CIR	ZAMORA LN	CDS	E	AC	9	235	32	9,020	7/12/17	89	95	0	5	New Construction	01-01-1980
31	14191	ALISA LN	BAY MEADOW DR	INDIANAPOLIS AVE	E	AAC	8	534	36	18,936	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
31	14278	ALISA LN	INDIANAPOLIS AVE	CAITHNESS DR	E	AC	8	166	36	5,976	3/19/24	89	63	0	37	Surface Treatment - Slurry Seal	05-11-2018
106	14523	ALLISON CIR	JONESPORT LN	CDS	E	AC	9	215	32	8,680	4/24/24	75	52	48	0	Surface Treatment - Slurry Seal	05-11-2019
107	15887	ALLPORT LN	MARVALE DR	CDS	E	AAC	7	798	36	30,978	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
108	15977	ALLSTONE DR	RAINGLEN LN	END	E	AC	5	587	36	21,132	3/12/20	89	53	0	47	New Construction	01-01-1980
109	14915	ALMELO LN	GHENT DR	NORDINA DR	E	AC	5	1,125	36	40,500	3/29/22	93	100	0	0	New Construction	01-01-1980
110	15570	ALOHA DR	KIOWA LN	KANEHOE LN	E	AC	9	930	36	34,980	3/27/24	91	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
112	15704	ALSUNA LN	ARIANA CIR	AHSANTE DR	E	AAC	6	500	36	18,250	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
112	15858	ALSUNA LN	AHSANTE DR	UTICA AVE	E	AAC	6	565	36	20,340	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
113	13360	ALTA VISTA CIR	SANTA YNEZ DR	END	E	AC	5	350	36	13,950	3/15/22	34	10	78	12	Surface Treatment - Slurry Seal	10-01-2012
114	15860	ALTAMAR DR	ALSUNA LN	FLORIDA ST	E	AAC	6	293	36	11,348	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
115	15187	ALTAMIRANO LN	VILLA NUEVA DR	CADIZ CIR	E	AC	5	1,101	36	41,136	2/25/20	85	21	79	0	Surface Treatment - Slurry Seal	10-01-2012
116	15885	ALVARADO DR	COLIMA LN	MISSION LN	E	AC	9	906	36	32,616	8/23/23	68	14	86	0	New Construction	01-01-1980
117	13487	AMAZON DR	ALLEY GANGES LN	SHER LN	E	AC	4	818	36	29,948	3/18/22	77	29	71	0	Surface Treatment - Slurry Seal	07-29-2020
118	14759	AMBERLEAF CIR	DELAWARE ST	CDS	E	AC	4	514	36	18,504	5/7/24	78	36	64	0	New Construction	01-01-1980
119	15806	AMBERTON LN	HELMSIDE DR	MARYPORT DR	E	AC	5	551	36	20,836	3/12/20	94	83	0	17	New Construction	01-01-1980
120	15559	AMBERWICK LN	EFFINGHAM DR	CDS	E	AC	8	1,021	36	38,256	4/10/24	88	32	64	4	New Construction	01-01-1980
121	14147	AMBY DR	BRENTSTONE LN	MANSARD LN	E	AAC	7	254	36	9,144	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
122	14822	AMSTERDAM DR	HAGUE LN	VAN DYKE LN	E	AAC	4	358	36	13,388	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
122	15741	AMSTERDAM DR	ROTTERDAM LN	HAGUE LN	E	AAC	4	353	36	12,708	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
123	15292	ANACAPA DR	CHATEAU LN	FAIRVIEW LN	E	AAC	1	780	36	30,580	5/7/24	74	73	27	0	Overlay - AC Fabric	10-01-2016
124	14171	ANCHOR CIR	CLOUDHAVEN DR	CDS	E	AC	7	164	32	6,748	2/10/20	38	52	48	0	Surface Treatment - Slurry Seal	07-15-2021
125	15973	ANCHORAGE DR	TOPEKA LN	TRIDENT LN	E	AC	7	1,275	36	46,650	2/24/20	66	32	62	6	Surface Treatment - Slurry Seal	07-15-2021
126	13712	ANDAMAN LN	CASPIAN CIR	ALLEY MCFADDEN AVE	E	AC	1	147	36	5,292	3/21/22	45	7	93	0	New Construction	01-01-1980
126	13713	ANDAMAN LN	ALLEY MCFADDEN AVE	MCFADDEN AVE	E	AC	1	159	36	5,724	3/21/22	74	21	79	0	New Construction	01-01-1980
126	15304	ANDAMAN LN	TASMAN DR	CASPIAN CIR	E	AC	1	548	36	19,728	3/21/22	83	24	53	23	New Construction	01-01-1980
127	14538	ANDERSON ST	COAST CIR	PCH	E	AC	2	220	31	6,820	4/9/22	59	87	0	13	New Construction	01-01-1980
127	60710	ANDERSON ST	PCH	END	E	AC	2	358	32	11,456	4/9/22	93	61	39	0	New Construction - Initial	01-01-1980
128	13252	ANGLER LN	PALISADE DR	ORLANDO DR	E	AC	3	620	36	22,320	3/17/22	79	100	0	0	New Construction	01-01-1980
128	15095	ANGLER LN	SOFTWIND DR	PALISADE DR	E	AC	3	534	36	19,224	3/17/22	88	100	0	0	New Construction	01-01-1980
129	15223	ANITA LN	SHER LN	NANCY DR	E	AC	4	1,054	36	37,944	3/18/22	84	42	58	0	Surface Treatment - Slurry Seal	07-29-2020
130	13324	ANNETTE CIR	LOVELL LN	CDS	E	AC	3	351	36	13,986	3/23/22	85	100	0	0	New Construction	01-01-1980
131	15583	ANNIK DR	MC LAREN LN.	HICKORY LN	E	AC	8	940	36	35,340	2/18/20	48	33	67	0	Surface Treatment - Slurry Seal	07-15-2021
132	15547	ANTIGUA LN	ST AUGUSTINE DR	SANDY HOOK DR	E	AC	9	1,013	36	37,218	8/30/23	84	49	47	4	New Construction	01-01-1980
133	13853	ANTRIM CIR	TOWAY LN	END	E	AC	1	419	36	16,334	5/8/24	43	11	63	26	New Construction	01-01-1980
134	14903	APEL LN	TILBURG DR	FRANS LN	E	AC	5	421	36	15,156	3/29/22	72	21	79	0	New Construction	01-01-1980
134	15787	APEL LN	BRANNED DR	TILBURG DR	E	AC	5	1,279	36	46,294	3/29/22	57	14	86	0	New Construction	01-01-1980
135	13727	APOLLO LN	ATLAS DR	THOR DR	E	AC	1	267	36	10,362	5/6/20	95	90	0	10	New Construction	01-01-1980
136	15720	APPLEBY DR	CARNABY LN	HUNTINGTON ST	E	AAC	4	519	36	19,684	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
137	13144	AQUARIUS DR	WALRUS LN	SPARTAN CIR	E	AAC	2	248	36	9,678	5/7/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
137	13158	AQUARIUS DR	RASCAL LN	SUNDANCER LN	E	AAC	2	245	36	8,820	5/7/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
137	15042	AQUARIUS DR	SPARTAN CIR	VIM LN	E	AAC	2	407	36	14,652	5/7/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
137	15043	AQUARIUS DR	VIM LN	RASCAL LN	E	AAC	2	731	36	26,316	5/7/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
138	15950	AQUATIC LN	CLIFF DR	EL CAPITAN DR	E	AAC	8	730	36	27,530	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
139	13426	ARACENA DR	CARRANZA LN	SAN DOVAL LN	E	AAC	5	256	36	9,966	2/25/20	91	100	0	0	Overlay - AC Structural	10-01-2012
140	14100	ARAGON CIR	SHANGRI LA DR	CDS	E	AAC	8	346	36	15,456	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
141	14332	ARCEL CIR	KROLL LN	END	E	AC	9	167	32	7,844	8/30/23	42	6	91	3	New Construction	01-01-1980
142	14480	ARCHER CIR	CLEARBROOK DR	CDS	E	AAC	9	415	36	16,440	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
143	13176	ARDSLEY CIR	HUMBOLDT DR	CDS	E	AC	2	406	32	14,492	4/7/22	60	21	79	0	New Construction	01-01-1980
144	13377	ARGO CIR	CAPSTONE DR	END	E	AAC	3	320	36	13,020	2/11/20	91	100	0	0	Overlay - AC Structural	10-01-2012
145	14576	ARGYLE DR	KESWICK LN	COVENTRY LN	E	AAC	8	204	24	4,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
145	14577	ARGYLE DR	CLAREMONT LN	CAMBRIDGE LN	E	AAC	8	204	24	4,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
145	14578	ARGYLE DR	INVERNESS LN	KINGSWOOD LN	E	AAC	8	170	24	4,080	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
146	13131	ARIA CIR	PRELUDE DR	CDS	E	AC	2	412	36	16,332	3/24/22	91	58	0	42	New Construction	01-01-1980
147	14729	ARIANA CIR	ALSUNA LN	CDS (W)	E	AAC	6	180	32	8,015	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
147	14730	ARIANA CIR	ALSUNA LN	CDS (E)	E	AC	6	140	32	6,840	6/29/21	27	8	73	19	New Construction	01-01-1980
148	13182	ARLINGTON LN	MEADOWLARD DR	CALIENTE DR	E	AAC	2	863	36	31,068	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
149	13409	ARMADA DR	COLLINS CIR	EDWARDS ST	E	AC	5	308	36	11,088	5/13/24	48	16	74	10	New Construction	01-01-1980
149	15980	ARMADA DR	FLINTSTONE LN	COLLINS CIR	E	AC	5	1,013	36	36,468	3/14/22	61	17	70	13	New Construction	01-01-1980
150	14835	ARNETT DR	ALLEY NEWLAND ST	NEWLAND ST	E	AAC	4	160	36	5,760	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
150	14836	ARNETT DR	NEWLAND ST	LUCIA LN	E	AAC	4	522	36	19,292	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
150	15752	ARNETT DR	GLENHAVEN LN	ALLEY NEWLAND ST	E	AAC	4	621	36	22,606	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
151	15172	ARROWHEAD DR	STILL HARBOR LN	CDS	E	AC	5	336	36	13,596	3/28/22	49	57	43	0	Surface Treatment - Slurry Seal	10-01-2012
152	13576	ASH ST	SYCAMORE AVE	CYPRESS AVE	E	AC	4	424	36	15,264	3/31/22	65	34	42	24	New Construction	01-01-1980
152	15266	ASH ST	CYPRESS AVE	MANDRELL DR	E	AC	4	675	36	24,300	3/31/22	72	56	44	0	New Construction	01-01-1980
152	15267	ASH ST	WARNER AVE	SYCAMORE AVE	E	AC	4	398	36	14,328	3/31/22	65	28	70	2	New Construction	01-01-1980
155	14593	ASHWORTH CIR	CONSTITUTION DR	CDS	E	AC	8	238	36	10,368	3/7/22	81	88	0	12	Surface Treatment - Slurry Seal	02-08-2023
156	13686	ASPEN CIR	ROYAL OAK DR	END	E	AC	1	350	32	13,000	2/10/20	93	100	0	0	New Construction	01-01-1980
157	13040	ASPENWOOD LN	ADAMS AVE	SHIPLEY ST	E	PCC	6	190	20	4,780	7/8/21	85	0	100	0	Surface Treatment - Slurry Seal	07-27-2022
158	13720	ASSEMBLY LN	MACHINE DR	MC FADDEN AVE	E	AC	1	818	40	32,720	5/5/20	90	91	0	9	New Construction	01-01-1980
159	14141	ASTOR LN	MIDBURY DR	GALLANT DR	E	AAC	7	252	36	9,822	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2291	17026	ASTRONAUTICS LN	SKYLAB RD	DELTA LN	E	AC	1	2,052	36	77,872	2/10/20	92	48	0	52	New Construction - Initial	01-01-2000
2291	17027	ASTRONAUTICS LN	DELTA LN	RANCHO RD	E	AC	1	1,592	36	61,512	2/10/20	87	25	0	75	New Construction - Initial	01-01-2000
160	13364	ATHENA DR	MADERA LN	EDWARDS ST	E	AAC	5	170	36	6,120	2/18/20	92	100	0	0	Overlay - AC Structural	10-01-2012
160	15151	ATHENA DR	LIDO LN	MADERA LN	E	AAC	5	1,020	36	36,720	2/18/20	87	96	0	4	Overlay - AC Structural	10-01-2012
85	14246	ATLANTA AVE	END	BASTIA LN	E	AC	9	350	26	9,100	8/30/23	95	100	0	0	New Construction	01-01-1980
85	14247	ATLANTA AVE	BASTIA LN	END	E	AC	9	527	26	13,702	8/30/23	70	69	31	0	New Construction	01-01-1980
85	780	ATLANTA AVE	BROOKHURST ST	END	E	AC	8	532	40	21,280	2/25/22	100	28	72	0	New Construction	01-01-1980
85	785	ATLANTA AVE	END	BROOKHURST	E	AC	8	532	40	21,280	2/25/22	100	30	70	0	New Construction - Initial	01-01-1980
161	13726	ATLAS DR	APOLLO LN	SABRE LN	E	AC	1	150	36	7,400	4/8/22	95	100	0	0	New Construction	01-01-1980
163	15109	AUBURN DR	REDLANDS LN	WHITTIER LN	E	AC	3	1,245	36	45,570	3/16/22	66	56	44	0	New Construction	01-01-1980
164	15029	AUDREY DR	TOMAS LN	WARREN LN	E	AC	2	1,005	36	36,180	3/24/22	82	89	11	0	New Construction	01-01-1980
165	14362	AUGUSTA CIR	PEPPERTREE DR	CDS	E	AAC	8	334	32	12,188	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
166	15334	AULNAY LN	MC FADDEN AVE	WINSLOW DR	E	AC	1	441	36	15,876	5/7/24	93	100	0	0	New Construction	01-01-1980
166	15335	AULNAY LN	WINSLOW DR	PRISCILLA DR	E	AC	1	520	36	18,720	5/7/24	91	100	0	0	New Construction	01-01-1980
166	15920	AULNAY LN	PRISCILLA DR	ROYALIST DR	E	AC	1	1,040	36	37,440	5/7/24	93	100	0	0	New Construction	01-01-1980
167	14041	AUSTIN DR	PHOENIX LN	TOPEKA LN	E	AC	7	252	36	9,072	2/24/20	47	44	56	0	Surface Treatment - Slurry Seal	07-15-2021
168	14952	AUTOPARK DR	REPAIR LN	GOTHARD ST	E	AC	4	353	40	13,800	5/9/24	91	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
169	13350	AUTUMN CIR	CDS	ROSEMONT DR	E	AC	5	320	36	13,020	3/29/22	45	21	79	0	New Construction	01-01-1980
170	13352	AVALON LN	PALO ALTO DR	POINT LOMA DR	E	AC	5	1,025	36	36,900	3/15/22	67	50	50	0	Surface Treatment - Slurry Seal	10-01-2012
171	15985	AVILLA LN	CRISTA PALMA DR	JARDINES DR	E	AAC	5	971	36	34,668	2/25/20	89	100	0	0	Overlay - AC Structural	10-01-2012
172	14831	B ST	ROBIDOUX DR	WARNER AVE	E	AC	4	651	34	22,134	3/31/22	91	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
172	15748	B ST	WARNER AVE	BLAYLOCK DR	E	AC	4	670	35	23,450	3/31/22	89	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
173	14707	BACKBAY CIR	OCEANHILL DR	CDS	E	AC	6	266	32	10,012	8/15/23	59	10	79	11	Surface Treatment - Slurry Seal	03-01-2011
174	13709	BAFFIN CIR	TASMAN DR	END	E	AC	1	545	36	20,870	3/21/22	58	12	88	0	New Construction	01-01-1980
175	14378	BAHAMA LN	HAITI DR	RHODESIA DR	E	AAC	9	752	36	28,072	3/26/24	86	52	16	32	Overlay - AC Structural	05-11-2018
176	15469	BAINFORD DR	MANSARD LN	CDS	E	AAC	7	446	32	16,272	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
177	14408	BAKER DR	MARGARITA LN	ROB ROY CIR	E	AAC	3	249	36	9,714	5/5/20	93	100	0	0	Overlay - AC Structural	10-01-2012
178	14511	BALBOA CIR	MOLOKAI DR	CDS	E	AAC	9	313	32	11,516	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
179	14288	BALGAIR CIR	SCOTSTOUN DR	CDS	E	AC	8	452	32	16,132	3/19/24	84	97	0	3	Surface Treatment - Slurry Seal	05-11-2018
180	13133	BALLAD LN	PRELUDE DR	CDS	E	AC	2	412	36	16,132	3/24/22	91	76	24	0	New Construction	01-01-1980
180	15034	BALLAD LN	MINUET DR	PRELUDE DR	E	AC	2	520	36	19,020	3/24/22	78	40	60	0	New Construction	01-01-1980
181	13264	BALLANTINE LN	EDINGER AVE	BELLINGER DR	E	AC	3	179	36	6,444	4/1/22	92	100	0	0	New Construction	01-01-1980
181	15102	BALLANTINE LN	BELLINGER DR	SILVERWOOD DR	E	AC	3	1,010	36	36,360	3/17/22	94	100	0	0	New Construction	01-01-1980
182	15981	BALMORAL DR	EDWARDS ST	END	E	AC	5	1,200	36	44,700	4/4/22	100	86	0	14	New Construction	01-01-1980
183	14626	BALTIMORE AVE	ALABAMA ST	ALLEY ALABAMA ST	E	AC	9	322	37	11,914	8/14/23	74	88	9	3	New Construction	01-01-1980
183	14627	BALTIMORE AVE	ALLEY ALABAMA ST	HUNTINGTON ST	E	AC	9	161	37	5,957	8/24/23	72	54	39	7	New Construction	01-01-1980
183	14628	BALTIMORE AVE	HUNTINGTON ST	ALLEY HUNTINGTON ST	E	AC	9	156	37	5,772	8/14/23	63	44	56	0	New Construction	01-01-1980
184	14165	BANCROFT CIR	HAZELBROOK DR	CDS	E	AC	7	496	36	19,356	2/10/20	57	40	60	0	Surface Treatment - Slurry Seal	07-15-2021

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
185	15533	BANFF LN	CREW DR	CDS	E	AC	9	997	36	39,096	8/30/23	78	37	48	15	New Construction	01-01-1980
186	14946	BANKTON DR	END	GAINSFORD LN	E	AC	5	146	36	5,256	3/12/20	95	100	0	0	New Construction	01-01-1980
186	15805	BANKTON DR	GAINSFORD LN	END	E	AC	5	424	36	17,264	3/12/20	95	100	0	0	New Construction	01-01-1980
2293	14399	BANNING AVE FRONTAGE	STARFIRE LN	CDS	E	AC	9	370	27	11,790	4/17/24	81	25	71	4	New Construction - Initial	01-01-1980
187	12858	BAR HARBOR LN	QUIET BAY LN	SCENIC BAY LN	E	AAC	5	348	36	13,108	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
188	14320	BARBADOS CIR	DORSETT DR	CDS	E	AC	9	570	36	22,020	8/30/23	24	6	94	0	New Construction	01-01-1980
189	15744	BARCELONA LN	BLAYLOCK DR	VALENCIA DR	E	AC	4	520	36	18,970	3/31/22	90	68	12	20	Surface Treatment - Slurry Seal	07-29-2020
190	13619	BARDON LN	LA MANCHA CIR	CORSICAN DR	E	AC	3	269	36	10,434	4/7/22	95	100	0	0	New Construction	01-01-1980
191	13186	BARNSTABLE CIR	HUMBOLDT DR	CDS	E	AC	2	375	32	13,500	4/7/22	76	31	69	0	New Construction	01-01-1980
192	14793	BARON CIR	TALBERT AVE	CDS	E	AAC	4	603	36	23,208	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
193	13502	BARTLETT LN	MADDOX DR	ALLEY NORMA DR	E	AAC	3	682	36	24,552	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
193	13503	BARTLETT LN	ALLEY NORMA DR	NORMA DR	E	AAC	3	105	36	3,780	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
196	14425	BARTON DR	KOLEDO LN	QUEENS LN	E	AAC	4	298	36	10,728	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
197	13206	BARUNA LN	NALU CIR	SEA WITCH LN	E	AC	2	412	36	14,832	4/7/22	82	39	61	0	New Construction	01-01-1980
197	13225	BARUNA LN	KITTEN CIR	SIRUS DR	E	AC	2	268	36	10,398	5/10/24	93	100	0	0	New Construction	01-01-1980
197	15068	BARUNA LN	SEA WITCH LN	DAVENPORT DR	E	AC	2	886	36	31,896	4/7/22	87	56	44	0	New Construction	01-01-1980
197	15071	BARUNA LN	DAVENPORT DR	KITTEN CIR	E	AC	2	607	36	21,852	4/7/22	82	28	72	0	New Construction	01-01-1980
198	15976	BARWOOD DR	RAINGLEN LN	BECKWALL LN	E	AC	5	652	36	23,184	3/12/20	94	100	0	0	New Construction	01-01-1980
199	15820	BASS DR	BUSHARD ST	WALLEYE LN	E	AC	8	322	36	12,592	3/7/22	93	72	0	28	New Construction	01-01-1980
200	14245	BASTIA LN	SNOWBIRD DR	ATLANTA AVE	E	AC	9	246	36	8,856	8/30/23	74	100	0	0	New Construction	01-01-1980
200	14248	BASTIA LN	ATLANTA AVE	ATLANTA AVE	E	AC	9	72	36	2,592	7/10/16	31	43	48	9	New Construction	01-01-1980
201	14921	BATES CIR	ALLSTONE DR	END	E	AC	5	217	36	9,612	3/12/20	92	69	0	31	New Construction	01-01-1980
202	13402	BAXTER CIR	AMADA DR	CDS	E	AC	5	338	36	13,668	3/14/22	56	8	92	0	New Construction	01-01-1980
203	15948	BAY MEADOW DR	BUSHARD ST	GRAYSTONE LN	E	AAC	8	1,195	36	43,020	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
204	14536	BAY VIEW DR	ALLEY BAY VIEW 1	BROADWAY	E	AC	2	122	27	3,294	4/9/22	90	22	0	78	New Construction	01-01-1980
204	14537	BAY VIEW DR	ALLEY BAY VIEW 2	ALLEY BAY VIEW 1	E	AC	2	233	27	6,291	4/9/22	95	50	0	50	New Construction	01-01-1980
204	15620	BAY VIEW DR	BROADWAY	END	E	AC	2	420	27	11,340	4/9/22	83	15	78	7	New Construction	01-01-1980
204	15621	BAY VIEW DR	REMORA DR	ALLEY BAY VIEW 2	E	AC	2	602	27	16,254	4/9/22	94	71	0	29	New Construction	01-01-1980
205	14498	BAYBREEZE DR	SUMMERWIND LN	BROOKHURST ST	E	AAC	9	237	44	9,628	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
206	13741	BAYLOR CIR	ALEXANDRIA DR	END	E	AC	1	410	36	16,260	5/6/20	82	43	42	15	New Construction	01-01-1980
207	13955	BAYONNE DR	CDS	LOMBARDY LN	E	AAC	7	586	34	21,174	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
207	13957	BAYONNE DR	LOMBARDY LN	CDS	E	AAC	7	220	32	8,540	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
208	13183	BAYSHORE LN	MEADOWLARK DR	CALIENTE DR	E	AAC	2	863	36	31,068	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
209	13766	BAYSIDE LN	SYDNEY DR	MEDFORD DR	E	AC	1	274	36	11,364	5/6/20	82	48	52	0	New Construction	01-01-1980
210	15380	BAYWATER LN	SUNCORAL DR	CLIFFSIDE DR	E	AC	7	646	36	23,506	2/19/20	42	17	71	12	Surface Treatment - Slurry Seal	07-15-2021
211	15384	BAYWOOD DR	PISMO LN	CORALWOOD LN	E	AAC	7	1,130	36	40,930	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
212	17000	BEACH BLVD FRONTAGE	DRIFTWOOD DR	TRAVELWAY	E	AC	9	1,352	28	37,856	8/24/23	85	98	0	2	New Construction	01-01-1980
212	17002	BEACH BLVD FRONTAGE	TRAVELWAY	WEST END	E	AC	9	1,032	36	37,152	8/30/23	92	41	0	59	New Construction	01-01-1980
212	17029	BEACH BLVD FRONTAGE	STERLING	TAYLOR	E	AAC	4	665	28	18,620	5/9/24	98	100	0	0	Overlay - AC Structural	04-01-2017
213	14487	BEACHSIDE DR	SEACREST LN	SEASIDE LN	E	AAC	9	257	36	10,252	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
214	15955	BEACHWOOD LN	FIVE HARBORS DR	CAMEL LN	E	AC	9	868	36	31,248	5/6/24	76	43	57	0	Surface Treatment - Slurry Seal	05-11-2018
215	13890	BEACON HILL LN	SUMMIT DR	LAWN HAVEN DR	E	AAC	5	219	36	6,684	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
216	14111	BEAM CIR	SEAPORT DR	END	E	AAC	9	155	32	4,960	8/21/23	65	46	54	0	Overlay - AC Structural	03-01-2011
217	14250	BEARSDEN CIR	COLBREGGAN DR	CDS	E	AAC	9	210	32	8,520	5/10/24	76	58	42	0	Overlay - AC Structural	05-11-2018
218	14201	BEAUMONT CIR	NIAGARA DR	CDS	E	AAC	8	356	32	13,392	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
219	14941	BECK CIR	GAINSFORD LN	END	E	AC	5	154	36	5,544	3/12/20	93	100	0	0	New Construction	01-01-1980
220	15798	BECKWALL LN	NEARGATE DR	END	E	AC	5	542	36	21,512	3/12/20	93	59	0	41	New Construction	01-01-1980
221	14354	BECKWOURTH CIR	CORNERBROOK DR	CDS	E	AC	8	341	36	13,776	7/13/17	86	59	0	41	New Construction	01-01-1980
222	15467	BEDEL DR	MANSARD LN	VILLAGE DR	E	AC	7	408	36	14,688	2/11/20	73	45	55	0	Surface Treatment - Slurry Seal	07-15-2021
223	15075	BEDFORD LN	DAVENPORT DR	WESTPORT DR	E	AC	2	573	36	20,628	4/7/22	52	34	66	0	New Construction	01-01-1980
224	13874	BELFAST LN	CARLOW DR	EDINGER AVE	E	AC	3	549	36	19,764	2/19/20	81	40	60	0	New Construction	01-01-1980
224	15347	BELFAST LN	GLEN DR	CARLOW DR	E	AC	3	900	36	32,400	3/30/22	94	100	0	0	New Construction	01-01-1980
225	15725	BELL CIR	TALBERT AVE	CDS	E	AC	4	562	36	21,732	5/13/24	78	18	82	0	Surface Treatment - Slurry Seal	11-28-2019
226	13436	BELLFIELD LN	MIDWAY DR	GRIMSBY DR	E	AC	5	203	36	7,308	3/28/22	77	70	30	0	New Construction	01-01-1980
226	15191	BELLFIELD LN	GRIMSBY DR	CDS	E	AC	5	1,048	34	35,632	3/28/22	82	70	0	30	New Construction	01-01-1980
227	15103	BELLINGER DR	BALLANTINE LN	CDS	E	AC	3	880	36	32,930	4/1/22	41	29	71	0	New Construction	01-01-1980
228	14058	BELLMEAD DR	BRIARLY LN	FELCLIFF LN	E	AC	7	1,027	36	36,972	2/24/20	70	20	78	2	Surface Treatment - Slurry Seal	07-15-2021
229	14916	BELLPORT CIR	GLENSTONE DR	CDS	E	AC	2	229	36	9,594	3/29/22	88	100	0	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
230	16022	BELLSHIRE DR	MAYPORT LN	SWANSEA LN	E	AC	7	758	36	27,288	2/11/20	79	94	0	6	Surface Treatment - Slurry Seal	07-15-2021
231	13678	BELMAR CIR	ROYAL OAK DR	END	E	AAC	1	350	32	13,000	5/7/24	81	100	0	0	Overlay - AC Structural	10-01-2016
233	14792	BELVA DR	GOTHARD ST	METZLER LN	E	AC	4	437	40	17,480	5/9/24	84	60	21	19	Surface Treatment - Slurry Seal	11-01-2019
234	14606	BENJAMIN DR	BRITTANY LN	NEWLAND ST	E	AAC	4	483	36	17,388	12/5/19	100	0	0	0	Overlay - AC Structural	12-05-2019
235	14592	BERKSHIRE DR	DEVONSHIRE DR	CORNWALL DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
236	14926	BERLARK CIR	SERENE DR	END	E	AC	5	424	36	17,064	3/12/20	95	100	0	0	New Construction	01-01-1980
237	15777	BERLIN LN	ROGERS DR	KERN DR	E	AC	5	1,238	36	44,818	3/22/22	40	12	87	1	New Construction	01-01-1980
238	15564	BERMUDA DR	MAGNOLIA ST	KANEHOE LN	E	AC	9	1,110	36	39,672	3/27/24	84	50	50	0	Surface Treatment - Slurry Seal	05-11-2018
239	15163	BERSHIRE DR	SHOREHAM LN	STAMONT LN	E	AC	5	782	36	27,504	3/12/20	30	12	88	0	New Construction	01-01-1980
241	13934	BETHEL CIR	BRIDGEPORT DR	CDS	E	AAC	7	315	32	13,728	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
242	15254	BETTY DR	GOLDENWEST ST	CDS	E	AC	3	957	36	35,952	4/7/22	66	31	46	23	New Construction	01-01-1980
243	14299	BEVERLY DR	SUBURBIA LN	LAVONNE LN	E	AAC	8	1,027	36	36,972	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
244	14450	BICKLEY DR	BUSHARD ST FRONTAGE	BROMLEY LN	E	AC	8	1,128	36	41,358	3/9/22	89	53	44	3	Surface Treatment - Slurry Seal	02-08-2023
245	14181	BIG BEND LN	LASSEN CIR	YELLOWSTONE DR	E	AC	8	252	36	9,072	3/1/22	94	100	0	0	Surface Treatment - Slurry Seal	02-13-2023
245	15481	BIG BEND LN	OLYMPIC DR	LASSEN CIR	E	AC	8	915	36	33,690	3/1/22	91	83	0	17	Surface Treatment - Slurry Seal	02-13-2023
246	15486	BIG SUR DR	WIND CAVE LN	RUNNING SPRINGS LN	E	AC	8	754	32	24,378	3/1/22	82	85	15	0	Surface Treatment - Slurry Seal	02-13-2023
247	15401	BIKINI LN	SAMOA DR	KUKUI DR	E	AC	8	802	36	30,372	3/3/22	43	9	86	5	New Construction	01-01-1980
248	14355	BINGHAMPTON CIR	EFFINGHAM DR	CDS	E	AC	8	495	36	19,320	4/10/24	77	13	68	19	New Construction	01-01-1980
249	14213	BIRCHWOOD DR	BROOKHURST ST	CRAIMER LN	E	AAC	8	1,176	36	42,336	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
250	13236	BIRDIE LN	MANGUM DR	LITTLER DR	E	AAC	3	260	36	9,360	10/1/16	100	0	0	0	Overlay - AC Structural	10-01-2016
250	13245	BIRDIE LN	VENTURI DR	MIDDLECOFF DR	E	AAC	3	520	36	18,720	10/1/16	100	0	0	0	Overlay - AC Structural	10-01-2016
250	15084	BIRDIE LN	LITTLER DR	VENTURI DR	E	AAC	3	1,014	36	36,504	10/1/16	100	0	0	0	Overlay - AC Structural	10-01-2016
251	13331	BISHOP DR	EDWARDS ST	COOPER LN	E	AC	3	531	36	19,116	3/18/22	87	37	63	0	Surface Treatment - Slurry Seal	07-29-2020
252	14093	BISMARK DR	BROOKHURST ST	MATSONIA LN	E	AC	8	886	36	31,896	3/3/22	71	59	37	4	Surface Treatment - Slurry Seal	02-08-2023
254	14350	BLACKFIN CIR	CHUBASCO LN	CDS	E	AC	8	228	36	9,708	4/1/24	67	69	31	0	Surface Treatment - Slurry Seal	05-11-2018
255	13223	BLAIR LN	WESTPORT DR	ROUNDHILL DR	E	AC	2	163	36	5,868	4/7/22	65	48	52	0	New Construction	01-01-1980
256	13981	BLANE CIR	JOICE LN	CDS	E	AAC	8	245	32	9,640	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
257	13290	BLANTON ST	PRAIRE DR	PEARCE ST	E	AC	2	660	36	23,760	3/29/22	90	42	0	58	New Construction	01-01-1980
257	13610	BLANTON ST	PEARCE ST	MILO ST	E	AC	2	660	36	23,120	3/22/22	84	20	61	19	New Construction	01-01-1980
259	15746	BLAYLOCK DR	BEACH BLVD	A ST	E	AC	4	300	35	10,500	4/6/22	89	57	0	43	Surface Treatment - Slurry Seal	07-29-2020
259	15747	BLAYLOCK DR	A ST	BARCELONA LN	E	AC	4	887	36	32,182	3/31/22	88	59	41	0	Surface Treatment - Slurry Seal	07-29-2020
260	13627	BLUE FOX CIR	CAPSTONE DR	END	E	AC	3	321	36	14,056	2/11/20	38	19	81	0	Surface Treatment - Slurry Seal	10-01-2012
261	13812	BLUE JAY CIR	BLUEBIRD LN	END	E	AC	1	530	36	20,330	3/21/22	88	50	46	4	New Construction	01-01-1980
262	13813	BLUEBIRD LN	DOVEWOOD DR	QUAIL CIR	E	AC	1	260	36	9,360	3/21/22	86	50	50	0	New Construction	01-01-1980
262	15326	BLUEBIRD LN	QUAIL CIR	ROBINWOOD DR	E	AC	1	780	36	28,080	3/21/22	75	37	63	0	New Construction	01-01-1980
263	13883	BLUEBONNET DR	SUNBURST LN	GOLDENWEST ST	E	AC	3	182	36	6,552	4/1/22	95	100	0	0	New Construction	01-01-1980
264	14348	BLUEFIELD DR	COCOBANA LN	STRATHMOOR LN	E	AAC	8	250	36	9,000	4/1/24	84	31	24	45	Overlay - AC Structural	05-11-2018
265	13986	BLUEFIN LN	GARFIELD AVE	ALBACORE DR	E	AC	8	180	47	7,810	3/7/22	92	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
266	15176	BLUEGATE LN	HAMSHIRE DR	CDS	E	AC	5	453	36	18,108	3/28/22	94	100	0	0	New Construction	01-01-1980
267	13993	BLUEGILL CIR	TARPON DR	CDS	E	AC	8	310	32	11,420	3/7/22	92	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
268	13602	BLUESAILS DR	BRIDGE LN	MOONGLOW LN	E	AAC	3	995	36	37,320	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
270	14172	BLUFFWATER CIR	COASTLAND DR	CDS	E	AAC	7	226	32	8,732	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
271	14988	BOARDWALK DR	SAYBROOK LN	ALGONQUIN ST	E	AC	2	834	36	30,024	4/5/22	92	72	28	0	New Construction - Initial	01-01-1980
272	14370	BOBBIE CIR	POLYNESIAN LN	CDS	E	AAC	9	480	36	18,780	3/26/24	86	68	32	0	Overlay - AC Structural	05-11-2018
273	14040	BOISE DR	SACRAMENTO LN	PHOENIX LN	E	AAC	7	253	36	9,608	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
274	13217	BOLERO LN	NALU CIR	FINISTERRE DR	E	AC	2	1,864	36	67,104	4/7/22	89	53	0	47	New Construction - Initial	01-01-1980
274	13228	BOLERO LN	FINISTERRE DR	SIRIUS DR	E	AC	2	800	36	29,550	4/7/22	88	48	52	0	New Construction - Initial	01-01-1980
275	14321	BOLIN CIR	LEASURE LN	END	E	AC	9	176	32	7,132	8/30/23	53	31	67	2	New Construction - Initial	01-01-1980
195	15765	BOLSA CHICA ST	WARNER AVE	LOS PATOS AVE	E	AC	2	1,326	100	97,600	3/22/22	46	13	80	7	New Construction - Initial	01-01-1980
195	60850	BOLSA CHICA ST	LOS PATOS AVE	BRIGHTWATER DR	E	AC	2	860	49	34,940	5/13/24	91	100	0	0	New Construction - AC	01-01-1980
276	13729	BOLSA PARK LN	KIMBERLY DR	DUNDEE DR	E	AC	1	276	36	9,936	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
276	13736	BOLSA PARK LN	DUNDEE DR	CORNELL DR	E	AC	1	274	36	9,864	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
276	13737	BOLSA PARK LN	CORNELL DR.	TYNDALL DR	E	AC	1	274	36	9,864	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
276	13747	BOLSA PARK LN	TYNDALL DR	SHELLY DR	E	AC	1	274	36	9,576	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
276	13754	BOLSA PARK LN	SHELLY DR	SYDNEY DR	E	AC	1	274	36	9,576	5/6/20	94	100	0	0	New Construction - Initial	01-01-1980
276	13756	BOLSA PARK LN	SYDNEY DR	MEDFORD DR	E	AC	1	274	36	9,576	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
277	13386	BOLTON CIR	WOODBORO DR	END	E	AC	5	136	36	6,396	3/12/20	95	100	0	0	New Construction - Initial	01-01-1980
279	14084	BOND CIR	EDUCATION LN	CDS	E	AC	8	472	36	18,792	3/9/22	84	41	53	6	Surface Treatment - Slurry Seal	02-08-2023

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
280	13267	BONDURANT CIR	FLINT DR	CDS	E	AC	3	99	32	4,418	3/17/22	58	30	70	0	New Construction - Initial	01-01-1980
281	13342	BONNIE DR	PATRICIA LN	KETTLER LN	E	AC	3	521	36	18,756	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
282	14619	BOOTHBAY CIR	PORT GREENWICH LN	END	E	AC	9	453	34	15,402	8/21/23	72	17	83	0	Surface Treatment - Slurry Seal	03-01-2011
283	14473	BORBA CIR	DAKAR LN	CDS	E	AC	9	276	32	11,332	4/25/24	73	32	0	68	Surface Treatment - Slurry Seal	05-11-2019
284	14049	BOSUN CIR	WESTWINDS LN	CDS	E	AAC	7	232	36	9,602	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
285	14439	BOUNTY CIR	CHANNEL LN	CDS	E	AC	2	288	32	10,716	4/9/22	90	51	0	49	New Construction - Initial	01-01-1980
286	13604	BOUQUET DR	SERENADE LN	MAGELLAN LN	E	AAC	3	260	36	10,110	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
287	14027	BOWMAN LN	HURSTWELL DR	DRYBANK DR	E	AAC	7	536	36	19,296	8/17/23	86	91	0	9	Overlay - AC Structural	03-01-2011
288	15554	BOWSPRIT LN	WATERFRONT DR	PIER DR	E	AAC	9	460	36	17,310	3/20/24	89	100	0	0	Overlay - AC Structural	05-11-2018
289	13973	BRABHAM DR	MC LAREN LN	HICKORY LN	E	AC	8	940	36	33,840	2/19/20	57	27	73	0	Surface Treatment - Slurry Seal	07-15-2021
290	13334	BRAD DR	EDWARDS ST	COOPER LN	E	AAC	3	530	36	19,080	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
291	13253	BRADBURY LN	PALISADE DR	DAGNY CIR	E	AC	3	367	36	13,212	3/17/22	75	18	82	0	New Construction	01-01-1980
291	15096	BRADBURY LN	DAGNY CIR	HEIL AVE	E	AC	3	963	36	34,668	3/17/22	56	31	61	8	New Construction	01-01-1980
292	15179	BRAEMAR DR	ORKNEY CIR	SKYE LN	E	AC	5	580	36	22,130	4/4/22	95	100	0	0	New Construction	01-01-1980
293	15059	BRANFORD DR	EDGEWATER LN	SAYBROOK LN	E	AC	2	814	36	29,304	3/24/22	52	33	67	0	New Construction	01-01-1980
294	15776	BRANNEN DR	APEL LN	SPRINGDALE ST	E	AC	5	940	36	33,840	5/13/24	64	26	73	1	New Construction	01-01-1980
295	14478	BRANTA CIR	LANDFALL DR	CDS	E	AAC	9	472	36	19,492	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
296	13242	BRASSIE CIR	SPRINGDALE ST	END	E	AAC	3	270	32	9,890	5/9/24	88	45	0	55	Overlay - AC Fabric	10-01-2016
297	14047	BREAKERS DR	TRIDENT LN	WESTWINDS LN	E	AAC	7	492	36	17,712	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
298	14340	BREAKWATER CIR	BOWSPIRIT LN	CDS	E	AAC	9	350	32	12,700	4/1/24	86	100	0	0	Overlay - AC Structural	05-11-2018
299	14914	BREDA LN	GHENT DR	NORDINA DR	E	AC	5	1,120	36	40,570	3/29/22	85	48	52	0	New Construction	01-01-1980
300	13127	BREELAND DR	SHERBECK LN	GOLDENWEST ST	E	AC	3	1,196	36	42,768	2/19/20	87	98	0	2	New Construction	01-01-1980
301	13261	BRENT CIR	SILVERWOOD DR	CDS	E	AC	3	140	32	5,730	3/17/22	80	73	27	0	New Construction	01-01-1980
302	15891	BRENTSTONE LN	BURLCREST DR	CHARFORD DR	E	AC	7	1,183	36	42,588	2/11/20	74	30	70	0	Surface Treatment - Slurry Seal	07-15-2021
303	13460	BRENTWELL CIR	GLENFOX DR	END	E	AAC	5	472	36	18,492	2/24/20	82	100	0	0	Overlay - AC Structural	10-01-2012
304	15248	BRESSEL LN	MERLE CIR	WARNER AVE	E	AC	4	486	36	17,746	4/6/22	84	26	74	0	Surface Treatment - Slurry Seal	07-29-2020
305	14328	BRETON LN	ST AUGUSTINE DR	HATTERAS DR	E	AC	9	833	36	30,738	8/30/23	71	100	0	0	New Construction	01-01-1980
305	15540	BRETON LN	ST AUGUSTINE DR	CDS	E	AC	9	584	32	20,188	8/30/23	58	28	72	0	New Construction	01-01-1980
306	13674	BRIARCLIFF DR	SPRINGDALE ST	CHATEAU LN	E	AC	1	180	36	6,480	2/10/20	71	37	63	0	New Construction	01-01-1980
306	13675	BRIARCLIFF DR	FAIRVIEW LN	END	E	AC	1	551	32	19,382	2/10/20	87	78	22	0	New Construction	01-01-1980
306	15293	BRIARCLIFF DR	CHATEAU LN	FAIRVIEW LN	E	AC	1	780	36	28,080	4/8/22	75	34	55	11	New Construction	01-01-1980
307	15959	BRIARLY LN	DOREMERE DR	LOWMEAD DR	E	AC	7	1,007	36	37,002	2/24/20	82	25	73	2	Surface Treatment - Slurry Seal	07-15-2021
308	13879	BRIARWOOD DR	DAWSON LN	SUNFLOWER LN	E	AC	3	257	36	8,676	4/1/22	95	100	0	0	New Construction	01-01-1980
309	13601	BRIDGE LN	BLUESAILS DR	STONEWOOD DR	E	AAC	3	260	36	10,110	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
310	15968	BRIDGEPORT DR	NEWHAVEN LN	NEWLAND ST	E	AAC	7	517	36	18,612	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
311	15111	BRIDGEWATER DR	REDLANDS LN	WHITTIER LN	E	AC	3	1,348	36	49,278	3/17/22	83	88	0	12	New Construction	01-01-1980
312	13947	BRIDGEWAY LN	GARFIELD AVE	BROOKSIDE DR	E	AC	7	410	36	14,760	2/19/20	32	18	80	2	Surface Treatment - Slurry Seal	07-15-2021
313	13996	BRIGANTINE LN	FAIR TIDE CR	YORKTOWN AVE	E	AAC	8	148	36	5,040	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
314	15810	BRIGHTON DR	CRESTMOOR LN	WHITFORD LN	E	AC	5	670	36	25,120	3/12/20	65	21	49	30	New Construction	01-01-1980
315	15101	BRIMHALL LN	REUBENS DR	MYRTLE DR	E	AC	3	660	36	24,260	3/17/22	72	22	76	2	New Construction	01-01-1980
316	14607	BRITTANY LN	BENJAMIN DR	EL ARROYO DR	E	AAC	4	251	36	9,036	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
317	13925	BRIXHAM CIR	WEYMOUTH LN	CDS	E	AAC	7	142	32	7,956	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
318	15942	BROADWAY	INTREPID LN	PCH	E	AAC	2	351	28	6,328	5/13/24	92	100	0	0	Overlay - AC Fabric	12-01-2017
318	60490	BROADWAY	PCH	PACIFIC S	E	AC	2	304	44	13,376	5/6/20	92	53	0	47	New Construction - Initial	01-01-1980
319	14080	BROMLEY LN	BICKLEY DR	PETTSWOOD DR	E	AAC	8	259	36	10,824	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
320	15506	BROOKDALE LN	CASTLEGATE DR	SUNRIDGE DR	E	AC	9	579	36	20,844	5/6/24	54	30	70	0	Surface Treatment - Slurry Seal	05-11-2018
240	14088	BROOKHURST ST	CUTTY SARK DR	FORRESTAL DR	E	AC	8	1,444	28	40,432	2/25/22	95	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
240	14204	BROOKHURST ST	END	MEREDITH DR	E	AAC	8	242	27	6,534	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
240	14209	BROOKHURST ST	MEREDITH DR	JON DAY DR	E	AAC	8	270	27	7,290	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
240	14430	BROOKHURST ST	KAMUELA DR.	YORKTOWN AVE	E	AC	8	1,121	26	29,146	2/25/22	81	41	0	59	Surface Treatment - Slurry Seal	02-08-2023
240	14616	BROOKHURST ST	CUTTY SARK DR	END	E	AC	8	116	26	3,016	2/25/22	95	100	0	0	New Construction	01-01-1980
240	15491	BROOKHURST ST	JON DAY DR	CRAILET DR	E	AAC	8	790	27	21,330	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
321	14075	BROOKLINE CIR	INNSBRUCK DR	CDS	E	AC	8	365	32	13,180	3/9/22	86	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
322	14783	BROOKSHIRE LN	WINDFIELD DR	TALBERT AVE	E	AC	4	344	46	15,324	5/13/24	71	33	31	36	Surface Treatment - Slurry Seal	11-01-2019
323	13948	BROOKSIDE DR	BRIDGEWAY LN	HOMESTEAD LN	E	AC	7	306	36	11,016	2/19/20	38	21	79	0	Surface Treatment - Slurry Seal	07-15-2021
324	13761	BROWN CIR	COLUMBIA LN	END	E	AC	1	543	36	21,048	3/30/22	86	26	56	18	New Construction	01-01-1980
325	15472	BROWNING DR	HARBOR ISLE LN	CDS	E	AC	7	557	32	20,124	2/11/20	74	78	18	4	Surface Treatment - Slurry Seal	07-15-2021
326	13801	BRUNSWICK DR	YORKSHIRE LN	GOLDENWEST ST	E	AC	1	550	36	19,512	2/26/20	61	14	85	1	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
327	14849	BRUSH DR	HART CIR	MONROE LN	E	AC	4	262	36	9,432	4/6/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
327	14850	BRUSH DR	IRBY LN	ALLEY NEWLAND ST	E	AC	4	140	36	5,040	4/6/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
327	14851	BRUSH DR	ALLEY NEWLAND ST	NEWLAND ST	E	AC	4	152	36	5,472	4/6/22	85	32	68	0	Surface Treatment - Slurry Seal	07-29-2020
327	15759	BRUSH DR	WAITE LN	HART CIR	E	AC	4	526	36	18,936	5/9/24	67	25	75	0	Surface Treatment - Slurry Seal	07-29-2020
327	15760	BRUSH DR	MONROE LN	TRIPP CIR	E	AC	4	550	36	19,800	4/6/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
327	15761	BRUSH DR	TRIPP CIR	IRBY LN	E	AC	4	550	36	19,800	4/6/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
328	14847	BRYANT DR	MONROE LN	CDS	E	AAC	4	380	32	13,410	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
328	14848	BRYANT DR	IRBY LN	MONROE LN	E	AAC	4	1,115	36	40,140	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
329	14401	BUCKINGHAM DR	GRAHAM ST	DAN LN	E	AC	1	1,239	40	49,240	2/10/20	95	100	0	0	New Construction	01-01-1980
331	14339	BULKHEAD CIR	WATERFRONT DR	CDS	E	AAC	9	395	36	15,720	3/20/24	90	95	0	5	Overlay - AC Structural	05-11-2018
332	13517	BURKE LN	EARL CIR	PRINCE DR	E	AC	3	361	40	14,440	3/31/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
332	15237	BURKE LN	HEIL AVE	EARL CIR	E	AC	3	1,303	40	52,120	3/31/22	84	37	61	2	Surface Treatment - Slurry Seal	07-29-2020
333	14138	BURLCREST DR	BRENTSTONE LN	SWANSEA LN	E	AC	7	469	36	17,634	2/11/20	70	40	60	0	Surface Treatment - Slurry Seal	07-15-2021
333	15464	BURLCREST DR	MEANDER LN	BRENTSTONE LN	E	AC	7	527	36	19,722	2/12/20	59	32	68	0	Surface Treatment - Slurry Seal	07-15-2021
334	14999	BURLINGTON LN	CHESTERFIELD LN	ASHBURTON CIR	E	AC	9	572	36	20,336	8/24/23	80	52	48	0	New Construction	01-01-1980
335	15369	BURNHAM CIR	WORCHESTER LN	CDS	E	AC	7	556	36	23,166	4/2/24	89	61	23	16	Surface Treatment - Slurry Seal	11-28-2019
336	14563	BURNLEY LN	RALEIGH DR	KENSINGTON DR	E	AAC	8	269	24	6,456	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
337	14788	BURTON DR	GRIFFIN LN	SAMPSON LN	E	AC	4	126	40	5,040	5/8/24	80	46	44	10	Surface Treatment - Slurry Seal	11-01-2019
338	13325	BUSBY LN	JEAN DR	SHIELDS DR	E	AC	3	1,280	36	46,080	3/23/22	66	26	74	0	New Construction	01-01-1980
258	14550	BUSHARD ST	NANTUCKET DR	HYANNIS PORT DR	E	AC	7	264	28	7,392	2/18/20	97	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
258	14597	BUSHARD ST	LITCHFIELD DR	VELARDO DR	E	AC	8	259	28	7,252	2/18/20	51	19	77	4	New Construction	01-01-1980
258	15428	BUSHARD ST	CAPE COD DR	ADAMS AVE	E	AAC	7	1,334	28	37,352	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
258	15627	BUSHARD ST	GREENWICH DR	NANTUCKET DR	E	AC	7	528	28	14,784	2/18/20	87	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
2294	14158	BUSHARD ST FRONTAGE	ADAM AVE FRONTAGE	NAUTILUS DR	E	AAC	7	809	28	22,652	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2294	14596	BUSHARD ST FRONTAGE	VELARDO DR	BASS DR	E	AC	8	449	28	12,572	3/7/22	90	37	0	63	New Construction - Initial	01-01-1980
2294	15628	BUSHARD ST FRONTAGE	INNSBRUCK DR	WOODLAWN DR	E	AC	8	252	27	6,804	3/9/22	72	14	72	14	Surface Treatment - Slurry Seal	02-08-2023
2294	15629	BUSHARD ST FRONTAGE	WOODLAWN DR	TELHAN DR	E	AC	8	506	27	13,662	3/9/22	73	19	81	0	Surface Treatment - Slurry Seal	02-08-2023
2294	15630	BUSHARD ST FRONTAGE	TELHAN DR	PETTSWOOD DR	E	AAC	8	519	27	14,013	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
339	14611	BUSHWICK DR	ASHBURTON CIR	ATTLEBORO CIR	E	AC	9	235	36	8,460	8/24/23	87	100	0	0	New Construction	01-01-1980
340	13715	BUSINESS DR	CHEMICAL LN	GRAHAM ST	E	AC	1	1,170	40	46,800	3/21/22	57	23	76	1	New Construction	01-01-1980
341	13837	CABOT CIR	WINSLOW DR	END	E	AC	1	339	36	13,454	5/8/24	36	28	53	19	New Construction	01-01-1980
342	14024	CADE CIR	DRYBROOK LN	END	E	AAC	7	294	32	9,408	8/17/23	86	59	24	17	Overlay - AC Structural	03-01-2011
343	13425	CADIZ CIR	ALTAMIRANO LN	END	E	AAC	5	100	50	5,750	2/25/20	85	80	0	20	Overlay - AC Structural	10-01-2012
344	13563	CAIN AVE	GOTHARD ST	PALMDALE ST	E	AC	3	345	36	12,420	4/6/22	63	28	72	0	New Construction	01-01-1980
344	13564	CAIN AVE	PALMDALE ST	END	E	AC	3	199	26	5,174	4/6/22	33	43	57	0	New Construction	01-01-1980
345	15511	CAITHNESS DR	PAISLET LN	QUEENS PARK LN	E	AAC	8	1,026	36	39,288	3/18/24	85	48	48	4	Overlay - AC Structural	05-11-2018
346	13412	CALEDONIA CIR	BALMORAL DR	CDS	E	AC	5	350	36	14,100	4/4/22	100	40	46	14	New Construction	01-01-1980
347	13203	CALHOUN DR	PHELPS LN	SAYBROOK LN	E	AC	2	621	36	22,356	3/24/22	46	29	71	0	New Construction	01-01-1980
348	13181	CALIENTE DR	SANTA ANITA LN	DEL MAR LN	E	AAC	2	260	36	9,360	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
348	13588	CALIENTE DR	BAYSHORE LN	HOLLYWOOD LN	E	AAC	2	265	36	10,040	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
348	15052	CALIENTE DR	SARATOGA LN	SANTA ANITA LN	E	AAC	2	520	36	19,220	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
348	15053	CALIENTE DR	DEL MAR LN	BAYSHORE LN	E	AAC	2	532	36	19,152	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
349	14640	CALIFORNIA ST	GENEVA AVE	HARTFORD AVE	E	AC	9	331	37	12,247	8/24/23	83	100	0	0	New Construction	01-01-1980
349	14641	CALIFORNIA ST	FRANKFORT AVE	GENEVA AVE	E	AC	9	330	37	12,210	8/24/23	65	100	0	0	New Construction	01-01-1980
349	14642	CALIFORNIA ST	ELMIRA AVE	FRANKFORT AVE	E	AC	9	329	40	13,160	8/24/23	70	89	0	11	New Construction	01-01-1980
349	14643	CALIFORNIA ST	DETROIT AVE	ELMIRA AVE	E	AC	9	330	38	12,540	8/24/23	87	80	0	20	New Construction	01-01-1980
349	14644	CALIFORNIA ST	CHICAGO AVE	DETROIT AVE	E	AC	9	328	36	11,808	8/24/23	72	38	62	0	New Construction	01-01-1980
349	14663	CALIFORNIA ST	NASHVILLE AVE	OSWEGO AVE	E	AC	6	330	36	11,880	8/15/23	32	18	82	0	Surface Treatment - Slurry Seal	03-01-2011
349	14664	CALIFORNIA ST	LINCOLN AVE	MEMPHIS AVE	E	AAC	6	330	37	11,803	8/14/23	86	100	0	0	Overlay - AC Structural	03-01-2011
349	14665	CALIFORNIA ST	KNOXVILLE AVE	LINCOLN AVE	E	AAC	6	330	37	11,877	8/14/23	76	31	61	8	Overlay - AC Structural	03-01-2011
349	14666	CALIFORNIA ST	JOILET AVE	KNOXVILLE AVE	E	AAC	6	330	37	11,988	8/14/23	70	59	41	0	Overlay - AC Structural	03-01-2011
349	14667	CALIFORNIA ST	INDIANAPOLIS AVE	JOILET AVE	E	AC	6	330	37	11,988	8/14/23	91	100	0	0	Surface Treatment - Slurry Seal	03-01-2011
349	14668	CALIFORNIA ST	HARTFORD AVE	INDIANAPOLIS AVE	E	AC	9	329	37	12,173	8/14/23	72	100	0	0	New Construction	01-01-1980
349	14724	CALIFORNIA ST	UTICA AVE	CDS	E	AAC	6	305	36	13,845	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
349	14725	CALIFORNIA ST	TORONTO AVE	UTICA AVE	E	AAC	6	310	36	11,160	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
349	14726	CALIFORNIA ST	SPRINGFIELD AVE	TORONTO AVE	E	AAC	6	330	36	11,880	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
349	14727	CALIFORNIA ST	ROCHESTER AVE	SPRINGFIELD AVE	E	AAC	6	330	36	11,880	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
349	14728	CALIFORNIA ST	ADAMS AVE	ROCHESTER AVE	E	AAC	6	285	36	10,260	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
350	14249	CALLIEBURN CIR	COLBREGGAN DR	CDS	E	AAC	9	206	32	9,392	5/10/24	83	100	0	0	Overlay - AC Structural	07-01-2018
351	13665	CALNEVA LN	CHINOOK DR	SAN SOUCI CIR	E	AC	1	260	36	9,360	4/8/22	80	54	46	0	New Construction	01-01-1980
351	15290	CALNEVA LN	SAN SOUCI CIR	SPA DR	E	AC	1	792	36	28,512	4/9/22	84	51	49	0	New Construction	01-01-1980
352	13432	CALPE CIR	SAN LEANDRO LN	END	E	AAC	5	100	50	6,000	2/25/20	88	100	0	0	Overlay - AC Structural	01-23-2014
353	13833	CALVIN CIR	AULNAY LN	END	E	AC	1	396	36	15,506	3/30/22	95	100	0	0	New Construction	01-01-1980
354	13714	CAMBAY LN	ALLEY MC FADDEN AVE	MC FADDEN AVE	E	AC	1	159	36	5,724	3/21/22	72	80	0	20	New Construction	01-01-1980
354	15303	CAMBAY LN	ALLEY MC FADDEN AVE	END	E	AC	1	826	36	29,736	3/21/22	64	20	80	0	New Construction	01-01-1980
355	13905	CAMBRIA COVE CIR	GOLDENWEST ST	CDS	E	AC	5	205	36	8,973	6/30/21	100	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
356	14581	CAMBRIDGE LN	DEVONSHIRE DR	CORNWALL DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
356	14582	CAMBRIDGE LN	ARGYLE DR	ABERDEEN DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
356	14583	CAMBRIDGE LN	CONTINENTAL DR	ABERDEEN DR	E	AAC	8	116	24	2,784	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
356	14584	CAMBRIDGE LN	CONTINENTAL DR	DEVONSHIRE DR	E	AAC	8	116	24	2,784	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
357	13545	CAMEL CIR	ROSS LN	END	E	AC	4	199	32	7,618	3/31/22	86	33	63	4	Surface Treatment - Slurry Seal	07-29-2020
358	14881	CAMELOT CIR	GLENROY DR	CDS	E	AC	2	472	36	18,342	3/22/22	88	100	0	0	New Construction	01-01-1980
359	14479	CAMEO LN	CLEARBROOK DR	LANDFALL DR	E	AC	9	267	36	9,612	4/25/24	75	20	80	0	Surface Treatment - Slurry Seal	05-11-2019
360	14794	CAMERON ST	SLATER AVE	NEWMAN AVE	E	AAC	4	1,322	36	43,592	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
361	15888	CAMFIELD LN	LARTHORN DR	CHARFORD DR	E	AAC	7	867	36	31,212	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
362	13327	CAMILLE DR	MYTINGER LN	SUMMERCLOUD LN	E	AC	3	358	36	12,888	3/23/22	92	100	0	0	New Construction	01-01-1980
5460	61010	CANAL ST	PCH	END N	E	PCC	2	56	24	1,344	5/13/24	91	34	0	66	New Construction - PCC	01-01-1980
5460	61020	CANAL ST	BAYVIEW DR	END	E	AC	2	78	26	2,028	5/6/24	77	47	53	0	New Construction - AC	01-01-1980
363	14091	CANBERRA LN	YORKTOWN AVE	MONITOR DR	E	AAC	8	170	36	6,120	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
363	14092	CANBERRA LN	CONSTITUTION DR	LURLINE DR	E	AAC	8	260	36	9,360	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
363	15436	CANBERRA LN	MONITOR DR	CONSTITUTION DR	E	AAC	8	780	36	28,080	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
364	14937	CANDLE CIR	GAINSFORD LN	END	E	AC	5	94	36	3,384	3/12/20	95	100	0	0	New Construction	01-01-1980
365	13477	CANDLELIGHT CIR	WISHINGWELL LN	CDS	E	AAC	3	486	36	19,296	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
366	15476	CANDLEWOOD DR	RAMONA LN	DEERVALE LN	E	AAC	7	960	36	34,560	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
367	13373	CANIS CIR	TAURUS LN	END	E	AC	3	222	28	6,216	2/11/20	62	41	59	0	Surface Treatment - Slurry Seal	10-01-2012
368	13554	CANNA CIR	FORD DR	END	E	AAC	3	350	32	12,700	2/11/20	95	100	0	0	Overlay - AC Structural	10-01-2012
369	13795	CANTERBURY DR	VICTORIA LN	YORKSHIRE LN	E	AC	1	782	36	27,864	2/26/20	93	100	0	0	New Construction	01-01-1980
369	13804	CANTERBURY DR	YORKSHIRE LN	END	E	AC	1	440	36	17,340	5/6/20	78	26	74	0	New Construction	01-01-1980
370	15965	CAPE COD DR	WATERBURY LN	BUSHARD ST	E	AAC	7	1,066	36	39,126	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
371	15654	CAPE COTTAGE LN	NORTHPORT DR	SOUTHPORT DR	E	AC	9	1,245	36	44,820	8/21/23	68	10	90	0	Surface Treatment - Slurry Seal	03-01-2011
372	14541	CAPE MAY LN	JONESPORT LN	CDS	E	AC	9	171	36	7,956	4/24/24	92	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
372	15622	CAPE MAY LN	PORT CYLDE DR	STONINGTON CIR	E	AC	9	373	36	14,678	4/24/24	86	49	0	51	Surface Treatment - Slurry Seal	05-11-2019
372	15623	CAPE MAY LN	STONINGTON CIR	JONESPORT LN	E	AAC	9	546	36	19,656	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
373	15446	CAPE NEWBURY DR	CAPE COTTAGE LN	END	E	AC	9	733	36	26,388	8/21/23	93	60	0	40	Surface Treatment - Slurry Seal	03-01-2011
374	14527	CAPE SPLIT CIR	CAPE MAY LN	CDS	E	AC	9	131	32	5,992	4/24/24	86	50	14	36	Surface Treatment - Slurry Seal	05-11-2019
375	15307	CAPETOWN LN	BOLSA AVE	KIMBERLY DR	E	AC	1	819	36	29,196	3/30/22	85	25	0	75	New Construction	01-01-1980
376	14506	CAPISTRANO LN	BANNING AVE	CHRISTINE DR	E	AC	9	1,001	36	36,036	4/17/24	72	17	81	2	Surface Treatment - Slurry Seal	05-11-2019
377	13919	CAPITOL CIR	GRANT DR	CDS	E	AAC	7	107	31	6,467	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
378	13789	CAPRI CIR	MELBOURNE DR	END	E	AC	1	410	36	16,560	3/30/22	95	100	0	0	New Construction	01-01-1980
379	15990	CAPSTONE DR	BLUE FOX CIR	WHETMORE LN	E	AC	3	893	36	34,648	2/11/20	65	44	56	0	Surface Treatment - Slurry Seal	10-01-2012
380	13437	CARBECK DR	BELLFIELD LN	FOSS LN	E	AC	5	863	36	31,068	3/28/22	67	58	42	0	New Construction	01-01-1980
381	13379	CARDIFF CIR	MARYPORT DR	END	E	AC	5	75	36	3,950	5/13/24	32	34	66	0	New Construction	01-01-1980
382	13346	CARLA CIR	MARIE LN	CDS	E	AAC	3	229	36	11,544	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
383	13875	CARLOW DR	BELFAST LN	DUNDALK LN	E	AC	3	264	36	9,216	3/30/22	95	100	0	0	New Construction	01-01-1980
384	16017	CARLSBAD LN	YELLOWSTONE DR	BAY MEADOW DR	E	AC	8	765	36	26,952	2/23/22	91	48	0	52	Surface Treatment - Slurry Seal	02-13-2023
385	14099	CARMANIA LN	ORONSAY CR	ADAMS AVE	E	AC	8	729	36	26,244	2/28/22	71	25	60	15	Surface Treatment - Slurry Seal	02-08-2023
385	15444	CARMANIA LN	SHALOM DR	ORONSAY CR	E	AC	8	517	36	18,612	2/28/22	92	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
387	14770	CARNABY LN	DANTON CIR	APPLEBY DR	E	AAC	4	722	36	26,992	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
387	15721	CARNABY LN	TAYLOR DR	DANTON CIR	E	AAC	4	529	36	19,044	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
388	13910	CAROLYN LN	KATHERINE DR	CDS	E	AAC	7	382	36	14,732	11/21/19	100	0	0	0	Overlay - AC Structural	11-21-2019
389	13200	CAROUSEL LN	WANDERER LN	WANDERER LN	E	AC	2	1,011	36	39,396	4/7/22	86	19	38	43	New Construction	01-01-1980
390	13988	CARP CIR	VERLARDO DR	CDS	E	AC	8	449	36	18,164	3/7/22	83	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
391	13430	CARRANZA LN	COLON CIR	SALAMANCA LN	E	AAC	5	207	36	7,452	2/25/20	86	71	0	29	Overlay - AC Structural	10-01-2012
391	15188	CARRANZA LN	VILLA NUEVA DR	COLON CIR	E	AAC	5	813	36	29,268	2/25/20	76	56	44	0	Overlay - AC Structural	10-01-2012
392	15921	CARRIE LN	SLIGO CIR	EDINGER AVE	E	AC	1	1,169	36	42,084	5/8/24	41	24	76	0	New Construction	01-01-1980
393	14260	CARROLLTOWN DR	HOPETOWN LN	CDS	E	AAC	9	245	32	9,340	5/6/24	77	51	30	19	Overlay - AC Structural	05-11-2018

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
393	14261	CARROLLTOWN DR	MAGNOLIA ST	KELVIN LN	E	AC	9	176	36	6,336	5/9/24	71	45	49	6	Surface Treatment - Slurry Seal	05-11-2018
393	15504	CARROLLTOWN DR	KELVIN LN	HOPETOWN LN	E	AC	9	760	36	27,360	5/8/24	75	64	27	9	Surface Treatment - Slurry Seal	05-11-2018
394	14038	CARSON DR	NEWLAND AVE	SACRAMENTO LN	E	AC	7	167	36	6,012	2/24/20	60	70	30	0	Surface Treatment - Slurry Seal	07-15-2021
395	15209	CASCADE LN	SHASTA LN	END	E	AAC	4	1,373	36	49,284	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
396	14951	CASCADE ST	NORTH CITY LIMIT	ANACAPA DR	E	AAC	1	131	36	4,716	5/7/24	70	41	59	0	Overlay - AC Fabric	10-01-2016
397	13371	CASPERS CIR	CORY DR	END	E	AAC	3	369	36	15,084	2/12/20	93	100	0	0	Overlay - AC Structural	10-01-2012
398	13711	CASPIAN CIR	ANDAMAN LN	END	E	AC	1	532	36	20,402	3/21/22	75	15	83	2	New Construction	01-01-1980
399	14243	CASTILIAN DR	COLIMA LN.	MISSION LN	E	AC	9	902	36	32,472	8/23/23	64	29	71	0	New Construction	01-01-1980
400	15618	CASTINE DR	WOOD ISLAND LN	CDS	E	AC	9	325	32	12,900	4/17/24	85	50	40	10	Surface Treatment - Slurry Seal	05-11-2019
401	13233	CASTLE DR	EAGLE LN	CLUBHOUSE LN	E	AAC	3	1,039	36	37,404	5/9/24	86	94	0	6	Overlay - AC Structural	10-01-2016
401	13234	CASTLE DR	CLUBHOUSE LN	END	E	AAC	3	285	36	10,260	5/9/24	91	100	0	0	Overlay - AC Structural	10-01-2016
402	14194	CASTLE ROCK CIR	BAY MEADOW DR	END	E	AAC	8	426	34	16,284	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
403	15507	CASTLEGATE DR	LANTERN LN	BUSHARD ST	E	AC	9	548	36	19,506	5/8/24	51	32	68	0	Surface Treatment - Slurry Seal	05-11-2018
404	14510	CATALINA CIR	MOLOKAI DR	CDS	E	AC	9	313	32	11,516	4/17/24	90	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
405	14227	CATAMARAN LN	KINGFISHER DR	SNOWBIRD DR	E	AC	9	1,044	36	37,584	8/23/23	62	16	84	0	New Construction	01-01-1980
406	13994	CATFISH CIR	TARPON DR	CDS	E	AC	8	310	32	11,420	3/7/22	91	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
407	14176	CATHAY CIR	INTERIOR LN	CDS	E	AC	8	379	32	13,628	2/23/22	73	43	57	0	Surface Treatment - Slurry Seal	02-13-2023
408	14035	CATO CIR	FLAXMAN DR	END	E	AAC	7	347	32	11,104	8/21/23	88	66	34	0	Overlay - AC Structural	03-01-2011
409	13859	CAVAN CIR	CARRIE LN	END	E	AC	1	419	36	16,334	4/1/22	95	100	0	0	New Construction	01-01-1980
410	15257	CEDAR AVE	GOTHARD ST	END	E	AC	3	545	36	19,620	4/6/22	65	59	27	14	New Construction	01-01-1980
411	15581	CENTRAL PARK DR	EDWARDS ST	CLIFFVIEW LN	E	AC	5	1,310	80	104,800	2/24/20	91	100	0	0	New Construction	01-01-1980
412	13680	CHALET LN	GLENWOOD DR	ROYAL OAK DR	E	AAC	1	280	36	13,080	5/7/24	81	97	0	3	Overlay - AC Structural	10-01-2016
413	14294	CHANCE CIR	NATIONAL LN	CDS	E	AAC	8	491	36	20,716	3/18/24	78	60	40	0	Overlay - AC Structural	05-11-2018
414	13194	CHANNEL LN	ADMIRALTY DR	DEVON CIR	E	AC	2	401	36	14,436	4/9/22	86	53	47	0	New Construction	01-01-1980
414	14438	CHANNEL LN	BOUNTY CIR	ADMIRALTY DR	E	AC	2	376	32	11,832	4/9/22	95	82	0	18	New Construction	01-01-1980
414	15060	CHANNEL LN	DEVON CIR	GILBERT DR	E	AC	2	1,236	36	44,296	4/9/22	85	54	46	0	New Construction	01-01-1980
415	14968	CHAPEL LN	ELLIS AVE	MODALE DR	E	AAC	7	1,288	36	46,848	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
416	14912	CHAPPARAL LN	LIEGE DR	NORDINA DR	E	AC	5	1,409	36	50,724	3/29/22	68	21	79	0	New Construction	01-01-1980
417	14146	CHARFORD DR	IVES LN	BRENTSTONE LN	E	AAC	7	391	36	14,826	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
417	15462	CHARFORD DR	CAMFIELD LN	IVES LN	E	AC	7	409	36	14,724	2/12/20	81	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
418	15637	CHARING CROSS DR	KESWICK LN	COVERNTRY LN	E	AAC	8	185	24	4,240	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
419	13296	CHARLENE CIR	GREEN ST	CDS	E	AAC	2	273	36	11,078	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
420	13522	CHARLES LN	DON DR	RHINE DR	E	AC	4	503	36	18,858	3/31/22	87	69	0	31	Surface Treatment - Slurry Seal	07-29-2020
421	13309	CHARLEYVILLE CIR	MEADOWBROOK DR	END	E	AC	3	219	32	8,808	2/18/20	86	100	0	0	New Construction	01-01-1980
422	15956	CHARWOOD LN	SUNRIDGE DR	FIRESIDE DR	E	AC	9	1,262	36	46,932	5/7/24	62	26	74	0	Surface Treatment - Slurry Seal	05-11-2018
423	13670	CHATEAU LN	ANACAPA DR	BRIARCLIFF DR	E	AAC	1	785	36	29,760	5/7/24	77	97	0	3	Overlay - AC Structural	10-01-2016
424	14257	CHAUCER LN	ELLSWORTH DR	CARROLLTOWN DR	E	AAC	9	902	36	32,472	5/8/24	73	62	37	1	Overlay - AC Structural	05-11-2018
425	13281	CHELE CIR	LAKEMONT LN	CDS	E	AC	3	143	36	6,948	3/17/22	86	100	0	0	New Construction	01-01-1980
426	14324	CHELSEA LN	SABLE DR	ST AUGUSTINE DR	E	AC	9	253	36	9,108	8/30/23	95	100	0	0	New Construction	01-01-1980
427	13718	CHEMICAL LN	MC FADDEN AVE.	RESEARCH DR	E	AC	1	1,116	40	44,640	3/21/22	37	8	84	8	New Construction	01-01-1980
427	13822	CHEMICAL LN	PRODUCTION DR	SYSTEM DR	E	AC	1	339	40	13,560	4/1/22	62	25	75	0	New Construction	01-01-1980
427	15305	CHEMICAL LN	BUSINESS DR	MC FADDEN AVE	E	AAC	1	796	40	31,840	5/3/24	89	84	0	16	Overlay - AC Structural	10-01-2016
427	15328	CHEMICAL LN	RESEARCH DR	PRODUCTION DR	E	AC	1	834	40	33,360	4/1/22	54	27	61	12	New Construction	01-01-1980
429	13585	CHERYL DR	TOMAS LN	SANDRA LN	E	AAC	2	740	36	27,390	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
430	14071	CHESAPEAKE LN	GRODON DDR	ADAMS AVE	E	AC	7	1,063	36	39,268	2/18/20	60	25	71	4	Surface Treatment - Slurry Seal	07-15-2021
431	15000	CHESTERFIELD LN	BURLINGTON LN	ATTLEBORO CIR	E	AC	9	542	36	19,512	8/24/23	91	100	0	0	New Construction	01-01-1980
432	13880	CHESTNUT DR	SUNFLOWER LN	SUNBURST LN	E	AC	3	254	36	10,144	2/19/20	83	69	28	3	New Construction	01-01-1980
433	14358	CHEVY CHASE DR	PINETREE LN	LEMONTREE LN	E	AC	8	727	36	26,672	7/26/17	56	52	41	7	Surface Treatment - Slurry Seal	05-11-2018
434	15869	CHICAGO AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	329	36	11,844	8/24/23	79	60	35	5	New Construction	01-01-1980
434	15870	CHICAGO AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	36	17,460	8/24/23	80	40	12	48	New Construction	01-01-1980
435	14954	CHINOOK AVE	CADCADE ST	WILLOW LN	E	AC	1	833	32	26,656	4/8/22	88	33	0	67	New Construction	01-01-1980
435	14955	CHINOOK AVE	SPRINGDALE ST	CADCADE ST	E	AC	1	827	32	26,464	4/8/22	94	100	0	0	New Construction	01-01-1980
436	15926	CHINOOK DR	TROPICANA LN	SPRINGDALE ST	E	AC	1	900	36	32,400	4/8/22	77	44	56	0	New Construction	01-01-1980
437	13592	CHIPPER LN	SNEAD DR	MEADOWLARK DR	E	AC	3	674	36	24,264	3/23/22	81	48	42	10	New Construction	01-01-1980
438	14501	CHRISTINE DR	HULA CIR	SUSAN LN	E	AC	9	249	36	9,964	4/17/24	86	69	19	12	Surface Treatment - Slurry Seal	05-11-2019
438	15606	CHRISTINE DR	SUSAN LN	ISLANDER LN	E	AAC	9	532	36	19,152	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
438	15607	CHRISTINE DR	ISLANDER LN	CDS	E	AAC	9	760	36	28,860	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
439	15904	CHRISTMAS DR	PITCAIRN LN	END	E	AAC	8	878	32	29,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
440	15099	CHRISTY DR	BRADBURY LN	WOODSTOCK LN	E	AC	3	524	36	19,114	3/17/22	55	32	64	4	New Construction	01-01-1980
441	14605	CHRYSLER CIR	VIEWPORT LN	BEACH BLVD	E	AAC	4	530	60	31,800	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
442	16014	CHUBASCO LN	ORIENT DR	PANACEA DR	E	AC	8	1,016	36	37,326	4/1/24	78	100	0	0	New Construction	01-01-1980
443	13900	CHURCH CIR	SURFDALE LN	CDS	E	AC	5	311	36	13,196	5/6/24	89	53	47	0	Surface Treatment - Slurry Seal	11-28-2019
444	14760	CHURCHILL DR	ROCKINGHORSE LN	QUARTERHORSE LN	E	AC	5	393	36	14,148	5/7/24	87	52	0	48	Surface Treatment - Slurry Seal	11-28-2019
445	13979	CINDY LN	KNEEP DR	GRAND DR	E	AC	8	1,020	36	36,720	2/18/20	63	29	71	0	Surface Treatment - Slurry Seal	07-15-2021
446	13752	CITADEL DR	LA SALLE LN	STANFORD LN	E	AC	1	260	36	9,072	5/6/20	91	41	59	0	New Construction	01-01-1980
446	13753	CITADEL DR	STANFORD LN	COLUMBIA LN	E	AC	1	260	36	8,784	5/6/20	95	100	0	0	New Construction	01-01-1980
446	15316	CITADEL DR	COLUMBIA LN	EDWARDS ST	E	AC	1	645	36	23,220	5/7/24	71	33	67	0	New Construction	01-01-1980
447	15646	CLANCY LN	GARRETT CIR	CDS	E	AC	8	402	36	16,822	3/7/22	94	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
448	13869	CLARE DR	EDWARDS ST	TULLOW LN	E	AC	3	406	36	14,328	3/30/22	92	60	40	0	New Construction	01-01-1980
449	14579	CLAREMONT LN	DEVONSHIRE DR	CORWALL DR	E	AAC	8	263	24	6,312	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
449	14580	CLAREMONT LN	ARGYLE DR	ABERDEEN DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
450	15085	CLARK DR	BIRDIE LN	NASSAU LN	E	AC	3	1,223	36	44,028	3/23/22	86	65	23	12	New Construction	01-01-1980
451	15408	CLARKDALE DR	EDGEWOOD LN	END	E	AC	7	720	34	24,480	8/21/23	23	5	77	18	Surface Treatment - Slurry Seal	03-01-2011
452	14745	CLAY AVE	STEWARD ST	CDS	E	AC	7	830	28	24,740	5/6/24	88	66	0	34	New Construction	01-01-1980
452	14747	CLAY AVE	MAIN ST	HOLLY ST	E	AC	7	368	30	11,040	3/12/24	86	58	0	42	Surface Treatment - Slurry Seal	11-28-2019
452	14748	CLAY AVE	HUNTINGTON ST	DELAWARE ST	E	AAC	7	660	36	23,760	4/9/24	95	100	0	0	Overlay - AC Structural	04-01-2017
452	14749	CLAY AVE	DELAWARE ST	SEVENTEENTH ST	E	AAC	7	242	36	8,712	4/9/24	95	100	0	0	Overlay - AC Structural	04-01-2017
452	14750	CLAY AVE	SEVENTEENTH ST	FLORIDA ST	E	AAC	7	418	36	15,048	4/9/24	95	100	0	0	Overlay - AC Structural	04-01-2017
452	15024	CLAY AVE	HOLLY ST	RANCH LN	E	AAC	7	1,321	36	47,556	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
452	15712	CLAY AVE	FLORIDA ST	BEACH BLVD	E	AC	7	661	36	23,796	4/9/24	83	65	0	35	Surface Treatment - Slurry Seal	04-01-2017
453	14482	CLEARBROOK DR	ARCHER CIR	ST JOHN LN	E	AC	9	250	36	9,750	4/25/24	89	71	0	29	Surface Treatment - Slurry Seal	05-11-2019
453	15597	CLEARBROOK DR	ARCHER CIR	CDS	E	AAC	9	593	36	23,148	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
454	13464	CLEARWATER CIR	INLET DR	END	E	AC	5	481	36	18,816	2/24/20	87	97	0	3	Surface Treatment - Slurry Seal	10-01-2012
455	14193	CLEARWOOD CIR	BAY MEADOW DR	CDS	E	AC	8	426	34	16,284	2/23/22	92	41	59	0	Surface Treatment - Slurry Seal	02-13-2023
456	14738	CLEVELAND DR	HUNTINGTON ST	CDS	E	AAC	7	330	32	10,560	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
457	14302	CLIFF DR	OYSTER BED LN	SPINDRIFT LN	E	AAC	8	311	36	11,196	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
457	15528	CLIFF DR	BROOKHURST ST	OYSTER BED LN	E	AAC	8	708	36	25,488	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
458	15381	CLIFFSIDE DR	BAYWATER LN	NORTHSTAR LN	E	AAC	7	1,126	36	41,036	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
459	14419	CLIFFVIEW LN	CENTRAL PARK DR	LAKEVIEW DR	E	AC	5	273	30	8,190	2/24/20	89	56	0	44	Surface Treatment - Slurry Seal	10-01-2012
460	50520	CLIFFWOOD DR	TIDELAND LN	CDS	E	AC	7	238	32	9,416	2/11/20	81	95	0	5	Surface Treatment - Slurry Seal	07-15-2021
461	14056	CLIPPER DR	WESTWINDS LN	MAGNOLIA ST	E	AAC	7	180	36	6,480	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
461	15419	CLIPPER DR	ISTHMUS LN	WESTWINDS LN	E	AAC	7	752	36	27,072	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
462	15894	CLOUDHAVEN DR	MOONCREST CIR	TIDELAND LN	E	AC	7	721	36	27,456	2/10/20	72	58	42	0	Surface Treatment - Slurry Seal	07-15-2021
463	13589	CLUBHOUSE LN	EDINGER AVE	ALLEY EDINGER AVE	E	AAC	3	161	36	5,796	5/9/24	95	100	0	0	Overlay - AC Structural	10-01-2016
463	13590	CLUBHOUSE LN	ALLEY EDINGER AVE	CASTLE DR	E	AAC	3	140	36	5,040	5/9/24	89	100	0	0	Overlay - AC Structural	10-01-2016
463	13591	CLUBHOUSE LN	CASTLE DR	MANGRUM DR	E	AC	3	260	36	9,360	4/9/22	54	14	86	0	New Construction	01-01-1980
463	13593	CLUBHOUSE LN	MARSHALL DR	MIDDLECOFF DR	E	AC	3	260	36	9,360	3/23/22	92	72	0	28	New Construction	01-01-1980
463	13594	CLUBHOUSE LN	MIDDLECOFF DR	ALLEY HEIL AVE	E	AC	3	140	36	5,040	3/23/22	91	100	0	0	New Construction	01-01-1980
463	13595	CLUBHOUSE LN	ALLEY HEIL AVE	HEIL AVE	E	AC	3	152	45	6,840	3/23/22	85	100	0	0	New Construction	01-01-1980
464	14615	COAST CIR	PACIFIC CIR	ANDERSON ST	E	AC	2	73	51	3,723	4/9/22	63	100	0	0	New Construction	01-01-1980
465	15479	COASTLAND DR	TIDELAND LN	BUSHARD ST	E	AAC	7	403	36	14,508	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
466	13625	COBRA LN	WRENFIELD DR	NORINO DR	E	AC	3	287	36	11,332	2/12/20	79	25	75	0	Surface Treatment - Slurry Seal	10-01-2012
467	14347	COCOBANA LN	ORIENT DR	BLUEFIELD DR	E	AC	8	507	36	19,002	4/1/24	83	58	0	42	Surface Treatment - Slurry Seal	05-11-2018
468	13348	COD CIR	SUN DR	END	E	AC	3	225	36	10,100	4/7/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
469	14744	COENSON CIR	CLAY AVE	CDS	E	AAC	7	394	34	15,396	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
470	14265	COHASSET LN	INDIANAPOLIS AVE	HINGHAM DR	E	AC	9	370	36	13,320	5/8/24	68	21	79	0	Surface Treatment - Slurry Seal	05-11-2018
471	15953	COLBREGGAN DR	CALLIEBURN CIR	MINERVA LN	E	AAC	9	950	36	35,200	5/10/24	84	100	0	0	Overlay - AC Structural	07-01-2018
472	15917	COLCHESTER LN	GARFIELD AVE	DARTMOOR DR	E	AAC	7	1,033	36	37,188	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
473	14970	COLDWATER LN	YORKTOWN AVE	SCRIBE DR	E	AC	7	364	36	13,104	8/21/23	77	18	76	6	Surface Treatment - Slurry Seal	03-01-2011
473	14971	COLDWATER LN	SCRIBE DR	DRYBANK DR	E	AC	7	1,479	36	53,244	8/21/23	85	79	0	21	Surface Treatment - Slurry Seal	03-01-2011
473	15403	COLDWATER LN	DRYBANK DR	ADAMS AVE	E	AC	7	1,074	36	38,664	8/21/23	78	27	64	9	Surface Treatment - Slurry Seal	03-01-2011
474	14200	COLGATE CIR	NIAGARA DR	CDS	E	AAC	8	355	32	13,360	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
475	14242	COLIMA LN	CASTILIAN CIR	SNOWBIRD DR	E	AC	9	253	36	9,108	8/23/23	86	27	73	0	New Construction	01-01-1980
475	15499	COLIMA LN	CASTILLIAN DR	END	E	AC	9	535	36	19,260	8/23/23	60	15	85	0	New Construction	01-01-1980
476	15171	COLLIE LN	FENLEY DR	ARROWHEAD DR	E	AC	5	1,125	36	40,500	3/28/22	54	59	41	0	New Construction	01-01-1980
477	13405	COLLINS CIR	ARNADA DR	CDS	E	AC	5	338	36	13,668	3/14/22	32	6	94	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
478	15984	COLLINS LN	MOTION CIR	COLLINS CIR	E	AC	5	774	36	28,614	3/14/22	85	48	52	0	New Construction	01-01-1980
479	13428	COLON CIR	CARRANZA LN	END	E	AAC	5	92	42	5,364	2/25/20	88	82	18	0	Overlay - AC Structural	01-23-2014
480	14186	COLONIAL CIR	MAMMOTH DR	CDS	E	AC	8	579	32	20,028	3/1/22	65	31	68	1	Surface Treatment - Slurry Seal	02-13-2023
481	13742	COLUMBIA LN	ALEXANDRIA DR	END	E	AC	1	410	36	16,560	5/6/20	81	48	52	0	New Construction	01-01-1980
481	13744	COLUMBIA LN	HARVARD CIR	CORNELL DR	E	AC	1	260	36	9,360	3/30/22	95	100	0	0	New Construction	01-01-1980
481	13751	COLUMBIA LN	BROWN CIR	CITADEL DR	E	AC	1	260	36	9,360	3/30/22	95	100	0	0	New Construction	01-01-1980
481	13763	COLUMBIA LN	CITADEL DR	END	E	AC	1	410	36	16,560	5/6/20	79	45	53	2	New Construction	01-01-1980
481	15312	COLUMBIA LN	ALEXANDRIA DR	HARVARD CIR	E	AC	1	520	36	18,720	5/6/20	77	32	68	0	New Construction	01-01-1980
481	15314	COLUMBIA LN	CORNELL DR	BROWN CIR	E	AC	1	520	36	18,720	3/30/22	94	83	0	17	New Construction	01-01-1980
482	13825	COMMERCE LN	MC FADDEN AVE	RESEARCH DR	E	AC	1	1,116	40	44,640	3/21/22	39	8	83	9	New Construction	01-01-1980
483	13716	COMMERCIAL DR	CHEMICAL LN	GRAHAM ST	E	AAC	1	1,170	40	46,800	5/3/24	85	50	43	7	Overlay - AC Fabric	10-01-2016
484	14338	COMPASS LN	SOUTHSHORE DR	WATERFRONT DR	E	AC	9	389	36	14,504	4/1/24	92	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
485	14026	COMPTON DR	DITMAR LN	NEWLAND AVE	E	AC	7	442	36	15,912	8/17/23	89	84	0	16	New Construction	01-01-1980
486	13826	COMPUTER LN	MC FADDEN AVE	RESEARCH DR	E	AC	1	1,116	40	44,640	3/21/22	43	21	78	1	New Construction	01-01-1980
487	14275	COMSTOCK DR	CHARWOOD LN	LANCELOT LN	E	AC	9	701	36	25,986	5/6/24	72	51	49	0	Surface Treatment - Slurry Seal	05-11-2018
488	14440	CONCORD LN	DAVENPORT DR	WINDSOR DR	E	AC	2	409	36	14,974	4/5/22	69	24	76	0	New Construction	01-01-1980
489	13920	CONGRESS CIR	GRANT DR	CDS	E	AAC	7	107	31	6,467	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
490	13724	CONNECTOR LN	ENGINEER DR	MACHINE DR	E	AC	1	1,141	40	45,640	5/5/20	64	24	68	8	New Construction	01-01-1980
491	14967	CONSTANTINE DR	HOYT CIR	LISTER LN	E	AAC	7	826	36	29,736	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
491	15363	CONSTANTINE DR	BEACH BLVD	HOYT CIR	E	AAC	7	660	36	23,760	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
492	14095	CONSTELLATION LN	MONITOR DR	LURLINE DR	E	AC	8	1,040	36	37,440	3/2/22	93	83	0	17	Surface Treatment - Slurry Seal	02-08-2023
493	14089	CONSTITUTION LN	BROOKHURST ST	BROOKHURST ST	E	AC	8	76	58	4,408	3/9/22	95	100	0	0	New Construction	01-01-1980
493	14459	CONSTITUTION LN	EDUCATION LN	BROOKHURST ST	E	AC	8	661	36	23,796	3/9/22	89	75	25	0	Surface Treatment - Slurry Seal	02-08-2023
493	15435	CONSTITUTION LN	BROOKHURST ST	CANBERRA LN	E	AAC	8	1,156	36	41,616	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
493	15647	CONSTITUTION LN	CLANCY LN	EDUCATION LN	E	AC	8	530	36	19,080	3/7/22	92	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
494	13717	CONTAINER LN	MC FADDEN AVE	RESEARCH DR	E	AC	1	1,116	40	44,640	4/1/22	69	34	66	0	New Construction	01-01-1980
495	13157	CONTENT CIR	AQUARIUS DR	CDS	E	AAC	2	204	32	6,528	5/7/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
496	15641	CONTINENTAL DR	CAMBRIDGE LN	BROOKHURST ST	E	AAC	8	617	36	20,712	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
496	15642	CONTINENTAL DR	COVENTRY LN	CAMBRIDGE LN	E	AAC	8	483	36	17,388	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
497	14019	COOK CIR	TOBAGO LN	CDS	E	AAC	8	358	32	13,256	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
498	15992	COOPER LN	ABBOTT DR	MARILYN DR	E	AC	3	1,555	36	55,732	3/18/22	88	96	0	4	Surface Treatment - Slurry Seal	07-29-2020
499	14980	CORAL CAY LN	PCH	BLUEWATER LN	E	AC	2	415	36	15,440	4/9/22	73	21	79	0	New Construction	01-01-1980
501	14050	CORAL CIR	WESTWINDS LN	CDS	E	AC	7	232	36	8,352	2/19/20	80	91	0	9	Surface Treatment - Slurry Seal	07-15-2021
502	13964	CORALWOOD LN	CRESCENT DR	SEAHURST DR	E	AC	7	350	36	12,850	2/19/20	83	74	0	26	Surface Treatment - Slurry Seal	07-15-2021
502	15383	CORALWOOD LN	SEAHURST DR	SAILPORT DR	E	AC	7	678	36	24,658	2/19/20	86	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
503	14416	CORDOBA LN	SLATER AVE	CRISTA PALMA DR	E	AC	5	173	36	5,940	2/25/20	78	34	66	0	Surface Treatment - Slurry Seal	10-01-2012
504	13873	CORK DR	WICKLOW LN	BELFAST LN	E	AC	3	260	36	9,072	3/30/22	95	100	0	0	New Construction	01-01-1980
505	13731	CORNELL DR	BOLSA PARK LN	END	E	AC	1	294	36	12,084	5/6/20	83	38	53	9	New Construction	01-01-1980
505	13745	CORNELL DR	STANFORD LN	COLUMBIA N	E	AC	1	260	36	9,360	5/6/20	85	55	45	0	New Construction	01-01-1980
505	13759	CORNELL DR	COLUMBIA LN	EDWARDS ST	E	AC	1	645	36	22,644	3/30/22	90	31	69	0	New Construction	01-01-1980
505	15309	CORNELL DR	BOLSA PARK LN	STANFORD LN	E	AC	1	1,298	36	46,152	5/6/20	86	100	0	0	New Construction	01-01-1980
506	15947	CORNERBROOK DR	STRATHMOOR LN	AMBERWICK LN	E	AC	8	1,008	36	36,288	4/10/24	76	30	70	0	New Construction	01-01-1980
507	14564	CORNWALL DR	CAMBRIDGE LN	INVERNESS LN	E	AAC	8	204	24	4,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
507	14565	CORNWALL DR	BERKSHIRE LN	KINGSWOOD LN	E	AAC	8	204	24	4,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
507	15898	CORNWALL DR	BUSHARD ST	DERBYSHIRE LN	E	AAC	8	819	36	29,032	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
507	15899	CORNWALL DR	DERBYSHIRE LN	CLAREMONT LN	E	AAC	8	926	24	21,998	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
508	13356	CORONADO LN	SONOMA DR	CDS	E	AC	5	179	36	7,794	3/15/22	64	48	52	0	New Construction	01-01-1980
508	15146	CORONADO LN	SLATER AVE	SONOMA AVE	E	AC	5	682	36	24,324	3/15/22	73	60	40	0	Surface Treatment - Slurry Seal	10-01-2012
509	13332	CORRINE CIR	COOPER LN	CDS	E	AC	3	423	36	18,528	3/18/22	81	39	61	0	Surface Treatment - Slurry Seal	07-29-2020
510	13511	CORSICAN DR	GOTHARD ST	ALLEY BARDON LN	E	AAC	3	258	36	9,288	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
510	15233	CORSICAN DR	ALLEY BARDON LN	CDS	E	AAC	3	330	36	13,380	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
511	13696	CORTEZ DR	SPRINGDALE ST	VANGUARD LN	E	AC	1	370	36	14,070	2/10/20	92	100	0	0	New Construction	01-01-1980
512	15989	CORY DR	MAYOR LN	END	E	AC	3	1,127	36	42,572	2/12/20	92	91	0	9	Surface Treatment - Slurry Seal	10-01-2012
513	13473	COTTONWOOD CIR	ETNA CIR	END	E	AC	4	570	36	25,020	5/13/24	96	100	0	0	New Construction	01-01-1980
514	13189	COTUIT CIR	HUMBOLDT DR	CDS	E	AC	2	345	32	12,540	4/7/22	75	27	38	35	New Construction	01-01-1980
515	13514	COUNT CIR	BURKE LN	END	E	AC	3	130	32	5,660	3/31/22	87	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
516	14991	COUNTESS DR	EDINGER AVE	PORTOFINO CIR	E	AC	2	1,605	44	71,870	4/7/22	92	88	0	12	New Construction	01-01-1980
517	13893	COUNTRY CIR	EVENING HILL DR	CDS	E	AAC	5	203	36	9,308	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
518	15074	COURTNEY LN	DAVENPORT DR	WESTPORT DR	E	AC	2	1,182	36	42,552	3/24/22	75	54	46	0	New Construction	01-01-1980
518	15080	COURTNEY LN	WESTPORT DR	EDGEWATER LN	E	AC	2	551	36	19,836	3/24/22	66	48	52	0	New Construction	01-01-1980
519	14159	COVE CIR	ADAMS AVE FRONTAGE	END	E	AC	7	558	36	21,588	2/10/20	83	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
520	14573	COVENTRY LN	CORNWALL DR	CHASING CROSS DR	E	AAC	8	320	24	7,680	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
520	14574	COVENTRY LN	ARGYLE DR	ABERDEEN DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
520	14575	COVENTRY LN	DEVONSHIRE DR	CORNWALL DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
520	15638	COVENTRY LN	ABERDEEN DR	DEVONSHIRE DR	E	AAC	8	232	20	4,640	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
521	15734	CRABB LN	SPEER DR	CDS	E	AC	4	456	36	16,416	5/13/24	87	96	4	0	Surface Treatment - Slurry Seal	11-01-2019
522	13272	CRAIG LN	WALTON DR	LENNOX DR	E	AC	3	712	36	25,344	3/16/22	95	100	0	0	New Construction	01-01-1980
523	14214	CRAILET DR	KENWORTH CIR	CRAIMER LN	E	AC	8	1,006	36	36,216	2/25/22	68	16	77	7	Surface Treatment - Slurry Seal	02-14-2023
523	15492	CRAILET DR	BROOKHURST ST	KENWORTH CIR	E	AAC	8	205	36	7,380	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
524	14208	CRAIMER LN	MEREDITH DR	JON DAY DR	E	AAC	8	260	36	9,360	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
524	14215	CRAIMER LN	JON DAY DR	STONEYBROOK DR	E	AAC	8	262	36	9,432	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
524	15493	CRAIMER LN	STONEYBROOK DR	WARWICK DR	E	AAC	8	931	36	33,516	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
525	13330	CRANDALL DR	MYTINGER LN	EDWARDS ST	E	AC	3	530	36	19,080	3/23/22	71	47	51	2	New Construction	01-01-1980
526	14236	CRANE CIR	SANDPIPER LN	END	E	AC	9	357	36	12,852	8/24/23	75	35	60	5	New Construction	01-01-1980
527	14177	CRATER CIR	ROCKY MOUNTAIN DR	CDS	E	AC	8	399	36	16,164	2/23/22	84	41	0	59	Surface Treatment - Slurry Seal	02-13-2023
528	14067	CRAWFORD CIR	LOTUS LN	CDS	E	AAC	7	382	36	15,252	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
529	13963	CRESCENT DR	PISMO LN	CORALWOOD LN	E	AC	7	1,116	36	40,676	2/19/20	87	94	0	6	Surface Treatment - Slurry Seal	07-15-2021
530	12991	CREST AVE	MAIN ST	ELEVENTH ST	E	AC	6	612	43	27,795	7/8/21	73	58	30	12	Surface Treatment - Slurry Seal	07-27-2022
530	12992	CREST AVE	LAKE ST	MAIN ST	E	AC	6	665	45	30,095	7/8/21	76	62	37	1	Surface Treatment - Slurry Seal	07-27-2022
530	13085	CREST AVE	CREST AVE	THIRTEENTH ST	E	AC	6	192	45	8,940	7/8/21	86	74	26	0	Surface Treatment - Slurry Seal	07-27-2022
530	13086	CREST AVE	ELEVENTH ST	TWELTH ST	E	AC	6	675	43	29,025	7/8/21	68	40	52	8	Surface Treatment - Slurry Seal	07-27-2022
530	13124	CREST AVE	THIRTEENTH ST	FOURTEENTH ST	E	AC	6	265	45	12,175	7/8/21	75	41	9	50	Surface Treatment - Slurry Seal	07-27-2022
531	14934	CRESTMOOR LN	SERENE DR	WINDCROFT DR	E	AC	5	246	36	8,568	3/12/20	95	100	0	0	New Construction	01-01-1980
531	14947	CRESTMOOR LN	BRIGHTON DR	MARYPORT DR	E	AC	5	306	36	11,016	3/12/20	69	22	77	1	New Construction	01-01-1980
531	15807	CRESTMOOR LN	WINDCROFT DR	BRIGHTON DR	E	AC	5	661	36	23,796	3/12/20	76	52	41	7	New Construction	01-01-1980
532	15957	CRESTVIEW LN	FIRESIDE DR	CDS	E	AC	9	1,343	36	50,498	7/17/17	79	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
533	14433	CREW DR	BANFF LN	LOCHLEA LN	E	AC	9	256	32	8,192	8/30/23	81	100	0	0	New Construction	01-01-1980
534	14969	CRIMSON CIR	FLAGSTAFF LN	CDS	E	AAC	7	692	36	30,112	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
535	13416	CRISTA PALMA DR	AVILLA LN.	END	E	AAC	5	416	36	16,976	2/25/20	90	100	0	0	Overlay - AC Structural	10-01-2012
535	15181	CRISTA PALMA DR	SAN ROQUE LN	AVILLA LN	E	AC	5	1,108	36	40,638	2/25/20	82	59	41	0	Surface Treatment - Slurry Seal	10-01-2012
536	14143	CROFT LN	GALLANT DR	BURLCREST DR	E	AAC	7	254	36	9,144	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
537	15330	CROSS DR	GRAHAM ST	ALLEY TAFT LN	E	AC	1	548	36	19,728	4/1/22	42	17	83	0	New Construction	01-01-1980
539	15291	CROUPIER CIR	CALNEVA LN	SPRINGDALE ST	E	AC	1	640	36	24,290	2/10/20	84	33	67	0	New Construction	01-01-1980
540	14928	CROWN CIR	BARWOOD DR	END	E	AC	5	431	36	17,516	3/12/20	91	100	0	0	New Construction	01-01-1980
541	15458	CROWN REFF LN	PRINCESS CIR	MASTERS DR	E	AAC	7	763	36	27,468	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
541	16023	CROWN REFF LN	FELCLIFF LN	PRINCESS CIR	E	AAC	7	584	36	21,024	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
542	13262	CULPEPPER CIR	SILVERWOOD DR	CDS	E	AC	3	140	32	5,730	3/17/22	95	100	0	0	New Construction	01-01-1980
543	13803	CUMBERLAND DR	YORKSHIRE LN	END	E	AC	1	440	36	17,340	2/26/20	66	30	70	0	New Construction	01-01-1980
543	15322	CUMBERLAND DR	VICTORIA LN	YORKSHIRE LN	E	AC	1	780	36	27,792	2/26/20	66	38	62	0	New Construction	01-01-1980
544	15532	CUPAR LN	CDS	CDS	E	AC	9	944	36	38,718	8/30/23	67	73	27	0	New Construction	01-01-1980
545	14885	CURTIS CIR	GREEN ST	CDS	E	AC	2	407	36	14,652	3/22/22	82	45	21	34	New Construction	01-01-1980
546	14055	CUTTER DR	ESTUARY LN	ISTHMUS LN	E	AC	7	260	36	9,860	2/24/20	76	56	44	0	Surface Treatment - Slurry Seal	07-15-2021
547	14094	CUTTY SARK DR	RANGER LN	LEXINGTON LN	E	AAC	8	260	36	9,134	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
547	15439	CUTTY SARK DR	BROOKHURST ST	RANGER LN	E	AAC	8	1,370	36	49,320	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
548	14306	CYNTHIA DR	SUBURBIA LN	LAVONNE LN	E	AAC	8	1,063	36	38,268	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
549	13567	CYPRESS AVE	OAK LN	ASH ST	E	AC	4	447	36	16,092	3/31/22	85	88	0	12	New Construction	01-01-1980
549	13579	CYPRESS AVE	ASH ST.	ELM ST	E	AC	4	436	36	15,696	3/31/22	68	70	30	0	New Construction	01-01-1980
549	13580	CYPRESS AVE	ELM ST	BEACH BLVD	E	AC	4	439	36	15,804	3/31/22	68	62	30	8	New Construction	01-01-1980
549	15262	CYPRESS AVE	EMERALD LN	OAK LN	E	AC	4	317	36	11,412	3/31/22	76	41	58	1	New Construction	01-01-1980
550	13251	DAGNY CIR	NATIONAL LN	CDS	E	AAC	3	343	36	13,598	5/13/24	49	33	64	3	Overlay - AC Structural	05-11-2018
551	15258	DAIRYVIEW CIR	END	END	E	AAC	4	511	36	21,396	5/5/20	93	51	0	49	Overlay - AC Structural	10-01-2012
552	14472	DAKAR LN	DRUMBEAT DR	BORBA CIR	E	AC	9	202	32	6,964	4/25/24	86	50	0	50	Surface Treatment - Slurry Seal	05-11-2019
553	13582	DALE DR	EDGEWATER LN	PHELPS LN	E	AAC	2	260	36	9,360	5/10/24	93	100	0	0	Overlay - AC Structural	12-01-2017
554	15135	DALE VISTA LN	MASON DR	MARILYN DR	E	AC	3	1,290	36	46,440	3/18/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
555	13939	DALEHURST CIR	MANDEVILLE DR	CDS	E	AAC	7	145	36	10,326	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
556	14031	DALLAS CIR	FLAGSTONE LN	END	E	AC	7	466	34	15,844	8/21/23	72	25	67	8	Surface Treatment - Slurry Seal	03-01-2011

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
557	14957	DAMASK DR	VIEWPOINT LN	BEACH BLVD	E	AAC	4	537	36	19,832	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
558	14402	DAN LN	BOLSA AVE	BUCKINGHAM DR	E	AC	1	314	40	12,560	2/10/20	41	19	81	0	New Construction	01-01-1980
559	15563	DANA DR	BROOKHURST ST	GALBAR CR	E	AAC	8	555	36	21,230	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
560	13935	DANBURY CIR	NEWHAVEN LN	CDS	E	AC	7	408	36	18,648	4/2/24	78	37	49	14	Surface Treatment - Slurry Seal	11-28-2019
561	13655	DANCY CIR	SPRINGTIME LN	CDS	E	AC	4	223	32	8,636	4/8/24	64	31	69	0	Surface Treatment - Slurry Seal	11-28-2019
562	13672	DANES CIR	BRIARCLIFF DR	END	E	AC	1	504	36	19,394	2/10/20	93	100	0	0	New Construction	01-01-1980
563	14775	DANTON CIR	CARNABY LN	CDS	E	AAC	4	122	32	5,404	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
564	13524	DANUBE DR	RHONE LN	THAMES LN	E	AC	4	1,043	36	37,548	3/31/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
565	13933	DAREN CIR	HAMDEN LN	CDS	E	AAC	7	198	32	10,197	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
567	15729	DARSY DR	FOREST LN	CDS	E	AC	4	398	34	15,832	5/13/24	85	63	32	5	Surface Treatment - Slurry Seal	11-28-2019
568	15366	DARTMOOR DR	SHERBORNE LN	CDS	E	AAC	7	540	36	23,749	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
570	13215	DAVENPORT DR	BARUNA LN	EDGEWATER LN	E	AC	2	679	60	37,140	4/5/22	94	100	0	0	New Construction	01-01-1980
570	13218	DAVENPORT DR	BEDFORD LN	SAYBROOK LN	E	AAC	2	537	60	32,220	5/10/24	95	100	0	0	Overlay - AC Structural	12-01-2017
570	15073	DAVENPORT DR	SAYBROOK LN	ALGONQUIN ST	E	AAC	2	802	60	48,120	5/10/24	93	100	0	0	Overlay - AC Structural	12-01-2017
570	15939	DAVENPORT DR	EDGEWATER LN	BEDFORD LN	E	AAC	2	871	60	52,260	5/10/24	95	100	0	0	Overlay - AC Structural	12-01-2017
571	13143	DAVIS LN	HENDRICKSEN DR	SISSON DR	E	AAC	2	849	36	32,064	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
572	15918	DAWSON LN	MC FADDEN AVE	SKYVIEW DR	E	AC	3	696	36	25,056	2/19/20	95	100	0	0	New Construction	01-01-1980
572	15919	DAWSON LN	SKYVIEW DR	SHANNON DR	E	AC	3	764	36	27,216	2/19/20	88	100	0	0	New Construction	01-01-1980
573	14398	DAYTONA CIR	STARFIRE LN	CDS	E	AC	9	360	32	13,020	4/17/24	81	39	61	0	New Construction	01-01-1980
574	14930	DE LONG CIR	PRICE DR	END	E	AC	5	385	36	15,360	3/9/20	83	100	0	0	New Construction	01-01-1980
575	13551	DE VILLE CIR	LANDAU LN	CDS	E	AC	4	518	36	18,648	3/31/22	74	32	68	0	Surface Treatment - Slurry Seal	07-29-2020
576	13938	DEAUVILLE DR	COLCHESTER LN	SUMMERFIELD LN	E	AAC	7	898	36	33,488	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
577	13339	DEBRA CIR	MARILYN DR	CDS	E	AAC	3	316	36	12,926	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
579	13904	DEEP HARBOR DR	QUIET BY LN	GOLDENWEST ST	E	AAC	5	130	35	4,550	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
580	15404	DEEPCLIFF DR	DRYBROOK LN	END	E	AAC	7	528	36	19,008	8/17/23	82	100	0	0	Overlay - AC Structural	03-01-2011
581	14030	DEEPVIEW DR	RUMFORD LN	DOREMERE DR	E	AC	7	171	36	6,156	8/21/23	46	9	91	0	Surface Treatment - Slurry Seal	03-01-2011
581	15407	DEEPVIEW DR	EDGEWOOD LN	RUMFORD LN	E	AC	7	588	36	21,168	8/21/23	34	10	82	8	Surface Treatment - Slurry Seal	03-01-2011
582	14162	DEERVALE LN	CANDLEWOOD DR	HAZELBROOK DR	E	AC	7	743	36	26,748	2/10/20	65	38	51	11	Surface Treatment - Slurry Seal	07-15-2021
583	15110	DEFIANCE DR	REDLANDS LN	HOBART LN	E	AC	3	1,086	36	40,096	3/16/22	82	100	0	0	New Construction	01-01-1980
584	12862	DEGUELLE CIR	FINDLEY CIR	CDS	E	AC	5	286	34	12,785	7/8/21	92	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
585	13180	DEL MAR LN	MEADOWLARK DR	CALIENTE DR	E	AC	2	863	36	31,068	3/24/22	50	10	90	0	New Construction	01-01-1980
585	13586	DEL MAR LN	ALLEY HEIL AVE	HEIL AVE	E	AC	2	154	36	5,544	3/24/22	75	23	77	0	New Construction	01-01-1980
585	13587	DEL MAR LN	CALIENTE DR	ALLEY HEIL AVE	E	AC	2	140	36	5,040	3/24/22	58	38	62	0	New Construction	01-01-1980
586	14076	DELAFIELD CIR	ROCKLAND LN	CDS	E	AC	8	309	32	11,688	3/9/22	82	24	74	2	Surface Treatment - Slurry Seal	02-08-2023
500	14758	DELAWARE ST	TAYLOR DR	ONTARIO DR	E	AC	4	260	36	9,360	4/9/24	92	76	0	24	Surface Treatment - Slurry Seal	11-28-2019
500	15715	DELAWARE ST	ONTARIO DR	ELLIS AVE	E	AC	4	1,083	36	38,988	4/9/24	91	70	0	30	Surface Treatment - Slurry Seal	11-28-2019
587	13401	DELLGLEN CIR	FOXSHIELD DR	CDS	E	AC	5	360	36	14,760	3/28/22	74	39	51	10	New Construction	01-01-1980
2292	17028	DELTA LN	SKYLAB LN	ASTRONAUTICS LN	E	AC	1	1,338	36	48,168	2/10/20	87	31	0	69	New Construction - Initial	01-01-2000
588	13499	DELTON CIR	ALLEY MADDOX DR	CDS	E	AC	3	223	32	8,636	3/18/22	78	37	54	9	Surface Treatment - Slurry Seal	07-29-2020
590	15914	DEMION LN	ELLIS AVE	CDS	E	AAC	7	1,216	36	47,121	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
591	15468	DENSMORE LN	BEDEL DR	BAINFORD DR	E	AC	7	668	36	24,048	2/11/20	84	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
592	13382	DENVALE CIR	SELKIRK DR	END	E	AC	5	126	36	6,036	3/12/20	76	26	74	0	New Construction	01-01-1980
593	14036	DENVER LN	YORKTOWN AVE	SALT LAKE DR	E	AC	7	166	36	5,976	2/24/20	40	51	49	0	Surface Treatment - Slurry Seal	07-15-2021
594	14173	DERBYSHIRE LN	ADAMS AVE	OLYMPIC DR	E	AAC	8	187	45	7,609	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
594	15634	DERBYSHIRE LN	CORNWALL DR	KENSINGTON DR	E	AAC	8	393	36	14,148	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
594	15835	DERBYSHIRE LN	ADAMS AVE	KENSINGTON DR	E	AAC	8	198	36	7,128	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
595	13363	DESTRY CIR	MARCELLENA DR	CDS	E	AC	5	135	36	6,300	3/15/22	42	13	87	0	Surface Treatment - Slurry Seal	10-01-2012
596	15666	DETROIT AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	37	17,945	8/24/23	55	41	59	0	New Construction	01-01-1980
596	15667	DETROIT AVE	CALIFORNIA ST	DELAWARE ST	E	AC	9	354	36	12,744	8/24/23	60	20	77	3	New Construction	01-01-1980
596	15868	DETROIT AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	330	37	12,210	8/24/23	66	42	58	0	New Construction	01-01-1980
597	13193	DEVON CIR	CHANNEL LN	CDS	E	AC	2	335	32	12,220	4/9/22	91	62	27	11	New Construction	01-01-1980
598	14585	DEVONSHIRE DR	KESWICK LN	COVENTRY LN	E	AAC	8	187	20	3,740	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
598	14586	DEVONSHIRE DR	COVENTRY LN	CLAREMONT LN	E	AAC	8	204	24	4,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
598	15639	DEVONSHIRE DR	KINGSWOOD LN	BERKSHIRE LN	E	AAC	8	203	24	4,872	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
598	15640	DEVONSHIRE DR	CAMBRIDGE LN	INVERNESS LN	E	AAC	8	206	24	4,944	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
599	13211	DIABLO CIR	EDGEWATER LN	CDS	E	AAC	2	350	36	14,100	5/10/24	88	100	0	0	Overlay - AC Fabric	12-01-2017
600	13341	DIANE LN	SYLVIA DR	MARILYN DR	E	AAC	3	547	36	20,392	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
601	14477	DIRIGO CIR	LANDFALL DR	CDS	E	AAC	9	472	36	18,492	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
602	15969	DITMAR LN	DEEPCLIFF DR	HURSTWELL DR	E	AC	7	986	36	35,496	8/17/23	82	77	0	23	New Construction	01-01-1980
603	14341	DOCKSIDE CIR	PIER DR	CDS	E	AAC	9	372	36	14,892	4/1/24	59	16	83	1	Overlay - AC Structural	05-11-2018
604	13365	DOHRN CIR	KRISTOPHER LN	END	E	AAC	3	368	36	15,248	5/5/20	79	100	0	0	Overlay - AC Structural	10-01-2012
605	14467	DOLLAR DR	SPA DR	NEVADA DR	E	AC	1	434	36	15,624	2/10/20	90	50	0	50	New Construction	01-01-1980
606	13288	DOLORES ST	PRAIRIE DR	PEARCE ST	E	AC	2	663	36	26,508	3/29/22	84	41	40	19	New Construction	01-01-1980
607	14053	DOLPHIN DR	ESTUARY LN	TRIDENT LN	E	AAC	7	520	36	19,470	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
607	15417	DOLPHIN DR	TOPEKA LN	ESTUARY LN	E	AAC	7	781	36	28,116	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
608	13454	DOLPHINWOOD DR	OXBORO LN	END	E	AC	5	186	36	6,408	3/11/20	31	12	88	0	New Construction	01-01-1980
609	14965	DON DR	CHARLES LN	RHINE DR	E	AC	4	649	36	24,864	3/31/22	88	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
610	13531	DONALD CIR	LUCIA LN	CDS	E	AC	4	350	32	12,450	4/6/22	86	61	39	0	Surface Treatment - Slurry Seal	07-29-2020
611	14311	DONCASTER DR	LOCHLEA LN	NEWLAND ST	E	AC	9	660	36	23,760	8/30/23	76	80	20	0	New Construction	01-01-1980
612	13316	DONLYN DR	GREENVIEW LN	SPRINGDALE ST	E	AC	3	520	36	18,432	2/18/20	89	100	0	0	New Construction	01-01-1980
615	13269	DORAINE CIR	GIARC LN	CDS	E	AC	3	222	32	8,904	3/16/22	76	61	38	1	New Construction	01-01-1980
614	14057	DOREMERE DR	GEMFALL LN	FELCLIFF LN	E	AC	7	215	36	8,490	2/24/20	89	89	0	11	Surface Treatment - Slurry Seal	07-15-2021
614	15420	DOREMERE DR	NEWLAND AV	GEMFALL LN	E	AC	7	981	36	35,316	2/24/20	82	35	65	0	Surface Treatment - Slurry Seal	07-15-2021
616	14906	DORITA DR	WILD ROSE LN	SPRINGDALE ST	E	AC	5	177	36	6,372	3/29/22	55	12	85	3	New Construction	01-01-1980
617	15541	DORSETT DR	MIRAMAR LN	POSTON LN	E	AC	9	1,279	36	46,794	8/30/23	46	18	78	4	New Construction	01-01-1980
618	13732	DOVER DR	CAPETOWN LN	KINGSTON LN	E	AC	1	270	36	10,220	3/30/22	95	100	0	0	New Construction	01-01-1980
619	13809	DOVEWOOD DR	BOLSA CHICA ST	PELICAN LN	E	AC	1	520	36	18,720	3/21/22	68	37	63	0	New Construction	01-01-1980
619	15325	DOVEWOOD DR	PELICAN LN	HUMMINGBIRD LN	E	AC	1	670	36	24,370	3/21/22	74	45	55	0	New Construction	01-01-1980
620	13855	DOWN DR	TOWAY LN	EDWARDS ST	E	AC	1	531	36	19,366	5/8/24	29	19	81	0	New Construction	01-01-1980
621	13323	DOYLE DR	SPRINGDALE ST	LOVELL LN	E	AC	3	520	36	18,720	3/23/22	65	13	87	0	New Construction	01-01-1980
622	14293	DRAGON CIR	NATIONAL LN	CDS	E	AC	8	491	36	20,716	3/18/24	69	43	49	8	New Construction	01-01-1980
623	13740	DRAKE LN	BOLSA AVE	ALEXANDRIA DR	E	AC	1	570	36	21,270	5/6/20	76	34	66	0	New Construction	01-01-1980
624	13802	DRESDEN CIR	YORKSHIRE LN	END	E	AC	1	440	36	17,340	2/26/20	75	36	64	0	New Construction	01-01-1980
625	14136	DREW CIR	TRUXTON DR	CDS	E	AAC	7	413	32	14,716	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
626	13375	DREY LN	CAPSTONE DR	MANHATTAN DR	E	AC	3	697	36	25,092	2/11/20	47	37	63	0	Surface Treatment - Slurry Seal	10-01-2012
627	15494	DRIFTWOOD DR	BEACH BLVD	END	E	AC	9	351	36	12,636	8/24/23	51	43	52	5	New Construction	01-01-1980
628	15595	DRUMBEAT DR	BUSHARD ST	CDS	E	AC	9	365	32	13,480	4/25/24	82	47	0	53	Surface Treatment - Slurry Seal	05-11-2019
629	15406	DRYBANK DR	COLDWATER LN	EDGEWOOD LN	E	AC	7	735	36	26,460	8/17/23	70	23	67	10	Surface Treatment - Slurry Seal	03-01-2011
630	15970	DRYBROOK LN	DEEPCLIFF DR	HURSTWELL DR	E	AC	7	991	36	35,676	8/17/23	83	38	56	6	Surface Treatment - Slurry Seal	03-01-2011
631	14308	DRYMEN DR	BANFF LN	ALLEY DONCASTER DR	E	AC	9	264	36	9,540	8/30/23	92	100	0	0	New Construction	01-01-1980
632	15450	DUBLIN LN	SEAPORT DR	MALLOY DR	E	AC	9	513	36	18,468	8/21/23	74	25	75	0	Surface Treatment - Slurry Seal	03-01-2011
633	13254	DUCHESS LN	PALISADE DR	CHRISTY DR	E	AC	3	1,160	36	41,760	3/17/22	86	100	0	0	New Construction	01-01-1980
634	13556	DUELLO LN	NIMROD DR	SLATER AVE	E	AAC	3	314	36	11,304	2/11/20	95	100	0	0	Overlay - AC Structural	10-01-2012
635	13764	DUKE CIR	CITADEL DR	END	E	AC	1	410	36	16,560	3/30/22	84	40	60	0	New Construction	01-01-1980
636	15512	DUMBRECK DR	PAISLEY LN	QUEENS PARK LN	E	AC	8	1,039	36	37,148	3/18/24	93	80	0	20	New Construction	01-01-1980
637	15766	DUNBAR AVE	BOLSA CHICA ST	HARBOR BLUFFS CIR	E	AC	2	1,182	36	42,552	3/22/22	87	97	0	3	New Construction	01-01-1980
638	15348	DUNDALK LN	SHANNON DR	END	E	AC	3	1,070	36	41,020	3/30/22	95	100	0	0	New Construction	01-01-1980
639	13730	DUNDEE DR	NORTH END	BOLSA PARK LN	E	AC	1	294	36	12,084	5/6/20	94	77	0	23	New Construction	01-01-1980
639	13735	DUNDEE DR	BOLSA PARK LN	SOUTH END	E	AC	1	485	36	18,960	5/6/20	91	76	0	24	New Construction	01-01-1980
640	13663	DUNES LN	HACIENDA DR	CHINOOK DR	E	AC	1	260	36	9,360	4/8/22	83	33	46	21	New Construction	01-01-1980
641	13852	DUNN DR	TOWAY LN	EDWARDS ST	E	AC	1	531	36	19,116	3/30/22	47	9	91	0	New Construction	01-01-1980
642	14558	DURHAM DR	DERBYSHIRE LN	VERMONT LN	E	AAC	8	390	24	9,360	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
643	13244	EAGLE LN	MEADOWLARK DR	MIDDLECOFF DR	E	AC	3	871	36	32,106	3/23/22	88	96	0	4	New Construction	01-01-1980
643	15082	EAGLE LN	CASTLE DR	MEADOWLARK DR	E	AAC	3	1,185	36	43,410	5/9/24	92	100	0	0	Overlay - AC Fabric	10-01-2016
644	13515	EARL CIR	BURKE LN	CDS	E	AC	3	130	32	5,660	3/31/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
645	13198	EASTER CIR	CHANNEL LN	CDS	E	AC	2	246	32	9,372	4/9/22	95	100	0	0	New Construction	01-01-1980
646	14166	EASTWOOD CIR	HAZELBROOK DR	CDS	E	AAC	7	496	36	19,356	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
647	14421	EASY LN	MIDWAY DR	CDS	E	AC	5	127	36	4,572	3/28/22	95	100	0	0	New Construction	01-01-1980
648	14452	EBBTIDE CIR	BEACH BLVD	END	E	AC	9	270	32	8,640	8/24/23	72	45	53	2	New Construction	01-01-1980
649	14826	EDAM CIR	HAGUE LN	CDS	E	AC	4	89	40	4,810	3/31/22	95	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
650	15997	EDGEMONT DR	EDWARDS ST	REDLANDS LN	E	AC	3	1,119	36	39,996	3/17/22	90	96	0	4	New Construction	01-01-1980
651	13676	EDGEVIEW LN	GLENWOOD DR	HARDWICK CIR	E	AC	1	260	36	9,360	2/10/20	88	100	0	0	New Construction	01-01-1980
651	13681	EDGEVIEW LN	KELSEY CIR	LARCHWOOD DR	E	AC	1	260	36	9,360	2/10/20	75	28	72	0	New Construction	01-01-1980
651	15295	EDGEVIEW LN	HARDWICK CIR	KELSEY CIR	E	AC	1	780	36	28,080	2/10/20	77	46	54	0	New Construction	01-01-1980
652	13197	EDGEWATER LN	MORNING STAR DR	BRANFORD DR	E	AAC	2	260	36	9,360	5/10/24	91	100	0	0	Overlay - AC Structural	12-01-2017
652	13230	EDGEWATER LN	DAVENPORT DR	WAVERLY LN	E	AC	2	1,678	36	60,408	3/24/22	60	22	74	4	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
652	15062	EDGEWATER LN	BRANFORD DR	FIGARO CIR	E	AAC	2	525	36	18,900	5/10/24	91	100	0	0	Overlay - AC Structural	12-01-2017
652	15066	EDGEWATER LN	FIGARO CIR	DAVENPORT DR	E	AAC	2	807	36	29,052	5/10/24	88	100	0	0	Overlay - AC Structural	12-01-2017
652	15081	EDGEWATER LN	WAVERLY LN	END	E	AC	2	1,061	36	38,196	3/24/22	76	33	6	61	New Construction	01-01-1980
654	15962	EDGEWOOD LN	DEEPVIEW DR	CLARKDALE DR	E	AC	7	1,049	36	37,764	8/21/23	32	4	85	11	Surface Treatment - Slurry Seal	03-01-2011
2289	17024	EDISON AVE	NEWLAND AVE	SOUTH END	E	AC	9	816	25	20,400	8/30/23	86	60	0	40	New Construction - Initial	01-01-1980
656	13314	EDMONDS CIR	GREENVIEW LN	END	E	AC	3	410	36	16,560	2/18/20	88	100	0	0	New Construction	01-01-1980
657	14081	EDUCATION LN	YORKTOWN AVE	FREDERICK CIR	E	AC	8	410	36	14,760	3/7/22	84	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
657	14085	EDUCATION LN	CONSTITUTION DR	GARRETT CIR	E	AC	8	261	36	9,396	3/7/22	85	45	55	0	New Construction	01-01-1980
657	15431	EDUCATION LN	FREDERICK CIR	CONSTITUTION DR	E	AC	8	759	36	27,324	3/7/22	88	70	0	30	New Construction	01-01-1980
569	14614	EDWARDS ST	GARFIELD AVE	PENINSULA LN	E	AC	5	669	44	29,436	3/28/22	89	100	0	0	New Construction - Initial	01-01-1980
4070	50430	EDWARDS ST FRONTAGE	ARMADA DR	VATCHER DR	E	AC	5	864	30	25,920	3/14/22	68	22	65	13	New Construction - Initial	01-01-1980
4070	50440	EDWARDS ST FRONTAGE	MEADOW CREST DR	FREEBORN DR	E	AC	5	611	30	18,330	3/15/22	58	23	74	3	Surface Treatment - Slurry Seal	01-10-2012
658	15527	EDYE DR	SUBURBIA LN	LAVONNE LN	E	AAC	8	897	36	34,792	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
659	16015	EFFINGHAM DR	STRATHMOOR LN	BROOKHURST ST	E	AC	8	1,195	36	43,020	4/10/24	57	14	67	19	Surface Treatment - Slurry Seal	05-11-2018
660	14231	EGRET LN	RELL DR	KINGFISHER DR	E	AC	9	982	36	35,352	8/24/23	71	35	65	0	New Construction	01-01-1980
661	13004	EIGHTEENTH ST	ACACIA AVE	PALM AVE	E	AAC	6	390	46	17,940	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
661	13005	EIGHTEENTH ST	PECAN AVE	ACACIA AVE	E	AAC	6	410	46	18,860	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
661	13006	EIGHTEENTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	410	46	18,860	6/22/21	79	16	0	84	Surface Treatment - Slurry Seal	07-27-2022
661	13007	EIGHTEENTH ST	PCH	WALNUT AVE	E	AAC	6	375	50	17,880	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
661	13008	EIGHTEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/22/21	83	31	0	69	Surface Treatment - Slurry Seal	07-27-2022
661	13094	EIGHTEENTH ST	ORANGE AVE	PECAN AVE	E	AAC	6	395	46	18,170	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
662	12954	EIGHTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	410	48	19,680	6/22/21	76	32	52	16	Surface Treatment - Slurry Seal	07-27-2022
662	12955	EIGHTH ST	PECAN AVE	ACACIA AVE	E	AC	6	410	48	19,680	6/22/21	77	45	25	30	Surface Treatment - Slurry Seal	07-27-2022
662	12956	EIGHTH ST	ACACIA AVE	PALM AVE	E	AC	6	390	47	18,330	6/22/21	86	80	0	20	Surface Treatment - Slurry Seal	07-27-2022
662	13071	EIGHTH ST	PCH	WALNUT AVE	E	AAC	6	390	50	19,785	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
662	13072	EIGHTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	48	18,960	6/30/21	79	47	12	41	Surface Treatment - Slurry Seal	07-27-2022
662	16032	EIGHTH ST	ORANGE AVE	PECAN AVE	E	AC	6	396	48	19,008	6/30/21	84	87	0	13	Surface Treatment - Slurry Seal	07-27-2022
663	13868	EIRE CIR	TULLOW LN	END	E	AC	3	294	32	11,208	2/19/20	95	100	0	0	New Construction	01-01-1980
664	14608	EL ARROYO DR	BRITTANY LN	NEWLAND ST	E	AC	4	496	36	17,856	5/13/24	87	82	18	0	Surface Treatment - Slurry Seal	04-01-2017
665	15529	EL CAPITAN DR	AQUATIC LN	SPINDRIFT LN	E	AAC	8	645	36	24,470	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
666	14415	EL CORTIJO DR	EDWARDS ST	ALTAMIRANO LN	E	AAC	5	167	36	5,724	2/25/20	93	100	0	0	Overlay - AC Structural	10-01-2012
667	14861	EL DORADO DR	NEWQUIST LN	ST ANDREWS LN	E	AC	2	744	36	29,064	3/22/22	94	100	0	0	New Construction	01-01-1980
668	15986	EL NOPAL LN	VIA ANGELINA DR	RIO VISTA DR	E	AAC	5	751	36	28,036	2/25/20	84	100	0	0	Overlay - AC Structural	10-01-2012
669	14296	EL TORO LN	KITE DR	ATLANTA AVE	E	AC	8	179	36	6,444	3/18/24	76	17	83	0	Surface Treatment - Slurry Seal	05-11-2018
670	13527	ELBE CIR	RHINE DR	CDS	E	AC	4	264	32	9,948	3/18/22	79	50	50	0	Surface Treatment - Slurry Seal	07-29-2020
671	13721	ELECTRONIC LN	MACHINE DR	MC FADDEN AVE	E	AC	1	817	40	32,680	5/5/20	56	22	78	0	New Construction	01-01-1980
672	12970	ELEVENTH ST	PCH	WALNUT AVE	E	AAC	6	345	47	16,215	12/17/21	100	0	0	0	Overlay - AC Fabric	12-17-2021
672	12971	ELEVENTH ST	WALNUT AVE	OLIVE AVE	E	AAC	6	390	47	18,330	12/17/21	100	0	0	0	Overlay - AC Fabric	12-17-2021
672	12972	ELEVENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/22/21	75	39	52	9	New Construction	01-01-1980
672	12973	ELEVENTH ST	ACACIA AVE	PALM AVE	E	AAC	6	390	46	17,940	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
672	13076	ELEVENTH ST	OLIVE AVE	ORANGE AVE	E	AAC	6	395	47	18,565	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
672	13077	ELEVENTH ST	PALM AVE	MAIN ST	E	AC	6	702	43	30,186	7/8/21	79	59	34	7	Surface Treatment - Slurry Seal	07-27-2022
672	13084	ELEVENTH ST	MAIN ST	LAKE ST	E	AC	6	782	47	41,595	7/8/21	75	42	58	0	Surface Treatment - Slurry Seal	07-27-2022
672	16029	ELEVENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	390	46	17,940	6/30/21	53	32	44	24	New Construction	01-01-1980
673	13953	ELGIN CIR	LINDSAY LN	CDS	E	AAC	7	419	36	16,334	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
674	13839	ELIOT CIR	WINSLOW DR	END	E	AC	1	339	36	13,454	3/30/22	89	100	0	0	New Construction	01-01-1980
675	14258	ELIZABETH LN	ELLSWORTH DR	CARROLTOWN DR	E	AAC	9	902	36	32,472	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
676	13512	ELK CIR	LILAC LN	CDS	E	AAC	3	237	32	9,834	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
677	14255	ELLSWORTH DR	MAGNOLIA ST	KELVIN LN	E	AC	9	176	32	5,632	5/9/24	83	60	37	3	Surface Treatment - Slurry Seal	05-11-2018
677	15952	ELLSWORTH DR	KELVIN LN	MINERVA LN	E	AAC	9	944	36	34,734	5/9/24	87	98	0	2	Overlay - AC Structural	05-11-2018
678	13578	ELM ST	SYCAMORE AVE	CYPRESS AVE	E	AC	4	424	36	15,264	3/31/22	73	58	37	5	New Construction	01-01-1980
678	13581	ELM ST	CYPRESS AVE	CDS	E	AC	4	443	36	17,448	3/31/22	52	33	67	0	New Construction	01-01-1980
679	14972	ELMCREST LN	DRYBROOK LN	DRYBANK DR	E	AAC	7	1,283	36	46,188	8/17/23	87	76	0	24	Overlay - AC Structural	03-01-2011
680	13673	ELMHURST CIR	BRIARCLIFF DR	END	E	AC	1	505	36	19,930	2/10/20	86	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
681	14629	ELMIRA AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	37	17,945	8/24/23	66	67	29	4	New Construction	01-01-1980
681	15867	ELMIRA AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	330	37	12,210	8/24/23	48	29	51	20	New Construction	01-01-1980
681	15880	ELMIRA AVE	CALIFORNIA ST	DELAWARE ST	E	AC	9	330	37	12,210	8/24/23	39	26	69	5	New Construction	01-01-1980
682	14079	ELMSFORD LN	WARBURTON DR	TELHAN DR	E	AAC	8	239	36	9,354	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
683	13355	ELSINORE CIR	SONOMA DR	CDS	E	AC	5	179	36	7,994	3/15/22	37	12	85	3	Surface Treatment - Slurry Seal	10-01-2012
684	14066	ELVA CIR	RUMSEY LN	CDS	E	AAC	7	161	36	8,346	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
685	14978	EMERALD LN	FIR DR	CYPRESS AVE	E	AC	4	669	36	24,084	3/31/22	75	25	61	14	New Construction	01-01-1980
686	13362	ENCINO CIR	SANTA YNEZ DR	CDS	E	AC	5	350	36	13,950	3/15/22	24	19	81	0	Surface Treatment - Slurry Seal	10-01-2012
688	14297	ENDEVER DR	SKIMMER LN	BROOKHURST ST	E	AC	8	187	36	6,732	3/19/24	87	52	48	0	Surface Treatment - Slurry Seal	05-11-2018
689	13932	ENFIELD CIR	HAMDEN LN	CDS	E	AC	7	198	36	10,989	4/2/24	93	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
690	13719	ENGINEER DR	GRAHAM ST	PIPELINE LN	E	AC	1	1,347	40	53,560	5/5/20	68	14	59	27	New Construction	01-01-1980
690	15922	ENGINEER DR	PIPELINE LN	SPRINGDALE ST	E	AC	1	1,206	40	47,760	5/5/20	90	39	0	61	New Construction	01-01-1980
691	14669	ENGLAND ST	LINCOLN AVE	MEMPHIS AVE	E	AAC	6	331	36	11,916	8/15/23	82	100	0	0	Overlay - AC Structural	03-01-2011
691	14670	ENGLAND ST	KNOXVILLE AVE	LINCOLN AVE	E	AC	6	330	37	12,062	8/15/23	90	100	0	0	New Construction	01-01-1980
691	14671	ENGLAND ST	JOILET AVE	KNOXVILLE AVE	E	AC	6	330	37	11,883	8/15/23	51	22	78	0	Surface Treatment - Slurry Seal	03-01-2011
691	14672	ENGLAND ST	INDIANAPOLIS AVE	JOILET AVE	E	AAC	6	330	37	11,877	8/15/23	55	30	70	0	Overlay - AC Structural	03-01-2011
691	14741	ENGLAND ST	YORKTOWN AVE	CDS	E	AAC	6	537	36	22,365	7/8/21	33	26	64	10	Overlay - AC Structural	11-28-2019
691	15706	ENGLAND ST	END	YORKTOWN AVE	E	AAC	7	540	36	19,440	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
692	14896	ENGLEWOOD CIR	FREEBORN DR	CDS	E	AC	5	364	36	16,704	3/15/22	48	19	69	12	Surface Treatment - Slurry Seal	10-01-2012
693	13191	ENSIGN CIR	HUMBOLDT DR	CDS	E	AC	2	315	32	11,580	4/7/22	54	15	65	20	New Construction	01-01-1980
694	14778	ENTERPRISE LN	PRODAN DR	MOUNTJOY DR	E	AAC	4	1,030	40	42,700	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
695	15651	ERNEST AVE	GOLDENWEST ST	GOTHARD ST	E	AC	4	1,321	40	52,840	3/5/24	83	55	45	0	Surface Treatment - Slurry Seal	11-28-2019
696	15518	ERSKINE DR	BUSHARD ST	IONA LN	E	AC	8	898	36	32,076	3/19/24	92	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
697	15779	ERWIN LN	FREEBORN DR	CDS	E	AC	5	592	36	22,662	2/18/20	53	14	74	12	Surface Treatment - Slurry Seal	10-01-2012
698	13174	ESCAPADE CIR	SUNDANCER LN	CDS	E	AAC	2	198	32	7,836	5/7/24	82	68	32	0	Overlay - AC Fabric	12-01-2017
699	13270	ESTA CIR	GIARC LN	CDS	E	AC	3	222	32	7,104	3/16/22	82	63	37	0	New Construction	01-01-1980
700	15837	ESTUARY LN	DOLPHIN DR	ADAMS AVE	E	AC	7	1,451	36	52,236	2/24/20	69	25	74	1	Surface Treatment - Slurry Seal	07-15-2021
701	13472	ETNA CIR	RUSHMOOR LN	COTTONWOOD CIR	E	AAC	4	156	32	5,892	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
702	13778	ETON CIR	ALEXANDRIA DR	END	E	AC	1	410	36	16,260	3/30/22	95	100	0	0	New Construction	01-01-1980
704	14224	EVELYNE CIR	FARNSWORTH LN	END	E	AC	9	321	32	10,272	8/24/23	92	69	0	31	New Construction	01-01-1980
705	13891	EVENING HILL DR	LAWN HAVEN DR	HARBOR KEY CIR	E	AAC	5	272	36	9,792	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
705	13896	EVENING HILL DR	MANOR POINT CIR	SHADY HARBOR CIR	E	AC	5	355	36	12,780	5/6/24	81	79	21	0	Surface Treatment - Slurry Seal	11-28-2019
705	13898	EVENING HILL DR	SHADY HARBOR CIR	SURFDALE LN	E	AC	5	389	36	14,004	5/6/24	100	0	0	0	Surface Treatment - Slurry Seal	11-28-2019
705	15355	EVENING HILL DR	HARBOR KEY CIR	MANOR POINT CIR	E	AAC	5	500	36	18,000	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
706	13471	EVEREST CIR	RUSHMOOR LN	END	E	AAC	4	368	32	15,376	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
707	14183	EVERGLADES LN	KINGS CANTON DR	MAMMOTH DR	E	AC	8	253	36	9,108	3/1/22	86	54	46	0	Surface Treatment - Slurry Seal	02-13-2023
707	16018	EVERGLADES LN	MAMMOTH DR	INDIANAPOLIS AVE	E	AC	8	1,469	36	52,884	3/1/22	82	52	32	16	Surface Treatment - Slurry Seal	02-13-2023
708	14873	EVERGREEN CIR	SUMMERDALE DR	END	E	AAC	5	246	36	10,584	2/18/20	93	100	0	0	Overlay - AC Structural	10-01-2012
709	15395	FAIR TIDE CIR	END	END	E	AAC	8	404	32	16,528	4/8/24	100	0	0	0	Overlay - AC Structural	02-08-2023
710	15011	FAIRCREST DR	EDWARDS ST	ROCKINGHORSE LN	E	AC	5	466	36	16,776	5/7/24	90	74	26	0	New Construction	01-01-1980
711	13220	FAIRFIELD CIR	WESTPORT DR	CDS	E	AAC	2	400	36	15,900	5/10/24	93	100	0	0	Overlay - AC Fabric	12-01-2017
712	14395	FAIRLANE CIR	RAMBLER DR	CDS	E	AC	9	390	36	15,540	5/6/24	79	40	60	0	New Construction	01-01-1980
713	13671	FAIRVIEW LN	ANACAPA DR	BRIARCLIFF DR	E	AAC	1	786	36	30,046	5/7/24	71	61	39	0	Overlay - AC Fabric	10-01-2016
714	13238	FAIRWAY LN	SNEAD DR	MEADOWLARK DR	E	AC	3	737	36	26,782	3/23/22	45	9	80	11	New Construction	01-01-1980
714	15089	FAIRWAY LN	MEADOWLARD DR.	MIDDLECOFF DR	E	AC	3	835	36	30,310	3/23/22	52	22	78	0	New Construction	01-01-1980
715	15974	FALKIRK LN	RIDGEBURY DR	END	E	AC	5	1,100	36	39,024	3/12/20	44	12	82	6	New Construction	01-01-1980
716	13205	FALKLAND CIR	CHANNEL LN	CDS	E	AC	2	200	32	7,900	4/9/22	93	91	0	9	New Construction	01-01-1980
717	13410	FALLINGWATER DR	FLINTSTONE LN.	EDWARDS ST	E	AC	5	1,335	36	48,060	3/14/22	48	11	89	0	New Construction	01-01-1980
718	15367	FALMOUTH DR	WORCHESTER LN	SHERBORNE LN	E	AAC	7	530	36	21,398	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
719	15937	FANTASIA LN	TENOR DR	SCENARIO DR	E	AC	2	940	36	34,140	3/24/22	82	35	65	0	New Construction	01-01-1980
719	15938	FANTASIA LN	EDINGER AVE	TENOR DR	E	AC	2	875	36	31,500	3/24/22	64	14	86	0	New Construction	01-01-1980
720	14933	FANWOOD DR	GAINSFORD LN	RAINGLEN LN	E	AC	5	389	36	14,754	3/12/20	91	44	0	56	New Construction	01-01-1980
721	13328	FARINELLA DR	TRUDY LN	SUMMERCLOUD LN	E	AC	3	1,148	36	41,328	3/23/22	89	100	0	0	New Construction	01-01-1980
721	13335	FARINELLA DR	EDWARDS ST	COOPER LN	E	AC	3	537	36	19,032	3/18/22	91	100	0	0	New Construction	01-01-1980
722	14220	FARNSWORTH LN	INDIANAPOLIS AVE	ALLEY INDIANAPOLIS AVE	E	AC	9	152	36	5,472	8/23/23	75	39	44	17	New Construction	01-01-1980
722	14221	FARNSWORTH LN	KINGFISHER DR	MARY CIR	E	AC	9	262	36	9,432	8/23/23	53	35	65	0	New Construction	01-01-1980
722	15495	FARNSWORTH LN	ALLEY INDIANAPOLIS AVE	KINGFISHER DR	E	AC	9	1,127	36	40,572	8/23/23	79	100	0	0	New Construction	01-01-1980
722	15496	FARNSWORTH LN	MARY CIR	SNOWVBIRD DR	E	AC	9	782	36	28,152	8/23/23	59	56	44	0	New Construction	01-01-1980
723	14148	FAUST CIR	DENSMORE LN	CDS	E	AAC	7	91	42	4,822	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
724	14449	FELCLIFF LN	ADAMS AVE	CROWN REEF LN	E	AC	7	127	36	4,572	4/6/22	73	100	0	0	New Construction	01-01-1980
724	15960	FELCLIFF LN	DOREMERE DR	ADAMS AVE	E	AC	7	1,108	36	40,638	2/24/20	83	51	49	0	Surface Treatment - Slurry Seal	07-15-2021
725	13381	FELSON CIR	SELKIRK DR	END	E	AC	5	114	36	5,904	3/12/20	83	33	0	67	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
726	15978	FENLEY DR	STILL HARBOR LN	FLINTSTONE LN	E	AC	5	1,135	36	42,360	3/14/22	62	19	81	0	New Construction	01-01-1980
727	14406	FENWICK DR	GOLDEN VIEW LN	MARGARITA LN	E	AC	3	126	36	5,536	2/11/20	66	50	50	0	Surface Treatment - Slurry Seal	10-01-2012
728	13887	FEOLA CIR	BREELAND DR	END	E	AC	3	560	36	21,960	2/19/20	82	79	0	21	New Construction	01-01-1980
729	13544	FERGUSON CIR	ROSS LN	CDS	E	AAC	4	244	32	9,058	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
730	15093	FERNHILL CIR	GRAHAM ST	END	E	AC	3	552	36	21,672	2/18/20	85	100	0	0	New Construction	01-01-1980
731	13399	FERNPOINT CIR	HAMSHIRE DR	CDS	E	AC	5	429	36	17,244	3/28/22	68	38	52	10	New Construction	01-01-1980
732	13450	FIELDBURY LN	TALBERT AVE	TALEGATE DR	E	AC	5	162	48	7,392	2/24/20	82	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
732	13462	FIELDBURY LN	GLENFOX DR	TALBERT AVE	E	AAC	5	499	36	17,964	3/11/20	85	67	33	0	Overlay - AC Structural	10-01-2012
732	15202	FIELDBURY LN	TALEGATE DR	NORBROOK DR	E	AC	5	875	36	31,212	3/11/20	63	39	61	0	Surface Treatment - Slurry Seal	10-01-2012
733	13749	FIELDSTON LN	TYNDALL DR	SHELLY DR	E	AC	1	274	36	11,364	5/6/20	85	83	0	17	New Construction	01-01-1980
734	12996	FIFTEENTH ST	ACACIA AVE	PALM AVE	E	AC	6	370	46	17,020	6/22/21	88	94	0	6	Surface Treatment - Slurry Seal	07-27-2022
734	12997	FIFTEENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	365	46	16,790	6/22/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
734	12998	FIFTEENTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	365	46	16,790	6/22/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
734	12999	FIFTEENTH ST	PCH	WALNUT AVE	E	AC	6	355	50	18,630	6/22/21	89	37	0	63	Surface Treatment - Slurry Seal	07-27-2022
734	13000	FIFTEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	380	46	17,480	6/22/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
734	13091	FIFTEENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	375	46	17,250	6/22/21	93	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
735	12947	FIFTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	370	56	18,815	6/22/21	89	65	18	17	New Construction	01-01-1980
735	13068	FIFTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	375	54	19,015	6/22/21	88	100	0	0	New Construction	01-01-1980
735	16028	FIFTH ST	PCH	WALNUT AVE	E	PCC	6	365	34	9,835	6/22/21	100	100	0	0	New Construction - Initial	01-01-1980
736	13208	FIGARO CIR	EDGEWATER LN	CDS	E	AAC	2	350	36	14,100	5/10/24	86	45	55	0	Overlay - AC Fabric	12-01-2017
737	14017	FIJI LN	KAMUELA DR	CHRISTMAS SR	E	AAC	8	1,019	36	36,684	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
738	13060	FINDLEY CIR	GOLDENWEST ST	CDS	E	AC	5	410	36	16,965	7/8/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
739	15072	FINISTERRE DR	BOLERO LN	BARUNA LN	E	AC	2	470	36	16,920	4/7/22	89	100	0	0	New Construction	01-01-1980
740	15261	FIR DR	EMERALD LN	OAK LN	E	AC	4	318	36	11,448	3/31/22	88	100	0	0	New Construction	01-01-1980
741	14343	FIREBRAND LN	ATLANTA AVE	ORIENT DR	E	AC	8	173	36	6,228	4/1/24	71	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
742	15510	FIRESIDE DR	CHARWOOD LN	CRESTVIEW LN	E	AC	9	954	36	35,844	5/7/24	63	27	73	0	Surface Treatment - Slurry Seal	05-11-2018
653	12859	FIRST ST	PCH	END	E	AC	6	100	65	7,145	7/8/21	96	100	0	0	New Construction	01-01-1980
744	15624	FISHER DR	SAYBROOK LN	DAVIS CUP	E	AAC	2	322	36	11,592	5/10/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
745	15954	FIVE HARBORS DR	CDS	CDS	E	AAC	9	1,056	32	36,792	5/6/24	81	62	38	0	Overlay - AC Structural	05-11-2018
747	15913	FLAGSTAFF LN	MODALE DR	CDS	E	AAC	7	1,269	36	48,717	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
748	15961	FLAGSTONE LN	DEEPVIEW DR	CLARKDALE DR	E	AC	7	1,041	36	37,476	8/21/23	57	30	68	2	Surface Treatment - Slurry Seal	03-01-2011
749	13811	FLAMINGO CIR	BLUEBIRD LN	END	E	AC	1	530	36	20,330	3/21/22	54	8	92	0	New Construction	01-01-1980
750	14128	FLAX CIR	MASTERS DR	CDS	E	AAC	7	105	26	2,730	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
752	15963	FLAXMAN DR	WEEMS LN	EDGEWOOD LN	E	AAC	7	771	36	27,756	8/21/23	90	92	0	8	Overlay - AC Structural	03-01-2011
753	14335	FLEET LN	TIDEWATER CIR	PIER DR	E	AAC	9	622	36	23,142	3/20/24	63	24	76	0	Overlay - AC Structural	05-11-2018
753	15552	FLEET LN	TIDEWATER CIR	CDS	E	AC	9	349	36	12,564	3/20/24	60	17	70	13	Surface Treatment - Slurry Seal	05-11-2018
754	16001	FLINT DR	BALLANTINE LN	EDWARDS ST	E	AC	3	1,201	36	43,236	3/17/22	44	22	75	3	New Construction	01-01-1980
755	13799	FLINTRIDGE LN	CUMBERLAND DR	HALIFAX DR	E	AC	1	521	36	19,256	2/26/20	95	100	0	0	New Construction	01-01-1980
756	13397	FLINTSTONE LN	FENLEY DR	AMADA DR	E	AC	5	780	36	28,080	3/14/22	64	17	78	5	New Construction	01-01-1980
756	15175	FLINTSTONE LN	AMADA DR	VATCHER DR	E	AC	5	866	36	31,926	3/14/22	57	25	64	11	New Construction	01-01-1980
757	13790	FLORENCE CIR	MELBOURNE DR	END	E	AC	1	410	36	16,560	3/30/22	95	100	0	0	New Construction	01-01-1980
758	14673	FLORIDA ST	INDIANAPOLIS AVE	JOILET AVE	E	AAC	6	330	37	12,210	8/15/23	84	64	0	36	Overlay - AC Structural	03-01-2011
758	14674	FLORIDA ST	JOILET AVE	KNOXVILLE AVE	E	AAC	6	330	37	11,988	8/15/23	90	69	0	31	Overlay - AC Structural	03-01-2011
758	14742	FLORIDA ST	YORKTOWN AVE	WILLIAMS AVE	E	AC	7	660	36	23,760	4/9/24	68	29	71	0	Surface Treatment - Slurry Seal	11-28-2019
758	14756	FLORIDA ST	MAIN ST	PROFESSIONAL CIR	E	AC	4	221	36	7,956	5/9/24	75	16	56	28	Surface Treatment - Slurry Seal	11-28-2019
758	15004	FLORIDA ST	SHAFFER CIR	GARFIELD AVE	E	AC	4	478	36	17,208	4/8/24	75	27	73	0	Surface Treatment - Slurry Seal	11-28-2019
758	15005	FLORIDA ST	PROFESSIONAL CIR	SHAFFER CIR	E	AC	4	1,365	36	49,140	4/8/24	80	26	53	21	Surface Treatment - Slurry Seal	11-21-2019
758	15671	FLORIDA ST	GENEVA AVE	INDIANAPOLIS AVE	E	AC	9	292	36	10,512	8/15/23	78	33	35	32	New Construction	01-01-1980
758	15683	FLORIDA ST	KNOXVILLE AVE	MEMPHIS AVE	E	AC	6	661	36	23,796	8/15/23	57	39	61	0	Surface Treatment - Slurry Seal	03-01-2011
758	15694	FLORIDA ST	ADAMS AVE	UTICA AVE	E	AAC	6	1,260	36	45,360	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
758	15695	FLORIDA ST	UTICA AVE	YORKTOWN AVE	E	AAC	6	1,260	36	45,360	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
758	15710	FLORIDA ST	GARFIELD AVE	CLAY AVE	E	AC	7	1,320	40	52,800	4/9/24	83	41	59	0	Surface Treatment - Slurry Seal	11-28-2019
758	15711	FLORIDA ST	WILLIAMS AVE	CLAY AVE	E	AC	7	660	36	23,760	4/9/24	82	56	44	0	Surface Treatment - Slurry Seal	11-28-2019
759	13989	FLOUNDER DR	SALMON LN	END	E	AAC	8	130	36	4,680	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
759	15388	FLOUNDER DR	BUSHARD ST	SALMON LN	E	AAC	8	1,189	36	42,804	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
760	15818	FLOWER LN	SUNBREEZE DR	SLATER AVE	E	AAC	3	314	36	12,054	2/11/20	92	100	0	0	Overlay - AC Structural	10-01-2012
761	14519	FOLKSTONE CIR	HARWICH LN	CDS	E	AAC	9	139	32	4,448	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
762	15791	FORBES LN	APEL LN	NORDINA DR	E	AC	5	1,190	36	43,090	3/29/22	64	24	76	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
763	15987	FORD DR	GOLDENWEST ST	END	E	AC	3	966	36	34,776	5/13/24	82	47	53	0	New Construction	01-01-1980
764	14409	FORD LN	WHETMORE LN	GOLDENWEST ST	E	AC	3	177	36	5,784	2/11/20	91	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
765	15283	FORELLE DR	GOODWIN LN	SPRINGTIME LN	E	AAC	4	570	37	20,490	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
765	15284	FORELLE DR	PATTERSON LN	GOODWIN LN	E	AAC	4	612	37	22,348	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
766	15728	FOREST LN	DARSY DR	NEWMAN AVE	E	AC	4	530	36	19,830	5/13/24	67	50	50	0	Surface Treatment - Slurry Seal	11-28-2019
767	14086	FORRESTAL DR	BROOKHURST ST	TRENTON LN	E	AC	8	884	36	32,824	2/25/22	87	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
768	13438	FOSS LN	MIDWAY DR	CDS	E	AC	5	127	36	4,572	3/28/22	87	100	0	0	New Construction	01-01-1980
768	15194	FOSS LN	KENBROOK DR	MIDWAY DR	E	AC	5	552	36	19,872	3/28/22	81	100	0	0	New Construction	01-01-1980
769	15134	FOUNTAIN LN	HEIL AVE	DALE VISTA LN	E	AC	3	1,117	36	40,212	3/18/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
770	12993	FOURTEENTH ST	ACACIA AVE	PALM AVE	E	AC	6	390	46	17,940	6/22/21	92	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
770	12994	FOURTEENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/22/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
770	12995	FOURTEENTH ST	CREST AVE	LOMA AVE	E	AC	6	845	45	41,745	6/30/21	71	30	46	24	Surface Treatment - Slurry Seal	07-27-2022
770	13089	FOURTEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/22/21	93	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
770	13090	FOURTEENTH ST	PALM AVE	CREST AVE	E	AC	6	556	45	25,020	6/30/21	84	44	48	8	Surface Treatment - Slurry Seal	07-27-2022
770	13115	FOURTEENTH ST	PCH	OLIVE AVE	E	AC	6	775	46	36,095	6/22/21	93	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
770	16026	FOURTEENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	395	46	18,170	6/22/21	91	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
771	14773	FOX CIR	STEEP LN	CDS	E	AAC	4	126	18	2,518	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
772	15983	FOXSHIELD DR	BLUEGATE LN	HALLCROFT LN	E	AC	5	759	36	27,324	3/28/22	90	81	0	19	New Construction	01-01-1980
773	13949	FRANCISCAN CIR	HOMESTEAD LN	CDS	E	AAC	7	279	36	11,294	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
774	14630	FRANKFORT AVE	HILL ST	CDS	E	AC	9	666	28	21,076	8/24/23	70	53	13	34	New Construction	01-01-1980
774	15668	FRANKFORT AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	38	18,430	8/24/23	76	61	0	39	New Construction	01-01-1980
774	15669	FRANKFORT AVE	DELAWARE ST	HILL ST	E	AC	9	943	32	30,176	8/24/23	73	89	0	11	New Construction	01-01-1980
774	15866	FRANKFORT AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	330	40	13,200	8/24/23	76	77	0	23	New Construction	01-01-1980
774	15879	FRANKFORT AVE	CALIFORNIA ST	DELAWARE ST	E	AC	9	330	36	11,880	8/17/23	70	49	51	0	New Construction	01-01-1980
774	50410	FRANKFORT AVE	LAKE ST	ALABAMA ST	E	AC	9	390	50	19,500	8/24/23	54	35	64	1	New Construction - Initial	01-01-1980
775	14772	FRANKLIN DR	DELAWARE ST	CDS	E	AAC	4	507	36	18,502	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
776	13313	FRANMAR CIR	GREENVIEW LN	END	E	AC	3	410	36	16,260	2/18/20	92	100	0	0	New Construction	01-01-1980
777	14909	FRANS LN	GLENSTONE DR	CDS	E	AC	5	193	36	8,198	3/29/22	70	13	87	0	New Construction	01-01-1980
777	15792	FRANS LN	APEL LN	GLENSTONE DR	E	AC	5	383	36	14,038	3/29/22	87	100	0	0	New Construction	01-01-1980
778	14886	FRASER LN	SUMMERDALE DR	JUNE DR	E	AAC	5	239	36	9,508	3/29/22	81	100	0	0	Overlay - AC Structural	10-01-2012
779	14082	FREDERICK CIR	EDUCATION LN	CDS	E	AAC	8	472	36	18,792	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
780	14894	FREEBORN DR	LIDO LN	ERWIN LN	E	AAC	5	405	36	15,720	2/18/20	89	81	0	19	Overlay - AC Structural	10-01-2012
780	15784	FREEBORN DR	ERWIN LN	EDWARDS ST	E	AAC	5	785	36	28,590	2/18/20	88	81	0	19	Overlay - AC Structural	10-01-2012
781	13465	FRESHWATER CIR	INLET DR	END	E	AC	5	478	36	18,708	2/24/20	81	53	42	5	Surface Treatment - Slurry Seal	10-01-2012
782	15519	FRIARSCOURT DR	GLENCAIRN LN	HUNTER LN	E	AC	8	506	36	18,216	3/19/24	86	66	15	19	Surface Treatment - Slurry Seal	05-11-2018
783	14812	FRIESLAND DR	ROTTERDAM LN	ZEIDER LN	E	AAC	4	898	36	32,328	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
783	14813	FRIESLAND DR	MARKEN LN	ROTTERDAM LN	E	AAC	4	660	36	24,010	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
783	15735	FRIESLAND DR	ZEIDER LN	NEWLAND ST	E	AAC	4	291	36	10,476	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
784	14901	FRIML LN	ROGERS DR	KERN DR	E	AC	5	1,120	36	40,320	3/22/22	79	30	69	1	New Construction	01-01-1980
785	14412	FRITCH DR	SPRINGDALE ST	STILL HARBOR LN	E	AC	5	180	36	6,480	3/28/22	21	4	96	0	New Construction	01-01-1980
786	13667	FRONTIER CIR	CALNEVA LN	END	E	AAC	1	530	36	19,080	5/8/24	68	52	48	0	Overlay - AC Fabric	10-01-2016
787	14333	FRY CIR	KNOLL LN	END	E	AC	9	168	32	6,876	8/30/23	94	100	0	0	New Construction	01-01-1980
788	14945	GAINSFORD LN	BECK CIR	BANKTON DR	E	AC	5	305	36	10,692	3/12/20	95	100	0	0	New Construction	01-01-1980
788	15804	GAINSFORD LN	FANWOOD DR	BECK CIR	E	AC	5	794	36	29,334	3/12/20	92	56	0	44	New Construction	01-01-1980
790	14366	GALBAR CIR	DANA DR	END	E	AAC	8	331	36	13,916	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
791	14417	GALICIA LN	JARDINES DR	VILLA NUEVA DR	E	AC	5	205	36	7,380	2/25/20	79	22	78	0	Surface Treatment - Slurry Seal	10-01-2012
792	15174	GALIPEAN DR	COLLIE LN	PRESCOTT LN	E	AC	5	633	36	22,788	3/28/22	62	29	71	0	New Construction	01-01-1980
793	14142	GALLANT DR	ASTOR LN	SWANSEA LN	E	AAC	7	255	36	9,180	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
793	15465	GALLANT DR	TRANQUIL LN	ASTOR LN	E	AAC	7	741	36	27,426	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
795	13710	GALWAY CIR	ANDAMAN LN	END	E	AC	1	530	36	20,330	3/21/22	65	7	91	2	New Construction	01-01-1980
796	15221	GANGES LN	ALLEY GANGES LN	ALLEY GANGES LN	E	AC	4	348	36	13,528	3/18/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
797	15359	GARDEN CIR	SURFDALE CIR	CDS	E	AC	5	343	36	14,348	5/6/24	87	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
703	13950	GARFIELD AVE	LINDSAY LN	END	E	AAC	7	423	26	10,998	3/5/24	95	100	0	0	Overlay - AC Structural	07-15-2021
703	14601	GARFIELD AVE	SEAPOINT AVE	END	E	AC	5	788	26	20,488	3/28/22	95	100	0	0	New Construction - Initial	01-01-1980
703	15377	GARFIELD AVE	PLUM TREE LN	END	E	AC	7	678	26	17,628	3/5/24	92	100	0	0	Surface Treatment - Slurry Seal	07-14-2021
798	15588	GARRETT CIR	CLANCY LN	CDS	E	AC	8	990	36	37,990	3/7/22	52	4	94	2	Surface Treatment - Slurry Seal	02-08-2023
799	13877	GAS LIGHT DR	OAKSHIRE LN	DAWSON LN	E	AC	3	640	36	23,790	4/1/22	95	100	0	0	New Construction	01-01-1980
800	14771	GASPE CIR	APPLEBY DR	CDS	E	AAC	4	458	36	17,988	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
801	13894	GATE HILL CIR	EVENING HILL DR	CDS	E	AAC	5	313	36	14,518	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
802	14517	GATESHEAD DR	HARWICH LN	CDS	E	AC	9	130	36	6,480	4/17/24	94	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
802	15612	GATESHEAD DR	HARWICH LN	BUSHARD ST	E	AAC	9	721	36	25,956	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
803	13301	GELDING CIR	ROOSEVELT LN	CDS	E	AC	2	275	36	11,150	4/5/22	59	23	77	0	New Construction	01-01-1980
804	14054	GEMFALL LN	DOLPHIN DR	DOREMERE DR	E	AAC	7	258	36	9,288	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
805	13508	GEMINI LN	MARS DR	SATURN DR	E	AC	3	575	40	24,500	4/7/22	89	63	0	37	Surface Treatment - Slurry Seal	07-29-2020
806	14631	GENEVA AVE	DELAWARE ST	ALLEY DELAWARE ST	E	AC	9	170	37	6,290	8/15/23	93	100	0	0	New Construction	01-01-1980
806	14632	GENEVA AVE	FLORIDA ST	INDIANAPOLIS AVE	E	AC	9	378	37	13,986	8/15/23	57	28	63	9	New Construction	01-01-1980
806	14633	GENEVA AVE	ALLEY DELAWARE ST	ALLEY HARTFORD AVE	E	AC	9	368	37	13,616	8/15/23	80	24	34	42	New Construction	01-01-1980
806	15670	GENEVA AVE	ALLEY HARTFORD AVE	FLORIDA ST	E	AC	9	280	37	10,360	8/15/23	67	19	54	27	New Construction	01-01-1980
806	15865	GENEVA AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	330	40	13,200	8/15/23	75	100	0	0	New Construction	01-01-1980
806	15872	GENEVA AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	37	17,945	8/15/23	85	75	25	0	New Construction	01-01-1980
806	15878	GENEVA AVE	CALIFORNIA ST	DELAWARE ST	E	AC	9	330	39	12,870	8/15/23	80	100	0	0	New Construction	01-01-1980
807	13779	GENOA CIR	ALEXANDRIA DR	END	E	AC	1	410	36	16,260	2/26/20	92	53	0	47	New Construction	01-01-1980
808	13596	GENTRY LN	MYRTLE DR	SHAYNE DR	E	AC	3	1,016	36	37,076	3/17/22	79	50	46	4	New Construction	01-01-1980
809	14784	GEORGETOWN LN	WOODWIND DR	WINDFIELD DR	E	AC	4	765	40	30,600	5/13/24	76	76	24	0	Surface Treatment - Slurry Seal	11-01-2019
810	14675	GEORGIA ST	INDIANAPOLIS AVE	JOILET AVE	E	AC	6	331	37	11,840	8/15/23	72	38	45	17	New Construction	01-01-1980
810	14676	GEORGIA ST	JOILET AVE	KNOXVILLE AVE	E	AC	6	330	37	11,988	8/15/23	95	100	0	0	New Construction	01-01-1980
811	14802	GERALDINE LN	SLATER AVE	ROSANNA DR	E	AAC	4	511	36	19,146	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
812	14879	GERSHWIN DR	GRAHAM ST	BERLIN LN	E	AC	5	167	36	6,012	3/22/22	46	20	80	0	New Construction	01-01-1980
813	14444	GETTYSBURG DR	MAGNOLIA ST FRONTAGE	LOTUS LN	E	AC	7	1,036	36	37,296	2/18/20	57	29	70	1	Surface Treatment - Slurry Seal	07-15-2021
814	15789	GHENT DR	BREDA LN	WILD ROSE LN	E	AC	5	513	36	18,718	3/29/22	84	43	57	0	New Construction	01-01-1980
815	13271	GIARC LN	WALTON DR	DORIANE CIR	E	AC	3	168	36	6,798	3/16/22	89	82	0	18	New Construction	01-01-1980
815	15104	GIARC LN	DORIANE CIR	LENNOX DR	E	AC	3	546	36	19,656	3/16/22	79	100	0	0	New Construction	01-01-1980
816	13376	GIBSON CIR	MANHATTAN DR	END	E	AAC	3	438	36	17,268	2/11/20	91	100	0	0	Overlay - AC Structural	10-01-2012
817	15063	GILBERT DR	CHANNEL LN	SOMERSET LN	E	AC	2	1,332	36	48,452	4/9/22	87	38	52	10	New Construction	01-01-1980
818	13315	GILDRED CIR	GREENVIEW LN	END	E	AC	3	410	36	16,560	2/18/20	89	100	0	0	New Construction	01-01-1980
819	13936	GILFORD CIR	NEWHAVEN LN	CDS	E	AC	7	408	36	17,768	4/2/24	83	29	71	0	Surface Treatment - Slurry Seal	11-28-2019
820	14178	GLACIER CIR	ROCKY MOUNTAIN DR	CDS	E	AAC	8	364	36	14,604	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
821	13643	GLADYS AVE	WHARTON ST	HARTLUND ST	E	AAC	4	387	33	13,371	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
822	13539	GLASGOW CIR	BRESSEL LN	CDS	E	AAC	4	420	32	14,690	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
823	13650	GLEADA ST	STERLING AVE	KINER AVE	E	AC	4	397	33	13,601	4/8/24	91	55	45	0	Surface Treatment - Slurry Seal	11-28-2019
824	13866	GLEN DR	TULLOW LN	END	E	AC	3	315	32	11,580	2/19/20	55	31	55	14	New Construction	01-01-1980
824	13870	GLEN DR	WICKLOW LN	TULLOW LN	E	AC	3	258	36	9,000	3/30/22	95	100	0	0	New Construction	01-01-1980
824	15344	GLEN DR	DAWSON LN	WICKLOW LN	E	AC	3	1,287	36	46,044	3/30/22	95	100	0	0	New Construction	01-01-1980
826	14295	GLENCAIRN LN	FRIARSCOURT DR.	SCOTTOUN DR	E	AC	8	1,033	36	37,188	3/19/24	75	33	67	0	New Construction	01-01-1980
827	13496	GLENCOE AVE	SILVER LN	BEACH BLVD	E	AC	4	1,320	36	47,520	3/18/22	84	18	82	0	Surface Treatment - Slurry Seal	07-29-2020
828	13461	GLENFOX DR	HEATHPOINT LN	WELLBROOK CIR	E	AAC	5	269	36	10,434	2/24/20	80	80	20	0	Overlay - AC Structural	10-01-2012
828	15208	GLENFOX DR	WELLBROOK CIR	LAKEPOINT LN	E	AAC	5	755	36	26,892	2/24/20	84	76	0	24	Overlay - AC Structural	10-01-2012
829	14837	GLENHAVEN LN	TERRY DR	ARNETT DR	E	AC	4	465	36	16,990	4/6/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
830	14880	GLENROY DR	GREENLEAF LN	NEWQUIST LN	E	AC	2	321	36	12,696	3/22/22	92	89	0	11	New Construction	01-01-1980
830	15778	GLENROY DR	NEWQUIST LN	ST ANDREWS LN	E	AC	2	778	36	28,008	3/22/22	92	82	0	18	New Construction	01-01-1980
831	14908	GLENSTONE DR	HILLGATE LN	GRAHAM ST	E	AC	2	166	36	5,976	3/29/22	93	100	0	0	New Construction	01-01-1980
831	15793	GLENSTONE DR	GRAHAM ST	FRANS LN	E	AC	5	423	36	15,228	3/29/22	79	34	62	4	New Construction	01-01-1980
831	15794	GLENSTONE DR	HILLGATE LN	CDS	E	AC	2	786	36	29,646	3/29/22	90	100	0	0	New Construction	01-01-1980
832	13679	GLENWOOD DR	SHINKLE CIR	CHALET LN	E	AAC	1	258	36	10,788	5/7/24	80	100	0	0	Overlay - AC Fabric	10-01-2016
832	15294	GLENWOOD DR	SPRINGDALE ST	SHINKLE CIR	E	AAC	1	899	36	32,364	5/7/24	71	54	45	1	Overlay - AC Fabric	10-01-2016
833	15129	GLORIA DR	TRUDY LN	TORJIAN LN	E	AC	3	1,140	36	41,040	3/23/22	74	23	77	0	New Construction	01-01-1980
834	15833	GLOUCESTER LN	CAPE COD DR	END	E	AAC	7	1,414	36	50,904	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
835	13268	GOLD CIR	FLINT DR	CDS	E	AC	3	168	32	6,626	5/13/24	35	31	69	0	New Construction	01-01-1980
836	13178	GOLDEN GATE LN	MEADOWLARK DR	CALIENTE DR	E	AAC	2	863	36	31,068	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
837	15156	GOLDEN VIEW LN	ROCK DR	FENWICK DR	E	AC	3	726	36	27,636	2/11/20	51	43	57	0	Surface Treatment - Slurry Seal	10-01-2012
838	13656	GOODWIN LN	FORELLE DR	ELLIS AVE	E	AC	4	660	36	23,184	4/8/24	92	68	27	5	Surface Treatment - Slurry Seal	11-28-2019
839	14230	GOSHAWK LN	REILLY DR	KINGFISHER DR	E	AC	9	985	36	35,460	8/24/23	68	73	27	0	New Construction	01-01-1980
841	14139	GOTHIC CIR	BELLSHIRE DR	CDS	E	AAC	7	456	32	16,092	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
842	13259	GOVIN CIR	NORMANDY LN	CDS	E	AC	3	238	32	8,866	3/17/22	27	16	83	1	New Construction	01-01-1980
843	14025	GRACE CIR	DITMAR LN	END	E	AAC	7	345	32	11,040	8/17/23	88	80	20	0	Overlay - AC Structural	03-01-2011
844	13305	GRAHAM PL	HEIL AVE	CDS	E	AC	2	550	36	21,050	4/5/22	48	36	64	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
751	14462	GRAHAM ST	RANCHO RD	HAROLD PL	E	AAC	1	394	18	9,092	5/8/24	76	37	36	27	Overlay - AC Structural	10-01-2016
751	223	GRAHAM ST	SLATER AVE	END	E	AC	0	1,638	30	49,140	5/3/24	83	43	57	0	New Construction - Initial	01-01-1980
751	665	GRAHAM ST	SLATER AVE	END	E	AC	0	1,638	30	49,140	5/3/24	86	39	61	0	New Construction - Initial	01-01-1980
845	15745	GRANADA LN	BLAYLOCK DR	VALENCIA DR	E	AAC	4	530	36	19,330	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
846	15902	GRAND DR	WATERBURY LN	CDS	E	AC	8	1,026	36	38,736	2/18/20	56	24	76	0	Surface Treatment - Slurry Seal	07-15-2021
847	15915	GRANT DR	WEYMOUTH LN	HARDING LN	E	AC	7	942	37	34,854	4/2/24	79	45	55	0	Surface Treatment - Slurry Seal	11-28-2019
848	13559	GRASS CIR	SUNBREEZE DR	END	E	AAC	3	223	36	10,278	2/11/20	94	90	0	10	Overlay - AC Structural	10-01-2012
849	15485	GRAYSTONE LN	VERDANT DR	END	E	AC	8	554	34	20,636	2/23/22	87	44	17	39	Surface Treatment - Slurry Seal	02-13-2023
850	13298	GRAZ CIR	STALLION CIR	CDS	E	AC	2	291	36	11,726	4/5/22	68	32	63	5	New Construction	01-01-1980
851	13907	GRAZIADIO DR	BEACH BLVD	LIBRA CIR	E	AAC	7	512	36	17,412	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
852	14962	GREEN ST	PEARCE ST	BARRACUDA LN	E	AC	2	437	36	15,732	3/22/22	91	95	0	5	New Construction	01-01-1980
852	14983	GREEN ST	HEIL AVE	RUDDER DR	E	AAC	2	589	36	21,204	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
852	15019	GREEN ST	WARNER AVE	KING CIR	E	AAC	2	505	36	18,180	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
852	15116	GREEN ST	BARRACUDA LN	WARNER AVE	E	AC	2	884	36	31,824	3/22/22	88	50	37	13	New Construction	01-01-1980
852	15780	GREEN ST	KING CIR	LOS PATOS AVE	E	AAC	2	821	36	29,556	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
852	15815	GREEN ST	RUDDER DR	PEARCE ST	E	AAC	2	747	36	26,892	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
853	14315	GREENBORO LN	MARTINIQUE DR	SABLE DR	E	AC	9	1,022	36	36,792	8/30/23	95	100	0	0	New Construction	01-01-1980
855	15781	GREENLEAF LN	GLENROY DR	END	E	AC	2	452	36	17,184	3/22/22	92	100	0	0	New Construction	01-01-1980
856	14875	GREENTREE LN	WARNER AVE	VINELAND DR	E	AC	2	672	36	24,192	3/22/22	88	100	0	0	New Construction	01-01-1980
857	13318	GREENVIEW LN	GILDRED CIR	TROPHY DR	E	AC	3	418	36	15,048	2/18/20	83	74	15	11	New Construction	01-01-1980
857	15121	GREENVIEW LN	LANGPORT CIR	TREETOP CIR	E	AC	3	259	36	10,074	2/18/20	94	100	0	0	New Construction	01-01-1980
857	15122	GREENVIEW LN	TREETOP CIR	DONLYN DR	E	AC	3	525	36	18,900	2/18/20	94	83	0	17	New Construction	01-01-1980
857	15123	GREENVIEW LN	DONLYN DR	GILDRED CIR	E	AC	3	780	36	28,080	2/18/20	93	100	0	0	New Construction	01-01-1980
858	14446	GREENWICH DR	WATERBURY LN	BUSHARD ST	E	AC	7	1,070	36	38,520	2/18/20	82	27	71	2	Surface Treatment - Slurry Seal	07-15-2021
859	15365	GREGORY LN	GARFIELD AVE	CDS	E	AC	7	1,164	27	31,428	4/8/24	78	33	67	0	New Construction	01-01-1980
860	14789	GRIFFIN LN	SLATER AVE	BURTON DR	E	AC	4	448	40	17,920	5/8/24	81	59	41	0	Surface Treatment - Slurry Seal	11-01-2019
861	14931	GRIFFITH CIR	PRICE DR	END	E	AC	5	385	36	15,660	3/9/20	83	41	59	0	New Construction	01-01-1980
862	14420	GRIMSBY DR	TALBERT AVE	BELLFIELD LN	E	AC	5	160	36	4,760	3/28/22	30	6	94	0	New Construction	01-01-1980
862	15166	GRIMSBY DR	WHITFORD LN	TALBERT AVE	E	AC	5	850	36	30,312	3/12/20	93	100	0	0	New Construction	01-01-1980
863	14070	GROTON DR	CHESAPEAKE LN	POTOMAC LN	E	AAC	7	270	36	10,720	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
864	14872	GROVE CIR	SUMMERDALE DR	END	E	AAC	5	246	36	10,584	2/18/20	83	72	28	0	Overlay - AC Structural	10-01-2012
865	14814	GUILDERS DR	MARKEN LN	JEFFERSON LN	E	AC	4	780	36	28,330	4/6/22	62	13	87	0	Surface Treatment - Slurry Seal	07-29-2020
866	13638	GULF LN	TALBERT AVE	ALLEY TALBERT AVE	E	AC	4	159	36	5,724	5/13/24	76	41	59	0	Surface Treatment - Slurry Seal	11-28-2019
866	15275	GULF LN	ALLEY TALBERT AVE	CDS	E	AC	4	534	36	19,224	5/13/24	75	47	53	0	Surface Treatment - Slurry Seal	11-28-2019
867	14397	GULSTRAND CIR	STARFIRE LN	CDS	E	AAC	9	355	32	13,160	4/17/24	94	90	0	10	Overlay - AC Structural	05-11-2018
868	13320	GUMM DR	TRUDY LN	END	E	AC	3	672	36	24,192	3/23/22	59	17	82	1	New Construction	01-01-1980
869	13622	GURNEY LN	ATHENA DR	MARCELLENA DR	E	AC	5	400	36	15,540	3/15/22	43	24	76	0	Surface Treatment - Slurry Seal	10-01-2012
870	15471	GUSS DR	HARBOR ISLE LN	CDS	E	AAC	7	550	32	19,950	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
871	13662	HACIENDA DR	DUNES LN	END	E	AAC	1	290	36	11,690	5/8/24	67	57	43	0	Overlay - AC Fabric	10-01-2016
871	14975	HACIENDA DR	DUNES LN	SANDS DR	E	AAC	1	1,230	36	44,280	5/8/24	80	57	41	2	Overlay - AC Structural	10-01-2016
872	14352	HAGERSTOWN CIR	CORNERBROOK DR	CDS	E	AC	8	340	36	13,740	7/13/17	84	77	0	23	Surface Treatment - Slurry Seal	05-11-2018
873	14824	HAGUE LN	AMSTERDAM DR	EDAM CIR	E	AC	4	245	36	8,820	3/31/22	57	17	83	0	Surface Treatment - Slurry Seal	07-29-2020
873	15742	HAGUE LN	EDAM CIR	VALENCIA DR	E	AC	4	765	36	27,540	3/31/22	87	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
874	14377	HAITI DR	BAHAMA LN	KANEHOE LN	E	AAC	9	259	36	10,074	3/26/24	93	100	0	0	Overlay - AC Structural	05-11-2018
875	14012	HALAWA DR	MAUNA LN	PITSCAIM LN	E	AC	8	1,080	36	38,880	3/2/22	91	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
876	14268	HALF LEAGUE DR	BEACHWOOD LN	SNUG HARBOR CIR	E	AC	9	250	36	9,750	5/6/24	74	22	78	0	Surface Treatment - Slurry Seal	05-11-2018
877	13773	HALIFAX DR	EDWARDS ST	HANOVER LN	E	AC	1	535	36	18,972	2/26/20	84	40	37	23	New Construction	01-01-1980
877	15323	HALIFAX DR	VICTORIA LN	FLINTRIDGE LN	E	AC	1	505	36	18,930	2/26/20	93	100	0	0	New Construction	01-01-1980
877	15929	HALIFAX DR	HANOVER LN	VICTORIA LN	E	AC	1	780	36	27,792	3/30/22	95	100	0	0	New Construction	01-01-1980
878	15178	HALLCROFT LN	HAMSHIRE DR	VARSITY DR	E	AC	5	532	36	19,152	3/28/22	70	38	60	2	New Construction	01-01-1980
879	14414	HALLPORT LN	VARSITY DR	NEWBURY DR	E	AAC	5	155	36	5,292	2/24/20	90	100	0	0	Overlay - AC Structural	10-01-2012
880	13928	HAMDEN LN	HARDING LN	NEWHAVEN LN	E	AC	7	256	36	8,928	4/2/24	88	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
880	15371	HAMDEN LN	GARFIELD AVE	NEWHAVEN LN	E	AC	7	1,434	36	51,624	4/2/24	85	87	0	13	Surface Treatment - Slurry Seal	11-28-2019
881	15287	HAMMON LN	HAROLD PL	SANDS DR	E	AC	1	690	36	24,840	2/10/20	88	53	22	25	New Construction	01-01-1980
881	15288	HAMMON LN	SANDS DR	SPA DR	E	AC	1	772	36	27,792	4/8/22	93	91	0	9	New Construction	01-01-1980
882	15982	HAMSHIRE DR	SPRINGDALE ST	HALLCROFT LN	E	AC	5	1,191	36	42,876	3/28/22	66	22	59	19	New Construction	01-01-1980
883	14389	HANAKAI LN	NEOLANI DR	MALAHINE DR	E	AAC	9	752	36	27,822	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
884	13777	HANOVER LN	ALEXANDRIA DR	END	E	AC	1	410	36	16,260	2/26/20	95	100	0	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
884	13781	HANOVER LN	ALEXANDRIA DR	OXFORD DR	E	AC	1	260	36	9,360	2/26/20	95	100	0	0	New Construction	01-01-1980
884	13782	HANOVER LN	OXFORD DR	PARIS CIR	E	AC	1	260	36	9,360	2/26/20	95	100	0	0	New Construction	01-01-1980
884	13783	HANOVER LN	HALIFAX DR	MELBOURNE DR	E	AC	1	260	36	9,072	2/26/20	95	100	0	0	New Construction	01-01-1980
884	13784	HANOVER LN	MELBOURNE DR	MC FADDEN AVE	E	AC	1	512	36	18,144	2/26/20	93	100	0	0	New Construction	01-01-1980
884	15317	HANOVER LN	PARIS CIR	HALIFAX DR	E	AC	1	780	36	27,792	2/26/20	92	94	0	6	New Construction	01-01-1980
2301	60780	HANSEN LN	PATCH DR	THOMPSON DR	E	AC	8	531	36	19,116	3/2/22	95	100	0	0	New Construction - AC	01-01-2015
885	14987	HAPPY DR	JOLLY LN	JOYFUL LN	E	AC	4	509	36	18,324	5/13/24	83	85	15	0	Surface Treatment - Slurry Seal	11-28-2019
886	15830	HARBOR BLUFFS CIR	CDS	CDS	E	AC	2	514	36	20,794	3/22/22	90	100	0	0	New Construction	01-01-1980
888	14155	HARBOR ISLE LN	BROWNING DR	STRATHCONA CIR	E	AC	7	583	36	22,488	2/11/20	81	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
888	15470	HARBOR ISLE LN	ADAMS AVE	GUSS DR	E	AC	7	1,151	36	42,186	2/11/20	40	33	57	10	Surface Treatment - Slurry Seal	07-15-2021
889	13892	HARBOR KEY CIR	EVENING HILL DR	CDS	E	AAC	5	195	32	8,240	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
890	15605	HARBORBREEZE LN	SHOEBREEZE DR	SUMMERWIND LN	E	AAC	9	770	36	29,720	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
891	14544	HARBOUR LN	MORNING STAR DR	END	E	AC	2	761	36	27,396	4/7/22	80	83	14	3	New Construction	01-01-1980
892	14271	HARCOURT CIR	BROOKSIDE LN	CDS	E	AAC	9	252	32	9,864	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
893	13929	HARDING LN	HAMDEN LN	GRANT DR	E	AAC	7	314	37	11,618	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
893	15967	HARDING LN	GRANT DR	YORKTOWN AVE	E	AAC	7	1,076	37	39,812	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
894	13682	HARDWICK CIR	EDGEVIEW LN	END	E	AAC	1	530	36	20,830	5/7/24	70	75	25	0	Overlay - AC Structural	10-01-2016
895	13216	HARKNESS CIR	TRUMBULL DR	CDS	E	AC	2	529	36	20,544	4/7/22	84	55	43	2	New Construction	01-01-1980
896	13693	HARMONY CIR	SUNNYCREST LN	END	E	AAC	1	352	32	13,064	5/7/24	79	100	0	0	Overlay - AC Fabric	10-01-2016
897	14463	HAROLD PL	SPA DR	GRAHAM ST	E	AAC	1	563	36	20,268	5/8/24	89	100	0	0	Overlay - AC Fabric	10-01-2016
897	14464	HAROLD PL	GRAHAM ST	HAMMON LN	E	AC	1	1,322	36	47,592	2/10/20	92	100	0	0	New Construction	01-01-1980
898	14110	HARPOON CIR	SEAPORT DR	END	E	AAC	9	238	32	7,616	8/21/23	72	76	24	0	Overlay - AC Structural	03-01-2011
899	50500	HARRIET WIEDER REG	GARFIELD AVE	OVERLOOK DR	E	AC	5	2,193	24	52,632	5/7/24	95	100	0	0	Surface Treatment - Slurry Seal	04-01-2017
900	14780	HARRIMAN ST	GOTHARD ST	CDS	E	AC	4	331	36	11,916	5/9/24	89	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
4030	50200	HART CIR	BRUSH DR	CDS	E	AAC	4	425	35	16,120	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
902	13385	HARTFIELD CIR	BERSHIRE DR	END	E	AC	5	155	36	7,080	3/12/20	91	71	0	29	New Construction	01-01-1980
903	14634	HARTFORD AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	330	37	12,210	8/14/23	83	51	26	23	New Construction	01-01-1980
903	14636	HARTFORD AVE	CALIFORNIA ST	DELAWARE ST	E	AC	9	330	37	12,210	8/15/23	68	55	25	20	New Construction	01-01-1980
903	15871	HARTFORD AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	37	17,945	8/14/23	68	35	65	0	New Construction	01-01-1980
903	15877	HARTFORD AVE	DELAWARE ST	GENEVA AVE	E	AC	9	626	37	23,162	8/15/23	91	69	0	31	New Construction	01-01-1980
904	13637	HARTLUND ST	TALBERT AVE	ALLEY TALBERT AVE	E	AAC	4	175	34	5,814	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
904	13642	HARTLUND ST	LE CONTE DR	CDS	E	AC	4	475	34	17,950	4/8/24	59	17	71	12	Surface Treatment - Slurry Seal	11-28-2019
904	15274	HARTLUND ST	ALLEY TALBERT AVE	MAGIC CIR	E	AAC	4	437	34	14,858	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
904	15276	HARTLUND ST	MAGIC CIR	LE CONTE DR	E	AAC	4	832	34	28,288	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
905	14073	HARTSDALE CIR	INNSBRUCK DR	END	E	AC	8	295	32	10,940	3/9/22	93	71	0	29	Surface Treatment - Slurry Seal	02-08-2023
906	13758	HARVARD CIR	COLUMBIA LN	END	E	AC	1	543	36	21,048	5/6/20	73	34	66	0	New Construction	01-01-1980
907	15613	HARWICH LN	GATESHEAD DR	WALLINGFORD LN	E	AAC	9	816	36	30,126	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
908	13540	HASTINGS CIR	ROSS LN	CDS	E	AAC	4	244	32	9,058	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
909	15549	HATTERAS DR	SEAFORTH LN	BRETON LN	E	AC	9	533	36	19,938	8/30/23	57	32	63	5	New Construction	01-01-1980
911	14078	HAVENHURST LN	WOODLAWN DR	WARBURTON DR	E	AC	8	293	36	10,548	3/9/22	91	80	0	20	Surface Treatment - Slurry Seal	02-08-2023
912	13166	HAWAII LN	KAUI LN	SCENARIO DR	E	AC	2	695	36	25,520	3/24/22	84	21	69	10	New Construction	01-01-1980
913	14121	HAXTON CIR	VINTAGE LN	CDS	E	AAC	7	435	32	15,420	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
914	13921	HAYES CIR	HARDING LN	CDS	E	AAC	7	520	37	22,860	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
915	15893	HAZELBROOK DR	RAMONA LN	BUSHARD ST	E	AC	7	1,122	36	40,392	2/11/20	53	37	62	1	Surface Treatment - Slurry Seal	07-15-2021
916	13970	HEATHERTON CIR	RANDI LN	CDS	E	AAC	8	400	32	14,600	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
917	13458	HEATHPOINT LN	NEWBURY DR	GLENFOX DR	E	AC	5	256	36	9,966	2/24/20	94	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
825	13482	HEIL AVE	CDS	SABOT LN	E	AAC	3	654	26	17,004	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
825	13483	HEIL AVE	SABOT LN	CDS	E	AAC	3	355	26	9,126	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
825	14539	HEIL AVE	TRUDY LN	TORJIAN LN	E	AC	3	1,140	36	41,040	2/18/20	86	42	0	58	New Construction - Initial	01-01-1980
918	14042	HELENA CIR	ANCHORAGE DR	END	E	AAC	7	341	36	13,526	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
919	14944	HELENBROOK LN	WINDCROFT DR	LARKMONT DR	E	AC	5	464	36	16,704	3/12/20	93	55	0	45	New Construction	01-01-1980
920	14938	HELMSIDE DR	AMBERTON LN	CRESTMOOR LN	E	AC	5	292	36	11,512	3/12/20	94	100	0	0	New Construction	01-01-1980
921	15028	HENDRICKSEN DR	SCHYER LN	DAVIS LN	E	AAC	2	1,025	36	38,400	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
922	15466	HENTON DR	BRENTSTONE LN	CDS	E	AC	7	547	32	17,504	2/25/20	89	30	70	0	Surface Treatment - Slurry Seal	07-15-2021
923	15767	HERBERT LN	ROGERS DR	RENOIR CIR	E	AC	5	500	36	18,000	3/22/22	56	40	60	0	New Construction	01-01-1980
924	14298	HERCULES DR	BROOKHURST ST	SUBURBUA LN	E	AAC	8	185	36	6,660	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
925	14843	HERITAGE LN	TERYY DR	LANCASTER DR	E	AC	4	465	36	16,990	4/6/22	85	45	50	5	Surface Treatment - Slurry Seal	07-29-2020
926	14878	HERMANSON CIR	LYNN ST	CDS	E	AAC	2	407	36	16,152	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
927	13519	HERMIT CIR	VANTAGE DR	CDS	E	AAC	4	131	32	5,692	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
928	14235	HERON CIR	SANDPIPER LN	END	E	AC	9	360	36	12,960	8/24/23	85	46	51	3	New Construction	01-01-1980
929	15705	HESS CIR	UTICA AVE	END	E	AAC	6	307	34	12,845	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
930	13971	HICKORY LN	HYDE PARK DR	BRABHAM DR	E	AC	8	1,286	36	47,296	2/19/20	69	29	53	18	Surface Treatment - Slurry Seal	07-15-2021
930	14429	HICKORY LN	BRABHAM DR	ANNIK DR	E	AC	8	260	36	10,110	2/19/20	79	69	31	0	Surface Treatment - Slurry Seal	07-15-2021
931	14858	HIGGINS CIR	BRUSH DR	CDS	E	AAC	4	424	32	14,818	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
932	15180	HIGHLAND LN	BRAEMAR DR	VARSITY DR	E	AC	5	280	36	10,080	4/4/22	100	67	33	0	New Construction	01-01-1980
933	14489	HIGHTIDE DR	OCEANVIEW LN	SEACREST LN	E	AAC	9	258	36	10,288	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
933	14491	HIGHTIDE DR	SUMMER CIR	VACATION LN	E	AAC	9	254	36	10,144	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
933	15600	HIGHTIDE DR	SEACREST LN	SUMMER CIR	E	AAC	9	511	36	18,396	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
934	14475	HILARIA CIR	LANDFALL DR.	CDS	E	AAC	9	472	36	18,492	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
935	14638	HILL ST	ALLEY GENEVA AVE	GENEVA AVE	E	AC	9	160	33	5,280	8/24/23	93	100	0	0	New Construction	01-01-1980
935	14639	HILL ST	FRANKFORT AVE	ALLEY GENEVA AVE	E	AC	9	160	33	5,280	8/24/23	87	100	0	0	New Construction	01-01-1980
936	14709	HILLCREST CIR	OCEANHILL DR	CDS	E	AC	6	248	32	9,436	8/15/23	51	14	86	0	New Construction	01-01-1980
937	14907	HILLGATE LN	CDS	GLENSTONE DR	E	AC	2	103	36	5,058	3/29/22	82	100	0	0	New Construction	01-01-1980
937	14910	HILLGATE LN	GLENSTONE DR	CDS	E	AC	2	197	36	8,442	3/29/22	90	100	0	0	New Construction	01-01-1980
938	14612	HILLHEAD CIR	LOCHLEA LN	CDS	E	AC	9	576	33	21,708	8/30/23	54	38	50	12	New Construction	01-01-1980
939	13975	HILLSBORO CIR	LITCHFIELD DR	CDS	E	AC	8	510	36	20,160	2/18/20	61	61	39	0	Surface Treatment - Slurry Seal	07-15-2021
940	14899	HILLSIDE CIR	LOS PATOS AVE	CDS	E	AC	2	80	25	2,000	3/22/22	95	100	0	0	New Construction	01-01-1980
941	13247	HILLVIEW CIR	FERNHILL CIR	END	E	AC	3	179	34	7,886	2/18/20	94	72	0	28	New Construction	01-01-1980
942	13137	HILO CIR	WAIKIKI LN	CDS	E	AC	2	535	36	19,260	3/24/22	83	100	0	0	New Construction	01-01-1980
943	13265	HILTON LN	BELLINGER DR	FLINT DR	E	AC	3	352	36	12,672	3/17/22	52	38	62	0	New Construction	01-01-1980
944	15505	HINGHAM DR	LANTERN LN	MONTAUK CIR	E	AC	9	370	36	14,070	5/10/24	59	17	78	5	Surface Treatment - Slurry Seal	05-11-2018
945	13287	HOBART LN	DEFIANCE DR	BRIDGEWATER DR	E	AC	3	254	36	10,144	3/16/22	76	100	0	0	New Construction	01-01-1980
946	13768	HOLIDAY LN	MEDFORD DR	MC FADDEN AVE	E	AC	1	179	36	6,444	3/30/22	95	100	0	0	New Construction	01-01-1980
947	14816	HOLLAND DR	WAAL CIR	JEFFERSON LN	E	AC	4	260	36	9,360	4/6/22	87	61	39	0	Surface Treatment - Slurry Seal	07-29-2020
947	14817	HOLLAND DR	MARKEN LN	END	E	AC	4	96	36	3,456	4/6/22	77	100	0	0	New Construction	01-01-1980
947	15016	HOLLAND DR	BEACH BLVD	CDS	E	AC	4	625	36	23,750	4/6/22	85	57	43	0	Surface Treatment - Slurry Seal	07-29-2020
947	15737	HOLLAND DR	MARKEN LN	WAAL CIR	E	AC	4	520	36	18,720	4/6/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
948	14754	HOLLY ST	CLAY AVE	CDS	E	AC	7	450	34	15,300	3/12/24	93	77	0	23	New Construction	01-01-1980
948	15713	HOLLY ST	GARFIELD AVE	MAIN ST	E	AC	7	580	36	20,880	3/12/24	92	85	0	15	Surface Treatment - Slurry Seal	11-28-2019
949	14404	HOLLYWOOD LN	MEADOWLARK DR	CALIENTE DR	E	AC	2	863	36	31,818	3/23/22	94	100	0	0	New Construction	01-01-1980
950	13493	HOLT AVE	PARKSIDE LN	BEACH BLVD	E	AC	4	660	36	23,760	4/1/22	91	67	0	33	Surface Treatment - Slurry Seal	07-29-2020
951	15910	HOMESTEAD LN	LUSS DR	END	E	AAC	7	732	32	24,674	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
952	14062	HONEYWOOD LN	YORKTOWN AVE	VERONICA DR	E	AC	7	170	36	6,120	2/18/20	81	58	0	42	Surface Treatment - Slurry Seal	07-15-2021
953	13165	HONOLULU LN	KAUI LN	SCENARIO DR	E	AC	2	693	36	24,948	3/24/22	78	34	66	0	New Construction	01-01-1980
954	13851	HOOKER DR	WILLETT LN	STANDISH LN	E	AC	1	780	36	28,080	5/8/24	60	50	42	8	New Construction	01-01-1980
955	13958	HOPEBAY LN	CLIFFSIDE DR	SAILPORT DR	E	AAC	7	250	36	9,000	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
956	14259	HOPETOWN LN	SPENCER CIR	CARROLLTOWN DR	E	AC	9	300	36	10,800	5/9/24	74	39	60	1	New Construction	01-01-1980
956	15503	HOPETOWN LN	ELLSWORTH DR	SPENCER CIR	E	AC	9	602	36	21,672	5/9/24	83	62	37	1	Surface Treatment - Slurry Seal	05-11-2018
957	15522	HORIZON LN	SPINNAKER DR	SILVER STRAND DR	E	AAC	8	500	36	18,000	3/6/24	89	57	0	43	Overlay - AC Structural	05-11-2018
958	13295	HOSKINS ST	PEARCE ST	MILO ST	E	AAC	2	660	36	23,760	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
958	14860	HOSKINS ST	MILO ST	WARNER AVE	E	AAC	2	660	36	23,760	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
959	14197	HOT SPRINGS DR	EVERGLADES LN	RUNNING SPRINGS LN	E	AC	8	1,006	36	36,716	3/1/22	82	32	43	25	Surface Treatment - Slurry Seal	02-13-2023
960	13534	HOWARD CIR	LUCIA LN	CDS	E	AAC	4	420	32	14,690	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
961	13275	HOWLAND LN	LENNOX DR	EDGEMONT DR	E	AC	3	1,058	36	38,088	3/17/22	85	100	0	0	New Construction	01-01-1980
962	14990	HOYT CIR	LINDENWOOD DR	CONSTANTINE DR	E	AAC	7	330	36	11,880	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
963	14400	HUDSON DR	IMPALA LN	STARFIRE LN	E	AC	9	558	36	21,588	4/24/24	72	17	83	0	New Construction	01-01-1980
964	13857	HUGHES DR	CARRIE LN	EDWARDS ST	E	AC	1	531	36	19,116	5/8/24	80	43	57	0	New Construction	01-01-1980
965	14500	HULA CIR	CHRISTINE DR	CDS	E	AC	9	220	36	10,420	4/17/24	88	64	36	0	New Construction	01-01-1980
966	13170	HUMBOLDT DR	ARDSLEY CIR	WAYFARER LN	E	AC	2	445	36	16,020	4/7/22	90	100	0	0	New Construction	01-01-1980
966	14958	HUMBOLDT DR	WAYFARER LN	SAYBROOK LN	E	AC	2	981	36	29,816	4/7/22	77	64	20	16	New Construction	01-01-1980
966	15050	HUMBOLDT DR	BARNSTABLE CIR	ARDSLEY CIR	E	AC	2	397	36	14,292	4/7/22	76	46	54	0	New Construction	01-01-1980
966	15054	HUMBOLDT DR	WANDERER LN	BARNSTABLE CIR	E	AC	2	1,115	36	40,140	4/7/22	88	91	0	9	New Construction	01-01-1980
967	13817	HUMMINGBIRD LN	DOVEWOOD DR	ROBINWOOD DR	E	AC	1	1,040	36	37,440	3/21/22	84	95	0	5	New Construction	01-01-1980
967	15327	HUMMINGBIRD LN	ROBINWOOD DR	SKYLARK DR	E	AC	1	520	36	18,970	3/21/22	84	100	0	0	New Construction	01-01-1980
968	15958	HUNTER LN	ERSKINE DR	SCOTSTOUN DR	E	AC	8	1,288	36	46,368	3/19/24	92	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
969	14609	HUNTINGTON ST	PCH	PACIFIC VIEW	E	AAC	9	450	50	21,445	8/24/23	95	100	0	0	Overlay - AC Structural	07-01-2010

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
969	14645	HUNTINGTON ST	GENEVA AVE	HARTFORD AVE	E	AC	9	331	38	12,578	8/14/23	70	100	0	0	New Construction	01-01-1980
969	14646	HUNTINGTON ST	FRANKFORT AVE	GENEVA AVE	E	AC	9	330	40	13,200	8/14/23	69	83	0	17	New Construction	01-01-1980
969	14647	HUNTINGTON ST	CHICAGO AVE	DETROIT AVE	E	AC	9	330	37	12,210	8/14/23	51	7	92	1	New Construction	01-01-1980
969	14648	HUNTINGTON ST	BALTIMORE AVE	CHICAGO AVE	E	AC	9	329	37	12,173	8/14/23	44	10	79	11	New Construction	01-01-1980
969	14649	HUNTINGTON ST	ATLANTA AVE	BALTIMORE AVE	E	AC	9	335	37	12,395	8/24/23	50	14	86	0	New Construction	01-01-1980
969	14656	HUNTINGTON ST	NASHVILLE AVE	OSWEGO AVE	E	AC	6	330	36	11,592	8/14/23	86	37	25	38	New Construction	01-01-1980
969	14657	HUNTINGTON ST	MEMPHIS AVE	NASHVILLE AVE	E	AC	6	330	37	12,210	8/14/23	77	24	68	8	New Construction	01-01-1980
969	14658	HUNTINGTON ST	KNOXVILLE AVE	LINCOLN AVE	E	AC	6	330	40	13,200	8/14/23	86	56	39	5	New Construction	01-01-1980
969	14659	HUNTINGTON ST	LINCOLN AVE	MEMPHIS AVE	E	AC	6	330	37	11,877	8/14/23	52	13	81	6	New Construction	01-01-1980
969	14660	HUNTINGTON ST	JOILET AVE	KNOXVILLE AVE	E	AC	6	330	40	13,200	8/14/23	67	70	28	2	Surface Treatment - Slurry Seal	03-01-2011
969	14661	HUNTINGTON ST	INDIANAPOLIS AVE	JOILET AVE	E	AC	6	330	40	13,200	8/14/23	53	38	62	0	New Construction	01-01-1980
969	14662	HUNTINGTON ST	HARTFORD AVE	INDIANAPOLIS AVE	E	AC	9	329	36	11,844	8/14/23	62	49	51	0	New Construction	01-01-1980
969	14711	HUNTINGTON ST	SPRINGFIELD AVE	UTICA AVE	E	AC	6	640	36	22,490	6/29/21	81	27	42	31	Surface Treatment - Slurry Seal	07-27-2022
969	14712	HUNTINGTON ST	ADAMS AVE	SPRINGFIELD AVE	E	AAC	6	615	36	21,526	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
969	14736	HUNTINGTON ST	GARFIELD AVE	CLAY AVE	E	AAC	7	1,320	36	47,520	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	14737	HUNTINGTON ST	YORKTOWN AVE	SEVENTEENTH ST	E	AAC	7	317	36	11,412	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	14768	HUNTINGTON ST	TAYLOR DR	ONTARIO DR	E	AAC	4	260	36	9,360	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	14769	HUNTINGTON ST	ONTARIO DR	QUEBEC CIR	E	AAC	4	267	36	9,612	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	14997	HUNTINGTON ST	PACIFIC VIEW	ATLANTA AVE	E	AAC	9	1,249	37	46,213	8/24/23	92	57	0	43	Overlay - AC Structural	07-01-2010
969	15002	HUNTINGTON ST	MONTE CRISTO LN	GARFIELD AVE	E	AC	4	472	36	16,992	4/9/24	90	76	24	0	Surface Treatment - Slurry Seal	11-28-2019
969	15006	HUNTINGTON ST	MAIN ST	CDS	E	AAC	4	593	42	26,156	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	15672	HUNTINGTON ST	ELMIRA AVE	FRANKFORT AVE	E	AC	9	329	40	13,160	8/14/23	60	51	35	14	New Construction	01-01-1980
969	15673	HUNTINGTON ST	DETROIT AVE	ELMIRA AVE	E	AC	9	330	38	12,540	8/14/23	64	53	33	14	New Construction	01-01-1980
969	15682	HUNTINGTON ST	OSWEGO AVE	ADAMS AVE	E	AAC	6	660	36	23,760	8/14/23	86	68	32	0	Overlay - AC Structural	03-01-2011
969	15693	HUNTINGTON ST	UTICA AVE	YORKTOWN AVE	E	AAC	6	1,153	36	41,508	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
969	15709	HUNTINGTON ST	SEVENTEENTH ST	CLAY AVE	E	AAC	7	1,105	36	39,780	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	15718	HUNTINGTON ST	QUEBEC CIR	ALBERTA DR	E	AAC	4	258	36	9,288	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	15719	HUNTINGTON ST	ALBERTA DR	ELLIS AVE	E	AAC	4	537	36	19,332	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
970	14977	HUNTINGTON VILLAGE	MC FADDEN AVE	CENTER AVE	E	AC	4	1,711	44	75,284	4/1/22	42	30	65	5	New Construction	01-01-1980
971	15405	HURSTWELL DR	BOWMAN LN	DITMAR LN	E	AAC	7	566	36	20,376	8/17/23	88	80	0	20	Overlay - AC Structural	03-01-2011
972	14447	HYANNIS PORT DR	WATERBURY LN	BUSHARD ST	E	AC	7	1,065	36	38,340	2/18/20	77	44	56	0	Surface Treatment - Slurry Seal	07-15-2021
973	15385	HYDE PARK DR	MAGNOLIA ST	HICKORY LN	E	AAC	8	1,162	36	42,832	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
974	14396	IMPALA LN	MOKIHANA DR	HUDSON DR	E	AC	9	260	36	10,110	4/24/24	83	25	75	0	New Construction	01-01-1980
974	15572	IMPALA LN	NEOLANI DR	MOKIHANA DR	E	AC	9	1,013	36	37,218	4/24/24	82	52	48	0	Surface Treatment - Slurry Seal	05-11-2018
975	14127	IMPERIAL COVE LN	VISCOUNT DR	MASTER DR	E	AC	7	904	36	33,294	2/12/20	84	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
976	15445	INDEPENDENCE LN	YORKTOWN AVE	SHANGRI LA DR	E	AAC	8	442	36	15,912	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
977	14361	INDIAN WELLS CIR	LEMONTREE LN	CDS	E	AC	8	499	36	19,464	7/13/17	58	51	45	4	Surface Treatment - Slurry Seal	05-11-2018
978	14346	INDIGO CIR	ORIENT DR	CDS	E	AC	8	451	36	17,736	4/1/24	85	100	0	0	New Construction	01-01-1980
979	13821	INDUSTRIAL DR	CHEMICAL LN	GRAHAM ST	E	AAC	1	1,170	40	46,800	5/3/24	81	55	43	2	Overlay - AC Fabric	10-01-2016
980	13820	INDUSTRY LN	MC FADDEN AVE	RESEARCH DR	E	AAC	1	1,116	40	44,640	5/3/24	81	54	42	4	Overlay - AC Fabric	10-01-2016
981	14344	INFERNO LN	ORIENT DR	VOLANTE DR	E	AC	8	512	36	18,932	4/1/24	80	30	42	28	Surface Treatment - Slurry Seal	05-11-2018
982	14422	INLET DR	LAKEPOINT LN	EDWARDS ST	E	AAC	5	175	36	6,012	2/24/20	92	100	0	0	Overlay - AC Structural	10-01-2012
982	14423	INLET DR	EDWARDS ST	CLEARWATER CIR	E	AC	5	155	36	5,580	2/24/20	68	27	73	0	Surface Treatment - Slurry Seal	10-01-2012
982	15582	INLET DR	CLEARWATER CIR	LAKEVIEW DR	E	AC	5	583	36	20,988	2/24/20	85	59	41	0	Surface Treatment - Slurry Seal	10-01-2012
983	15900	INNSBRUCK DR	BUSHARD ST FRONTAGE	TIBBETT LN	E	AC	8	1,167	36	42,512	3/9/22	83	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
984	15896	INTERIOR LN	OLYMPIC DR	YELLOWSTONE DR	E	AAC	8	1,129	36	41,144	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
985	13209	INTREPID LN	REMORA DR	BROADWAY	E	AAC	2	957	32	30,624	5/13/24	94	75	0	25	Overlay - AC Fabric	12-01-2017
986	14590	INVERNESS LN	ARGYLE DR	ABERDEEN DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
986	14591	INVERNESS LN	DEVONSHIRE DR	CORNWALL DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
987	14393	IOLANI CIR	ZAMORA LN	CDS	E	AC	9	235	32	9,020	7/12/17	92	100	0	0	New Construction	01-01-1980
988	14285	IONA LN	NETHERWAY DR	ERSKINE DR	E	AC	8	237	36	8,532	3/19/24	91	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
989	15753	IRBY LN	LAMBERT DR	ARNETT DR	E	AAC	4	727	36	26,172	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
989	15754	IRBY LN	HEIL AVE	BRUSH DR	E	AAC	4	526	36	18,936	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
989	15755	IRBY LN	BRUSH DR	LAMBERT DR	E	AAC	4	524	36	18,864	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
990	13369	IRELAND LN	SHENLYN DR.	CORY DR	E	AAC	3	259	36	10,074	2/12/20	93	100	0	0	Overlay - AC Structural	10-01-2012
991	13441	IRONGATE CIR	NEWMOON LN	END	E	AAC	5	476	36	18,636	3/11/20	88	100	0	0	Overlay - AC Structural	10-01-2012
992	13048	ISLAND BAY LN	PALM AVE	MORNING TIDE DR	E	AC	5	285	36	9,400	6/30/21	91	62	0	38	Surface Treatment - Slurry Seal	07-27-2022
992	13078	ISLAND BAY LN	MORNING TIDE DR	CDS	E	AC	5	943	32	38,740	6/30/21	93	100	0	0	Surface Treatment - Slurry Seal	07-27-2022

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
993	13614	ISLAND CIR	VISTA DR	CDS	E	AC	2	243	36	13,270	4/7/22	84	45	55	0	New Construction	01-01-1980
994	14505	ISLANDER LN	PLAYA DR	CHRISTINE DR	E	AAC	9	695	36	26,020	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
995	15418	ISTHMUS LN	CUTTER DR	ADAMS AVE	E	AAC	7	1,113	36	40,568	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
996	14149	IVES LN	CHARFORD DR	INDIANAPOLIS AVE	E	AAC	7	170	36	6,120	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
997	13683	IVORY CIR	EDGEVIEW LN	END	E	AC	1	530	36	20,830	2/10/20	85	39	61	0	New Construction	01-01-1980
998	13444	IVORYCREST LN	VARSITY DR	JASONWOOD DR	E	AAC	5	166	36	5,976	3/11/20	90	100	0	0	Overlay - AC Structural	10-01-2012
998	15200	IVORYCREST LN	JASONWOOD DR	NORBROOK DR	E	AAC	5	828	36	29,808	3/11/20	77	35	0	65	Overlay - AC Structural	10-01-2012
999	14032	IVY CIR	FLAGSTONELN	END	E	AC	7	466	34	15,844	8/21/23	49	16	57	27	Surface Treatment - Slurry Seal	03-01-2011
1000	14807	JACQUELYN LN	ALLEY BARTON DR	ALLEY SLATER AVE	E	AC	4	500	36	19,000	4/6/22	87	89	0	11	New Construction	01-01-1980
1000	14808	JACQUELYN LN	ALLEY SLATER AVE	SLATER AVE	E	AC	4	150	36	5,400	4/6/22	93	100	0	0	New Construction	01-01-1980
1000	14809	JACQUELYN LN	SPEER AVE	LIBERTY AVE	E	AC	4	330	36	11,880	5/13/24	90	38	1	61	Surface Treatment - Slurry Seal	11-01-2019
1001	13684	JADE CIR	EDGEVIEW LN	END	E	AC	1	530	36	20,830	2/10/20	94	91	0	9	New Construction	01-01-1980
1002	14996	JALM DR	NEWLAND ST	CDS	E	AC	4	536	36	21,296	5/13/24	81	87	13	0	Surface Treatment - Slurry Seal	11-28-2019
1003	14868	JAMES CIR	LYNN ST	ALLEY JAMES CIR	E	AC	2	189	36	9,304	3/22/22	81	38	62	0	New Construction	01-01-1980
1004	14785	JAMESTOWN LN	WOODWIND DR	WINDFIELD DR	E	AC	4	766	40	30,640	5/13/24	79	47	40	13	Surface Treatment - Slurry Seal	11-01-2019
1005	14751	JANA CIR	FLORIDA ST	CDS	E	AAC	7	190	33	6,270	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1006	13424	JARDINES DR	AVILLA LN	END	E	AAC	5	528	36	21,008	2/25/20	87	88	0	12	Overlay - AC Structural	10-01-2012
1006	15183	JARDINES DR	SAN ROGUE LN	AVILLA LN	E	AAC	5	1,108	36	40,388	2/25/20	88	85	0	15	Overlay - AC Structural	10-01-2012
1007	15196	JASONWOOD DR	IVORYCREST LN	END	E	AAC	5	836	36	31,896	3/11/20	82	56	40	4	Overlay - AC Structural	10-01-2012
1008	14731	JAY CIR	FLORIDA ST	CDS	E	AAC	6	210	32	8,785	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1009	15127	JEAN DR	BUSBY LN	TRUDY LN	E	AC	3	520	36	18,552	3/23/22	78	35	65	0	New Construction	01-01-1980
1010	14800	JEFFERSON LN	SLATER AVE	MICHAEL DR	E	AAC	4	530	36	18,080	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1010	14801	JEFFERSON LN	MICHAEL DR	DANY DR	E	AC	4	260	36	9,072	5/13/24	81	61	39	0	Surface Treatment - Slurry Seal	11-28-2019
1010	15730	JEFFERSON LN	GUILDER DR	SLATER AVE	E	AAC	4	920	36	33,370	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1011	14838	JEFFREY CIR	TERRY DR	CDS	E	AAC	4	197	32	7,554	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1012	14973	JENNY DR	LOCHLEA LN	NEWLAND ST	E	AC	9	660	36	23,760	8/30/23	79	90	10	0	New Construction	01-01-1980
1013	13370	JEPSEN CIR	CORY DR	END	E	AAC	3	449	36	18,164	2/12/20	89	100	0	0	Overlay - AC Structural	10-01-2012
1014	13266	JEREVA CIR	FLINT DR	CDS	E	AC	3	99	32	4,418	3/17/22	50	44	56	0	New Construction	01-01-1980
1015	13978	JERRILYN LN	GRAND DR	KREPP DR	E	AC	8	1,020	36	36,720	2/18/20	70	42	58	0	Surface Treatment - Slurry Seal	07-15-2021
1016	13260	JERSEY CIR	NORMANDY LN	CDS	E	AC	3	238	32	8,866	3/17/22	95	100	0	0	New Construction	01-01-1980
1018	14152	JETT DR	SUNSHINE DR	JOHNSON LN	E	AC	7	255	36	9,180	2/11/20	76	69	22	9	Surface Treatment - Slurry Seal	07-15-2021
1019	13292	JIB CIR	RUDDER DR	CDS	E	AC	2	499	36	21,240	4/7/22	80	43	55	2	New Construction	01-01-1980
1020	14202	JILL DR	VIVA CIR	LAWSON LN	E	AAC	8	264	34	8,976	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1021	15892	JOHSON LN	GUSS DR	BROWNING DR	E	AC	7	750	36	27,000	2/11/20	63	57	43	0	Surface Treatment - Slurry Seal	07-15-2021
1022	13983	JOICE LN	KAREN CIR	GRAND DR	E	AC	8	254	36	9,894	2/18/20	89	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1022	15391	JOICE LN	RONNEY DR	KAREN CIR	E	AC	8	510	36	19,110	2/18/20	83	59	39	2	Surface Treatment - Slurry Seal	07-15-2021
1023	14704	JOLIET AVE	GEORGIA ST	BEACH BLVD	E	AC	6	315	37	11,655	8/15/23	82	79	0	21	New Construction	01-01-1980
1023	15873	JOLIET AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	485	37	17,723	8/15/23	63	58	35	7	Overlay - AC Structural	03-01-2011
1023	15874	JOLIET AVE	HUNTINGTON ST	CALIFORNIA ST	E	AAC	6	330	37	12,210	8/15/23	67	67	26	7	Overlay - AC Structural	03-01-2011
1023	15875	JOLIET AVE	CALIFORNIA ST	DELAWARE ST	E	AC	6	329	37	12,173	8/15/23	90	100	0	0	New Construction	01-01-1980
1023	15876	JOLIET AVE	DELAWARE ST	ENGLAND ST	E	AC	6	331	37	12,247	8/15/23	43	19	81	0	New Construction	01-01-1980
1023	15881	JOLIET AVE	ENGLAND ST	FLORIDA ST	E	AC	6	330	37	12,210	8/15/23	65	37	36	27	New Construction	01-01-1980
1023	15882	JOLIET AVE	FLORIDA ST	GEORGIA ST	E	AC	6	345	37	12,765	8/15/23	29	10	89	1	Surface Treatment - Slurry Seal	03-01-2011
2290	17025	JOLLY LN	HAPPY DR	TALBERT AVE	E	AC	4	466	36	18,176	5/13/24	84	71	25	4	Surface Treatment - Slurry Seal	11-28-2019
1024	14211	JON DAY DR	BROOKHURST ST	CRAIMER LN	E	AC	8	1,280	36	46,080	2/28/22	92	51	0	49	Surface Treatment - Slurry Seal	02-14-2023
1024	14216	JON DAY DR	CRAIMER LN	RAVENWOOD LN	E	AC	8	313	36	12,268	2/28/22	63	24	76	0	Surface Treatment - Slurry Seal	02-14-2023
1025	14524	JONESPORT LN	ALLISON CIR	CAPE MAY LN	E	AC	9	647	36	23,004	4/24/24	85	46	39	15	Surface Treatment - Slurry Seal	05-11-2019
1025	15615	JONESPORT LN	MELINDA CIR	ALLISON CIR	E	AC	9	248	36	9,428	4/17/24	89	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1026	14545	JOYFUL LN	TALBERT AVE	HAPPY DR	E	AC	4	508	36	18,288	5/13/24	86	54	19	27	Surface Treatment - Slurry Seal	11-28-2019
1027	13440	JUDWICK CIR	NEWMOON LN	END	E	AAC	5	479	36	18,744	3/11/20	84	100	0	0	Overlay - AC Structural	10-01-2012
1028	13532	JUDY CIR	LUCIA LN	CDS	E	AC	4	350	32	12,450	4/6/22	72	31	69	0	Surface Treatment - Slurry Seal	07-29-2020
1029	13282	JULIEN CIR	LAKEMONT LN	CDS	E	AC	3	143	36	6,648	3/17/22	82	100	0	0	New Construction	01-01-1980
1030	15224	JULIETTE LOW DR	ANITA LN	SILVER LN	E	AC	4	890	36	32,040	3/18/22	87	39	58	3	Surface Treatment - Slurry Seal	07-29-2020
1031	13374	JULIP LN	ROCK DR	CAPSTONE DR	E	AC	3	573	36	20,340	2/11/20	73	83	17	0	Surface Treatment - Slurry Seal	10-01-2012
1032	14887	JUNE DR	FRASER LN	ERWIN LN	E	AC	5	251	36	9,338	3/29/22	91	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1033	14287	JURA DR	WOODLEA LN	HUNTER LN	E	AC	8	267	36	9,612	3/19/24	88	51	49	0	Surface Treatment - Slurry Seal	05-11-2018
1034	14379	KAHULUI DR	KIOWA LN	KANEHOE LN	E	AC	9	930	36	33,480	3/27/24	77	16	71	13	Surface Treatment - Slurry Seal	05-11-2019
1035	14002	KAIMU DR	KIPAHULU DR	TONGA LN	E	AAC	8	670	36	24,120	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1036	13212	KAMALII DR	BARUNA LN	SEA WITCH LN	E	AC	2	445	36	16,020	4/7/22	86	79	21	0	New Construction	01-01-1980
1037	14823	KAMPEN LN	AMSTERDAM DR	VALENCIA DR	E	AC	4	1,010	36	36,360	3/31/22	73	34	66	0	Surface Treatment - Slurry Seal	07-29-2020
1038	14010	KAMUELA DR	MAUNA LN	PITCAIM LN	E	AAC	8	1,080	36	38,880	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1038	15400	KAMUELA DR	PITCAIM LN	CDS	E	AAC	8	877	36	33,372	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1038	15905	KAMUELA DR	BROOKHURST ST	MAUNA LN	E	AAC	8	592	36	21,312	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1039	14388	KANAKOA LN	NEOLANI DR	MALAHINE DR	E	AC	9	752	36	27,072	7/12/17	83	66	0	34	Surface Treatment - Slurry Seal	05-11-2018
1040	14376	KANEOHE LN	REGATTA DR	HAITI DR	E	AC	9	273	36	10,578	3/26/24	88	100	0	0	New Construction	01-01-1980
1040	14383	KANEOHE LN	KAPAA DR	ALOHA DR	E	AC	9	256	36	9,966	3/27/24	92	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1040	15567	KANEOHE LN	HAITI DR	BERMUDA DR	E	AC	9	1,008	36	36,288	3/27/24	85	45	55	0	New Construction	01-01-1980
1040	15568	KANEOHE LN	BERMUDA DR	KAPAA DR	E	AC	9	768	36	27,648	3/27/24	85	47	53	0	New Construction	01-01-1980
1041	14381	KAPAA DR	KIOWA LN	KANEHOE LN	E	AC	9	930	36	32,904	3/27/24	71	34	64	2	Surface Treatment - Slurry Seal	05-11-2019
1042	13982	KAREN CIR	JOICE LN	CDS	E	AAC	8	246	32	9,672	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1043	13911	KATHERINE DR	CAROLYN LN	LISTER LN	E	AAC	7	236	36	9,436	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1044	13139	KAUI LN	HONOLULU LN	HAWAII LN	E	AC	2	262	36	10,432	3/24/22	75	33	46	21	New Construction	01-01-1980
1045	14322	KAUSCH CIR	SATTERFIELD DR	END	E	AC	9	240	32	9,180	8/30/23	93	87	0	13	New Construction	01-01-1980
1046	13944	KEEL DR	YACHT LN	LOOKOUT LN	E	AAC	7	461	36	16,596	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1047	13573	KEELSON LN	ALLEY SLATER AVE	SLATER AVE	E	AAC	4	150	36	5,400	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
1047	13574	KEELSON LN	KRISTIN CIR	END	E	AAC	4	107	38	5,266	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
1047	15265	KEELSON LN	ALLEY SLATER AVE	KRISTIN CIR	E	AAC	4	1,012	36	36,432	5/5/20	91	46	0	54	Overlay - AC Structural	10-01-2012
2304	60810	KELLEY CIR	PRESCOTT LN	CDS	E	AC	5	410	36	18,360	5/13/24	50	21	79	0	New Construction - AC	01-01-1980
3500	35000	KELLOG CIR	MADDOX DR	CDS	E	AC	3	223	36	11,328	3/18/22	91	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1054	13685	KELSEY CIR	EDGEVIEW LN	END	E	AAC	1	530	36	20,830	5/7/24	72	91	9	0	Overlay - AC Structural	10-01-2016
3100	20100	KELSO DR	NEWLAND ST	VINTAGE DR	E	AAC	7	490	36	18,390	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
3000	20000	KELVIN LN	ELLSWORTH DR	CARROLTOWN DR	E	AC	9	902	36	32,472	5/9/24	69	52	40	8	Surface Treatment - Slurry Seal	05-11-2018
1053	14252	KELVINGROVE LN	INDIANAPOLIS AVE	COLBREGGAN DR	E	AAC	9	371	32	11,872	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1053	15473	KELVINGROVE LN	INDIANAPOLIS AVE	CDS	E	AC	7	493	32	17,576	2/11/20	21	41	57	2	New Construction	01-01-1980
4040	50210	KENBROOK DR	BELLFIELD LN	FOSS LN	E	AC	5	567	33	18,711	3/28/22	29	15	78	7	New Construction - Initial	01-01-1980
4040	50220	KENBROOK DR	FOSS LN	SPRINGDALE ST	E	AC	5	180	33	5,440	3/28/22	33	5	95	0	New Construction - Initial	01-01-1980
1055	13322	KENDRICK CIR	LOVELL LN	CDS	E	AC	3	351	36	13,986	3/23/22	83	62	38	0	New Construction	01-01-1980
1056	15783	KENILWORTH DR	GREENLEAF LN	GRAHAM ST	E	AC	2	1,400	36	50,400	3/22/22	92	92	0	8	New Construction	01-01-1980
1057	14555	KENSINGTON DR	SHEFFIELD LN	BURNLEY LN	E	AAC	8	202	24	4,648	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1057	14556	KENSINGTON DR	SIDCUP LN	LURES LN	E	AAC	8	202	24	4,848	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1057	14557	KENSINGTON DR	DERBYSHIRE LN	VERMONT LN	E	AAC	8	390	24	9,160	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1058	13547	KENT CIR	ROSS LN	CDS	E	AAC	4	199	32	7,618	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1059	13439	KENWICK CIR	NEWMOON LN	END	E	AAC	5	488	36	19,068	3/11/20	80	65	35	0	Overlay - AC Structural	10-01-2012
1060	14210	KENWORTH CIR	CRAILET DR	CDS	E	AAC	8	245	32	9,640	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1061	14167	KENYON LN	HAZELBROOK DR	CLIFFWOOD DR	E	AC	7	241	36	8,164	2/11/20	85	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1062	14391	KEOKI CIR	ZAMORA LN	CDS	E	AC	9	235	32	9,020	7/12/17	89	100	0	0	New Construction	01-01-1980
1063	14883	KERN DR	TIFFANY CIR	RENOIR CIR	E	AC	5	354	36	12,744	3/22/22	59	36	59	5	New Construction	01-01-1980
1063	14902	KERN DR	BERLIN LN	CDS	E	AC	5	105	36	5,030	3/22/22	32	14	83	3	New Construction	01-01-1980
1063	15782	KERN DR	BERLIN LN	TIFFANY CIR	E	AC	5	849	36	30,564	3/22/22	44	27	73	0	New Construction	01-01-1980
1064	14568	KESWICK LN	CORNWALL DR	CHASING CROSS DR	E	AAC	8	320	24	7,680	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1064	14569	KESWICK LN	ARGYLE DR	ABERDEEN DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1064	15636	KESWICK LN	ABERDEEN DR	CORNWALL DR	E	AAC	8	495	24	11,880	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1065	50450	KETTLER LN	BONNIE DR	SYLVIA DR	E	AC	3	1,018	36	40,348	3/18/22	93	92	0	8	Surface Treatment - Slurry Seal	07-29-2020
1066	13366	KILDA CIR	KRISTOPHER LN	END	E	AAC	3	368	36	15,248	2/12/20	90	78	22	0	Overlay - AC Structural	10-01-2012
1067	14104	KILKENNY LN	MALLOY DR	ALLEY MALLOY DR	E	AC	9	139	36	5,004	8/23/23	58	20	80	0	Surface Treatment - Slurry Seal	03-01-2011
1067	14105	KILKENNY LN	ALLEY MALLOY DR	INDIANAPOLIS AVE	E	AC	9	152	36	5,472	8/23/23	30	7	93	0	Surface Treatment - Slurry Seal	03-01-2011
1068	13488	KIM LN	RHONE LN	CDS	E	AC	4	294	36	11,084	3/18/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1069	13734	KIMBERLY DR	CAPETOWN LN	KINGSTON LN	E	AC	1	270	36	10,470	3/30/22	95	100	0	0	New Construction	01-01-1980
1069	15308	KIMBERLY DR	CAPETOWN LN	END	E	AC	1	794	36	30,384	3/30/22	86	26	74	0	New Construction	01-01-1980
1070	14277	KIMBERWICK LN	FIRESIDE DR	HAVEN LN	E	AC	9	177	36	6,372	5/7/24	86	53	47	0	Surface Treatment - Slurry Seal	05-11-2018
1071	13644	KINER AVE	WHARTON ST	HARTLUND ST	E	AAC	4	387	33	13,371	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1071	13651	KINER AVE	GLEADA LN	LISA LN	E	AAC	4	854	33	28,682	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1071	17030	KINER AVE	HARTLUND ST	CDS	E	AAC	4	126	33	3,894	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1072	14869	KING CIR	ALLEY GREEN ST	GREEN ST	E	AAC	2	187	36	9,232	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1073	14225	KINGFISHER DR	CATAMARAN LN	FARNSWORTH LN	E	AC	9	591	36	21,276	8/23/23	60	30	70	0	New Construction	01-01-1980
1073	15884	KINGFISHER DR	FARNSWORTH LN	ALICANTE LN	E	AC	9	911	36	32,796	8/23/23	58	50	50	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1074	15482	KINGS CANYON DR	INTERIOR LN	RUNNING SPRINGS LN	E	AC	8	1,286	36	46,796	3/1/22	81	35	34	31	Surface Treatment - Slurry Seal	02-13-2023
1075	15409	KINGSDALE DR	COLDWATER LN	EDGEWOOD LN	E	AC	7	835	36	30,060	8/21/23	64	33	59	8	New Construction	01-01-1980
1076	13914	KINGSPORT DR	FLAGSTAFF LN	NEWLAND ST	E	AAC	7	176	33	4,848	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1077	13733	KINGSTON LN	DOVER DR	KIMBERLY DR	E	AC	1	578	36	22,308	3/30/22	95	100	0	0	New Construction	01-01-1980
1078	14588	KINGSWOOD LN	CONTINENTAL DR	DEVONSHIRE DR	E	AAC	8	115	24	2,760	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1078	14589	KINGSWOOD LN	DEVONSHIRE DR	CORNWALL DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1078	15645	KINGSWOOD LN	ARGYLE DR	CONTINENTAL DR	E	AAC	8	383	24	9,192	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1079	14382	KIOWA LN	BERMUDA DR	KAHULUI DR	E	AC	9	256	36	8,928	3/27/24	72	34	64	2	Surface Treatment - Slurry Seal	05-11-2018
1079	15569	KIOWA LN	KAHULUI DR	ALOHA DR	E	AC	9	768	36	27,648	3/27/24	85	39	61	0	New Construction	01-01-1980
1080	13998	KIPAHULU DR	GARFIELD AVE	KAIMU DR	E	AAC	8	187	36	6,732	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1080	15396	KIPAHULU DR	KAIMU DR	KUKUI DR	E	AAC	8	801	36	28,836	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1081	13368	KIRKLUND CIR	KRISTOPHER LN	END	E	AAC	3	368	36	15,248	2/12/20	93	100	0	0	Overlay - AC Structural	10-01-2012
1082	15271	KISER DR	STILL HARBOR LN	PRESCOTT LN	E	AC	5	858	36	32,388	3/28/22	48	38	62	0	Surface Treatment - Slurry Seal	10-01-2012
1083	15944	KITE DR	SPARKMAN LN	SKIMMER LN	E	AC	8	1,007	36	36,252	3/18/24	88	55	45	0	Surface Treatment - Slurry Seal	05-11-2018
1084	13221	KITTEN CIR	BARUNA LN	CDS	E	AC	2	170	36	6,120	4/7/22	83	45	50	5	New Construction	01-01-1980
1085	14526	KITTERY CIR	CASTINE DR	CDS	E	AC	9	169	32	6,908	4/17/24	85	55	45	0	Surface Treatment - Slurry Seal	05-11-2019
1086	14130	KNIGHTS CIR	CROWN REEF LN	CDS	E	AC	7	160	36	7,260	2/12/20	82	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1087	13794	KNOLLWOOD CIR	HALIFAX DR	END	E	AC	1	326	36	13,236	2/26/20	93	100	0	0	New Construction	01-01-1980
1088	14693	KNOXVILLE AVE	ALABAMA ST	ALLEY ALABAMA ST	E	AAC	6	323	37	11,951	8/15/23	78	100	0	0	Overlay - AC Structural	03-01-2011
1088	14694	KNOXVILLE AVE	ALLEY ALABAMA ST	HUNTINGTON ST	E	AAC	6	162	37	5,994	8/15/23	77	100	0	0	Overlay - AC Structural	03-01-2011
1088	14695	KNOXVILLE AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	6	330	37	12,210	8/15/23	74	29	63	8	New Construction	01-01-1980
1088	14697	KNOXVILLE AVE	CALIFORNIA ST	ALLEY CALIFORNIA ST	E	AC	6	160	37	5,920	8/15/23	72	29	50	21	New Construction	01-01-1980
1088	14698	KNOXVILLE AVE	ALLEY CALIFORNIA ST	DELAWARE ST	E	AC	6	169	37	6,253	8/15/23	90	100	0	0	New Construction	01-01-1980
1088	14699	KNOXVILLE AVE	DELAWARE ST	ALLEY DELAWARE ST	E	AAC	6	171	37	6,327	8/15/23	53	48	52	0	Overlay - AC Structural	03-01-2011
1088	14700	KNOXVILLE AVE	ALLEY DELAWARE ST	ENGLAND ST	E	AC	6	160	37	5,920	8/15/23	58	45	55	0	Surface Treatment - Slurry Seal	03-01-2011
1088	14701	KNOXVILLE AVE	ENGLAND ST	ALLEY ENGLAND ST	E	AC	6	165	37	6,105	8/15/23	61	53	0	47	Surface Treatment - Slurry Seal	03-01-2011
1088	14702	KNOXVILLE AVE	ALLEY ENGLAND ST	FLORIDA ST	E	AC	6	165	37	6,105	8/15/23	52	48	52	0	Surface Treatment - Slurry Seal	03-01-2011
1088	14703	KNOXVILLE AVE	FLORIDA ST	BEACH BLVD	E	AC	6	660	37	24,420	8/15/23	52	31	62	7	Surface Treatment - Slurry Seal	03-01-2011
1089	13570	KOLEDO LN	ALLEY SLATER AVE	SLATER AVE	E	AC	4	150	36	5,400	4/6/22	37	20	80	0	New Construction	01-01-1980
1089	13571	KOLEDO LN	BARTON DR	ALLEY BARTON DR	E	AAC	4	165	36	5,940	5/5/20	94	100	0	0	Overlay - AC Structural	10-01-2012
1089	15263	KOLEDO LN	MANDRELL DR	BARTON DR	E	AAC	4	330	36	11,880	5/5/20	93	72	0	28	Overlay - AC Structural	10-01-2012
1090	15033	KONA DR	WAIKIKI LN	BOLSA CHICA ST	E	AC	2	670	36	24,120	3/24/22	50	27	73	0	New Construction	01-01-1980
1091	15012	KOVACS LN	TALBERT AVE	REDONDO CIR	E	AC	4	911	40	36,440	5/13/24	88	81	19	0	Surface Treatment - Slurry Seal	11-28-2019
1092	15903	KREPP DR	WATERBURY LN	STEVEN LN	E	AC	8	960	36	36,060	2/18/20	75	36	64	0	Surface Treatment - Slurry Seal	07-15-2021
1093	13575	KRISTIN CIR	KEELSON LN	END	E	AAC	4	197	34	6,698	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
1094	15991	KRISTOPHER LN	WRENFIELD DR	SHENLYN DR	E	AAC	3	1,264	36	44,928	2/12/20	93	100	0	0	Overlay - AC Structural	10-01-2012
1095	15550	KROLL LN	ARCEL CIR	STILWELL DR	E	AC	9	406	32	14,492	8/30/23	91	100	0	0	New Construction	01-01-1980
1096	13999	KUKUI DR	BROOKHURST ST	KIPAHULU DR	E	AAC	8	682	36	24,552	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1096	14000	KUKUI DR	KIPAHULU DR	MOOREA LN	E	AAC	8	1,101	36	39,636	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1096	14014	KUKUI DR	MOOREA LN	BIKINI LN	E	AAC	8	693	36	25,698	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1097	13628	KURT LN	MANHATTEN DR	SPICKARD DR	E	AAC	3	261	36	9,896	2/11/20	83	100	0	0	Overlay - AC Structural	10-01-2012
1098	14283	LA CRESTA CIR	PIERVIEW LN	CDS	E	AC	8	510	36	19,560	3/6/24	86	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1099	14508	LA JOLLA CIR	MALIBU LN	CDS	E	AAC	9	331	32	12,092	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1100	13509	LA MANCHA CIR	ALLEY BARDON LN	CDS	E	AAC	3	258	36	11,538	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1100	13510	LA MANCHA CIR	BARDON LN	ALLEY BARDON LN	E	AAC	3	136	36	4,896	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1101	15144	LA MESA LN	PALO ALTO DR	POINT LOMA DR	E	AC	5	1,020	36	36,720	3/15/22	66	61	39	0	New Construction	01-01-1980
1102	13657	LA PALMA DR	PATTERSON LN	CDS	E	AAC	4	281	32	10,492	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1103	15229	LA PAZ DR	MALAGA LN	ALLEY VILLA YORBA	E	AAC	4	219	36	9,368	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1104	15313	LA SALLE LN	CORNELL DR	MC FADDEN AVE	E	AC	1	1,292	36	46,512	5/6/20	94	100	0	0	New Construction	01-01-1980
1105	13185	LADONA CIR	MISTRAL DR	CDS	E	AC	2	358	32	12,956	4/7/22	84	100	0	0	New Construction	01-01-1980
1106	13283	LAFAYETTE DR	POMONA LN	CDS	E	AC	3	168	32	7,176	3/16/22	83	80	0	20	New Construction	01-01-1980
1106	15108	LAFAYETTE DR	WINDEMEIR LN	POMONA LN	E	AC	3	1,196	36	43,806	3/16/22	78	48	52	0	New Construction	01-01-1980
1107	14502	LAGUNA CIR	CHRISTINE DR	CDS	E	AAC	9	243	36	10,248	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1108	15107	LAKEMONT LN	EDGEMONT DR	CHELE CIR	E	AC	3	520	36	19,470	3/17/22	90	100	0	0	New Construction	01-01-1980
1109	13459	LAKEPOINT LN	INLET DR	END	E	AC	5	268	36	11,448	2/24/20	86	22	14	64	Surface Treatment - Slurry Seal	10-01-2012
1109	15207	LAKEPOINT LN	NEWBURY DR	INLET DR	E	AAC	5	519	36	19,434	2/24/20	83	100	0	0	Overlay - AC Structural	10-01-2012
1110	14705	LAKESIDE LN	MEMPHIS AVE	OCEANHILL DR	E	AAC	6	986	34	33,524	8/15/23	84	54	44	2	Overlay - AC Structural	03-01-2011
1111	15826	LAKEVIEW DR	INLET DR	CLIFFVIEW LN	E	AC	5	700	30	21,750	2/24/20	82	45	55	0	Surface Treatment - Slurry Seal	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1112	13535	LAMAR DR	NEWLAND ST	LUCIA LN	E	AC	4	493	36	17,748	4/6/22	86	37	63	0	Surface Treatment - Slurry Seal	07-29-2020
2299	60760	LAMB LN	YORKTOWN AVE	PATCH DR	E	AC	8	630	36	22,680	3/2/22	91	44	0	56	New Construction - AC	01-01-2015
1113	14845	LAMBERT DR	MONROE LN	CDS	E	AAC	4	380	32	13,410	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1113	14846	LAMBERT DR	MONROE LN	IRBY LN	E	AAC	4	1,116	36	40,176	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1114	14516	LANAI CIR	LUAU LN	CDS	E	AAC	9	345	32	12,540	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1115	13951	LANARK CIR	LINDSAY LN	CDS	E	AAC	7	419	36	16,334	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1116	15758	LANCASTER DR	HERITAGE LN	MONTCLAIR LN	E	AAC	4	788	36	28,718	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1117	13388	LANCEFIELD DR	SHAMLEY CIR	WELLBANK LN	E	AC	5	255	36	10,180	3/12/20	92	100	0	0	New Construction	01-01-1980
1117	15167	LANCEFIELD DR	OLDGLEN LN	SHAMLEY CIR	E	AC	5	509	36	19,324	3/12/20	87	100	0	0	New Construction	01-01-1980
1118	14273	LANCELOT LN	WOODCREST DR	COMSTOCK DR	E	AC	9	502	36	18,822	5/6/24	60	48	52	0	Surface Treatment - Slurry Seal	05-11-2018
1119	15253	LANDAU LN	HEIL AVE	ROYAL DR	E	AC	4	1,349	36	48,564	3/31/22	84	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
2298	60750	LANDERS DR	SLAYBACK LN	WARDLOW LN	E	AC	7	262	36	9,432	2/18/20	97	80	0	20	New Construction - AC	01-01-2014
1120	14474	LANDFALL DR	BUSHARD ST	HILARIA CIR	E	AC	9	166	36	5,976	4/25/24	64	27	56	17	Surface Treatment - Slurry Seal	05-11-2019
1120	15577	LANDFALL DR	DIRIGO CIR	BRANTA CIR	E	AC	9	260	36	10,360	4/25/24	72	25	42	33	Surface Treatment - Slurry Seal	05-11-2019
1120	15596	LANDFALL DR	HILARIA CIR	DIRIGO CIR	E	AC	9	764	36	27,504	4/25/24	86	72	0	28	Surface Treatment - Slurry Seal	05-11-2019
1121	13310	LANGPORT CIR	GREENVIEW LN	END	E	AC	3	333	32	13,156	2/18/20	95	100	0	0	New Construction	01-01-1980
1122	14270	LANTERN LN	HINGHAM DR	CASTLEGATE DR	E	AAC	9	243	36	8,748	5/10/24	76	33	44	23	Overlay - AC Structural	05-11-2018
1123	14292	LAPWORTH CIR	NATIONAL LN	CDS	E	AAC	8	491	36	20,716	3/18/24	91	61	25	14	Overlay - AC Structural	05-11-2018
1124	13694	LARCHWOOD DR	SUNNYCREST LN	END	E	AC	1	352	36	14,472	2/10/20	82	76	0	24	New Construction	01-01-1980
1124	13695	LARCHWOOD DR	NORTHRIDGE LN	SUNNYCREST LN	E	AC	1	1,280	36	45,792	2/10/20	93	100	0	0	New Construction	01-01-1980
1124	15298	LARCHWOOD DR	SPRINGDALE ST	NORTHRIDGE LN	E	AC	1	915	36	32,652	2/10/20	88	79	0	21	New Construction	01-01-1980
1125	13400	LARCREST CIR	FOXSHIELD DR	CDS	E	AC	5	250	36	10,250	3/28/22	30	5	95	0	New Construction	01-01-1980
1126	15124	LARK LN	TROPHY DR	WARNER AVE	E	AC	3	537	36	20,082	2/18/20	82	100	0	0	New Construction	01-01-1980
1128	15808	LARKMONT DR	CRESTMOOR LN	HELENBROOK LN	E	AC	5	517	36	19,362	3/12/20	92	66	0	34	New Construction	01-01-1980
1129	15421	LARKPORT DR	BRIARLY LN	FELCLIFF LN	E	AAC	7	1,027	36	36,972	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1131	13691	LARKSPUR CIR	SUNNYCREST LN	END	E	AAC	1	352	32	13,064	5/7/24	81	100	0	0	Overlay - AC Fabric	10-01-2016
1132	16024	LARTHORN DR	NORCROFT LN	MEANDER LN	E	AAC	7	1,236	36	45,246	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1133	14180	LASSEN CIR	BIG BEND LN	CDS	E	AAC	8	504	36	19,944	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1134	13952	LAUDER CIR	LINDSAY LN	CDS	E	AAC	7	419	36	16,334	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1135	13915	LAURA CIR	GREGORY LN	CDS	E	AC	7	160	27	5,570	4/8/24	84	69	31	0	New Construction - Initial	01-01-1980
1136	16005	LAURELHURST DR	WINDEMEIR LN	GOLDENWEST ST	E	AC	3	1,540	36	54,864	3/16/22	72	59	35	6	New Construction - Initial	01-01-1980
1137	15526	LAVONNE LN	CYNTHIA DR	EDYE DR	E	AAC	8	776	36	28,936	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1138	15353	LAWN HAVEN DR	EVENING HILL DR	CDS	E	AAC	5	226	32	9,032	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1138	15354	LAWN HAVEN DR	EVENING HILL DR	CDS (E)	E	AC	5	1,090	36	41,240	5/6/24	91	73	22	5	Surface Treatment - Slurry Seal	11-28-2019
1139	14199	LAWSON LN	ADAMS AVE	NIAGARA DR	E	AAC	8	546	35	19,110	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1139	15489	LAWSON LN	NIAGARA DR	MEREDITH DR	E	AC	8	516	35	18,060	2/28/22	33	7	81	12	New Construction - Initial	01-01-1980
1140	15281	LE CONTE DR	HARTLUND ST	CDS	E	AAC	4	460	36	18,060	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1141	14961	LE GRAND LN	HEIL AVE	PRAIRE DR	E	AAC	2	664	36	25,570	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
1142	13448	LEAF CIR	PACEMONT DR	END	E	AAC	5	380	36	17,680	3/11/20	83	48	52	0	Overlay - AC Structural	10-01-2012
1143	14844	LEAFWOOD CIR	TERRY DR	CDS	E	AAC	4	520	36	19,975	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1144	15542	LEASURE LN	ATLANTA AVE	SATTERFIELD DR	E	AC	9	433	36	16,338	8/30/23	40	22	73	5	New Construction - Initial	01-01-1980
1145	13553	LEE CIR	FORD DR	END	E	AAC	3	350	32	12,700	2/11/20	94	89	0	11	Overlay - AC Structural	10-01-2012
1146	14061	LEECREST LN	LARKPORT DR	LOWMEAD DR	E	AC	7	266	36	10,326	2/24/20	86	59	32	9	Surface Treatment - Slurry Seal	07-15-2021
1147	13219	LEGEND CIR	BARUNA LN	CDS	E	AC	2	170	36	7,620	4/7/22	83	26	74	0	New Construction - Initial	01-01-1980
1148	14385	LEHUA LN	HAMILTON AVE	NEOLANI DR	E	AC	9	178	36	6,120	4/24/24	93	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1149	14566	LEIGHTON LN	CORNWALL DR	END	E	AAC	8	227	24	5,448	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1150	15611	LEILANI DR	MAILBU LN	BUSHARD ST	E	AC	9	894	36	32,934	4/17/24	56	21	79	0	Surface Treatment - Slurry Seal	05-11-2019
1151	14364	LEMONTREE LN	CHEVY CHASE DR	CDS	E	AC	8	127	36	4,572	7/13/17	88	78	0	22	New Construction - Initial	01-01-1980
1151	15561	LEMONTREE LN	PEPPERTREE DR	CHEVY CHASE DR	E	AC	8	838	36	30,918	7/13/17	86	100	0	0	New Construction - Initial	01-01-1980
1152	13343	LENIS CIR	MARIE LN	CDS	E	AAC	3	229	36	9,844	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1153	13598	LENNOX DR	BRIMHALL LN	EDWARDS ST	E	AC	3	180	36	6,480	3/17/22	41	12	88	0	New Construction - Initial	01-01-1980
1153	16003	LENNOX DR	EDWARDS ST	WINDEMEIR LN	E	AC	3	1,104	36	39,744	3/17/22	68	62	31	7	New Construction - Initial	01-01-1980
1154	13172	LEONARD LN	MISTRAL DR	HUMBOLDT DR	E	AC	2	260	36	9,072	4/7/22	89	100	0	0	New Construction - Initial	01-01-1980
1155	14865	LESLIE LN	WARNER AVE	DUNBAR AVE	E	AC	2	440	36	15,840	3/22/22	85	95	0	5	New Construction - Initial	01-01-1980
1156	14282	LEVEE DR	QUEENS PARK LN	REEF LN	E	AC	8	246	36	8,856	3/18/24	90	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1157	13634	LEWIS LN	GALIPEAN DR	WINTERGREEN DR	E	AC	5	531	36	19,866	3/28/22	33	18	79	3	New Construction - Initial	01-01-1980
1158	13901	LEXIE CIR	PALM AVE	END	E	AC	5	173	36	9,015	7/8/21	91	70	0	30	Surface Treatment - Slurry Seal	07-27-2022
1159	14096	LEXINGTON LN	SHANGRI LA DR	LURLINE DR	E	AAC	8	780	36	29,080	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1159	15442	LEXINGTON LN	LURLINE DR	ADAMS AVE	E	AC	8	1,358	36	48,888	2/28/22	68	39	61	0	Surface Treatment - Slurry Seal	02-08-2023
1160	14805	LIBERTY AVE	JACQUELYN LN	ALLEY LIBERTY AVE	E	AAC	4	155	36	5,580	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1160	14806	LIBERTY AVE	ALLEY LIBERTY AVE	BEACH BLVD	E	AAC	4	1,331	36	47,916	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1160	15732	LIBERTY AVE	CRABB LN	JACQUELYN LN	E	AAC	4	325	36	11,700	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1161	15362	LIBRA CIR	CDS	CDS	E	AAC	7	529	34	20,870	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1162	13621	LIDO LN	MARIPOSA DR	SANTA YNEZ DR	E	AC	5	320	36	12,660	3/15/22	32	7	92	1	New Construction - Initial	01-01-1980
1162	15147	LIDO LN	FREEBORN DR	MARIPOSA DR	E	AC	5	953	36	35,240	3/15/22	60	18	82	0	Surface Treatment - Slurry Seal	10-01-2012
1163	14890	LIEGE DR	CHAPPARAL LN	WILD ROSE LN	E	AC	5	629	36	22,644	3/29/22	91	76	24	0	New Construction	01-01-1980
1164	14109	LIGHTHOUSE LN	SEAPORT DR	SEALROCK DR	E	AAC	9	246	36	8,856	8/21/23	88	80	20	0	Overlay - AC Structural	03-01-2011
1164	15448	LIGHTHOUSE LN	SEALROCK DR	END	E	AAC	9	151	40	6,040	8/21/23	82	73	27	0	Overlay - AC Structural	03-01-2011
1165	13513	LILAC LN	ELK CIR	ALLEY WARNER AVE	E	AC	3	137	32	4,384	4/7/22	58	91	0	9	New Construction	01-01-1980
1165	15235	LILAC LN	TOULOUSE DR	ELK CIR	E	AAC	3	280	36	10,830	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1166	13129	LILES LN	EDINGER AVE	ALLEY EDINGER AVE	E	AAC	2	158	36	5,688	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1166	13130	LILES LN	ALLEY EDINGER AVE	HENDRICKSEN DR	E	AAC	2	144	36	5,184	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1167	13349	LIMELIGHT CIR	SUN DR	CDS	E	AAC	3	220	36	9,920	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1168	15343	LIMERICK DR	WICKLOW LN	END	E	AC	3	557	36	21,552	3/30/22	95	100	0	0	New Construction	01-01-1980
1169	14683	LINCOLN AVE	ALABAMA ST	ALLEY ALABAMA ST	E	AAC	6	323	37	11,951	8/15/23	84	79	14	7	Overlay - AC Structural	03-01-2011
1169	14684	LINCOLN AVE	ALLEY ALABAMA ST	HUNTINGTON ST	E	AAC	6	162	37	5,994	5/21/20	82	32	68	0	Overlay - AC Structural	03-01-2011
1169	14685	LINCOLN AVE	HUNTINGTON ST	CALIFORNIA ST	E	AAC	6	330	37	12,210	8/15/23	60	32	68	0	Overlay - AC Structural	03-01-2011
1169	14687	LINCOLN AVE	CALIFORNIA ST	ALLEY CALIFORNIA ST	E	AAC	6	160	37	5,920	8/15/23	52	44	56	0	Overlay - AC Structural	03-01-2011
1169	14688	LINCOLN AVE	ALLEY CALIFORNIA ST	DELAWARE ST	E	AAC	6	169	37	5,957	8/15/23	58	42	58	0	Overlay - AC Structural	03-01-2011
1169	14689	LINCOLN AVE	DELAWARE ST	ALLEY DELAWARE ST	E	AC	6	171	36	5,868	8/15/23	66	54	46	0	Surface Treatment - Slurry Seal	03-01-2011
1169	14690	LINCOLN AVE	ALLEY DELAWARE ST	ENGLAND ST	E	AC	6	160	36	5,760	8/15/23	52	47	53	0	Surface Treatment - Slurry Seal	03-01-2011
1169	14691	LINCOLN AVE	ENGLAND ST	ALLEY ENGLAND ST	E	AC	6	165	37	6,031	8/15/23	59	56	44	0	Surface Treatment - Slurry Seal	03-01-2011
1169	14692	LINCOLN AVE	ALLEY ENGLAND ST	FLORIDA ST	E	AC	6	165	37	6,105	8/15/23	50	35	40	25	Surface Treatment - Slurry Seal	03-01-2011
1170	13135	LINDA CIR	TOMAS LN	END	E	AAC	2	470	36	18,720	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1172	15909	LINDSAY LN	GARFIELD AVE	LUSS DR	E	AAC	7	998	36	36,178	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1173	13649	LISA LN	STERLING DR	CDS	E	AAC	4	124	33	3,828	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1173	13654	LISA LN	TAYLOR DR	FORELLE DR	E	AAC	4	533	33	17,325	11/21/19	100	0	0	0	Overlay - AC Structural	11-21-2019
1173	15278	LISA LN	STERLING AVE	TAYLOR DR	E	AAC	4	659	33	21,483	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1174	15364	LISTER LN	MODALE DR	GARFIELD AVE	E	AAC	7	1,440	36	51,840	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1175	15907	LITCHFIELD DR	WOODWARD LN	BUSHARD ST	E	AC	8	1,098	36	39,528	2/18/20	73	12	69	19	Surface Treatment - Slurry Seal	07-15-2021
1176	13906	LITTLE HARBOR DR	SUMMER BREEZE LN	GOLDENWEST ST	E	AC	5	130	36	5,526	6/30/21	70	18	43	39	Surface Treatment - Slurry Seal	07-27-2022
1177	13443	LITTLEFIELD DR	NEWMOON LN	TWINFORD LN	E	AAC	5	328	36	11,808	3/11/20	87	100	0	0	Overlay - AC Structural	10-01-2012
1177	15195	LITTLEFIELD DR	SPRINGDALE ST	NEWMOON LN	E	AAC	5	629	36	22,644	3/11/20	85	100	0	0	Overlay - AC Structural	10-01-2012
1178	14960	LITTLER DR	BIRDIE LN	CLARK DR	E	AAC	3	1,153	36	41,758	5/9/24	90	61	31	8	Overlay - AC Fabric	10-01-2016
1179	14309	LOCHLEA LN	HILLHEAD CIR	ALLEY DONCASTER DR	E	AC	9	165	36	5,940	8/30/23	87	100	0	0	New Construction	01-01-1980
1179	14310	LOCHLEA LN	ALLEY LOMOND DR	LOMOND DR	E	AC	9	170	28	5,786	8/30/23	89	100	0	0	New Construction	01-01-1980
1179	15534	LOCHLEA LN	ATLANTA AVE	GALLEY DR	E	AC	9	573	36	23,884	8/24/23	55	11	85	4	New Construction	01-01-1980
1179	15535	LOCHLEA LN	JENNY DR	HILLHEAD CIR	E	AC	9	660	36	23,760	8/30/23	83	61	33	6	New Construction	01-01-1980
1179	15536	LOCHLEA LN	ALLEY DONCASTER DR	ALLEY LOMOND DR	E	AC	9	326	36	11,736	8/30/23	86	100	0	0	New Construction	01-01-1980
1180	14356	LOCKHAVEN CIR	EFFINGHAM DR	CDS	E	AC	8	495	36	19,320	4/10/24	64	12	71	17	New Construction	01-01-1980
1181	13526	LOIRE CIR	RHINE DR	CDS	E	AAC	4	465	36	18,240	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1182	13530	LOIS CIR	LUCIA LN	CDS	E	AC	4	350	32	12,450	4/6/22	76	40	60	0	Surface Treatment - Slurry Seal	07-29-2020
1183	13984	LOLA LN	ANNIK DR	YORKTOWN AVE	E	AC	8	171	36	6,156	2/18/20	81	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1184	13119	LOMA AVE	SAN NICHOLAS CIR	MAIN ST	E	AC	6	255	36	9,535	6/30/21	97	46	0	54	Surface Treatment - Slurry Seal	05-03-2021
1184	13121	LOMA AVE	LAKE ST	PARK ST	E	AAC	6	590	37	21,830	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1184	50480	LOMA AVE	PARK ST	MAIN ST	E	AC	6	349	36	12,564	6/28/21	86	59	41	0	Surface Treatment - Slurry Seal	07-27-2022
1186	15912	LOMBARDY LN	LORRAINE DR	YORKTOWN AVE	E	AC	7	685	36	24,660	2/19/20	74	33	67	0	Surface Treatment - Slurry Seal	07-15-2021
1187	14312	LOMOND DR	LOCHLEA LN	NEWLAND ST	E	AC	9	660	39	26,766	8/30/23	69	34	66	0	New Construction	01-01-1980
1188	14115	LONDONDERRY LN	MALLOY DR	MUNSTER DR	E	AAC	9	260	36	9,360	8/23/23	86	100	0	0	Overlay - AC Structural	03-01-2011
1188	14116	LONDONDERRY LN	MUNSTER DR	END	E	AC	9	130	36	4,680	8/23/23	89	100	0	0	New Construction	01-01-1980
1189	13858	LONGFORD CIR	CARRIE LN	END	E	AC	1	419	36	16,334	4/1/22	95	100	0	0	New Construction	01-01-1980
4050	50250	LOOKOUT LN	NAPLES DR	KEEL DR	E	AC	7	500	35	17,500	2/19/20	35	15	84	1	Surface Treatment - Slurry Seal	07-15-2021
1191	13484	LORGE CIR	GOTHARD ST	END	E	AAC	3	404	36	16,044	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1192	15379	LORRAINE DR	SAUSALITO LN	BAYWATER LN	E	AC	7	916	36	32,976	4/15/20	84	61	28	11	Surface Treatment - Slurry Seal	07-15-2021
1193	13421	LOS AMIGOS CIR	VIA ESPANA LN	END	E	AAC	5	916	36	34,476	2/25/20	88	82	18	0	Overlay - AC Structural	10-01-2012
1194	14900	LOS PATOS AVE	GREEN ST	BOLSA CHICA ST	E	AC	2	660	36	23,112	3/22/22	69	46	53	1	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1194	15785	LOS PATOS AVE	SIMS ST	GREEN ST	E	AC	2	1,320	36	47,520	3/22/22	84	50	0	50	New Construction	01-01-1980
1194	15941	LOS PATOS AVE	WARNER AVE	SIMS ST	E	AC	2	1,174	36	43,764	3/22/22	83	24	45	31	New Construction	01-01-1980
1195	13308	LOS VERDES LN	HEIL AVE	MEADOWBROOK DR	E	AC	3	321	36	10,968	2/18/20	90	59	41	0	New Construction	01-01-1980
1196	15897	LOTUS LN	PIONEER DR	ADAMS AVE	E	AC	7	803	36	29,808	2/18/20	96	67	0	33	Surface Treatment - Slurry Seal	07-15-2021
1197	14936	LOURDES DR	MISTY LN	WRIGHTWOOD LN	E	AC	5	1,013	36	36,192	3/9/20	83	33	59	8	New Construction	01-01-1980
1198	15125	LOVELL LN	ANNETTE CIR	SHIELDS DR	E	AC	3	781	36	28,116	3/23/22	90	100	0	0	New Construction	01-01-1980
1199	13226	LOWELL CIR	WESTPORT DR	CDS	E	AC	2	479	36	18,744	3/24/22	56	38	62	0	New Construction	01-01-1980
1200	14059	LOWMEAD DR	BRIARLY LN	LEECREST LN	E	AC	7	628	36	24,108	2/24/20	64	27	73	0	Surface Treatment - Slurry Seal	07-15-2021
1201	13285	LOYOLA DR	TUFTS LN	WHITTIER LN	E	AC	3	1,094	36	40,384	3/16/22	89	100	0	0	New Construction	01-01-1980
1202	14514	LUAU LN	LANAI CIR	LEILANI DR	E	AC	9	258	36	8,700	4/17/24	89	77	23	0	Surface Treatment - Slurry Seal	05-11-2019
1202	15610	LUAU LN	MOLOKAI DR	LANAI CIR	E	AC	9	514	36	18,504	4/17/24	66	18	79	3	Surface Treatment - Slurry Seal	05-11-2019
1203	15817	LUCERO LN	NIMROD DR	SLATER AVE	E	AAC	3	314	32	10,048	2/11/20	95	100	0	0	Overlay - AC Structural	10-01-2012
1204	13536	LUCIA LN	HEIL AVE	LOIS CIR	E	AAC	4	161	36	5,796	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1204	13537	LUCIA LN	HOWARD CIR	ARNETT DR	E	AAC	4	298	36	10,728	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1204	15246	LUCIA LN	LOIS CIR	JUDY CIR	E	AAC	4	512	36	18,432	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1204	15247	LUCIA LN	JUDY CIR	HOWARD CIR	E	AAC	4	797	36	28,692	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1205	13435	LUCIENTO DR	SALAMANCA LN	SAN LEANDRO LN	E	AAC	5	438	36	15,768	2/25/20	88	100	0	0	Overlay - AC Structural	10-01-2012
1205	15189	LUCIENTO DR	CADIZ CIR	SALAMANCA LN	E	AAC	5	429	36	15,444	2/25/20	86	100	0	0	Overlay - AC Structural	10-01-2012
1206	14942	LUDLOW CIR	AMDERTON LN	END	E	AC	5	258	36	11,088	3/12/20	65	30	70	0	New Construction	01-01-1980
1207	14559	LURES LN	RALEIGH DR	KENSINGTON DR	E	AAC	8	269	24	6,456	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1207	14560	LURES LN	CORNWALL DR	END	E	AAC	8	174	24	4,176	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1208	15437	LURLINE DR	CANBERRA LN	LEXINGTON LN	E	AAC	8	520	36	19,720	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1209	15378	LUSS DR	LINDSAY LN	CDS	E	AAC	7	949	36	35,414	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1210	13347	LYDIA DR	MARIE LN	GOLDENWEST ST	E	AC	3	409	36	14,724	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1211	14274	LYMAN DR	CRESTVIEW LN	BUSHARD ST	E	AC	9	166	36	5,976	5/6/24	73	28	72	0	Surface Treatment - Slurry Seal	05-11-2018
1212	15245	LYNDON ST	WARNER AVE	CDS	E	AC	4	466	36	18,576	3/31/22	85	49	47	4	Surface Treatment - Slurry Seal	07-29-2020
1213	13606	LYNN ST	PRAIRIE DR	PEARCE ST	E	AAC	2	660	36	24,750	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1213	15018	LYNN ST	WARNER AVE	JAMES CIR	E	AAC	2	505	36	18,180	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1213	15115	LYNN ST	PEARCE ST	WARNER AVE	E	AC	2	1,321	36	47,556	3/22/22	91	100	0	0	New Construction	01-01-1980
1213	15786	LYNN ST	JAMES CIR	LOS PATOS AVE	E	AAC	2	821	36	27,056	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1214	14782	LYONS CIR	TALBERT AVE	CDS	E	AC	4	275	40	12,500	5/13/24	90	92	0	8	Surface Treatment - Slurry Seal	11-01-2019
1215	13495	MAC DONALD AVE	BEACH BLVD	END	E	AC	4	660	35	23,100	4/1/22	91	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1216	15923	MACHINE DR	PIPELINE LN	SPRINGDALE ST	E	AC	1	1,254	40	50,160	5/5/20	88	71	0	29	New Construction	01-01-1980
1217	13504	MADDOX DR	ALLEY GOLDENWEST ST	BARTLETT LN	E	AC	3	157	36	5,652	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1217	13505	MADDOX DR	ALLEY SABOT LN	ALLEY MADDOX DR	E	AC	3	160	36	5,760	3/18/22	93	100	0	0	New Construction	01-01-1980
1217	15022	MADDOX DR	GOLDENWEST ST	ALLEY GOLDENWEST ST	E	AC	3	181	36	6,516	3/18/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1217	15230	MADDOX DR	BARTLETT LN	ALLEY BARTLETT LN	E	AC	3	157	36	5,652	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1217	15231	MADDOX DR	ALLEY BARTLETT LN	TUNSTALL LN	E	AC	3	158	36	5,688	4/9/22	81	43	57	0	Surface Treatment - Slurry Seal	07-29-2020
1217	15232	MADDOX DR	TUNSTALL LN	ALLEY SABOT LN	E	AC	3	359	36	12,924	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1218	15964	MADELINE DR	MAGNOLIA ST	OCCIDENTAL LN	E	AC	7	1,121	36	41,106	2/18/20	24	3	92	5	New Construction	01-01-1980
1219	13623	MADERA LN	SANTA YNEZ DR	CDS	E	AC	5	485	36	19,020	3/15/22	35	23	75	2	Surface Treatment - Slurry Seal	10-01-2012
1219	14604	MADERA LN	ATHENA DR	MUKAI CT	E	AC	5	386	36	15,036	3/15/22	80	83	17	0	Surface Treatment - Slurry Seal	10-01-2012
1220	13605	MAGELLAN LN	BOUQUET DR	SUNLIGHT DR	E	AC	3	1,041	36	37,476	3/18/22	93	91	0	9	Surface Treatment - Slurry Seal	07-29-2020
1221	13639	MAGIC CIR	HARTLUND ST	CDS	E	AC	4	121	32	5,372	4/8/24	65	44	56	0	Surface Treatment - Slurry Seal	11-28-2019
2287	17016	MAGNOLIA ST FRONTAGE	PIONEER DR	GETTYSBURG DR	E	AAC	7	260	26	6,760	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2287	17017	MAGNOLIA ST FRONTAGE	SUNSHINE DR	VILLAGE DR	E	AAC	7	655	26	17,030	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1222	14380	MAHALO DR	KIOWA LN	KANEOHE LN	E	AC	9	930	36	32,904	3/27/24	81	25	75	0	New Construction	01-01-1980
1223	14001	MAIKAI DR	KIPAHULU DR	TONGA LN	E	AAC	8	671	36	24,156	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1223	15398	MAIKAI DR	TONGA LN	END	E	AC	8	864	36	32,904	3/7/22	82	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1130	12860	MAIN ST	SIXTH ST	ACACIA AVE	E	AAC	6	320	45	12,850	6/29/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1130	13046	MAIN ST	LOMA AVE	ADAMS AVE	E	AAC	6	349	30	3,468	6/29/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1130	13051	MAIN ST	ACACIA AVE	PALM AVE	E	AAC	6	578	45	26,185	6/29/21	87	28	0	72	Surface Treatment - Slurry Seal	07-27-2022
1130	13052	MAIN ST	ORANGE AVE	SIXTH ST	E	AAC	6	695	43	37,605	6/29/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1130	13053	MAIN ST	OLIVE AVE	ORANGE AVE	E	AAC	6	415	38	15,655	6/29/21	95	100	0	0	Overlay - AC Structural	06-01-2016
1130	13054	MAIN ST	PCH	OLIVE AVE	E	AAC	6	790	33	29,160	6/29/21	95	100	0	0	Overlay - AC Structural	06-01-2016
1130	13055	MAIN ST	ADAMS AVE	SEVENTEENTH ST	E	AAC	6	1,191	30	11,910	6/29/21	81	37	63	0	Surface Treatment - Slurry Seal	07-27-2022
1130	13056	MAIN ST	PALM AVE	CREST AVE	E	AAC	6	858	45	39,610	6/29/21	91	44	0	56	Surface Treatment - Slurry Seal	07-27-2022
1130	13057	MAIN ST	CREST AVE	TWELTH ST	E	AAC	6	1,015	45	45,675	6/29/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1130	13059	MAIN ST	TWELTH ST	LOMA AVE	E	AAC	6	845	45	44,486	6/29/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1130	17004	MAIN ST	ADAMS AVE	LOMA AVE	E	AAC	6	349	33	11,517	6/30/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1130	17005	MAIN ST	SEVENTEENTH ST	ADAMS AVE	E	AAC	6	1,191	28	33,348	6/30/21	99	2	0	98	Surface Treatment - Slurry Seal	05-01-2021
1224	14832	MAJOR CIR	B ST	CDS	E	AC	4	303	34	11,552	3/31/22	57	24	76	0	Surface Treatment - Slurry Seal	07-29-2020
1225	15228	MALAGA LN	SAN ANGELO DR	LA PAZ DR	E	AAC	4	819	36	31,234	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1226	15573	MALAHINE DR	IMPALA LN	HANAKAI LN	E	AC	9	516	36	19,326	7/12/17	89	100	0	0	New Construction	01-01-1980
1227	13188	MALDEN CIR	SOMERSET LN	CDS	E	AC	2	331	32	12,092	4/9/22	81	44	56	0	New Construction	01-01-1980
1228	14530	MALIBU LN	TAHITI CIR	LEILANI DR	E	AAC	9	275	36	10,650	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1228	15608	MALIBU LN	BANNING AVE	TAHITI CIR	E	AAC	9	944	36	33,984	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1229	14119	MALLOY DR	SOMERVILLE LN	YVONNE DR	E	AC	9	291	36	10,476	8/23/23	55	25	67	8	Surface Treatment - Slurry Seal	03-01-2011
1229	15452	MALLOY DR	YVONNE DR	DUBLIN LN	E	AC	9	1,326	36	47,736	8/21/23	67	17	81	2	Surface Treatment - Slurry Seal	03-01-2011
1230	13886	MALM CIR	BREELAND DR	END	E	AC	3	560	36	21,960	2/19/20	94	73	0	27	New Construction	01-01-1980
1231	13224	MALTA CIR	COURTNEY LN	CDS	E	AC	2	716	36	27,276	3/24/22	65	32	68	0	New Construction	01-01-1980
1232	15895	MAMMOTH DR	EVERGLADES LN	RUNNING SPRINGS LN	E	AC	8	1,032	36	36,576	3/1/22	71	18	82	0	Surface Treatment - Slurry Seal	02-13-2023
1233	13940	MANDEVILLE DR	DALEHURST CIR	SUMMERFIELD LN	E	AAC	7	401	36	15,414	11/21/19	100	0	0	0	Overlay - AC Structural	11-21-2019
1234	15264	MANDRELL DR	ALLEY OAK LN	ASH ST	E	AC	4	437	36	16,232	3/31/22	59	21	65	14	New Construction	01-01-1980
1235	14367	MANESSA CIR	DANA DR	END	E	AAC	8	322	32	10,304	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1236	13235	MANGRUM DR	EAGLE LN	BIRDIE LN	E	AC	3	260	36	9,360	3/23/22	91	77	23	0	New Construction	01-01-1980
1236	15083	MANGRUM DR	BIRDIE LN	END	E	AC	3	1,216	36	43,776	3/23/22	62	27	72	1	New Construction	01-01-1980
1237	15988	MANHATTAN DR	MAYOR LN	WHETMORE LN	E	AAC	3	1,181	36	42,516	2/11/20	87	100	0	0	Overlay - AC Structural	10-01-2012
1238	14767	MANITOBA LN	ALBERTA DR	YUKON DR	E	AC	4	246	36	9,856	5/13/24	83	94	0	6	Surface Treatment - Slurry Seal	11-28-2019
1238	15717	MANITOBA LN	ONTARIO DR	ALBERTA DR	E	AAC	4	561	36	20,196	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1239	13895	MANOR POINT CIR	EVENING HILL DR	CDS	E	AAC	5	354	36	14,744	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1240	15199	MANORFIELD DR	OLDGATE LN	OXBORO LN	E	AAC	5	1,032	36	37,152	3/11/20	81	52	0	48	Overlay - AC Structural	10-01-2012
1241	15890	MANSARD LN	HENTON DR	BAINFORD DR	E	AC	7	941	36	34,376	2/11/20	79	35	65	0	Surface Treatment - Slurry Seal	07-15-2021
1242	13823	MANUFACTURE LN	PRODUCTION DR	SYSTEM DR	E	AC	1	339	40	13,810	4/1/22	79	53	44	3	New Construction	01-01-1980
1243	15301	MAR VISTA DR	SUNNYCREST LN	EDWARDS ST	E	AAC	1	452	36	16,272	5/7/24	59	44	56	0	Overlay - AC Fabric	10-01-2016
1243	15925	MAR VISTA DR	NORTHRIDGE LN	SUNNYCREST LN	E	AC	1	1,300	36	46,800	2/10/20	72	29	66	5	New Construction	01-01-1980
1244	14410	MARBER LN	WOODBORO DR	TALBERT AVE	E	AC	5	182	36	6,552	3/12/20	89	64	0	36	New Construction	01-01-1980
1245	14520	MARBLEHEAD LN	BANNING AVE	PORT CLYDE DR	E	AC	9	167	36	6,012	4/17/24	95	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1246	15150	MARCELLENA DR	LIDO LN	GURNEY LN	E	AC	5	529	36	20,184	3/15/22	41	14	86	0	Surface Treatment - Slurry Seal	10-01-2012
1247	14407	MARGARITA LN	FENWICK DR	BAKER DR	E	AAC	3	300	36	11,550	2/11/20	89	90	0	10	Overlay - AC Structural	10-01-2012
1248	14434	MARIANA CIR	WELLINGTON CIR	CDS	E	AAC	2	279	32	10,428	5/6/24	80	100	0	0	Overlay - AC Fabric	12-01-2017
1249	15139	MARIE LN	PAULA CIR	MARILYN DR	E	AC	3	827	36	29,772	3/18/22	97	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1249	15994	MARIE LN	HEIL AVE	PAULA CIR	E	AC	3	933	36	33,588	3/18/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
2305	60820	MARIGAYLE CIR	EDWARDS ST	CDS	E	AC	5	185	36	8,550	5/7/24	93	100	0	0	New Construction - AC	01-01-1980
1250	13336	MARILYN DR	COOPER LN	CDS	E	AAC	3	428	36	17,008	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1250	15133	MARILYN DR	DIANE LN	COOPER LN	E	AAC	3	919	36	33,084	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1250	15995	MARILYN DR	DIANE LN	CDS	E	AAC	3	1,071	36	40,056	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1251	14157	MARINA LN	ADAMS AVE FRONTAGE	NAUTILUS DR	E	AC	7	805	36	29,730	2/10/20	84	93	0	7	Surface Treatment - Slurry Seal	07-15-2021
1252	15020	MARINA VIEW PL	ORION AVE	LOS PATOS AVE	E	AAC	2	686	36	24,696	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1253	14405	MARIPOSA DR	CORONADO LN	LIDO LN	E	AC	5	262	36	9,432	3/15/22	53	43	57	0	Surface Treatment - Slurry Seal	10-01-2012
1254	15106	MARJAN LN	EDINGER AVE	LAURELHURST DR	E	AC	3	1,190	36	42,264	5/9/24	86	95	0	5	New Construction	01-01-1980
1255	13490	MARK LN	NANCY DR	ALHAMBRA AVE	E	AC	4	260	36	10,110	3/18/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1256	14815	MARKEN LN	HOLLAND DR	SLATER AVE	E	AAC	4	660	36	23,760	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1256	15736	MARKEN LN	FRIESLAND DR	HOLLAND DR	E	AAC	4	520	36	18,970	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1257	13506	MARS DR	GEMINI LN	GOTHARD ST	E	AC	3	361	40	15,190	4/7/22	88	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1258	14828	MARSEILLE DR	GRANADA LN	BARCELONA LN	E	AC	4	757	36	27,252	3/31/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1259	15091	MARSHALL DR	ACE LN	NASSAU LN	E	AC	3	1,165	36	42,440	3/23/22	45	15	84	1	New Construction	01-01-1980
1260	14313	MARTINIQUE DR	WHITE HORSE LN	MIRAMAR LN	E	AC	9	253	36	9,108	8/30/23	95	100	0	0	New Construction	01-01-1980
1260	15537	MARTINIQUE DR	SHEPHERD LN	WHITE HORSE LN	E	AC	9	504	36	18,894	8/30/23	95	100	0	0	New Construction	01-01-1980
1261	13173	MARUFFA CIR	MISTRAL DR	CDS	E	AC	2	381	32	13,692	4/7/22	76	100	0	0	New Construction	01-01-1980
1262	14133	MARVALE DR	ALLPORT LN	CAMFIELD LN	E	AAC	7	737	36	27,282	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1263	14222	MARY CIR	FARNSWORTH LN	END	E	AC	9	321	32	10,272	8/24/23	69	69	31	0	New Construction	01-01-1980
1264	15160	MARYPORT DR	CRESTMOOR LN	SHOREHAM LN	E	AC	5	524	36	18,864	3/12/20	88	49	51	0	New Construction	01-01-1980
1264	15809	MARYPORT DR	FALKIRK LN	CRESTMOOR LN	E	AC	5	521	36	18,756	3/12/20	73	39	61	0	New Construction	01-01-1980
1265	13555	MASHIE CIR	NIMROD DR	END	E	AAC	3	216	32	8,412	2/11/20	92	55	0	45	Overlay - AC Structural	10-01-2012
1266	13337	MASON DR	DALE VISTA LN	FOUNTAIN LN	E	AC	3	398	36	14,328	3/18/22	91	100	0	0	Surface Treatment - Slurry Seal	07-29-2020

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1267	15889	MASTERS DR	NORCROFT LN	NEWBY LN	E	AC	7	1,033	36	37,938	2/12/20	83	97	0	3	Surface Treatment - Slurry Seal	07-15-2021
1268	14240	MATARO LN	VARAS CIR	ALVARADO DR	E	AC	9	273	36	9,828	8/23/23	78	69	31	0	New Construction	01-01-1980
1270	15438	MATSONIA LN	CONSTITUTION DR	CUTTY SARK DR	E	AAC	8	520	36	18,720	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1269	13976	MATTHEW CIR	LITCHFIELD DR	CDS	E	AAC	8	510	36	20,160	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1271	13145	MAUI CIR	WAIKIKI LN	CDS	E	AC	2	535	36	19,260	3/24/22	54	17	83	0	New Construction	01-01-1980
1272	15821	MAUNA LN	KAMUELA DR	YORKTOWN AVE	E	AAC	8	1,188	36	42,768	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1273	14097	MAURETANIA CIR	CARMANIA LN	CDS	E	AAC	8	303	32	11,696	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1274	15337	MAYFLOWER LN	MC FADDEN AVE	PRISCILLA DR	E	AC	1	961	36	34,846	5/8/24	41	10	70	20	New Construction	01-01-1980
1275	13372	MAYOR LN	SLATER AVE	CORY DR	E	AAC	3	168	36	6,048	2/12/20	92	52	0	48	Overlay - AC Structural	10-01-2012
1275	15154	MAYOR LN	CORY DR	END	E	AAC	3	368	36	15,748	2/12/20	93	100	0	0	Overlay - AC Structural	10-01-2012
1276	15460	MAYPORT LN	ADAMS AVE	MIDBURY DR	E	AAC	7	746	36	26,856	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1277	14411	MC CARTHY DR	SPRINGDALE ST	STILL HARBOR LN	E	AC	5	180	36	6,480	3/14/22	28	9	91	0	New Construction	01-01-1980
1185	14469	MC FADDEN AVE	BOLSA CHICA ST	PELICAN LN	E	AC	1	520	60	31,200	3/21/22	62	13	87	0	New Construction	01-01-1980
1185	14470	MC FADDEN AVE	INDUSTRY LN	GRAHAM ST	E	AC	1	256	44	11,264	3/21/22	82	31	42	27	New Construction	01-01-1980
1185	15591	MC FADDEN AVE	PELICAN LN	CHEMICAL LN	E	AC	1	1,028	60	61,030	3/21/22	47	12	80	8	New Construction	01-01-1980
1185	15592	MC FADDEN AVE	CHEMICAL LN	INDUSTRY LN	E	AC	1	914	44	40,216	3/21/22	53	6	83	11	New Construction	01-01-1980
1278	14179	MC KINLEY LN	ROCKY MOUNTAIN DR	YELLOWSTONE DR	E	AAC	8	872	36	32,142	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1279	13404	MC KINNEY CIR	ARMADA DR	CDS	E	AC	5	338	36	13,668	3/14/22	67	13	83	4	New Construction	01-01-1980
1280	14428	MC LAREN LN	ANNIK DR	BRABHAM DR	E	AC	8	260	36	9,360	2/18/20	46	19	81	0	Surface Treatment - Slurry Seal	07-15-2021
1280	15386	MC LAREN LN	BRABHAM DR	CDS	E	AAC	8	759	36	29,124	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1281	13307	MEADOW CIR	GRAHAM ST	CDS	E	AC	2	451	36	18,036	4/5/22	90	100	0	0	New Construction	01-01-1980
1282	15120	MEADOWBROOK DR	CHARLEYVILLE CIR	GREENVIEW LN	E	AC	3	513	36	18,968	2/18/20	93	100	0	0	New Construction	01-01-1980
1283	14874	MEADOWCREST DR	NORTHFIELD LN	EDWARDS ST	E	AC	5	540	36	20,580	3/15/22	67	30	70	0	Surface Treatment - Slurry Seal	10-01-2012
1284	13148	MEADOWLARK DR	GRAHAM ST	EAGLE LN	E	AAC	3	176	34	5,984	5/9/24	86	100	0	0	Overlay - AC Structural	10-01-2016
1284	13149	MEADOWLARK DR	EAGLE LN	BIRDIE LN	E	AAC	3	265	36	9,540	5/9/24	84	100	0	0	Overlay - AC Structural	10-01-2016
1284	13239	MEADOWLARK DR	NASSAU LN	FAIRWAY LN	E	AAC	3	260	36	9,360	5/9/24	91	100	0	0	Overlay - AC Fabric	10-01-2016
1284	15088	MEADOWLARK DR	FAIRWAY LN	SPRINGDALE ST	E	AAC	3	614	45	26,630	5/9/24	93	100	0	0	Overlay - AC Fabric	10-01-2016
1284	15934	MEADOWLARK DR	SARATOGA LN	DEL MAR LN	E	AAC	2	783	36	28,688	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1284	15935	MEADOWLARK DR	DEL MAR LN	GRAHAM ST	E	AAC	2	1,024	36	36,864	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1285	14145	MEANDER LN	RATH CIR	CHARFORD DR	E	AC	7	593	36	21,348	2/12/20	55	34	64	2	Surface Treatment - Slurry Seal	07-15-2021
1285	15463	MEANDER LN	BURLCREST DR	RATH CIR	E	AC	7	600	36	22,350	2/12/20	70	19	79	2	Surface Treatment - Slurry Seal	07-15-2021
1286	13867	MEATH CIR	TULLOW LN	END	E	AC	3	294	32	11,208	2/19/20	95	100	0	0	New Construction	01-01-1980
1287	13767	MEDFORD DR	BAYSIDE LN	HOLIDAY LN	E	AC	1	523	36	19,578	3/30/22	95	100	0	0	New Construction	01-01-1980
1287	15315	MEDFORD DR	HOLIDAY LN	END	E	AC	1	540	36	20,940	3/30/22	95	100	0	0	New Construction	01-01-1980
1288	14144	MEDITERRANEAN DR	SWANSEA LN	MAGNOLIA ST	E	AC	7	179	36	6,444	2/11/20	55	29	67	4	Surface Treatment - Slurry Seal	07-15-2021
1288	14151	MEDITERRANEAN DR	MAGNOLIA ST	HARBOR ISLE LN	E	AC	7	1,117	36	40,212	2/11/20	53	33	62	5	Surface Treatment - Slurry Seal	07-15-2021
1289	14818	MEER CIR	HOLLAND DR	CDS	E	AC	4	560	36	21,410	4/6/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1291	13774	MELBOURNE DR	HANOVER LN	END	E	AC	1	433	36	17,388	3/30/22	93	67	0	33	New Construction	01-01-1980
1291	15927	MELBOURNE DR	VICTORIA LN	YORKSHIRE LN	E	AC	1	780	36	29,080	4/27/24	96	100	0	0	New Construction	01-01-1980
1291	15928	MELBOURNE DR	HANOVER LN	VICTORIA LN	E	AC	1	780	36	28,080	2/26/20	95	100	0	0	New Construction	01-01-1980
1292	14522	MELINDA CIR	JONESPORT LN	CDS	E	AC	9	409	32	15,588	4/17/24	81	38	48	14	Surface Treatment - Slurry Seal	05-11-2019
1294	15030	MELODY LN	EDINGER AVE	RHAPSODY DR	E	AC	2	1,295	36	47,370	3/24/22	77	24	52	24	New Construction	01-01-1980
1295	14436	MELVILLE CIR	MARIANA CIR	CDS	E	AAC	2	367	32	13,244	5/6/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
1296	14681	MEMPHIS AVE	HUNTINGTON ST	DELAWARE ST	E	AC	6	659	37	24,087	8/15/23	77	23	70	7	New Construction	01-01-1980
1296	14682	MEMPHIS AVE	DELAWARE ST	FLORIDA ST	E	AAC	6	661	36	23,508	8/15/23	69	27	58	15	Overlay - AC Structural	03-01-2011
1296	15688	MEMPHIS AVE	ALABAMA ST	HUNTINGTON ST	E	AC	6	485	36	17,460	8/14/23	68	9	90	1	New Construction	01-01-1980
1296	15691	MEMPHIS AVE	FLORIDA ST	BEACH BLVD	E	AC	6	660	36	23,472	8/15/23	65	21	79	0	Surface Treatment - Slurry Seal	03-01-2011
1296	15847	MEMPHIS AVE	LAKE ST	ALABAMA ST	E	AC	6	372	36	13,392	8/14/23	51	21	79	0	Surface Treatment - Slurry Seal	03-01-2011
1297	13256	MERCIER LN	MYRTLE DR	SHAYNE DR	E	AC	3	1,020	36	36,720	3/17/22	61	17	77	6	New Construction	01-01-1980
1298	14207	MEREDITH DR	CRAIMER LN	MIDLAND LN	E	AC	8	377	36	14,322	2/28/22	90	100	0	0	Surface Treatment - Slurry Seal	02-14-2023
1298	16020	MEREDITH DR	BROOKHURST ST	CRAIMER LN	E	AC	8	1,358	36	48,888	2/28/22	85	42	53	5	Surface Treatment - Slurry Seal	02-14-2023
1299	13538	MERLE CIR	BRESSEL LN	CDS	E	AAC	4	420	36	16,620	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1300	14454	MERMAID CIR	BEACH BLVD	END	E	AC	9	270	32	8,640	8/24/23	79	67	33	0	New Construction	01-01-1980
1301	14090	MERRIMAC DR	BROOKHURST ST	CANBERRA LN	E	AC	8	1,156	36	41,616	3/3/22	77	60	40	0	Surface Treatment - Slurry Seal	02-08-2023
1302	14790	METZLER LN	SLATER AVE	BELVA DR	E	AAC	4	1,319	40	52,760	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1302	14791	METZLER LN	BELVA DR	CDS	E	AC	4	310	40	14,200	5/9/24	82	80	17	3	Surface Treatment - Slurry Seal	11-01-2019
1303	14796	MICHAEL DR	VAN BUREN ST	CDS	E	AC	4	190	32	7,880	5/13/24	82	67	33	0	Surface Treatment - Slurry Seal	11-28-2019
1303	14797	MICHAEL DR	VAN BUREN ST	JEFFERSON LN	E	AC	4	561	34	19,074	5/13/24	85	83	17	0	Surface Treatment - Slurry Seal	11-28-2019

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1303	14798	MICHAEL DR	JEFFERSON LN	CDS	E	AC	4	81	36	4,416	5/13/24	79	64	34	2	Surface Treatment - Slurry Seal	11-28-2019
1304	15461	MIDBURY DR	TRANQUIL LN	ASTOR LN	E	AAC	7	732	36	27,102	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1305	13243	MIDDLECOFF DR	CLUBHOUSE LN	FAIRWAY LN	E	AC	3	855	36	31,030	3/23/22	85	52	48	0	New Construction	01-01-1980
1305	15092	MIDDLECOFF DR	EAGLE LN	CLUBHOUSE LN	E	AC	3	1,087	36	39,132	3/23/22	96	90	0	10	New Construction	01-01-1980
1306	13312	MIDIRON CIR	GREENVIEW LN	END	E	AC	3	412	32	14,684	2/18/20	92	100	0	0	New Construction	01-01-1980
1307	15488	MIDLAND LN	MEREDITH DR	CDS	E	AAC	8	872	32	30,654	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1308	15192	MIDWAY DR	BELLFIELD LN	FOSS LN	E	AC	5	1,047	36	37,692	3/28/22	81	100	0	0	New Construction	01-01-1980
1309	13937	MILFORD CIR	NEWLAND ST	CDS	E	AAC	7	311	32	13,912	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1310	13552	MILL CIR	FORD DR	END	E	AAC	3	350	32	12,700	2/11/20	94	90	0	10	Overlay - AC Structural	10-01-2012
1311	14620	MILLBRIDGE CIR	PORT GREENWICH LN	END	E	AC	9	453	34	15,402	8/21/23	81	22	78	0	Surface Treatment - Slurry Seal	03-01-2011
1312	14329	MILNE DR	ANTIGUA LN	SAND DOLLAR LN	E	AC	9	252	36	9,572	8/30/23	52	17	80	3	New Construction	01-01-1980
1313	13609	MILO ST	SIMS ST	BLANTON ST	E	AC	2	330	36	12,860	3/22/22	83	25	68	7	New Construction	01-01-1980
1313	13611	MILO ST	LYNN ST	HOSKINS ST	E	AC	2	330	36	11,664	3/22/22	50	14	86	0	New Construction	01-01-1980
1313	13612	MILO ST	HOSKINS ST	GREEN ST	E	AAC	2	330	36	11,664	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
1314	13834	MILTON CIR	AULNAY LN	END	E	AC	1	330	36	13,130	3/30/22	95	100	0	0	New Construction	01-01-1980
1315	15502	MINERVA LN	ELLSWORTH DR	ELLSWORTH DR	E	AAC	9	512	32	16,384	5/9/24	73	42	26	32	Overlay - AC Structural	05-11-2018
1316	14833	MINORU LN	ALLEY WARNER AVE	WARNER AVE	E	AC	4	180	36	6,480	4/6/22	92	56	44	0	Surface Treatment - Slurry Seal	07-29-2020
1316	15750	MINORU LN	ALLEY SARU CIR	ALLEY WARNER AVE	E	AC	4	466	36	16,776	4/6/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1317	13138	MINUET DR	FANTASIA LN	BALLAD LN	E	AC	2	800	36	29,300	3/24/22	73	31	69	0	New Construction	01-01-1980
1318	13434	MIRA EL RIO LN	LUCIENTO DR	CENTRAL PARK DR	E	AAC	5	177	36	6,084	2/25/20	93	100	0	0	Overlay - AC Structural	10-01-2012
1319	13361	MIRA LOMA CIR	SANTA YNEZ DR	CDS	E	AC	5	350	36	13,950	3/15/22	42	26	74	0	Surface Treatment - Slurry Seal	10-01-2012
1320	14317	MIRAMAR LN	DORSETT DR	SABLE DR	E	AC	9	512	36	18,144	8/30/23	86	52	41	7	New Construction	01-01-1980
1320	15538	MIRAMAR LN	GREENFIELD LN	DORSETT DR	E	AC	9	686	36	24,696	8/30/23	92	71	29	0	New Construction	01-01-1980
1321	14238	MISSION LN	ALVARADO DR	END	E	AC	9	481	36	17,316	8/23/23	83	89	0	11	New Construction	01-01-1980
1321	15500	MISSION LN	SNOWBIRD DR	ALVARADO DR	E	AC	9	505	36	18,180	8/23/23	87	100	0	0	New Construction	01-01-1980
1322	13155	MISTRAL DR	TISBURY CIR	WAYFARER LN	E	AC	2	481	36	17,316	4/7/22	92	96	0	4	New Construction	01-01-1980
1322	15048	MISTRAL DR	LEONARD LN	TISBURY CIR	E	AC	2	527	36	18,972	4/7/22	89	67	0	33	New Construction	01-01-1980
1322	15051	MISTRAL DR	WANDERER LN	LEONARD LN	E	AC	2	1,080	36	38,880	4/7/22	77	43	55	2	New Construction	01-01-1980
1323	14918	MISTY LN	SLATER AVE	PRICE DR	E	AC	5	170	36	6,120	3/9/20	92	100	0	0	New Construction	01-01-1980
1323	15168	MISTY LN	RAPHAEL DR	PADUA DR	E	AC	5	780	36	28,080	3/9/20	80	57	43	0	New Construction	01-01-1980
1323	15800	MISTY LN	PRICE DR	RAPHAEL DR	E	AC	5	905	36	32,580	3/9/20	83	33	44	23	New Construction	01-01-1980
1324	14982	MODALE DR	FLAGSTAFF LN	NEWLAND ST	E	AC	7	595	36	21,420	4/8/24	88	66	34	0	Surface Treatment - Slurry Seal	11-28-2019
1324	15814	MODALE DR	CHAPEL LN	FLAGSTAFF LN	E	AC	7	727	36	26,652	4/8/24	89	59	41	0	Surface Treatment - Slurry Seal	11-28-2019
1325	14394	MOKIHANA DR	ALLEY BUSHARD ST	BUSHARD ST	E	AAC	9	120	36	4,320	5/6/24	82	40	60	0	Overlay - AC Structural	05-11-2018
1325	15574	MOKIHANA DR	IMPALA LN	ALLEY BUSHARD ST	E	AAC	9	990	36	35,640	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
1326	14507	MOLOKAI DR	MALIBU LN	CATALINA CIR	E	AAC	9	252	36	9,072	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1326	14513	MOLOKAI DR	NEWPORT CIR	BUSHARD ST	E	AAC	9	322	36	11,592	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1326	15609	MOLOKAI DR	CATALINA CIR	NEWPORT CIR	E	AAC	9	520	36	18,720	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1327	13636	MONA LN	BETTY DR	END	E	AC	3	126	36	4,536	4/7/22	70	81	19	0	New Construction	01-01-1980
1328	15440	MONITOR DR	CANBERRA LN	INDEPENDENCE LN	E	AC	8	1,142	36	40,896	3/2/22	91	74	0	26	Surface Treatment - Slurry Seal	02-08-2023
1329	14852	MONROE LN	HEIL AVE	BRUSH DR	E	AAC	4	526	36	18,936	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1329	15864	MONROE LN	BRUSH DR	TERRY DR	E	AAC	4	786	36	28,296	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1330	14266	MONTAUK CIR	HINGHAM DR	CDS	E	AC	9	279	32	11,478	5/8/24	71	29	53	18	Surface Treatment - Slurry Seal	05-11-2018
1331	14927	MONTBURY CIR	SERENE DR	END	E	AC	5	420	36	16,920	3/12/20	61	29	61	10	New Construction	01-01-1980
1332	14840	MONTCLAIR LN	TERRY DR	LANCASTER DR	E	AAC	4	465	36	16,990	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1334	13250	MONTECITO DR	ANGLER LN	WOODSTOCK LN	E	AC	3	1,012	36	36,432	3/17/22	59	52	48	0	New Construction	01-01-1980
1335	13418	MONTOYA CIR	SAN ROQUE LN	END	E	AAC	5	285	36	11,760	2/25/20	85	100	0	0	Overlay - AC Structural	10-01-2012
1336	13302	MOODY CIR	PEARCE ST	CDS	E	AC	2	259	36	10,574	4/5/22	64	35	46	19	New Construction	01-01-1980
1337	13882	MOONBEAM DR	SUNFLOWER LN	SUNBURST LN	E	AC	3	254	36	11,144	4/1/22	95	100	0	0	New Construction	01-01-1980
1338	14168	MOONCREST CIR	CLOUDHAVEN DR	CDS	E	AC	7	342	36	14,812	2/10/20	77	52	45	3	Surface Treatment - Slurry Seal	07-15-2021
1339	13451	MOONFIELD DR	IVORYCREST LN	FIELDBURY LN	E	AAC	5	917	36	33,012	3/11/20	86	100	0	0	Overlay - AC Structural	10-01-2012
1340	13603	MOONGLOW LN	BLUESAILS DR	STONEWOOD DR	E	AAC	3	260	36	10,860	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1341	13479	MOONLIGHT CIR	WISHINGWELL LN	CDS	E	AC	3	486	36	19,296	3/18/22	90	55	45	0	Surface Treatment - Slurry Seal	07-29-2020
1342	14451	MOONSHADOW CIR	VIEWPOINT LN	CDS	E	AC	4	273	32	10,236	4/6/22	87	61	39	0	Surface Treatment - Slurry Seal	07-29-2020
1343	15834	MOONTIDE CIR	ADAMS AVE FRONTAGE	CDS	E	AC	7	635	36	24,360	2/10/20	79	59	41	0	Surface Treatment - Slurry Seal	07-15-2021
1344	14083	MOORE CIR	EDUCATION LN	CDS	E	AAC	8	472	36	18,792	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1345	14008	MOOREA LN	PUA DR	KUKUI DR	E	AC	8	260	36	9,360	3/7/22	74	47	42	11	Surface Treatment - Slurry Seal	02-08-2023
1346	13972	MOORPARK DR	SEAHURST DR	MC LAREN LN	E	AAC	8	180	36	6,480	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1348	14810	MORGAN LN	SLATER AVE	SPEER AVE	E	AAC	4	661	36	23,796	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1349	13406	MORION CIR	COLLINS LN	CDS	E	AC	5	222	36	7,992	3/14/22	89	100	0	0	New Construction	01-01-1980
1350	13195	MORNING STAR DR	EDGEWATER LN	CDS	E	AAC	2	357	36	14,352	5/10/24	92	88	0	12	Overlay - AC Fabric	12-01-2017
1350	15056	MORNING STAR DR	SAYBROOK LN	EDGEWATER LN	E	AAC	2	794	36	28,584	5/10/24	81	58	42	0	Overlay - AC Structural	12-01-2017
1352	13047	MORNING TIDE DR	ISLAND BAY LN	OCEAN BLUFF CIR	E	AAC	5	1,284	36	46,556	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1353	14185	MORRISTOWN CIR	MAMMOTH DR	CDS	E	AC	8	579	32	20,028	3/1/22	79	54	43	3	Surface Treatment - Slurry Seal	02-13-2023
1354	13624	MORRO BAY LN	SANTA YNEZ DR	SLATER AVE	E	AC	5	170	36	6,120	3/15/22	60	49	51	0	Surface Treatment - Slurry Seal	10-01-2012
1355	13214	MORSE CIR	TRUMBULL DR	CDS	E	AAC	2	306	36	11,016	5/10/24	90	100	0	0	Overlay - AC Fabric	12-01-2017
1356	14923	MOSS DR	WRIGHTWOOD LN	SPRINGDALE ST	E	AC	5	180	36	6,204	3/9/20	79	39	61	0	New Construction	01-01-1980
1357	14060	MOSSFORD DR	BRIARLY LN	FELCLIFF LN	E	AAC	7	1,027	36	36,972	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1358	14917	MOSSVALE CIR	WOODFERN LN	END	E	AC	5	548	35	20,980	3/12/20	84	59	27	14	New Construction	01-01-1980
1359	14777	MOUNTJOY DR	GOTHARD ST	ENTERPRISE LN	E	AAC	4	439	40	18,310	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1360	14993	MUKAI CT	MADERA LN	CDS	E	AC	5	271	36	12,036	3/15/22	95	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1361	14117	MUNSTER DR	SOMERVILLE LN	LONDONDERRY LN	E	AC	9	577	36	20,772	8/23/23	64	24	76	0	Surface Treatment - Slurry Seal	03-01-2011
1361	14118	MUNSTER DR	LONDONDERRY LN	DUBLIN LN	E	AC	9	1,040	36	37,440	8/23/23	84	59	19	22	Surface Treatment - Slurry Seal	03-01-2011
1362	14140	MURAL CIR	BELLSHIRE DR	CDS	E	AAC	7	449	32	15,868	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1363	14859	MURDY CIR	GOTHARD ST	CDS	E	AAC	3	435	36	17,460	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1364	13398	MUTHER LN	KISER DR	HAMSHIRE DR	E	AC	5	257	36	9,252	3/28/22	87	45	55	0	New Construction	01-01-1980
1365	13597	MYCROFT LN	SHAYNE DR	HEIL AVE	E	AC	3	170	36	6,120	3/17/22	43	13	86	1	New Construction	01-01-1980
1366	16002	MYRTLE DR	GENTRY LN	BRIMHALL LN	E	AC	3	1,016	36	37,076	3/17/22	74	80	20	0	New Construction	01-01-1980
1367	15993	MYTINGER LN	GLORIA DR	CAMILLE DR	E	AC	3	859	36	30,924	3/23/22	66	24	75	1	New Construction	01-01-1980
1368	13199	NALU CIR	BARUNA LN	CDS	E	AC	2	229	36	9,744	4/7/22	84	84	0	16	New Construction	01-01-1980
1369	15225	NANCY DR	RHONE LN	MARK LN	E	AC	4	890	36	32,790	3/18/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1370	15822	NANTUCKET DR	WATERBURY LN	BUSHARD ST	E	AC	7	1,122	36	40,392	2/18/20	76	59	39	2	Surface Treatment - Slurry Seal	07-15-2021
1371	13358	NAPA CIR	OJAI LN	CDS	E	AC	5	216	36	10,266	3/15/22	56	48	52	0	Surface Treatment - Slurry Seal	10-01-2012
1372	15375	NAPLES DR	NEWLAND ST	LOOKOUT LN	E	AAC	7	641	36	23,326	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1373	14680	NASHVILLE AVE	HUNTINGTON ST	DELAWARE ST	E	AAC	6	660	37	23,828	8/14/23	83	81	19	0	Overlay - AC Structural	03-01-2011
1373	15686	NASHVILLE AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	485	37	17,649	8/14/23	81	51	49	0	Overlay - AC Structural	03-01-2011
1374	13237	NASSAU LN	MANGRUM DR	SNEAD DR	E	AC	3	311	36	11,196	3/23/22	68	22	78	0	New Construction	01-01-1980
1374	13241	NASSAU LN	VENTURI DR	MARSHALL DR	E	AC	3	260	36	9,610	3/23/22	81	100	0	0	New Construction	01-01-1980
1374	15086	NASSAU LN	SNEAD DR	VENTURI DR	E	AC	3	998	36	35,928	3/23/22	65	25	75	0	New Construction	01-01-1980
1375	16013	NATIONAL LN	STAR DR	KITE DR	E	AC	8	1,014	36	36,504	3/18/24	81	33	55	12	Surface Treatment - Slurry Seal	05-11-2018
1376	15824	NAUTILUS DR	MARINA LN	BUSHARD ST	E	AC	7	1,106	36	40,566	2/10/20	86	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1377	15801	NEARGATE DR	RAINGLEN LN	GRAHAM ST	E	AC	5	587	36	20,844	3/12/20	88	65	35	0	New Construction	01-01-1980
1378	13293	NEELY CIR	GREEN ST	CDS	E	AC	2	269	36	10,934	4/7/22	82	47	50	3	New Construction	01-01-1980
1379	14386	NEOLANI DR	IMPALA LN	KANAKOA LN	E	AC	9	278	36	11,008	4/24/24	93	100	0	0	New Construction	01-01-1980
1379	14387	NEOLANI DR	ZAMORA LN	CDS	E	AC	9	235	32	9,320	4/24/24	95	100	0	0	New Construction	01-01-1980
1379	15571	NEOLANI DR	KANAKOA LN	ZAMORA LN	E	AC	9	517	36	18,612	4/24/24	92	100	0	0	New Construction	01-01-1980
1380	15513	NETHERWAY DR	PAISLEY LN	QUEENS PARK LN	E	AC	8	1,039	36	38,580	3/18/24	89	66	0	34	Surface Treatment - Slurry Seal	05-11-2018
1381	14468	NEVADA DR	STARDUST DR	TANGIERS DR	E	AAC	1	260	36	9,360	5/8/24	87	100	0	0	Overlay - AC Structural	10-01-2016
1381	15589	NEVADA DR	TANGIERS DR	HAMMON LN	E	AAC	1	1,203	36	43,308	5/8/24	88	100	0	0	Overlay - AC Structural	10-01-2016
1382	14623	NEW BRITAIN LN	HAMMON LN	END	E	AAC	9	639	36	23,004	8/21/23	92	100	0	0	Overlay - AC Structural	03-01-2011
1382	15658	NEW BRITAIN LN	ROTHERT LN	END	E	AC	9	773	36	27,828	8/21/23	68	23	77	0	Surface Treatment - Slurry Seal	03-01-2011
1383	13457	NEWBURY DR	LAKEPOINT LN	HALLPORT LN	E	AAC	5	542	36	20,262	2/24/20	77	100	0	0	Overlay - AC Structural	10-01-2012
1383	15206	NEWBURY DR	HALLPORT LN	END	E	AAC	5	785	36	30,060	2/24/20	84	100	0	0	Overlay - AC Structural	10-01-2012
1384	14132	NEWBY LN	MASTERS DR	LARTHORN DR	E	AAC	7	238	36	9,318	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1386	13785	NEWCASTLE LN	OXFORD DR	HALIFAX DR	E	AC	1	1,040	36	37,152	2/26/20	79	28	51	21	New Construction	01-01-1980
1387	13042	NEWFOUNDLAND CIR	PALM AVE	CDS	E	AC	6	195	36	9,045	6/22/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1389	13930	NEWHAVEN LN	HAMDEN LN	BRIDGEPORT DR	E	AAC	7	370	36	13,320	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1389	13931	NEWHAVEN LN	ALLEY GIILFORD CIR	YORKTOWN AVE	E	AC	7	150	36	5,400	4/2/24	89	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1389	15370	NEWHAVEN LN	BRIDGEPORT DR	ALLEY GILFORD CIR	E	AC	7	877	36	31,572	4/2/24	69	30	67	3	Surface Treatment - Slurry Seal	11-28-2019
1391	15013	NEWMAN AVE	BEACH BLVD	CDS	E	AAC	4	1,330	36	47,880	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1391	15014	NEWMAN AVE	BEACH BLVD	VAN BUREN ST	E	AC	4	955	40	36,920	5/13/24	77	27	72	1	Surface Treatment - Slurry Seal	11-28-2019
1391	15727	NEWMAN AVE	VAN BUREN ST	CDS	E	AC	4	1,049	40	43,460	5/13/24	85	57	21	22	Surface Treatment - Slurry Seal	11-28-2019
1392	13442	NEWMOON LN	JASONWOOD DR	IRONGATE CIR	E	AAC	5	255	36	9,180	3/11/20	87	100	0	0	Overlay - AC Structural	10-01-2012
1392	15197	NEWMOON LN	IRONGATE CIR	LITTLEFIELD DR	E	AAC	5	814	36	29,304	3/11/20	84	100	0	0	Overlay - AC Structural	10-01-2012
1393	14512	NEWPORT CIR	MOLOKAI DR	CDS	E	AAC	9	313	32	11,516	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1394	15775	NEWQUIST LN	EL DORADO DR	GLENROY DR	E	AC	2	733	36	27,528	3/22/22	87	95	0	5	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1396	16019	NIAGARA DR	LAWSON LN	MIDLAND LN	E	AAC	8	756	36	27,216	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1397	13169	NIANTIC CIR	MISTRAL DR	CDS	E	AC	2	405	32	14,460	4/7/22	62	38	27	35	New Construction	01-01-1980
1398	14964	NICHOLS ST	WAGON DR	SLATER AVE	E	AC	0	327	44	14,388	5/8/24	90	74	26	0	New Construction	01-01-1980
1398	15652	NICHOLS ST	WARNER AVE	CDS	E	AC	4	615	36	23,940	3/31/22	80	35	65	0	Surface Treatment - Slurry Seal	07-29-2020
1398	15838	NICHOLS ST	BELSITO DR	WARNER AVE	E	AC	0	670	44	29,480	5/8/24	82	100	0	0	New Construction	01-01-1980
1398	15839	NICHOLS ST	WAGON DR	BELSITO DR	E	AC	0	1,645	44	72,380	5/8/24	84	63	35	2	New Construction	01-01-1980
1399	14371	NIGUEL CIR	POLYNESIAN LN	CDS	E	AAC	9	480	36	19,080	3/26/24	88	93	0	7	Overlay - AC Structural	05-11-2018
1400	13520	NILE CIR	RHINE DR	CDS	E	AC	4	166	32	6,812	3/31/22	95	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1401	13168	NIMBLE CIR	SUNDANCER LN	CDS	E	AAC	2	194	32	7,708	5/7/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
1402	15255	NIMROD DR	MASHIE CIR	LUCERO LN	E	AAC	3	658	36	25,188	2/11/20	93	57	0	43	Overlay - AC Structural	10-01-2012
1403	13009	NINETEENTH ST	ACACIA AVE	PALM AVE	E	AAC	6	390	46	17,940	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1403	13010	NINETEENTH ST	PECAN AVE	ACACIA AVE	E	AAC	6	405	46	18,630	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1403	13011	NINETEENTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	415	46	19,090	6/23/21	78	15	85	0	Surface Treatment - Slurry Seal	07-27-2022
1403	13012	NINETEENTH ST	PCH	WALNUT AVE	E	AC	6	370	50	18,500	6/23/21	87	34	0	66	Surface Treatment - Slurry Seal	07-27-2022
1403	13013	NINETEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/23/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1403	13095	NINETEENTH ST	ORANGE AVE	PECAN AVE	E	AAC	6	395	46	18,170	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1404	12959	NINTH ST	OLIVE AVE	ORANGE AVE	E	AAC	6	395	48	18,960	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1404	12960	NINTH ST	PECAN AVE	ACACIA AVE	E	AAC	6	375	46	17,250	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1404	12961	NINTH ST	ORANGE AVE	PECAN AVE	E	AAC	6	375	48	18,000	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1404	12963	NINTH ST	WALNUT AVE	OLIVE AVE	E	AAC	6	395	48	18,960	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1404	12964	NINTH ST	ACACIA AVE	PALM AVE	E	AAC	6	375	46	17,250	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1404	15840	NINTH ST	PCH	WALNUT AVE	E	AC	6	370	46	17,020	6/22/21	92	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1405	14799	NOBLE CIR	FOREST LN	CDS	E	AC	4	400	34	15,100	5/13/24	75	66	34	0	Surface Treatment - Slurry Seal	11-28-2019
1406	13445	NORBROOK DR	IVORYCREST LN	TWINFORD LN	E	AAC	5	136	36	5,646	3/11/20	91	94	0	6	Overlay - AC Structural	10-01-2012
1406	13452	NORBROOK DR	FIELDBURY LN	END	E	AAC	5	104	36	3,744	3/11/20	91	100	0	0	Overlay - AC Structural	10-01-2012
1406	15203	NORBROOK DR	TWINFORD LN	FIELDBURY LN	E	AAC	5	664	36	23,904	3/11/20	82	70	0	30	Overlay - AC Structural	10-01-2012
1407	14904	NORCON CIR	TILBURG DR	CDS	E	AC	5	128	36	5,858	3/29/22	95	100	0	0	New Construction	01-01-1980
1408	15456	NORCROFT LN	KELSO DR	LARTHORN DR	E	AAC	7	534	36	19,974	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1409	14913	NORDINA DR	FORBES LN	CHAPPARAL LN	E	AC	5	249	36	9,214	3/29/22	51	11	89	0	New Construction	01-01-1980
1409	15795	NORDINA DR	CHAPPARAL LN	WILD ROSE LN	E	AC	5	767	36	27,862	3/29/22	69	31	69	0	New Construction	01-01-1980
1410	14621	NORFOLK DR	PORT GREENWICH LN	KELSO DR	E	AAC	9	549	36	19,764	8/21/23	91	42	58	0	Overlay - AC Structural	03-01-2011
1411	13263	NORGROVE CIR	SILVERWOOD DR	CDS	E	AC	3	140	32	5,730	3/17/22	74	31	69	0	New Construction	01-01-1980
1412	13626	NORINO DR	COBRA LN	GOLDEN VIEW LN	E	AC	3	253	36	9,108	2/12/20	69	53	47	0	Surface Treatment - Slurry Seal	10-01-2012
1413	15268	NORMA DR	GOLDENWEST ST	TUNSTALL LN	E	AC	3	653	36	23,508	3/18/22	91	100	0	0	New Construction	01-01-1980
1414	13257	NORMANDY LN	MYRTLE DR	RINGO CIR	E	AC	3	255	36	9,180	3/17/22	90	100	0	0	New Construction	01-01-1980
1414	15100	NORMANDY LN	RINGO CIR	SHAYNE DR	E	AC	3	765	36	27,540	3/17/22	92	100	0	0	New Construction	01-01-1980
5000	60000	NORTH PACIFIC	WARNER AVE	5TH ST	E	AC	2	1,347	20	26,940	5/6/24	83	27	73	0	New Construction - Initial	01-01-1980
5000	60010	NORTH PACIFIC	5TH ST	7TH ST	E	AC	2	470	25	11,750	5/6/24	94	86	0	14	New Construction - Initial	01-01-1980
5000	60020	NORTH PACIFIC	7TH ST	10TH ST	E	AC	2	705	25	17,625	5/6/24	92	100	0	0	New Construction - Initial	01-01-1980
5000	60030	NORTH PACIFIC	10TH ST	BROADWAY	E	AC	2	728	25	18,200	5/6/24	68	13	87	0	New Construction - Initial	01-01-1980
5000	60040	NORTH PACIFIC	BROADWAY	16TH ST	E	AC	2	727	25	18,175	5/6/24	81	18	74	8	New Construction - Initial	01-01-1980
5000	60050	NORTH PACIFIC	16TH ST	19TH ST	E	AC	2	705	25	17,625	5/6/24	88	48	52	0	New Construction - Initial	01-01-1980
5000	60060	NORTH PACIFIC	19TH ST	22ND ST	E	AC	2	706	25	17,650	5/6/24	83	21	38	41	New Construction - Initial	01-01-1980
5000	60070	NORTH PACIFIC	22ND ST	25TH ST	E	AC	2	705	25	17,625	5/6/24	89	34	66	0	New Construction - Initial	01-01-1980
5000	60080	NORTH PACIFIC	25TH ST	ANDERSON ST	E	AC	2	485	25	12,125	5/6/24	87	23	42	35	New Construction - Initial	01-01-1980
1415	14895	NORTHFIELD LN	MEADOWCREST DR	FREEBORN DR	E	AC	5	610	36	21,960	3/15/22	51	16	84	0	Surface Treatment - Slurry Seal	10-01-2012
1416	14618	NORTHPORT DR	PORT GREENWICH LN	END	E	AC	9	453	36	16,308	8/21/23	88	35	65	0	Surface Treatment - Slurry Seal	03-01-2011
1416	15656	NORTHPORT DR	NEW BRITAIN LN	PORT GREENWICH LN	E	AC	9	534	36	19,224	8/21/23	90	55	45	0	Surface Treatment - Slurry Seal	03-01-2011
1417	15300	NORTHRIDGE LN	LARCHWOOD DR	END	E	AAC	1	742	36	28,712	5/7/24	56	45	55	0	Overlay - AC Fabric	10-01-2016
1418	14342	NORTHSHORE LN	PIER DR	HAMILTON AVE	E	AC	9	169	36	5,796	4/1/24	72	31	53	16	Surface Treatment - Slurry Seal	05-11-2018
1419	13962	NORTHSTAR LN	CLIFFSIDE DR	SAILPORT DR	E	AAC	7	253	36	9,358	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1420	13792	NORWICH CIR	MELBOURNE DR	END	E	AC	1	410	36	16,560	2/26/20	92	56	0	44	New Construction	01-01-1980
1421	13786	NOTTINGHAM LN	OXFORD DR	HALIFAX DR	E	AC	1	1,040	36	37,152	3/30/22	95	100	0	0	New Construction	01-01-1980
1422	13669	NUGGET CIR	SAHARA LN	END	E	AC	1	270	36	11,220	2/10/20	93	100	0	0	New Construction	01-01-1980
1423	13394	NUTWOOD CIR	PRESCOTT LN	CDS	E	AC	5	340	36	13,490	3/14/22	52	12	85	3	Surface Treatment - Slurry Seal	10-01-2012
1424	13276	NYANZA DR	MARJAN LN	TYEE LN	E	AC	3	840	36	30,240	3/16/22	89	100	0	0	New Construction	01-01-1980
1425	13153	OAHU DR	WAIKIKI LN	BOLSA CHICA ST	E	AAC	2	670	36	24,120	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
1426	13565	OAK LN	ALLEY ASH ST	ALLEY OAK LN	E	AC	4	176	36	6,336	3/31/22	77	37	63	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1426	15259	OAK LN	WARNER AVE	SYCAMORE AVE	E	AC	4	397	36	14,292	3/31/22	52	10	87	3	New Construction	01-01-1980
1426	15260	OAK LN	SYCAMORE AVE	ALLEY ASH ST	E	AC	4	933	36	33,588	3/31/22	54	36	63	1	New Construction	01-01-1980
1427	13279	OAKGROVE CIR	OAKMONT LN	CDS	E	AC	3	420	36	16,920	3/17/22	89	59	0	41	New Construction	01-01-1980
1428	15996	OAKMONT LN	EDGEMONT DR	HEIL AVE	E	AC	3	690	36	24,265	3/17/22	76	33	67	0	New Construction	01-01-1980
1429	13876	OAKSHIRE LN	RED COACH DR	GAS LIGHT DR	E	AC	3	253	36	10,108	4/1/22	95	100	0	0	New Construction	01-01-1980
1430	13699	OAKTREE CIR	MAR VISTA DR	END	E	AC	1	480	36	19,080	2/10/20	85	100	0	0	New Construction	01-01-1980
1431	15423	OCCIDENTAL LN	VERONICA DR	MADELINE DR	E	AC	7	827	36	31,272	2/18/20	69	4	77	19	Surface Treatment - Slurry Seal	07-15-2021
1432	12851	OCEAN BLUFF CIR	MORNING TIDE DR	CDS	E	AAC	5	232	36	11,360	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1434	15603	OCEANBREEZE LN	OCEANCREST DR	SUMMERWIND LN	E	AC	9	796	36	29,406	3/26/24	92	89	0	11	Surface Treatment - Slurry Seal	05-11-2019
1435	14494	OCEANCREST DR	SUMMERWIND LN	CDS	E	AAC	9	130	34	5,920	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1435	15602	OCEANCREST DR	SUMMERWIND LN	CDS	E	AAC	9	775	34	28,150	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1436	14706	OCEANHILL DR	DELAWARE ST	CDS	E	AAC	6	1,218	34	42,912	8/15/23	86	62	21	17	Overlay - AC Structural	03-01-2011
1437	13706	OCEANUS DR	TRITON LN	GRAHAM ST	E	AC	1	2,027	40	81,080	3/21/22	66	24	76	0	New Construction	01-01-1980
1438	15598	OCEANVIEW LN	ROCK POINT DR	HIGHTIDE DR	E	AC	9	1,026	36	38,936	3/26/24	90	100	0	0	New Construction	01-01-1980
1439	14262	OCEANWOOD DR	MAGNOLIA ST	SEA MIST LN	E	AC	9	379	36	14,394	5/6/24	77	89	10	1	Surface Treatment - Slurry Seal	05-11-2018
1440	12852	OFELIA LN	MORNING TIDE DR	PALM AVE	E	AC	5	202	36	6,555	6/30/21	96	19	0	81	Surface Treatment - Slurry Seal	07-27-2022
1441	13359	OJAI LN	NAPA CIR	POINT LOMA DR	E	AC	5	262	36	10,572	3/15/22	78	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1442	14011	OLANA LN	KAMUELA DR	YORKTOWN AVE	E	AAC	8	1,132	36	40,752	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1444	15198	OLDGATE LN	LITTLEFIELD DR	END	E	AAC	5	337	36	12,132	3/11/20	81	41	0	59	Overlay - AC Structural	10-01-2012
1445	13387	OLDGLEN LN	LANCEFIELD DR	WOODBORO DR	E	AC	5	315	36	12,340	3/12/20	95	100	0	0	New Construction	01-01-1980
1446	12905	OLIVE AVE	ELEVENTH ST	FOURTEENTH ST	E	AC	6	930	38	35,340	6/23/21	85	62	0	38	Surface Treatment - Slurry Seal	07-27-2022
1446	12911	OLIVE AVE	EIGHTH ST	ELEVENTH ST	E	AAC	6	930	37	34,410	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1446	12917	OLIVE AVE	SIXTH ST	EIGHTH ST	E	AC	6	600	40	24,000	6/23/21	87	50	0	50	Surface Treatment - Slurry Seal	05-03-2021
1446	12922	OLIVE AVE	FIFTH ST	SIXTH ST	E	AC	6	270	36	9,720	6/23/21	93	100	0	0	Surface Treatment - Slurry Seal	05-03-2021
1446	12924	OLIVE AVE	MAIN ST	FIFTH ST	E	AC	6	310	36	10,195	6/23/21	95	100	0	0	Surface Treatment - Slurry Seal	05-03-2021
1446	12926	OLIVE AVE	SECOND ST	THIRD ST	E	AC	6	265	26	6,890	6/30/21	76	19	80	1	Surface Treatment - Slurry Seal	07-27-2022
1446	12927	OLIVE AVE	FIRST ST	SECOND ST	E	AC	6	265	36	9,540	6/30/21	89	36	0	64	Surface Treatment - Slurry Seal	07-27-2022
1446	13065	OLIVE AVE	THIRD ST	MAIN ST	E	AC	6	267	36	9,612	6/30/21	90	51	0	49	Surface Treatment - Slurry Seal	05-03-2021
1446	13106	OLIVE AVE	NINETEENTH ST	TWENTY-SECOND ST	E	AAC	6	825	36	29,700	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
1446	13107	OLIVE AVE	SEVENTEENTH ST	NINETEENTH ST	E	AAC	6	610	36	21,960	12/17/21	100	0	0	0	Overlay - AC Fabric	12-17-2021
1446	13113	OLIVE AVE	FOURTEENTH ST	SEVENTEENTH ST	E	AC	6	930	36	33,480	6/23/21	92	63	0	37	Surface Treatment - Slurry Seal	07-27-2022
1446	16034	OLIVE AVE	22ND ST	GOLDENWEST ST	E	AC	6	255	36	9,430	6/23/21	82	37	61	2	Surface Treatment - Slurry Seal	07-27-2022
1447	14174	OLYMPIC DR	INTERIOR LN	CDS	E	AC	8	379	32	13,628	3/1/22	77	68	32	0	Surface Treatment - Slurry Seal	02-13-2023
1447	15480	OLYMPIC DR	BIG BEND LN	INTERIOR LN	E	AAC	8	1,006	36	36,966	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1448	13202	ONDINE CIR	EDGEWATER LN	CDS	E	AAC	2	350	36	14,100	5/10/24	85	59	41	0	Overlay - AC Fabric	12-01-2017
1449	14528	ONSET CIR	CAPE MAY LN	CDS	E	AC	9	206	32	8,092	4/24/24	87	83	17	0	Surface Treatment - Slurry Seal	05-11-2019
1450	14763	ONTARIO DR	CARNABY LN	HUNTINGTON ST	E	AAC	4	483	36	17,100	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1450	15716	ONTARIO DR	HUNTINGTON ST	DELAWARE ST	E	AAC	4	888	36	31,680	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1451	14804	OPAL CIR	VAN BUREN ST	CDS	E	AAC	4	190	32	7,580	12/5/19	100	0	0	0	Overlay - AC Structural	12-05-2019
1452	13162	OPERA LN	OPERETTA DR	SCENARIO DR	E	AC	2	260	26	7,260	3/24/22	79	79	0	21	New Construction	01-01-1980
1453	13152	OPERETTA DR	FANTASIA LN	OPERA LN	E	AC	2	1,060	36	38,660	3/24/22	80	81	0	19	New Construction	01-01-1980
1455	15951	ORIENT DR	CHUBASCO LN	COCOBANA LN	E	AC	8	1,025	36	38,400	4/1/24	78	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1456	13533	ORINDA CIR	LUCIA LN	CDS	E	AC	4	350	32	12,450	4/6/22	77	38	49	13	Surface Treatment - Slurry Seal	07-29-2020
1457	13815	ORIOLE LN	ROBINWOOD DR	SPARROW DR	E	AC	1	260	36	9,360	3/21/22	75	28	72	0	New Construction	01-01-1980
1457	13819	ORIOLE LN	SPARROW DR	SKYLARK DR	E	AC	1	260	36	9,610	3/21/22	71	51	48	1	New Construction	01-01-1980
1458	14870	ORION AVE	MARINA VIEW PL	SANDRA LEE LN	E	AAC	2	256	36	9,216	5/13/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
1458	15769	ORION AVE	SANDRA LEE LN	SIMS ST	E	AAC	2	330	36	11,592	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1459	13414	ORKNEY CIR	BRAEMAR DR	CDS	E	AC	5	125	36	6,750	4/4/22	100	55	0	45	New Construction	01-01-1980
1460	15098	ORLANDO DR	SPRINGDALE ST	BRADBURY LN	E	AC	3	668	36	24,048	3/17/22	46	12	88	0	New Construction	01-01-1980
1461	14098	ORONSAY CIR	CARMANIA LN	CDS	E	AAC	8	295	32	11,440	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1462	14678	OSWEGO AVE	ALLEY ALABAMA ST	HUNTINGTON ST	E	AAC	6	162	36	5,544	8/14/23	81	45	55	0	Overlay - AC Structural	03-01-2011
1462	14679	OSWEGO AVE	HUNTINGTON ST	DELAWARE ST	E	AAC	6	660	36	23,184	8/14/23	82	59	41	0	Overlay - AC Structural	03-01-2011
1462	14732	OSWEGO AVE	ALABAMA ST	ALLEY ALABAMA ST	E	AAC	6	322	36	11,304	8/14/23	88	52	48	0	Overlay - AC Structural	03-01-2011
1462	15848	OSWEGO AVE	LAKE ST	ALABAMA ST	E	AAC	6	372	37	13,764	8/15/23	75	34	66	0	Overlay - AC Structural	03-01-2011
1463	14600	OVERLOOK DR	EDWARDS ST	WILDFLOWER LN	E	AC	5	403	36	14,508	5/7/24	83	41	37	22	New Construction	01-01-1980
1464	14743	OWEN AVE	FLORIDA ST	BEACH BLVD	E	AAC	7	660	36	23,760	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1465	13455	OXBORO LN	MANOFIELD DR	END	E	AAC	5	115	36	4,140	3/11/20	90	100	0	0	Overlay - AC Structural	10-01-2012
1465	15205	OXBORO LN	NORBROOK DR	MANOFIELD DR	E	AAC	5	547	36	19,692	3/11/20	84	100	0	0	Overlay - AC Structural	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1466	13769	OXFORD DR	HANOVER LN	END	E	AC	1	433	36	15,588	3/30/22	95	100	0	0	New Construction	01-01-1980
1466	15319	OXFORD DR	VICTORIA LN	GOLDENWEST ST	E	AC	1	1,334	36	48,024	2/26/20	75	44	37	19	New Construction	01-01-1980
1466	15930	OXFORD DR	HANOVER LN	VICTORIA LN	E	AC	1	781	36	28,116	3/30/22	95	100	0	0	New Construction	01-01-1980
1467	14122	OXLEY CIR	VINTAGE LN	CDS	E	AAC	7	435	32	15,420	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1468	14301	OYSTER BED LN	EDYE DR	CLIFF DR	E	AAC	8	254	36	9,144	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1469	13449	PACEMONT DR	IVORYCREST LN	VESTRY CIR	E	AC	5	213	36	7,668	2/10/20	91	69	0	31	New Construction	01-01-1980
1469	15201	PACEMONT DR	VESTRY CIR	FIELDBURY LN	E	AC	5	873	36	31,428	3/11/20	95	100	0	0	New Construction	01-01-1980
1473	14154	PADDOCK CIR	JOHNSON LN	CDS	E	AC	7	324	32	10,368	2/11/20	75	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1474	13383	PADUA DR	WRIGHTWOOD LN	SPRINGDALE ST	E	AC	5	180	36	6,480	3/9/20	86	57	43	0	New Construction	01-01-1980
1474	15164	PADUA DR	WHITFORD LN	WRIGHTWOOD LN	E	AC	5	1,295	36	45,820	3/9/20	74	27	63	10	New Construction	01-01-1980
1475	14125	PAGE CIR	CROWN REEF LN	CDS	E	AC	7	160	36	7,260	2/12/20	79	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1476	14020	PAGO PAGO CIR	TOBAGO LN	END	E	AAC	8	358	32	13,256	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1477	16016	PAISLEY LN	CAITHNESS DR	NETHERWAY DR	E	AC	8	758	36	29,640	3/18/24	83	42	37	21	Surface Treatment - Slurry Seal	05-11-2018
1478	13954	PALERMO DR	CDS	LOMBARDY LN	E	AAC	7	585	32	19,970	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1478	13956	PALERMO DR	LOMBARDY LN	CDS	E	AAC	7	221	32	8,322	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1479	16007	PALISADE ST	ANGLER LN	WOODSTOCK LN	E	AC	3	1,012	36	36,432	3/17/22	84	100	0	0	New Construction	01-01-1980
1385	12863	PALM AVE	ELEVENTH ST	FOURTEENTH ST	E	AC	6	975	40	39,000	6/23/21	93	100	0	0	Surface Treatment - Slurry Seal	05-03-2021
1385	12869	PALM AVE	MAIN ST	ELEVENTH ST	E	AC	6	1,320	40	52,800	6/23/21	81	14	59	27	Surface Treatment - Slurry Seal	05-03-2021
1385	13110	PALM AVE	FOURTEENTH ST	SEVENTEENTH ST	E	AAC	6	955	40	38,200	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1385	15841	PALM AVE	MAIN ST	LAKE ST	E	AC	6	265	46	12,190	7/8/21	89	77	0	23	Surface Treatment - Slurry Seal	07-27-2022
1480	13561	PALMDALE ST	WARNER AVE	CAIN AVE	E	AC	3	330	38	12,540	4/6/22	52	21	79	0	New Construction	01-01-1980
1480	13562	PALMDALE ST	CAIN AVE	CEDAR AVE	E	AC	3	660	38	25,080	4/6/22	64	10	77	13	New Construction	01-01-1980
1481	15142	PALO ALTO DR	SPRINGDALE ST	PINEHURST LN	E	AC	5	700	36	26,340	3/15/22	58	46	54	0	Surface Treatment - Slurry Seal	10-01-2012
1482	14762	PAMMY LN	TAYLOR DR	FRANKLIN DR	E	AAC	4	1,000	36	35,712	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1483	15557	PANACEA DR	BUSHARD ST	CDS	E	AC	8	401	36	15,936	4/1/24	70	62	38	0	Surface Treatment - Slurry Seal	05-11-2018
1484	14004	PAPUA LN	MAIKAI DR	PUA DR	E	AAC	8	259	36	9,324	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1485	13240	PAR CIR	FAIRWAY LN	END	E	AC	3	348	32	12,386	3/23/22	75	49	51	0	New Construction	01-01-1980
1486	13770	PARIS CIR	HANOVER LN	END	E	AC	1	433	36	17,388	3/30/22	90	38	62	0	New Construction	01-01-1980
1487	14540	PARK AVE	PCH	END	E	AC	2	255	36	9,180	4/9/22	94	100	0	0	New Construction	01-01-1980
1488	13029	PARK ST	SPRINGFIELD AVE	UTICA AVE	E	AC	6	645	37	23,865	6/29/21	87	45	0	55	Surface Treatment - Slurry Seal	07-27-2022
1488	13030	PARK ST	ADAMS AVE	SPRINGFIELD AVE	E	AC	6	645	37	23,865	7/8/21	94	70	0	30	Surface Treatment - Slurry Seal	07-27-2022
1488	13033	PARK ST	THIRTEENTH ST	ADAMS AVE	E	AC	6	646	37	23,902	6/29/21	67	20	58	22	Surface Treatment - Slurry Seal	07-27-2022
1488	13099	PARK ST	TWELTH ST	THIRTEENTH ST	E	AAC	6	450	36	16,200	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1488	14733	PARK ST	UTICA AVE	LAKE ST	E	AC	6	1,145	36	41,220	6/29/21	86	4	51	45	Surface Treatment - Slurry Seal	07-27-2022
1489	13543	PARKER CIR	ROSS LN	CDS	E	AC	4	244	32	9,058	3/31/22	83	35	65	0	Surface Treatment - Slurry Seal	07-29-2020
1490	14985	PARKSIDE LN	STARK ST	HOLT AVE	E	AC	4	475	36	17,100	4/1/22	91	84	0	16	Surface Treatment - Slurry Seal	07-29-2020
1490	15625	PARKSIDE LN	EDINGER AVE	STARK ST	E	AC	4	905	36	32,580	4/1/22	91	83	0	17	Surface Treatment - Slurry Seal	07-29-2020
1493	13299	PARLAY CIR	STALLION CIR	CDS	E	AC	2	282	36	11,402	4/5/22	89	100	0	0	New Construction	01-01-1980
1494	13807	PARTRIDGE CIR	PELICAN LN	END	E	AAC	1	380	36	14,930	5/9/24	86	100	0	0	Overlay - AC Fabric	10-01-2016
1495	14548	PASEO CIR	NEWLAND ST	CDS	E	AC	4	362	36	15,032	5/13/24	86	100	0	0	New Construction	01-01-1980
2300	60770	PATCH DR	HANSEN LN	CDS	E	AC	8	550	36	20,842	3/2/22	95	100	0	0	New Construction - AC	01-01-2015
1496	15136	PATRICIA LN	HEIL AVE	RUTH DR	E	AC	3	610	36	22,660	3/18/22	95	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1497	15285	PATTERSON LN	FORELLE DR	CDS	E	AAC	4	252	32	9,564	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1497	15862	PATTERSON LN	FORELLE DR	ELLIS AVE	E	AAC	4	665	32	21,024	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1498	13345	PAULA CIR	MARIE LN	CDS	E	AAC	3	229	36	9,844	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1499	13974	PAULINE LN	GARFIELD AVE	LITCHFIELD DR	E	AC	8	630	36	22,680	2/18/20	79	31	69	0	Surface Treatment - Slurry Seal	07-15-2021
1501	15057	PEALE LN	MALDEN CIR	GILBERT DR	E	AC	2	1,178	36	42,408	4/9/22	91	73	27	0	New Construction	01-01-1980
1502	13294	PEARCE ST	GREEN ST	BOLSA CHICA ST	E	AC	2	660	36	23,760	3/22/22	83	33	61	6	New Construction	01-01-1980
1502	13303	PEARCE ST	ROOSEVELT LN	CDS	E	AC	2	332	36	13,202	4/5/22	84	32	68	0	New Construction	01-01-1980
1502	13607	PEARCE ST	BLANTON ST	LYNN ST	E	AC	2	330	36	11,880	3/22/22	91	41	59	0	New Construction	01-01-1980
1502	13608	PEARCE ST	SIMS ST	BLANTON ST	E	AC	2	330	36	11,880	3/22/22	63	19	81	0	New Construction	01-01-1980
1502	15114	PEARCE ST	LYNN ST	GREEN ST	E	AC	2	660	36	23,760	3/22/22	92	45	0	55	New Construction	01-01-1980
1502	15119	PEARCE ST	BOLSA CHICA ST	ROOSEVELT LN	E	AC	2	663	36	23,868	4/5/22	76	23	65	12	New Construction	01-01-1980
1502	15812	PEARCE ST	ALGONQUIN ST	SIMS ST	E	AC	2	660	36	23,760	3/22/22	76	21	62	17	New Construction	01-01-1980
1504	15517	PEBBLE LN	SPINNAKER DR	CDS	E	AAC	8	529	36	20,244	3/6/24	90	91	0	9	Overlay - AC Structural	05-11-2018
1505	12889	PECAN AVE	ELEVENTH ST	FOURTEENTH ST	E	AAC	6	880	36	31,680	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1505	12895	PECAN AVE	EIGHTH ST	ELEVENTH ST	E	AC	6	912	36	32,832	6/23/21	92	83	0	17	Surface Treatment - Slurry Seal	06-08-2021
1505	12901	PECAN AVE	PECAN AVE	EIGHTH ST	E	AAC	6	540	36	19,440	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1505	12957	PECAN AVE	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/23/21	92	84	0	16	Surface Treatment - Slurry Seal	07-27-2022
1505	12958	PECAN AVE	ACACIA AVE	MAIN ST	E	AC	6	42	65	2,380	7/8/21	81	77	23	0	Surface Treatment - Slurry Seal	07-27-2022
1505	13104	PECAN AVE	TWENTIETH ST	GOLDENWEST ST	E	AC	6	795	36	28,920	6/23/21	72	10	72	18	Surface Treatment - Slurry Seal	07-27-2022
1505	13105	PECAN AVE	SEVENTEENTH ST	TWENTIETH ST	E	AC	6	820	36	29,520	6/23/21	94	97	0	3	Surface Treatment - Slurry Seal	07-27-2022
1505	13112	PECAN AVE	FOURTEENTH ST	SEVENTEENTH ST	E	AC	6	930	36	33,480	6/23/21	77	18	49	33	Surface Treatment - Slurry Seal	07-27-2022
1505	15845	PECAN AVE	LAKE ST	ALABAMA ST	E	AC	9	372	37	13,764	8/24/23	62	13	87	0	New Construction	01-01-1980
1505	15846	PECAN AVE	MAIN ST	LAKE ST	E	AC	6	265	36	9,540	7/8/21	96	100	0	0	Surface Treatment - Slurry Seal	05-03-2021
1506	14198	PECK DR	RUNNING SPRINGS LN	BROOKHURST ST	E	AC	8	187	45	7,585	3/1/22	91	59	0	41	New Construction	01-01-1980
1507	13333	PEGGY CIR	COOPER LN	CDS	E	AC	3	423	36	18,528	3/18/22	84	51	49	0	Surface Treatment - Slurry Seal	07-29-2020
1508	13806	PELICAN LN	MC FADDEN AVE	ALLEY MC FADDEN AVE	E	AC	1	161	36	5,796	3/21/22	36	10	84	6	New Construction	01-01-1980
1508	15324	PELICAN LN	ALLEY MC FADDEN AVE	DOVEWOOD DR	E	AC	1	660	36	23,760	3/21/22	65	25	75	0	New Construction	01-01-1980
1509	13646	PEMBERCO CIR	STERLING AVE	CDS	E	AAC	4	130	32	5,660	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1510	14867	PENDLETON DR	ST ANDREWS LN	GRAHAM ST	E	AC	2	170	32	5,440	3/22/22	92	100	0	0	New Construction	01-01-1980
1511	13700	PENFIELD CIR	MAR VISTA DR	END	E	AC	1	480	36	19,080	5/5/20	92	84	0	16	New Construction	01-01-1980
1513	14363	PENSACOLA CIR	PEPPERTREE DR	CDS	E	AC	8	334	32	12,188	7/13/17	58	26	71	3	Surface Treatment - Slurry Seal	05-11-2018
1514	13411	PEPPER LN	VATCHER DR	BALMORAL DR	E	AC	5	253	36	9,108	4/4/22	71	33	65	2	New Construction	01-01-1980
1515	14359	PEPPERTREE DR	PINETREE LN	AUGUSTA CIR	E	AAC	8	250	36	9,750	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
1515	15562	PEPPERTREE DR	LEMONTREE LN	SPYGLASS LN	E	AAC	8	496	36	18,606	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
1516	13995	PERCH CIR	TARPON DR	CDS	E	AC	8	309	32	11,388	3/7/22	81	97	0	3	Surface Treatment - Slurry Seal	02-08-2023
1517	15586	PETTSWOOD DR	BUSHARD ST	BROMLEY LN	E	AAC	8	1,190	36	43,590	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1518	13808	PHEASANT CIR	PELICAN LN	END	E	AAC	1	380	36	14,930	5/9/24	71	44	56	0	Overlay - AC Fabric	10-01-2016
1519	13204	PHELPS LN	BRANFORD DR	CALHOUN DR	E	AC	2	264	36	9,504	3/24/22	83	44	56	0	New Construction	01-01-1980
1519	15065	PHELPS LN	CALHOUN DR	DALE DR	E	AC	2	420	36	15,120	3/24/22	58	54	46	0	New Construction	01-01-1980
1519	15069	PHELPS LN	DALE DR	CDS	E	AAC	2	560	36	21,460	5/10/24	81	30	70	0	Overlay - AC Fabric	12-01-2017
1520	15412	PHOENIX LN	PIERRE DR	BOISE DR	E	AAC	7	757	36	27,752	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1521	14594	PICCADILLY LN	ADAMS AVE	ADAMS AVE	E	AC	8	68	50	3,400	4/6/22	66	45	55	0	New Construction	01-01-1980
1522	14547	PICKWICK CIR	TALISMAN LN	PICKWICK CIR	E	AAC	2	559	36	21,724	5/10/24	90	79	21	0	Overlay - AC Fabric	12-01-2017
1523	15555	PIER DR	NORTHSHORE LN	CDS	E	AC	9	547	36	21,492	3/20/24	83	69	31	0	Surface Treatment - Slurry Seal	05-11-2018
1523	15556	PIER DR	FLEET LN	NORTHSHORE LN	E	AAC	9	302	36	11,622	3/20/24	71	20	80	0	Overlay - AC Structural	05-11-2018
1524	14039	PIERRE DR	SACRAMENTO LN	PHOENIX LN	E	AAC	7	253	36	9,358	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1525	13207	PIERSON DR	PHELPS LN	SAYBROOK LN	E	AC	2	734	36	26,424	3/24/22	52	29	62	9	New Construction	01-01-1980
1526	15515	PIERVIEW LN	INDIANAPOLIS AVE	SALINE DR	E	AC	8	416	36	14,720	3/6/24	85	83	17	0	Surface Treatment - Slurry Seal	05-11-2018
1527	13849	PILGRIM CIR	ROYALIST DR	END	E	AC	1	530	36	20,330	3/30/22	94	100	0	0	New Construction	01-01-1980
1528	13034	PINE ST	SPRINGFIELD AVE	UTICA AVE	E	AC	6	642	37	23,754	6/29/21	84	46	41	13	Surface Treatment - Slurry Seal	07-27-2022
1528	13035	PINE ST	ADAMS AVE	SPRINGFIELD AVE	E	AC	6	645	37	23,865	6/29/21	74	32	57	11	Surface Treatment - Slurry Seal	07-27-2022
1528	13036	PINE ST	THIRTEENTH ST	ADAMS AVE	E	AC	6	645	37	23,865	6/29/21	79	39	31	30	Surface Treatment - Slurry Seal	07-27-2022
1528	14735	PINE ST	UTICA AVE	PARK ST	E	AC	6	660	36	23,760	6/29/21	86	0	0	100	Surface Treatment - Slurry Seal	07-27-2022
1529	15269	PINEHURST LN	SUMMERDALE DR	PALO ALTO DR	E	AC	5	860	36	32,100	3/29/22	48	32	68	0	Surface Treatment - Slurry Seal	10-01-2012
1529	15829	PINEHURST LN	WARNER AVE	SUMMERDALE DR	E	AC	5	595	36	21,420	3/29/22	54	41	59	0	Surface Treatment - Slurry Seal	10-01-2012
1530	15560	PINETREE LN	CHEVY CHASE DR	PEPPERTREE DR	E	AAC	8	836	36	31,596	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
1531	13392	PINON DR	MISTY LN	WRIGHTWOOD LN	E	AC	5	1,013	36	35,892	3/9/20	67	10	83	7	New Construction	01-01-1980
1532	15585	PIONEER DR	MAGNOLIA ST	LOTUS LN	E	AC	7	1,117	36	40,662	2/18/20	79	39	58	3	Surface Treatment - Slurry Seal	07-15-2021
1533	13723	PIPELINE LN	ENGINEER DR	MACHINE DR	E	AC	1	1,141	40	45,320	5/5/20	74	35	60	5	New Construction	01-01-1980
1534	13164	PIRATE CIR	SUNDANCER LN	CDS	E	AAC	2	404	32	14,428	5/7/24	93	86	0	14	Overlay - AC Fabric	12-01-2017
1535	15966	PISMO LN	CRESCENT DR	BAYWOOD DR	E	AAC	7	498	36	17,928	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1536	14021	PITCAIRN LN	CHRISTMAS DR	YORKTOWN AVE	E	AAC	8	170	36	6,120	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1536	15399	PITCAIRN LN	KAMUELA DR	CHRISTMAS DR	E	AAC	8	1,019	36	36,684	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1537	13274	PITMAN LN	WALTON DR	LAURELHURST DR	E	AC	3	1,010	36	35,784	3/17/22	84	34	66	0	New Construction	01-01-1980
1538	13865	PLACID CIR	RED COACH DR	END	E	AC	3	227	32	8,764	4/1/22	95	100	0	0	New Construction	01-01-1980
1539	14504	PLAYA DR	SURFRIDER LN	ISLANDER LN	E	AC	9	270	36	11,720	4/17/24	76	30	70	0	Surface Treatment - Slurry Seal	05-11-2019
2306	60860	PLAZA LN	WARNER AVE	ACORN DR	E	AC	2	750	36	34,320	8/1/18	95	84	0	16	New Construction - AC	01-01-1980
2306	60870	PLAZA LN	ACORN DR	DOVERTON DR	E	AC	2	828	28	23,184	8/1/18	97	100	0	0	New Construction - AC	01-01-1980
2306	60880	PLAZA LN	DOVERTON DR	HEIL AVE	E	AC	2	1,078	28	33,200	8/1/18	96	82	0	18	New Construction - AC	01-01-1980
1540	14882	PLEASANT CIR	GLENROY DR	CDS	E	AC	2	476	36	18,486	3/22/22	90	100	0	0	New Construction	01-01-1980
1541	15911	PLUM TREE LN	GARFIELD AVE	WINDLASS DR	E	AC	7	438	36	16,018	2/19/20	22	10	89	1	Surface Treatment - Slurry Seal	07-14-2021
1542	13836	PLYMOUTH LN	ROYALIST DR	EDINGER AVE	E	AC	1	640	36	23,040	5/7/24	44	7	93	0	New Construction	01-01-1980
1542	13844	PLYMOUTH LN	ALBION DR	PRISCILLA DR	E	AC	1	260	36	9,360	5/8/24	59	42	58	0	New Construction	01-01-1980
1542	13846	PLYMOUTH LN	PRISCILLA DR	ROYALIST DR	E	AC	1	1,040	36	37,440	5/8/24	48	48	52	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1543	14028	POE DR	DITMAR LN	RUMFORD LN	E	AAC	7	261	36	9,396	8/17/23	81	42	56	2	Overlay - AC Structural	03-01-2011
1544	13353	POINT LOMA DR	OJAI LN	CORONADO LN	E	AC	5	474	36	17,064	3/15/22	90	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1544	15143	POINT LOMA DR	AVALON LN	OJAI LN	E	AC	5	515	36	19,680	3/15/22	87	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1545	14827	POLDER CIR	HAGUE LN	CDS	E	AC	4	554	36	21,194	3/31/22	79	44	56	0	Surface Treatment - Slurry Seal	07-29-2020
1546	13923	POLK CIR	HARDING LN	CDS	E	AAC	7	524	37	23,008	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1547	13991	POLLACK DR	WEAKFISH LN	SALMON LN	E	AAC	8	1,019	36	36,684	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1548	14368	POLYNESIAN LN	HAMILTON AVE	REGATTA DR	E	AAC	9	168	36	6,048	5/6/24	88	75	21	4	Overlay - AC Structural	05-11-2018
1548	14373	POLYNESIAN LN	REGATTA DR	BOBBIE CIR	E	AAC	9	256	36	9,216	3/26/24	92	100	0	0	Overlay - AC Structural	05-11-2018
1548	15566	POLYNESIAN LN	BOBBIE CIR	RHODESIA DR	E	AAC	9	768	36	27,648	3/26/24	91	100	0	0	Overlay - AC Structural	05-11-2018
1549	13284	POMONA LN	LAFAYETTE DR	AUBURN DR	E	AC	3	259	36	9,324	3/16/22	82	100	0	0	New Construction	01-01-1980
1550	14160	PORT CIR	ADAMS AVE FRONTAGE	CDS	E	AAC	7	559	36	21,624	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1551	15614	PORT CLYDE DR	CAPE MAY LN	ROCKPORT LN	E	AC	9	612	36	24,032	4/17/24	80	36	64	0	Surface Treatment - Slurry Seal	05-11-2019
1552	14617	PORT GREENWICH LN	NORTHPORT DR	BOOTHBAY CIR	E	AC	9	255	36	9,180	8/21/23	92	100	0	0	New Construction	01-01-1980
1552	15655	PORT GREENWICH LN	BOOTHBAY CIR	CAPE NEWBURY DR	E	AC	9	768	36	27,648	8/21/23	92	100	0	0	New Construction	01-01-1980
1553	15684	PORTLAND AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	485	36	16,884	8/14/23	71	46	48	6	Overlay - AC Structural	03-01-2011
1554	14677	PORTLAND CIR	HUNTINGTON ST	END	E	AAC	6	576	36	22,236	8/15/23	74	76	16	8	Overlay - AC Structural	03-01-2011
1556	13389	PORTSIDE CIR	LANCEFIELD DR	END	E	AC	5	102	36	5,472	3/12/20	87	32	68	0	New Construction	01-01-1980
1557	14448	PORTSMOUTH DR	WATERBURY LN	BUSHARD ST	E	AAC	7	1,068	36	38,448	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1558	14323	POSTON LN	DORSETT DR	STILLWELL DR	E	AC	9	659	36	24,474	8/30/23	49	14	86	0	New Construction	01-01-1980
1559	15426	POTOMAC LN	CAPE COD DR	ADAMS AVE	E	AAC	7	1,336	36	48,096	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1560	14854	POTTER CIR	BRUSH DR	CDS	E	AAC	4	424	32	14,818	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1561	13291	PRAIRIE DR	DOLORES ST	ALLEY LE GRAND LN	E	AC	2	201	36	8,556	3/29/22	33	5	93	2	New Construction	01-01-1980
1561	15113	PRAIRIE DR	ALLEY LE GRAND LN	LYNN ST	E	AAC	2	786	36	29,276	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1562	13838	PRATT CIR	WINSLOW DR	END	E	AC	1	339	36	13,454	3/30/22	41	17	83	0	New Construction	01-01-1980
1563	13134	PRELUDE DR	BALLAD LN	MELODY LN	E	AC	2	260	36	9,360	3/24/22	85	100	0	0	New Construction	01-01-1980
1563	15936	PRELUDE DR	FANTASIA LN	BALLAD LN	E	AC	2	800	36	28,800	3/24/22	82	56	44	0	New Construction	01-01-1980
1564	15173	PRESCOTT LN	KELLEY CIR	KISER DR	E	AC	5	1,129	36	41,394	3/14/22	60	16	83	1	New Construction	01-01-1980
1564	15979	PRESCOTT LN	FENLEY DR	KELLEY CIR	E	AC	5	516	36	18,576	3/14/22	87	34	66	0	New Construction	01-01-1980
1567	13916	PRESTWICK CIR	COLSHESTER LN	CDS	E	AAC	7	250	32	11,850	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1568	14919	PRICE DR	MISTY LN	DE LONG CIR	E	AC	5	254	36	8,868	3/9/20	93	100	0	0	New Construction	01-01-1980
1568	15797	PRICE DR	DE LONG CIR	WRIGHTWOOD LN	E	AC	5	759	36	28,074	5/5/20	92	100	0	0	New Construction	01-01-1980
1569	13516	PRINCE DR	GOTHARD ST	BURKE LN	E	AC	3	436	40	17,440	3/9/20	89	69	18	13	Surface Treatment - Slurry Seal	07-29-2020
1570	14129	PRINCESS CIR	CROWN REEF LN	CDS	E	AC	7	160	36	7,260	2/12/20	83	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1571	14205	PRINCETON CIR	MEREDITH DR	CDS	E	AC	8	108	31	5,348	2/28/22	84	36	43	21	Surface Treatment - Slurry Seal	02-14-2023
1572	13832	PRISCILLA DR	SPRINGDALE ST	AULNAY LN	E	AC	1	551	36	19,836	5/8/24	52	36	50	14	New Construction	01-01-1980
1572	13845	PRISCILLA DR	AULNAY LN	PLYMOUTH LN	E	AC	1	261	36	9,396	5/8/24	62	47	53	0	New Construction	01-01-1980
1572	15338	PRISCILLA DR	PLYMOUTH LN	MAYFLOWER LN	E	AC	1	1,040	36	37,690	3/30/22	50	21	79	0	New Construction	01-01-1980
1573	13248	PRO CIR	FERNHILL CIR	END	E	AC	3	183	34	8,022	2/18/20	90	35	0	65	New Construction	01-01-1980
1574	14776	PRODAN DR	GOTHARD ST	ENTERPRISE LN	E	AC	4	402	40	16,830	5/9/24	64	30	70	0	Surface Treatment - Slurry Seal	11-28-2019
1575	13827	PRODUCER LN	MC FADDEN AVE	RESEARCH DR	E	AC	1	1,116	40	44,640	3/21/22	37	7	86	7	New Construction	01-01-1980
1576	13722	PRODUCT LN	MC FADDEN AVE	RESEARCH DR	E	AC	1	1,116	40	44,640	3/21/22	57	17	83	0	New Construction	01-01-1980
1577	15329	PRODUCTION DR	CHEMICAL LN	GRAHAM ST	E	AC	1	1,170	40	46,320	4/1/22	64	37	61	2	New Construction	01-01-1980
1578	14757	PROFESSIONAL CIR	FLORIDA ST	CDS	E	AC	4	314	22	6,908	4/8/24	53	17	69	14	Surface Treatment - Slurry Seal	11-28-2019
1579	14602	PROMENADE PKWY DR	SEAGATE DR	GOTHARD AVE	E	AC	4	1,017	42	42,714	3/5/24	92	70	0	30	Surface Treatment - Slurry Seal	11-28-2019
1579	14603	PROMENADE PKWY DR	MAIN ST	SEAGATE DR	E	AC	4	849	42	35,658	3/5/24	89	54	0	46	Surface Treatment - Slurry Seal	11-28-2019
1580	14622	PROVIDENCE LN	CAPE COD DR	ADAMS AVE	E	AC	7	1,338	36	48,168	2/18/20	78	64	36	0	Surface Treatment - Slurry Seal	07-15-2021
1581	14009	PUA DR	MOOREA LN	END	E	AC	8	431	36	17,316	3/7/22	84	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1581	15397	PUA DR	KIPAHULU LN	MOOREA LN	E	AC	8	1,102	36	39,672	3/7/22	69	18	82	0	South Gate Slurry Seal	02-08-2023
1582	14241	PUERTO DR	MISSION LN	NEWLAND ST	E	AC	9	167	36	6,012	8/23/23	73	79	0	21	New Construction	01-01-1980
1583	13850	PURITAN CIR	ROYALIST DR	END	E	AC	1	530	36	20,330	5/8/24	49	53	42	5	New Construction	01-01-1980
1584	14924	PUTNEY CIR	BARWOOD DR	END	E	AC	5	313	36	13,268	3/12/20	87	31	0	69	New Construction	01-01-1980
1585	13810	QUAIL CIR	BLUEBIRD LN	END	E	AAC	1	530	36	20,330	5/9/24	72	28	72	0	Overlay - AC Fabric	10-01-2016
1586	15008	QUARTERHORSE LN	ELLIS AVE	CHURCHILL DR	E	AC	5	1,480	36	53,280	5/7/24	84	35	58	7	Surface Treatment - Slurry Seal	11-28-2019
1586	15009	QUARTERHORSE LN	CHURCHILL DR	END	E	AC	5	566	36	20,376	5/7/24	90	93	0	7	New Construction	01-01-1980
1588	14764	QUEBEC DR	HUNTINGTON ST	MANITOBA LN	E	AAC	4	617	36	21,924	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1588	14774	QUEBEC DR	HUNTINGTON DR	CDS	E	AC	4	150	34	6,600	5/13/24	83	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1589	13569	QUEENS LN	ALLEY BARTON DR	ALLEY SLATER AVE	E	AAC	4	501	36	18,036	5/5/20	94	100	0	0	Overlay - AC Structural	10-01-2012
1589	13572	QUEENS LN	ALLEY SLATER AVE	SLATER AVE	E	AAC	4	150	36	5,400	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1589	14426	QUEENS LN	BARTON DR	ALLEY BARTON DR	E	AAC	4	158	36	5,688	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
1590	14281	QUEENS PARK LN	CAITHNESS DR	LEVEE DR	E	AC	8	456	36	16,416	3/18/24	91	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1590	15514	QUEENS PARK LN	CAITHNESS DR	NETHERWAY DR	E	AC	8	684	36	25,800	3/18/24	91	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1590	15520	QUEENS PARK LN	UPLAND DR	ATLANTA AVE	E	AC	8	747	36	26,892	3/19/24	76	29	60	11	Surface Treatment - Slurry Seal	05-11-2018
1591	13154	QUICKSTEP CIR	SPARTAN CIR	CDS	E	AAC	2	182	32	7,624	5/7/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
1592	13903	QUIET BAY LN	DEEP HARBOR DR	CDS	E	AAC	5	290	36	12,380	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1592	15361	QUIET BAY LN	BAR HARBOR LN	DEEP HARBOR LN	E	AAC	5	805	36	30,069	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1593	12857	QUIET SURF CIR	SCENIC BAY LN	CDS	E	AAC	5	177	32	7,630	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1594	13889	QUIETSANDS CIR	LAWN HAVEN DR	CDS	E	AC	5	193	36	8,948	4/15/24	88	100	0	0	New Construction	01-01-1980
1595	13701	QUILL CIR	MAR VISTA DR	END	E	AAC	1	480	36	19,080	5/7/24	71	78	22	0	Overlay - AC Fabric	10-01-2016
1596	15190	QUINTANA LN	VILLA NUEVA DR	CARRANZA LN	E	AAC	5	1,020	36	36,720	2/25/20	76	91	9	0	Overlay - AC Structural	10-01-2012
1597	13151	RAGTIME CIR	SUNDANCER LN	CDS	E	AAC	2	196	32	8,072	5/7/24	91	76	0	24	Overlay - AC Fabric	12-01-2017
1598	13453	RAIN CIR	NORBROOK DR	END	E	AAC	5	280	36	11,880	3/11/20	89	100	0	0	Overlay - AC Structural	10-01-2012
1599	14939	RAINGLEN LN	BANKTON DR	NEARGATE DR	E	AC	5	357	36	12,852	3/12/20	94	91	0	9	New Construction	01-01-1980
1599	15831	RAINGLEN LN	NEARGATE DR	END	E	AC	5	897	36	34,292	3/12/20	92	100	0	0	New Construction	01-01-1980
1600	14175	RAINIER CIR	INTERIOR LN	CDS	E	AC	8	379	32	13,628	2/23/22	81	74	26	0	Surface Treatment - Slurry Seal	02-13-2023
1601	15632	RALEIGH DR	SIDCUP LN	LURES LN	E	AAC	8	202	24	4,848	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1601	15633	RALEIGH DR	SHEFFIELD LN	BURNLEY LN	E	AAC	8	202	24	4,848	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1602	14471	RAMBLER DR	ALLEY BUSHARD ST	BUSHARD ST	E	AC	9	150	36	5,400	7/12/17	84	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1602	14485	RAMBLER DR	BUSHARD ST	OCEANVIEW LN	E	AC	9	167	36	5,724	3/26/24	95	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1602	15594	RAMBLER DR	STARFIRE LN	ALLEY BUSHARD ST	E	AC	9	403	36	14,508	7/12/17	84	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1603	14163	RAMONA LN	CANDLEWOOD DR	HAZELBROOK DR	E	AAC	7	743	36	26,748	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1604	15908	RANDI LN	GARFIELD AVE	HYDE PARK DR	E	AAC	8	995	34	33,830	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1605	15832	RANGER LN	CUTTY SARK DR	ADAMS AVE	E	AC	8	1,163	36	41,868	2/28/22	70	28	69	3	Surface Treatment - Slurry Seal	02-08-2023
1606	14940	RAPHAEL DR	MISTY LN	WRIGHTWOOD LN	E	AC	5	1,013	36	35,892	3/9/20	88	31	55	14	New Construction	01-01-1980
1607	13147	RASCAL LN	SEASCAPE DR	AQUARIUS DR	E	AAC	2	385	36	13,860	5/7/24	93	70	0	30	Overlay - AC Fabric	12-01-2017
1608	14137	RATH CIR	MEANDER LN	CDS	E	AAC	7	76	63	6,288	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1609	14218	RAVENWOOD LN	JON DAY DR	WARWICK DR	E	AC	8	1,219	36	45,384	2/28/22	81	19	79	2	Surface Treatment - Slurry Seal	02-14-2023
1610	13171	REBEL CIR	SUNDANCER LN	CDS	E	AAC	2	485	34	17,990	5/7/24	89	100	0	0	Overlay - AC Fabric	12-01-2017
1611	13860	RED COACH DR	WHITEOAK LN	WILD CHERRY CIR	E	AC	3	399	36	15,364	3/30/22	95	100	0	0	New Construction	01-01-1980
1611	13871	RED COACH DR	OAKSHIRE LN	DAWSON LN	E	AC	3	584	36	21,024	4/1/22	95	100	0	0	New Construction	01-01-1980
1611	15341	RED COACH DR	WILD CHERRY CIR	OAKSHIRE LN	E	AC	3	746	36	26,856	3/30/22	95	100	0	0	New Construction	01-01-1980
1612	14345	RED JACKET CIR	ORIENT DR	CDS	E	AC	8	451	36	16,236	4/1/24	83	86	14	0	New Construction	01-01-1980
1613	13278	REDGROVE CIR	OAKMONT LN	CDS	E	AC	3	420	36	16,920	3/17/22	81	100	0	0	New Construction	01-01-1980
1614	16006	REDLANDS LN	LAFAYETTE DR	HEIL AVE	E	AC	3	1,228	36	44,208	3/16/22	92	88	0	12	New Construction	01-01-1980
1615	14781	REDONDO CIR	TALBERT AVE	KOVACS LN	E	AAC	4	718	40	28,720	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1616	14195	REDWOOD LN	BIG SUR DR	VICKSBURG DR	E	AAC	8	252	36	9,822	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1617	14291	REEF LN	LEVEE DR	STAR DR	E	AC	8	127	36	6,572	3/6/24	93	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1617	15521	REEF LN	SALINE DR	LEVEE DR	E	AC	8	904	36	34,544	3/6/24	70	79	21	0	Surface Treatment - Slurry Seal	05-11-2018
1618	14135	REGAL CIR	TRUXTON DR	CDS	E	AAC	7	411	32	13,152	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1619	14369	REGATTA DR	POLYNESIAN LN	CDS	E	AAC	9	480	36	18,780	3/26/24	82	38	62	0	Overlay - AC Structural	05-11-2018
1619	14375	REGATTA DR	POLYNESIAN LN	KANEOHE LN	E	AAC	9	478	36	17,708	3/26/24	85	59	41	0	Overlay - AC Structural	05-11-2018
1620	13297	REGINA CIR	HEIL AVE	CDS	E	AC	2	592	36	22,562	4/9/22	58	16	84	0	New Construction	01-01-1980
1621	14229	REILLY DR	SANDPIPER LN	END	E	AC	9	364	36	13,104	8/24/23	91	100	0	0	New Construction	01-01-1980
1621	15883	REILLY DR	FARNSWORTH LN	SANDPIPER LN	E	AC	9	796	36	28,656	8/24/23	83	33	53	14	New Construction	01-01-1980
1622	15743	REMBRANDT DR	HAGUE LN	NEWLAND ST	E	AC	4	653	36	23,508	3/31/22	86	56	44	0	Surface Treatment - Slurry Seal	07-29-2020
1623	14862	REMINGTON LN	WARNER AVE	ROGERS DR	E	AC	5	191	36	6,876	3/22/22	41	35	65	0	New Construction	01-01-1980
1624	13196	REMORA DR	BAY VIEW DR	INTREPID LN	E	AAC	2	103	28	2,884	5/13/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
1625	13367	RENNRICK CIR	KRISTOPHER LN	END	E	AAC	3	368	36	15,248	2/12/20	89	80	20	0	Overlay - AC Structural	10-01-2012
1626	13828	RENO CIR	TAFT LN	END	E	AC	1	127	52	6,604	4/1/22	70	52	42	6	New Construction	01-01-1980
1627	14876	RENOIR CIR	KERN DR	CDS	E	AC	5	50	36	1,800	3/22/22	82	100	0	0	New Construction	01-01-1980
1628	14950	REPAIR LN	AUTOPARK DR	ELLIS AVE	E	AC	4	183	40	7,000	5/9/24	93	86	14	0	Surface Treatment - Slurry Seal	11-28-2019
1629	15331	RESEARCH DR	GRAHAM ST	COMPUTER LN	E	AC	1	925	40	37,000	4/1/22	72	28	72	0	New Construction	01-01-1980
1629	15332	RESEARCH DR	COMPUTER LN	PRODUCER LN	E	AC	1	1,097	40	43,880	4/1/22	49	7	81	12	New Construction	01-01-1980
1629	15933	RESEARCH DR	CHEMICAL LN	GRAHAM ST	E	AC	1	1,170	40	46,800	3/21/22	46	17	79	4	New Construction	01-01-1980
1630	13126	RETHERFORD DR	SHERBECK LN	ROLLINS LN	E	AC	3	1,010	36	37,110	2/19/20	94	100	0	0	New Construction	01-01-1980
1632	13599	REUBENS DR	BALLANTINE LN	BRIMHALL LN	E	AC	3	1,014	36	36,504	3/17/22	49	16	83	1	New Construction	01-01-1980
1633	14787	REYNOLDS CIR	SAMPSON LN	CDS	E	AC	4	304	40	13,660	5/8/24	84	72	22	6	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1634	13583	RHAPSODY DR	FANTASIA LN	MELODY LN	E	AC	2	1,060	36	38,910	3/24/22	74	46	54	0	New Construction	01-01-1980
1635	13528	RHINE CIR	RHINE DR	CDS	E	AAC	4	129	32	5,628	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1636	15240	RHINE DR	RHONE LN	CHARLES LN	E	AC	4	520	36	18,720	3/18/22	86	37	63	0	Surface Treatment - Slurry Seal	07-29-2020
1636	15241	RHINE DR	CHARLES LN	DON DR	E	AC	4	670	36	24,120	3/18/22	90	51	49	0	Surface Treatment - Slurry Seal	07-29-2020
1636	15243	RHINE DR	DON DR	LOIRE CIR	E	AC	4	520	36	18,720	3/18/22	80	37	63	0	Surface Treatment - Slurry Seal	07-29-2020
1636	15244	RHINE DR	LOIRE CIR	HEIL AVE	E	AC	4	693	36	24,948	3/18/22	91	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1637	14374	RHODESIA DR	BAHAMA LN	KANEOHE LN	E	AAC	9	260	36	9,072	3/27/24	88	100	0	0	Overlay - AC Structural	05-11-2018
1637	15565	RHODESIA DR	BAHAMA LN	CDS	E	AAC	9	740	36	28,440	3/27/24	93	100	0	0	Overlay - AC Structural	05-11-2018
1638	13489	RHONE LN	SHER LN	KIM LN	E	AC	4	851	36	30,636	3/18/22	85	40	60	0	Surface Treatment - Slurry Seal	07-29-2020
1638	13518	RHONE LN	RHINE DR	VANTAGE DR	E	AC	4	500	36	19,000	3/31/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1638	15222	RHONE LN	KIM LN	HEIL AVE	E	AAC	4	1,062	36	38,232	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1638	15238	RHONE LN	HEIL AVE	RHINE DR	E	AC	4	1,190	36	42,840	3/31/22	90	37	59	4	Surface Treatment - Slurry Seal	07-29-2020
1639	13743	RICE CIR	ALEXANDRIA DR	END	E	AC	1	410	36	16,560	5/6/20	87	100	0	0	New Construction	01-01-1980
1640	14357	RICHMOND CIR	EFFINGHAM DR	CDS	E	AC	8	495	36	19,320	4/10/24	66	16	53	31	New Construction	01-01-1980
1641	15802	RIDGEBURY DR	GRAHAM ST	CRESTMOOR LN	E	AC	5	716	36	25,776	3/12/20	88	56	16	28	New Construction	01-01-1980
1642	13702	RIDGEVIEW CIR	MAR VISTA DR	END	E	AAC	1	480	36	19,280	5/7/24	73	77	23	0	Overlay - AC Fabric	10-01-2016
1643	13258	RINGO CIR	NORMANDY LN	CDS	E	AC	3	238	32	8,866	3/17/22	60	10	74	16	New Construction	01-01-1980
1644	15186	RIO VISTA DR	GOLDENWEST ST	END	E	AAC	5	539	36	21,404	2/25/20	82	77	23	0	Overlay - AC Structural	10-01-2012
1645	13447	RIVERSIDE CIR	PACEMONT DR	END	E	AAC	5	360	36	14,460	3/11/20	89	70	0	30	Overlay - AC Structural	10-01-2012
1646	14708	RIVERVIEW CIR	OCEANHILL DR	CDS	E	AC	6	248	32	9,436	8/15/23	27	6	94	0	Surface Treatment - Slurry Seal	03-01-2011
1647	14974	RIVIERA DR	STARDUST DR	HAMMON LN	E	AAC	1	1,028	36	37,008	5/8/24	72	30	70	0	Overlay - AC Fabric	10-01-2016
1648	15157	ROB ROY CIR	MANHATTAN DR	END	E	AAC	3	446	36	16,556	2/11/20	90	100	0	0	Overlay - AC Structural	10-01-2012
1649	13326	ROBERT LN	JEAN DR	SHIELDS DR	E	AC	3	1,281	36	46,116	3/23/22	91	50	29	21	New Construction	01-01-1980
1650	13653	ROBERTA CIR	TAYLOR DR	CDS	E	AAC	4	232	32	8,924	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1651	15749	ROBIDOUX DR	BEACH BLVD	B ST	E	AC	4	599	28	15,572	3/31/22	87	36	58	6	Surface Treatment - Slurry Seal	07-29-2020
1652	15932	ROBINWOOD DR	BOLSA CHICA ST	HUMMINGBIRD LN	E	AC	1	1,190	36	42,840	3/21/22	63	36	63	1	New Construction	01-01-1980
1653	15703	ROCHESTER AVE	CALIFORNIA ST	DELAWARE ST	E	AAC	6	270	36	9,720	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1653	15856	ROCHESTER AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	435	36	15,660	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1653	15857	ROCHESTER AVE	HUNTINGTON ST	CALIFORNIA ST	E	AAC	6	288	36	10,368	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1654	14484	ROCK POINT DR	OCEANVIEW LN	SEASIDE LN	E	AAC	9	515	36	19,290	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1656	13961	ROCKCREST LN	SAILPORT DR	YORKTOWN AVE	E	AC	7	173	33	5,019	2/19/20	56	64	36	0	Surface Treatment - Slurry Seal	07-15-2021
1657	14761	ROCKINGHORSE LN	CHURCHILL DR	FAIRCREST DR	E	AC	5	467	36	16,812	5/7/24	91	15	0	85	New Construction	01-01-1980
1658	15429	ROCKLAND LN	YORKTOWN AVE	INNSBRUCK DR	E	AC	8	450	36	16,200	3/9/22	91	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1659	15616	ROCKPORT LN	PORT CLYDE DR	CDS	E	AC	9	382	36	16,252	4/17/24	86	67	0	33	Surface Treatment - Slurry Seal	05-11-2019
1660	15483	ROCKY MOUNTAIN DR	BIG BEND LN	MC KINLEY LN	E	AAC	8	753	36	27,858	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1661	14063	RODERICK LN	VERONICA DR	MADELINE DR	E	AAC	7	828	36	30,558	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1662	15762	RODGERS DR	BERLIN LN	TWAIN LN	E	AC	5	508	36	18,538	3/22/22	83	84	16	0	New Construction	01-01-1980
1662	15763	RODGERS DR	TWAIN LN	CDS	E	AC	5	798	36	29,978	3/22/22	77	20	80	0	New Construction	01-01-1980
1663	14427	ROLF CIR	HARTLUND ST	CDS	E	AC	4	121	32	5,372	4/8/24	61	41	59	0	Surface Treatment - Slurry Seal	11-28-2019
1664	13888	ROLLINS LN	RETHERFORD DR	BREELAND DR	E	AC	3	281	36	10,866	3/30/22	90	100	0	0	New Construction	01-01-1980
1665	13771	ROME CIR	HANOVER LN	END	E	AC	1	433	36	17,388	3/30/22	95	100	0	0	New Construction	01-01-1980
1666	15726	RONALD RD	ALLEY RONALD RD	BEACH BLVD	E	AC	4	1,310	36	48,410	5/9/24	73	23	75	2	New Construction	01-01-1980
1667	15390	RONNEY DR	JOICE LN	BUSHARD ST	E	AC	8	344	36	13,134	2/18/20	95	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1668	15155	ROOK DR	GOLDEN VIEW LN	TAURUS LN	E	AC	3	1,000	36	37,500	2/11/20	68	38	47	15	Surface Treatment - Slurry Seal	10-01-2012
1669	15023	ROOSEVELT LN	PEARCE ST	CDS	E	AC	2	487	36	18,782	4/5/22	76	54	44	2	New Construction	01-01-1980
1669	15118	ROOSEVELT LN	STALLION CIR	PEARCE ST	E	AC	2	515	36	18,540	4/5/22	48	19	72	9	New Construction	01-01-1980
1671	14803	ROSANNA DR	GERALDINE LN	ROXANNE LN	E	AAC	4	288	36	11,118	12/6/19	100	0	0	0	Overlay - AC Structural	12-06-2019
1672	13351	ROSEMONT DR	AUTUMN CIR	PINEHURST LN	E	AAC	5	260	36	9,360	3/29/22	83	100	0	0	Overlay - AC Structural	10-01-2012
1672	15141	ROSEMONT DR	SPRINGDALE ST	AUTUMN CIR	E	AAC	5	440	36	15,840	3/29/22	83	88	0	12	Overlay - AC Structural	10-01-2012
1673	13549	ROSS LN	HEIL AVE	HASTINGS CIR	E	AAC	4	159	36	5,724	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1673	15249	ROSS LN	HASTINGS CIR	ROYER CIR	E	AAC	4	516	36	18,576	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1673	15250	ROSS LN	ROYER CIR	ROYAL DR	E	AAC	4	615	36	22,140	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1673	15251	ROSS LN	ROYAL DR	SALEM CIR	E	AAC	4	414	36	14,904	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1673	15252	ROSS LN	SALEM CIR	WARNER AVE	E	AAC	4	936	36	33,696	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1674	14034	ROTHERT LN	FLAXMAN DR	NEW BRITAIN LN	E	AAC	7	465	36	16,740	2/24/20	56	24	68	8	Overlay - AC Structural	03-01-2011
1675	14820	ROTTERDAM DR	VALENCIA DR	FRIESLAND DR	E	AAC	4	261	36	9,396	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1675	15738	ROTTERDAM DR	WARNER AVE	VALENCIA DR	E	AAC	4	1,200	36	43,200	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1676	13232	ROUNDHILL DR	BLAIR LN	COURTNEY LN	E	AC	2	1,169	36	41,884	3/29/22	72	77	23	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1676	15078	ROUNDHILL DR	DAVENPORT DR	BLAIR LN	E	AC	2	1,407	36	50,430	3/29/22	61	35	65	0	New Construction	01-01-1980
1677	15731	ROXANNE LN	ROSANNA DR	CDS	E	AAC	4	333	32	12,456	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1678	14424	ROYAL DR	ROSS LN	LANDAU LN	E	AC	4	245	36	8,820	3/31/22	72	17	83	0	Surface Treatment - Slurry Seal	07-29-2020
1679	15296	ROYAL OAK DR	SUNNYCREST LN	EDWARDS ST	E	AC	1	452	36	15,984	2/10/20	92	100	0	0	New Construction	01-01-1980
1679	15924	ROYAL OAK DR	CHALET LN	SUNNYCREST LN	E	AAC	1	1,041	36	38,976	5/7/24	78	66	34	0	Overlay - AC Structural	10-01-2016
1680	13847	ROYALIST DR	PLYMOUTH LN	WILLETT LN	E	AC	1	260	36	9,360	3/30/22	55	16	84	0	New Construction	01-01-1980
1680	15336	ROYALIST DR	SPRINGDALE ST	PLYMOUTH LN	E	AC	1	811	36	29,196	5/7/24	44	12	88	0	New Construction	01-01-1980
1680	16009	ROYALIST DR	WILLET LN	STANDISH LN	E	AC	1	780	36	28,080	5/8/24	42	24	70	6	New Construction	01-01-1980
1681	13542	ROYER CIR	ROSS LN	CDS	E	AC	4	244	32	9,058	3/31/22	73	23	76	1	Surface Treatment - Slurry Seal	07-29-2020
1682	13615	RUDDER DR	GREEN ST	JIB CIR	E	AC	2	446	36	16,056	4/7/22	81	66	34	0	New Construction	01-01-1980
1683	14029	RUMFORD LN	POE DR	DEEPVIEW DR	E	AAC	7	520	36	18,720	8/17/23	73	58	28	14	Overlay - AC Structural	03-01-2011
1684	14065	RUMSEY LN	WARFIELD DR	ELVA CIR	E	AAC	7	311	36	11,946	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1685	14184	RUNNING SPRINGS LN	KINGS CANYON DR	MAMMOTH DR	E	AC	8	253	36	9,858	3/1/22	66	9	76	15	Surface Treatment - Slurry Seal	02-13-2023
1685	15487	RUNNING SPRINGS LN	MAMMOTH DR	HOT SPRINGS DR	E	AC	8	1,341	36	49,026	3/1/22	83	38	25	37	Surface Treatment - Slurry Seal	02-13-2023
1686	13175	RUNNING TIDE CIR	SUNDANCER LN	CDS	E	AAC	2	576	34	21,084	5/7/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
1687	13470	RUSHMOOR LN	ETNA CIR	SUGAR AVE	E	AC	4	682	36	24,336	5/13/24	65	28	72	0	Surface Treatment - Slurry Seal	07-29-2020
1687	15212	RUSHMOOR LN	WHITNEY DR	ETNA CIR	E	AC	4	626	36	22,536	5/13/24	73	32	68	0	Surface Treatment - Slurry Seal	07-29-2020
1688	13760	RUTGERS CIR	COLUMBIA LN	END	E	AC	1	543	36	21,048	3/30/22	94	87	0	13	New Construction	01-01-1980
1689	13338	RUTH DR	PATRICIA LN	SIMMONE LN	E	AC	3	265	36	10,340	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1690	13419	SABBICAS CIR	SAN ROQUE LN	END	E	AAC	5	285	36	12,260	2/25/20	84	85	15	0	Overlay - AC Structural	10-01-2012
1691	14318	SABLE DR	SHEPHERD LN	CHELSEA LN	E	AC	9	117	36	4,962	8/30/23	95	100	0	0	New Construction	01-01-1980
1691	14319	SABLE DR	MIRAMAR LN	BRETON LN	E	AC	9	270	36	9,720	8/30/23	68	27	73	0	New Construction	01-01-1980
1691	15539	SABLE DR	CHELSEA LN	MIRAMAR LN	E	AC	9	640	36	23,040	8/30/23	95	100	0	0	New Construction	01-01-1980
1692	13500	SABOT LN	HEIL AVE	ALLEY HEIL AVE	E	AAC	3	165	36	5,940	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1692	13501	SABOT LN	ALLEY HEIL AVE	MADDOX DR	E	AAC	3	365	36	13,140	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1692	15819	SABOT LN	SUNLIGHT DR	HEIL AVE	E	AC	3	312	36	11,232	3/18/22	95	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1693	13728	SABRE LN	ATLAS DR	BOLSA AVE	E	AC	1	224	36	8,814	4/8/22	95	100	0	0	New Construction	01-01-1980
1693	15299	SABRE LN	BOLSA AVE	END	E	AC	1	613	36	24,068	2/10/20	85	68	32	0	New Construction	01-01-1980
1694	15971	SACRAMENTO LN	SALT LAKE DR	BOISE DR	E	AAC	7	1,021	36	37,256	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1695	15007	SADDLEBACK LN	ELLIS AVE	CDS	E	AC	5	1,434	36	51,624	5/6/24	79	39	56	5	Surface Treatment - Slurry Seal	11-28-2019
1695	15010	SADDLEBACK LN	GARFIELD AVE	CDS	E	AC	5	643	37	23,791	5/7/24	90	50	13	37	Surface Treatment - Slurry Seal	11-28-2019
1696	15036	SAGAMORE DR	TYPHOON LN	CDS	E	AAC	2	1,093	36	41,148	5/7/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
1697	13668	SAHARA LN	CROUPIER CIR	NUGGET CIR	E	AC	1	260	36	10,860	2/10/20	93	100	0	0	New Construction	01-01-1980
1698	14453	SAIL CIR	BEACH BLVD	END	E	AC	9	270	32	8,640	8/24/23	80	65	35	0	New Construction	01-01-1980
1699	13992	SAILFISH DR	WEAKFISH LN	SALMON LN	E	AC	8	1,019	36	36,684	3/7/22	81	50	43	7	Surface Treatment - Slurry Seal	02-08-2023
1700	13959	SAILPORT DR	HOPEBAY LN	CDS	E	AC	7	340	32	12,130	2/19/20	85	76	0	24	Surface Treatment - Slurry Seal	07-15-2021
1700	15382	SAILPORT DR	CORALWOOD LN	HOPEBAY LN	E	AC	7	1,039	36	37,654	2/19/20	82	41	31	28	Surface Treatment - Slurry Seal	07-15-2021
1701	13966	SAILWIND LN	SEASPRAY DR	BAYWOOD DR	E	AC	7	261	36	9,646	2/19/20	79	62	38	0	Surface Treatment - Slurry Seal	07-15-2021
1702	13433	SALAMANCA LN	CARRANZA LN	LUCIENTO DR	E	AAC	5	254	36	8,856	2/25/20	92	100	0	0	Overlay - AC Structural	10-01-2012
1703	13546	SALEM CIR	ROSS LN	CDS	E	AAC	4	199	32	7,618	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1704	15516	SALINE DR	REEF LN	PEBBLE LN	E	AC	8	760	36	31,360	3/6/24	69	95	0	5	Surface Treatment - Slurry Seal	05-11-2018
1705	13793	SALISBURY LN	MELBOURNE DR	MC FADDEN AVE	E	AC	1	512	36	18,144	3/30/22	95	100	0	0	New Construction	01-01-1980
1706	13990	SALMON LN	FLOUNDER DR	POLLACK DR	E	AAC	8	260	36	9,360	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1706	15394	SALMON LN	POLLACK DR	YORKTOWN AVE	E	AAC	8	929	36	33,444	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1707	14284	SALT AIR CIR	SPINNAKER DR	CDS	E	AAC	8	528	36	20,208	3/6/24	91	100	0	0	Overlay - AC Structural	05-11-2018
1708	14037	SALT LAKE DR	TOPEKA LN	CDS	E	AAC	7	231	36	9,566	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1708	15411	SALT LAKE DR	SACRAMENTO LN	TOPEKA LN	E	AAC	7	537	36	19,582	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1709	14476	SALUDA CIR	LANDFALL DR	CDS	E	AC	9	472	36	18,492	4/25/24	80	48	0	52	Surface Treatment - Slurry Seal	05-11-2019
1710	14007	SAMOA DR	SUVA LN	END	E	AAC	8	196	32	8,072	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1710	14013	SAMOA DR	BIKINI LN	SUVA LN	E	AAC	8	675	36	24,300	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1711	14786	SAMPSON LN	WOODWIND DR	CDS	E	AC	4	540	40	22,800	5/8/24	55	27	73	0	Surface Treatment - Slurry Seal	11-01-2019
1711	15724	SAMPSON LN	BURTON DR	WOODWIND DR	E	AC	4	1,119	40	44,760	5/8/24	81	48	43	9	Surface Treatment - Slurry Seal	11-01-2019
1712	15227	SAN ANGELO DR	MALAGA LN	ALLEY SAN ANGELO DR	E	AAC	4	227	36	9,922	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1713	13427	SAN DOVAL LN	VILLA NUEVA DR	ARACENA DR	E	AAC	5	596	36	22,206	2/25/20	89	96	0	4	Overlay - AC Structural	10-01-2012
1714	13431	SAN LEANDRO LN	VILLA NUEVA DR	CALPE CIR	E	AAC	5	1,084	36	38,736	2/25/20	83	79	12	9	Overlay - AC Structural	10-01-2012
1715	13039	SAN NICOLAS CIR	LOMA AVE	CDS	E	AC	6	258	54	17,890	6/30/21	94	100	0	0	Surface Treatment - Slurry Seal	05-09-2021
1717	13420	SAN ROQUE LN	CRISTA PALMA DR	SEGOVIA CIR	E	AAC	5	246	36	9,606	2/25/20	90	100	0	0	Overlay - AC Structural	10-01-2012
1717	15182	SAN ROQUE LN	SEGOVIA CIR	JARDINES DR	E	AAC	5	730	36	27,030	2/25/20	89	64	0	36	Overlay - AC Structural	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1718	13666	SAN SOUCI CIR	CALNEVA LN	END	E	AAC	1	530	36	19,080	5/8/24	72	80	20	0	Overlay - AC Fabric	10-01-2016
1719	14327	SAND DOLLAR LN	ST AUGUSTINE DR	MILNE DR	E	AC	9	758	36	27,788	8/30/23	63	23	71	6	New Construction	01-01-1980
1720	14064	SANDERSON LN	WARFIELD DR	MADELINE DR	E	AAC	7	568	36	21,198	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1721	14966	SANDPEBBLE CIR	GARDEN CIR	CDS	E	AC	5	338	36	15,668	5/6/24	90	100	0	0	New Construction	01-01-1980
1722	14228	SANDPIPER LN	INDIANAPOLIS AVE	ALLEY INDIANAPOLIS AVE	E	AC	9	152	36	5,472	8/24/23	79	59	41	0	New Construction	01-01-1980
1722	14232	SANDPIPER LN	ALLEY INDIANAPOLIS AVE	REILLY DR	E	AC	9	140	36	5,040	8/24/23	70	56	44	0	New Construction	01-01-1980
1722	14233	SANDPIPER LN	REILLY DR	TERN CIR	E	AC	9	261	36	9,396	8/24/23	78	54	32	14	New Construction	01-01-1980
1722	15498	SANDPIPER LN	TERN CIR	KINGFISHER DR	E	AC	9	758	36	27,288	8/24/23	76	66	34	0	New Construction	01-01-1980
1723	14863	SANDRA LEE LN	WARNER AVE	SANDRA LEE LN	E	AAC	2	201	36	7,236	5/13/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
1723	14897	SANDRA LEE LN	ORION AVE	LOS PATOS AVE	E	AAC	2	662	36	23,832	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1723	15764	SANDRA LEE LN	ORION AVE	CDS	E	AAC	2	441	36	17,376	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1725	13584	SANDRA LN	AUDREY DR	CHERYL DR	E	AAC	2	569	36	21,234	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1726	15289	SANDS LN	HAMMON LN	TROPICANA LN	E	AAC	1	520	36	18,720	5/8/24	79	53	47	0	Overlay - AC Fabric	10-01-2016
1727	14330	SANDY HOOK DR	ANTIGUA LN	SEAFORTH LN	E	AC	9	446	36	16,806	8/30/23	84	79	21	0	New Construction	01-01-1980
1728	13179	SANTA ANITA LN	MEADOWLARK DR	CALIENTE DR	E	AC	2	863	36	31,068	3/23/22	70	31	51	18	New Construction	01-01-1980
1731	15148	SANTA YNEZ DR	LIDO LN	MIRA LOMA CIR	E	AC	5	509	36	19,464	3/15/22	83	30	70	0	New Construction	01-01-1980
1731	15149	SANTA YNEZ DR	MIRA LOMA CIR	MADERA LN	E	AC	5	511	36	19,280	3/15/22	74	25	75	0	Surface Treatment - Slurry Seal	10-01-2012
1732	13641	SANTANA CIR	GULF LN	CDS	E	AAC	4	233	32	8,956	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1733	13177	SARATOGA LN	MEADOWLARK DR	CALIENTE DR	E	AC	2	860	36	32,460	3/23/22	95	76	0	24	New Construction	01-01-1980
1734	14834	SARU CIR	MINORU LN	ALLEY SARU CIR	E	AAC	4	223	22	5,406	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1735	15543	SATTERFIELD DR	LEASURE LN	SHAW LN	E	AC	9	687	36	25,482	8/30/23	62	26	72	2	New Construction	01-01-1980
1736	13507	SATURN DR	GEMINI LN	GOTHARD ST	E	AC	3	395	40	16,550	4/7/22	91	70	0	30	Surface Treatment - Slurry Seal	07-29-2020
1737	15376	SAUSALITO LN	NAPLES DR	LORRAINE DR	E	AC	7	501	36	18,036	2/19/20	96	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1738	13550	SAVOY CIR	LANDAU LN	CDS	E	AAC	4	270	36	10,970	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1631	13222	SAYBROOK LN	DAVENPORT DR	WESTPORT DR	E	AC	2	472	36	16,992	3/24/22	51	23	77	0	New Construction	01-01-1980
1631	14443	SAYBROOK LN	HEIL AVE	ALLEY SEABROOK LN	E	AAC	2	193	36	6,948	5/10/24	100	0	0	0	Overlay - AC Structural	12-01-2017
1631	15058	SAYBROOK LN	ALLEY SEABROOK LN	BRANFORD DR	E	AAC	2	420	36	15,120	5/10/24	90	100	0	0	Overlay - AC Structural	12-01-2017
1631	15061	SAYBROOK LN	BRANFORD DR	TALISMAN LN	E	AAC	2	365	36	13,140	5/10/24	93	100	0	0	Overlay - AC Structural	12-01-2017
1631	15064	SAYBROOK LN	TALISMAN LN	SILLMAN DR	E	AAC	2	392	36	14,112	5/10/24	82	37	63	0	Overlay - AC Structural	12-01-2017
1631	15067	SAYBROOK LN	SILLMAN DR	DAVENPORT DR	E	AAC	2	1,137	36	40,932	5/10/24	93	100	0	0	Overlay - AC Structural	12-01-2017
1739	13163	SCENARIO DR	FANTASIA LN	OPERA LN	E	AC	2	1,060	36	38,660	3/24/22	94	89	0	11	New Construction	01-01-1980
1739	13167	SCENARIO DR	WAIKIKI LN	CDS	E	AC	2	535	36	20,760	3/24/22	95	100	0	0	New Construction	01-01-1980
1739	15047	SCENARIO DR	OPERA LN	WAIKIKI LN	E	AC	2	781	36	28,116	3/24/22	73	9	91	0	New Construction	01-01-1980
1740	13049	SCENIC BAY LN	ISLAND BAY LN	CDS	E	AAC	5	860	36	32,580	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1741	15827	SCEPTRE LN	ALADDIN DR	WARNER AVE	E	AC	2	367	36	13,212	4/9/22	86	56	44	0	New Construction	01-01-1980
1742	15501	SCHOONER LN	SNOWBIRD DR	ATLANTA AVE	E	AC	9	311	36	11,196	8/24/23	60	32	63	5	New Construction	01-01-1980
1743	13142	SCHRYER LN	HENDRICKSEN DR	SISSON DR	E	AAC	2	849	36	30,564	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1744	14307	SCONE DR	CUPAR LN	BANFF LN	E	AC	9	266	36	9,576	8/30/23	87	100	0	0	New Construction	01-01-1980
1745	13413	SCOTIA CIR	BALMORAL DR	CDS	E	AC	5	350	36	14,100	4/4/22	100	32	56	12	New Construction	01-01-1980
1746	14841	SCOTSDALE CIR	LANCASTER DR	CDS	E	AAC	4	213	32	8,066	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1747	15943	SCOTSTOUN DR	GLENCAIRN LN	QUEENS PARK LN	E	AC	8	1,027	36	36,972	3/19/24	86	65	35	0	Surface Treatment - Slurry Seal	05-11-2018
1748	14153	SCOUGALL CIR	JOHNSON LN	CDS	E	AC	7	323	32	11,836	2/11/20	67	96	0	4	Surface Treatment - Slurry Seal	07-15-2021
1749	14023	SCRIBE DR	COLDWATER LN	DRYBROOK LN	E	AAC	7	210	36	7,560	8/17/23	90	76	0	24	Overlay - AC Structural	03-01-2011
1750	13617	SCULPIN DR	SUN DR	WARNER AVE	E	AAC	3	199	36	7,164	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1752	12853	SEA CANYON CIR	MORNING TIDE DR	CDS	E	AC	5	363	32	14,055	6/30/21	68	15	77	8	Surface Treatment - Slurry Seal	07-27-2022
1753	14112	SEA CIR	SEAPORT DR	END	E	AAC	9	155	32	4,960	8/21/23	70	79	0	21	Overlay - AC Structural	03-01-2011
1754	14263	SEA MIST LN	FIVE HARBORS DR	OCEANWOOD DR	E	AC	9	249	36	9,714	5/6/24	84	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1755	15070	SEA WITCH LN	BARUNA LN	FINISTERRE DR	E	AC	2	1,312	36	47,232	4/5/22	84	70	30	0	New Construction	01-01-1980
1756	14223	SEABIRD CIR	FARNSWORTH LN	END	E	AC	9	321	32	10,272	8/24/23	71	73	27	0	New Construction	01-01-1980
1759	14488	SEACREST LN	BEACHSIDE DR	HIGHTIDE DR	E	AAC	9	773	36	28,578	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1760	14331	SEAFORTH LN	SANDY HOOK DR	HAMILTON AVE	E	AC	9	175	36	6,300	8/30/23	95	100	0	0	New Construction	01-01-1980
1760	15548	SEAFORTH LN	ST AUGUSTINE DR	SANDY HOOK DR	E	AC	9	1,025	36	36,900	8/30/23	95	100	0	0	New Construction	01-01-1980
1761	14992	SEAGATE DR	PROMENADE PKWY	CDS	E	AC	4	592	42	26,114	3/5/24	85	45	0	55	Surface Treatment - Slurry Seal	11-28-2019
1762	13967	SEAHURST DR	CORALWOOD LN	MAGNOLIA AVE	E	AAC	7	182	33	5,276	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1763	14107	SEALROCK DR	LIGHTHOUSE LN	NEWLAND ST	E	AAC	9	162	36	5,832	8/21/23	92	100	0	0	Overlay - AC Structural	03-01-2011
1763	14108	SEALROCK DR	SEASHELL CIR	LIGHTHOUSE LN	E	AC	9	246	36	8,856	8/21/23	78	100	0	0	New Construction	01-01-1980
1764	14888	SEAPINE CIR	GREEN ST	CDS	E	AAC	2	347	36	13,992	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
1765	14113	SEAPORT DR	SEA CIR	END	E	AAC	9	120	36	4,320	8/21/23	76	100	0	0	Overlay - AC Structural	03-01-2011

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1765	14114	SEAPORT DR	DUBLIN LN	LIGHTHOUSE LN	E	AAC	9	135	36	4,860	8/21/23	80	100	0	0	Overlay - AC Structural	03-01-2011
1765	15449	SEAPORT DR	SEA CIR	DUBLIN LN	E	AAC	9	791	36	28,476	8/21/23	77	46	47	7	Overlay - AC Structural	03-01-2011
1766	15037	SEASCAPE DR	CDS	CDS	E	AAC	2	945	36	37,620	5/7/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
1767	14106	SEASHELL CIR	SEALROCK DR	END	E	AAC	9	151	36	5,436	8/21/23	69	73	0	27	Overlay - AC Structural	03-01-2011
1768	14483	SEASIDE LN	LANDFALL DR	ROCK POINT DR	E	AAC	9	656	36	23,328	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1768	15599	SEASIDE LN	ROCK POINT DR	HIGHTIDE DR	E	AAC	9	1,026	36	36,936	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1769	13965	SEASPRAY DR	PISMO LN	SAILWIND LN	E	AAC	7	872	36	31,642	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1771	13902	SEAWAY CIR	QUIET BAY LN	CDS	E	AAC	5	132	30	6,245	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1772	12943	SECOND ST	OLIVE AVE	ORANGE AVE	E	AAC	6	385	36	14,365	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1772	12944	SECOND ST	WALNUT AVE	OLIVE AVE	E	AC	6	385	36	13,860	6/22/21	66	43	57	0	Surface Treatment - Slurry Seal	07-27-2022
1772	13067	SECOND ST	PCH	WALNUT AVE	E	AAC	6	355	36	12,780	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1773	13417	SEGOVIA CIR	SAN ROQUE LN	END	E	AAC	5	285	36	11,760	2/25/20	86	100	0	0	Overlay - AC Structural	10-01-2012
1774	13523	SEINE DR	TIBER LN	THAMES LN	E	AC	4	809	36	29,874	3/31/22	86	61	39	0	Surface Treatment - Slurry Seal	07-29-2020
1775	13380	SELKIRK DR	DENVALE CIR	SHOREHAM LN	E	AC	5	258	36	9,012	3/12/20	95	100	0	0	New Construction	01-01-1980
1775	15161	SELKIRK DR	FALKIRK LN	DENVALE CIR	E	AC	5	765	36	27,264	3/12/20	92	59	41	0	New Construction	01-01-1980
1776	15112	SELL CIR	HEIL AVE	CDS	E	AC	2	492	36	21,672	4/9/22	88	57	28	15	New Construction	01-01-1980
1777	15216	SERENADE LN	STONEWOOD DR	SUNLIGHT DR	E	AAC	3	1,300	36	46,800	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1778	14925	SERENE DR	WOODFERN LN	END	E	AC	5	499	36	19,964	3/12/20	92	100	0	0	New Construction	01-01-1980
1778	14929	SERENE DR	MISTY LN	MONTBURY CIR	E	AC	5	254	36	8,856	4/5/22	78	47	53	0	New Construction	01-01-1980
1778	15799	SERENE DR	MONTBURY CIR	WOODFERN LN	E	AC	5	618	36	22,248	3/12/20	79	73	0	27	New Construction	01-01-1980
1779	14101	SEVEN SEAS LN	INDIANAPOLIS AVE	END	E	AC	9	536	36	19,296	8/24/23	62	31	65	4	New Construction	01-01-1980
1779	14219	SEVEN SEAS LN	INDIANAPOLIS AVE	INDIANAPOLIS AVE	E	AC	9	204	36	7,344	8/24/23	38	15	85	0	New Construction	01-01-1980
1670	14739	SEVENTEENTH ST	FLORIDA ST	CLAY AVE	E	AC	7	660	36	23,760	3/13/24	84	67	0	33	Surface Treatment - Slurry Seal	11-28-2019
1670	14740	SEVENTEENTH ST	DELAWARE ST	CLAY AVE	E	AC	7	383	36	13,788	3/13/24	90	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1670	15003	SEVENTEENTH ST	HUNTINGTON ST	DELAWARE ST	E	AC	7	1,043	56	58,408	3/13/24	69	27	65	8	Surface Treatment - Slurry Seal	11-28-2019
1670	50260	SEVENTEENTH ST	MAIN ST	UTICA AVE	E	AC	0	170	25	4,250	3/13/24	95	100	0	0	New Construction - Initial	01-01-1980
1780	12949	SEVENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	390	48	18,720	6/23/21	81	45	11	44	Surface Treatment - Slurry Seal	07-27-2022
1780	12950	SEVENTH ST	WALNUT AVE	OLIVE AVE	E	AAC	6	390	48	18,720	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1780	12952	SEVENTH ST	PCH	WALNUT AVE	E	AC	6	390	48	18,720	6/22/21	80	47	24	29	Surface Treatment - Slurry Seal	07-27-2022
1780	13069	SEVENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	375	46	17,250	6/22/21	78	56	0	44	Surface Treatment - Slurry Seal	07-27-2022
1780	13070	SEVENTH ST	ACACIA AVE	PALM AVE	E	AC	6	360	48	17,280	6/23/21	79	30	43	27	New Construction	01-01-1980
1780	16033	SEVENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	395	46	18,170	6/23/21	80	38	23	39	Surface Treatment - Slurry Seal	07-27-2022
1781	13780	SEVILLA CIR	ALEXANDRIA DR	END	E	AC	1	410	36	16,260	2/26/20	90	73	22	5	New Construction	01-01-1980
1782	14353	SHACKLEFORD CIR	CORNERBROOK DR	CDS	E	AC	8	340	36	13,740	7/13/17	85	79	0	21	New Construction	01-01-1980
1783	13897	SHADY HARBOR CIR	EVENING HILL DR	CDS	E	AAC	5	416	36	16,976	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1784	14755	SHAFFER CIR	FLORIDA ST	CDS	E	AAC	4	184	34	6,256	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1785	15443	SHALOM DR	LEXINGTON LN	CDS	E	AAC	8	590	36	23,040	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1786	13390	SHAMLEY CIR	LANCEFIELD DR	END	E	AC	5	102	36	5,472	3/12/20	93	100	0	0	New Construction	01-01-1980
1787	15441	SHANGRI LA DR	LEXINGTON LN	ARAGON CIR	E	AC	8	824	36	31,664	3/3/22	55	27	70	3	New Construction	01-01-1980
1788	13884	SHANNON DR	DUNDALK LN	SHERBECK LN	E	AC	3	260	36	10,110	2/19/20	94	78	0	22	New Construction	01-01-1980
1788	15351	SHANNON DR	SHERBECK LN	END	E	AC	3	770	36	29,520	2/19/20	94	77	0	23	New Construction	01-01-1980
1789	15211	SHASTA LN	WHITNEY DR	SUGAR AVE	E	AC	4	1,290	36	46,440	5/13/24	59	27	72	1	Surface Treatment - Slurry Seal	07-29-2020
1790	15544	SHAW LN	STILLWELL DR	END	E	AC	9	1,153	36	43,008	8/30/23	90	51	49	0	New Construction	01-01-1980
1791	15998	SHAYNE DR	GENTRY LN	CDS	E	AC	3	1,012	36	37,932	3/17/22	70	32	56	12	New Construction	01-01-1980
1792	14561	SHEFFIELD LN	RALEIGH DR	KENSINGTON DR	E	AAC	8	269	24	6,456	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1792	14562	SHEFFIELD LN	CORNWALL DR	RALEIGH DR	E	AC	8	125	24	3,000	3/9/22	37	16	84	0	New Construction	01-01-1980
1793	14264	SHELL HARBOR CIR	FIVE HARBORS DR	CDS	E	AAC	9	317	32	11,644	5/6/24	54	13	57	30	Overlay - AC Structural	05-11-2018
1794	13739	SHELLY DR	BOLSA PARK LN	END	E	AC	1	294	36	12,384	5/6/20	78	27	73	0	New Construction	01-01-1980
1794	13748	SHELLY DR	FIELDSTON LN	BOLSA PARK LN	E	AC	1	769	36	28,184	5/6/20	90	100	0	0	New Construction	01-01-1980
1795	14161	SHELTER LN	NAUTILUS DR	CANDLEWOOD DR	E	AC	7	258	36	9,288	2/10/20	94	94	0	6	Surface Treatment - Slurry Seal	07-15-2021
1796	15153	SHENLYN DR	EDWARDS ST	IRELAND LN	E	AAC	3	531	36	19,866	2/12/20	92	100	0	0	Overlay - AC Structural	10-01-2012
1797	14314	SHEPHERD LN	MARTINIQUE DR	SABLE DR	E	AC	9	1,022	36	38,292	8/30/23	95	100	0	0	New Construction	01-01-1980
1798	13485	SHER LN	EDINGER AVE	ALLEY VOLGA DR	E	AAC	4	670	36	24,120	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1798	15218	SHER LN	ALLEY VOLGA DR	ALLEY AMAZON DR	E	AAC	4	308	36	11,088	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1798	15219	SHER LN	ALLEY AMAZON DR	ALLEY RHONE LN	E	AAC	4	308	36	11,088	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1798	15220	SHER LN	ALLEY RHONE LN	JULIETTE LOW DR	E	AAC	4	660	36	23,560	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1799	13885	SHERBECK LN	BREELAND DR	EDINGER AVE	E	AC	3	670	36	23,842	3/30/22	95	100	0	0	New Construction	01-01-1980
1799	15352	SHERBECK LN	SHANNON DR	BREELAND DR	E	AC	3	521	36	18,478	3/30/22	95	100	0	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1800	13918	SHERBORNE LN	DARTMOOR DR	FALMOUTH DR	E	AAC	7	254	36	11,462	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2296	60730	SHERIDAN DR	SLAYBACK LN	CDS	E	AC	7	438	36	16,810	2/18/20	92	27	0	73	New Construction - AC	01-01-2014
1801	13698	SHERMAN DR	VANGUARD LN	SABRE LN	E	AC	1	267	36	10,612	2/10/20	82	50	50	0	New Construction	01-01-1980
1802	13968	SHERRY CIR	RANDI LN	CDS	E	AAC	8	330	32	12,360	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1803	13321	SHIELDS DR	LOVELL LN	END	E	AC	3	400	36	15,650	3/23/22	82	100	0	0	New Construction	01-01-1980
1803	15126	SHIELDS DR	LOVELL LN	TRUDY LN	E	AC	3	803	36	30,258	3/23/22	89	100	0	0	New Construction	01-01-1980
1803	15130	SHIELDS DR	TRUDY LN	EDWARDS ST	E	AC	3	1,323	36	47,628	3/23/22	88	100	0	0	New Construction	01-01-1980
1804	13677	SHINKLE CIR	GLENWOOD DR	END	E	AAC	1	350	32	12,950	5/7/24	77	100	0	0	Overlay - AC Fabric	10-01-2016
1805	13100	SHIPLEY ST	ADAMS AVE	CDS	E	AC	6	464	36	17,250	7/8/21	73	37	47	16	Surface Treatment - Slurry Seal	07-27-2022
1806	14045	SHOAL CIR	WESTWINDS LN	CDS	E	AC	7	232	36	9,602	2/19/20	55	34	66	0	Surface Treatment - Slurry Seal	07-15-2021
1807	14044	SHORE CIR	WESTWINDS LN	CDS	E	AAC	7	232	36	8,352	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1808	14496	SHOREBREEZE DR	HARBORBREEZE LN	OCEANBREEZE LN	E	AAC	9	262	36	10,182	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1809	15162	SHOREHAM LN	BRIGHTON DR	BERSHIRE DR	E	AC	5	913	36	32,292	3/12/20	33	7	93	0	New Construction	01-01-1980
1810	13468	SHOREVEIW CIR	LAKEVIEW DR	END	E	AC	5	237	32	9,084	2/24/20	58	43	51	6	Surface Treatment - Slurry Seal	10-01-2012
1811	14150	SHOREWOOD CIR	ADAMS AVE	CDS	E	AC	7	630	36	24,480	2/11/20	77	83	9	8	Surface Treatment - Slurry Seal	07-15-2021
1812	13899	SICILY CIR	EVENING HILL DR	CDS	E	AC	5	361	36	16,196	5/6/24	85	100	0	0	New Construction	01-01-1980
1813	14553	SIDCUP LN	CORNWALL DR	END	E	AAC	8	176	24	4,224	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1813	14554	SIDCUP LN	CORNWALL DR	RALEIGH DR	E	AAC	8	125	24	3,000	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1813	15631	SIDCUP LN	RALEIGH DR	ADAMS AVE FRONTAGE	E	AAC	8	378	24	9,072	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1814	14304	SIGNET CIR	AQUATIC LN	END	E	AAC	8	448	36	18,128	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1815	13210	SILLIMAN DR	PHELPS LN	SAYBROOK LN	E	AAC	2	871	36	31,356	5/10/24	81	100	0	0	Overlay - AC Fabric	12-01-2017
1816	15358	SILVER BEACH CIR	SUMMER BREEZE LN	CDS	E	AAC	5	564	36	22,104	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1817	13491	SILVER LN	ALHAMBRA AVE	HEIL AVE	E	AC	4	165	36	5,940	3/18/22	95	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1817	15272	SILVER LN	JULIETTE LOW DR	ALHAMBRA AVE	E	AAC	4	530	36	19,080	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1818	15946	SILVER STRAND DR	REEF LN	CDS	E	AC	8	1,010	36	37,560	3/6/24	86	88	0	12	Surface Treatment - Slurry Seal	05-11-2018
1819	13408	SILVERHEEL CIR	COLLINS LN	CDS	E	AC	5	222	36	9,492	3/14/22	80	28	72	0	New Construction	01-01-1980
1820	16000	SILVERWOOD DR	WOODSTOCK LN	BRIMHALL LN	E	AC	3	1,272	36	45,792	3/17/22	89	100	0	0	New Construction	01-01-1980
1821	15138	SIMMONE LN	SYLVIA DR	CDS	E	AAC	3	758	36	28,658	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1822	13289	SIMS ST	PRAIRE DR	PEARCE ST	E	AC	2	660	36	23,760	3/22/22	71	23	77	0	New Construction	01-01-1980
1822	14898	SIMS ST	STELLRECHT CIR	LOS PATOS AVE	E	AAC	2	561	36	20,196	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1822	15770	SIMS ST	WARNER AVE	STELLRECHT CIR	E	AAC	2	764	36	27,504	5/13/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
1822	15811	SIMS ST	PEARCE ST	WARNER AVE	E	AC	2	1,320	36	47,520	3/22/22	78	25	75	0	New Construction	01-01-1980
1823	13227	SIRIUS DR	BOLERO LN	BARUNA LN	E	AC	2	430	36	16,980	4/7/22	84	19	61	20	New Construction	01-01-1980
1824	15038	SISSON DR	BOLSA CHICA ST	WARREN LN	E	AAC	2	1,195	36	43,020	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1824	15039	SISSON DR	WARREN LN	DAVIS LN	E	AAC	2	1,286	36	47,046	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1825	13001	SIXTEENTH ST	ACACIA AVE	PALM AVE	E	AC	6	390	46	17,940	6/22/21	89	91	0	9	Surface Treatment - Slurry Seal	07-27-2022
1825	13002	SIXTEENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	395	46	18,170	6/22/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1825	13003	SIXTEENTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	390	46	17,940	6/22/21	80	18	0	82	Surface Treatment - Slurry Seal	07-27-2022
1825	13092	SIXTEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	380	46	17,480	6/22/21	91	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1825	13093	SIXTEENTH ST	PCH	WALNUT AVE	E	AC	6	370	46	16,825	6/22/21	85	25	0	75	Surface Treatment - Slurry Seal	07-27-2022
1825	16025	SIXTEENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	380	46	17,480	6/22/21	93	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1827	14267	SKI HARBOR CIR	BEACHWOOD LN	CDS	E	AC	9	303	32	11,196	5/6/24	83	49	33	18	Surface Treatment - Slurry Seal	05-11-2018
1828	14051	SKIFF CIR	WESTWINDS LN	CDS	E	AAC	7	232	36	9,602	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1829	15525	SKIMMER LN	STAR DR	KITE DR	E	AC	8	1,014	36	36,504	3/18/24	75	38	41	21	Surface Treatment - Slurry Seal	05-11-2018
1830	13635	SKYE LN	BALMORAL DR	BRAEMAR DR	E	AC	5	236	36	8,996	4/4/22	100	66	0	34	New Construction	01-01-1980
1831	14531	SKYLAB RD	ABLE LN	SPRINGDALE ST	E	AC	1	1,325	60	79,500	2/10/20	81	32	68	0	New Construction	01-01-1980
1831	14532	SKYLAB RD	DELTA LN	ABLE LN	E	AC	1	1,631	60	97,860	2/10/20	94	100	0	0	New Construction	01-01-1980
1833	13818	SKYLARK DR	ORIOLE LN	HUMMINGBIRD LN	E	AC	1	980	36	35,780	3/21/22	76	59	41	0	New Construction	01-01-1980
1834	13558	SKYLINE LN	SUNBREEZE DR	SLATER AVE	E	AC	3	314	36	11,304	4/9/22	82	65	35	0	New Construction	01-01-1980
1835	13878	SKYVIEW DR	SWEETBRIAR LN	DAWSON LN	E	AC	3	594	36	21,096	4/1/22	91	46	0	54	New Construction	01-01-1980
2207	13557	SLATER AVE FRONTAGE RD	LUCERO L N	CDS	E	AC	3	232	27	7,464	4/9/22	85	31	69	0	New Construction	01-01-1980
2207	13560	SLATER AVE FRONTAGE RD	FLOWER LN	END	E	AAC	3	251	27	7,977	2/11/20	95	100	0	0	Overlay - AC Structural	10-01-2012
2297	60740	SLAYBACK LN	SHERIDAN DR	LANDERS DR	E	AC	7	277	36	9,972	2/18/20	97	70	0	30	New Construction - AC	01-01-2014
1836	13856	SLIGO CIR	CARRIE LN	END	E	AC	1	419	36	16,334	4/1/22	32	9	91	0	New Construction	01-01-1980
1837	13908	SMOKEWOOD CIR	CONSTANTINE DR	CDS	E	AAC	7	273	34	9,282	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1839	14188	SMOKEY CIR	CARLSBAD LN	END	E	AC	8	363	36	14,568	2/23/22	86	45	43	12	Surface Treatment - Slurry Seal	02-13-2023
1840	15087	SNEAD DR	NASSAU LN	CHIPPER LN	E	AAC	3	576	36	20,986	5/9/24	92	100	0	0	Overlay - AC Fabric	10-01-2016
1841	14226	SNOWBIRD DR	CATAMARAN LN	SCHOONER LN	E	AC	9	415	36	14,940	8/23/23	92	86	0	14	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1841	14244	SNOWBIRD DR	BASTIA LN	MISSION LN	E	AC	9	706	36	25,416	8/23/23	92	78	15	7	New Construction	01-01-1980
1841	15497	SNOWBIRD DR	SCHOONER LN	BASTIA LN	E	AC	9	624	36	22,464	8/23/23	83	34	66	0	New Construction	01-01-1980
2303	60800	SNOWDON LN	PATCH DR	THOMPSON DR	E	AC	8	480	36	17,280	3/2/22	95	100	0	0	New Construction - AC	01-01-2015
1842	14269	SNUG HARBOR CIR	HALF LEAGUE DR	CDS	E	AC	9	255	32	10,410	5/6/24	74	41	59	0	Surface Treatment - Slurry Seal	05-11-2018
1843	15094	SOFTWIND DR	SPRINGDALE ST	WOODSTOCK LN	E	AC	3	1,194	36	42,984	3/17/22	78	44	53	3	New Construction	01-01-1980
1844	13192	SOMERSET LN	MALDEN CIR	GILBERT DR	E	AC	2	1,041	36	37,976	4/9/22	88	36	34	30	New Construction	01-01-1980
1845	15451	SOMERVILLE LN	MALLOY DR	END	E	AC	9	390	36	14,040	8/23/23	53	19	81	0	Surface Treatment - Slurry Seal	03-01-2011
1846	13357	SONOMA DR	ELSINORE CIR	CORONADO LN	E	AAC	5	253	36	9,108	2/18/20	93	100	0	0	Overlay - AC Structural	10-01-2012
1846	15145	SONOMA DR	LA MESA LN	ELSINORE CIR	E	AAC	5	499	36	17,964	2/18/20	88	100	0	0	Overlay - AC Structural	10-01-2012
1847	13772	SORENTO CIR	HANOVER LN	END	E	AC	1	433	36	17,388	3/30/22	95	100	0	0	New Construction	01-01-1980
1848	13429	SORIA CIR	QUINTANA LN	END	E	AAC	5	92	42	5,364	2/25/20	89	100	0	0	Overlay - AC Structural	10-01-2012
5010	60090	SOUTH PACIFIC	ANDERSON ST	25TH ST	E	AC	2	481	25	12,025	5/6/20	91	49	0	51	New Construction - Initial	01-01-1980
5010	60100	SOUTH PACIFIC	25TH ST	22ND ST	E	AC	2	709	25	17,725	5/6/20	84	75	0	25	New Construction - Initial	01-01-1980
5010	60110	SOUTH PACIFIC	22ND ST	19TH ST	E	AC	2	706	25	17,650	5/21/20	83	26	59	15	New Construction - Initial	01-01-1980
5010	60120	SOUTH PACIFIC	19TH ST	16TH ST	E	AC	2	705	25	17,625	5/6/20	91	30	0	70	New Construction - Initial	01-01-1980
5010	60130	SOUTH PACIFIC	16TH ST	BROADWAY	E	AC	2	727	25	18,175	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5010	60140	SOUTH PACIFIC	BROADWAY	10TH ST	E	AC	2	728	25	18,200	5/6/20	94	88	0	12	New Construction - Initial	01-01-1980
5010	60150	SOUTH PACIFIC	10TH ST	7TH ST	E	AC	2	705	25	17,625	5/6/20	93	59	0	41	New Construction - Initial	01-01-1980
5010	60160	SOUTH PACIFIC	7TH ST	5TH ST	E	AC	2	470	25	11,750	5/6/20	89	96	0	4	New Construction - Initial	01-01-1980
5010	60170	SOUTH PACIFIC	5TH ST	END	E	AC	2	956	25	23,900	5/6/20	89	86	0	14	New Construction - Initial	01-01-1980
1849	15447	SOUTHPORT DR	CAPE COTTAGE LN	END	E	AAC	9	372	36	13,392	8/21/23	82	31	69	0	Overlay - AC Structural	03-01-2011
1850	14337	SOUTHSHORE DR	FLEET LN	COMPASS LN	E	AC	9	618	36	22,748	4/1/24	87	63	37	0	Surface Treatment - Slurry Seal	05-11-2018
1851	13658	SPA DR	RANCHO RD	HAROLD PL	E	AC	1	173	36	6,228	4/8/22	93	100	0	0	New Construction	01-01-1980
1851	13659	SPA DR	DOLLAR DR	HAMMON LN	E	AC	1	1,391	36	50,076	2/10/20	92	100	0	0	New Construction	01-01-1980
1851	13661	SPA DR	HAMMON LN	CALNEVA LN	E	AC	1	780	36	28,080	2/10/20	87	52	48	0	New Construction	01-01-1980
1851	15286	SPA DR	HAROLD PL	DOLLAR DR	E	AC	1	776	36	27,936	4/8/22	79	100	0	0	New Construction	01-01-1980
1852	14979	SPAR CIR	BROOKHURST ST	END	E	AAC	8	579	36	20,844	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1853	15524	SPARKMAN LN	KITE DR	CDS	E	AC	8	751	36	28,732	3/18/24	85	70	0	30	Surface Treatment - Slurry Seal	05-11-2018
1854	13816	SPARROW DR	ORIOLE LN	HUMMINGBIRD LN	E	AC	1	980	36	35,280	3/21/22	53	14	81	5	New Construction	01-01-1980
1855	15044	SPARTAN CIR	AQUARIUS DR	CDS	E	AAC	2	554	36	21,744	5/7/24	93	86	0	14	Overlay - AC Fabric	12-01-2017
1856	15015	SPEER AVE	MORGAN LN	BEACH BLVD	E	AAC	4	1,320	26	33,940	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1856	15733	SPEER AVE	CRABB LN	MORGAN LN	E	AAC	4	479	36	17,244	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1857	14254	SPENCER CIR	HOPETOWN LN	CDS	E	AAC	9	245	32	7,840	5/6/24	83	73	24	3	Overlay - AC Structural	05-11-2018
1858	15270	SPICKARD DR	KURT LN	WHETMORE LN	E	AAC	3	927	36	34,872	2/11/20	80	100	0	0	Overlay - AC Structural	10-01-2012
1859	15530	SPINDRIFT LN	CLIFF DR	CDS	E	AAC	8	1,179	36	45,444	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1860	15945	SPINNAKER DR	HORIZON LN	BROOKHURST ST	E	AC	8	695	36	24,500	3/6/24	86	58	0	42	New Construction	01-01-1980
1861	13912	SPRING CIR	FLAGSTAFF LN	CDS	E	AAC	7	401	32	17,088	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1751	14529	SPRINGDALE ST	LITTLEFIELD DR	END	E	AC	5	225	80	18,000	3/28/22	74	62	38	0	New Construction	01-01-1980
1751	15619	SPRINGDALE ST	TALBERT AVE	LITTLEFIELD DR	E	AC	5	1,152	80	92,160	3/28/22	83	100	0	0	New Construction	01-01-1980
1862	13116	SPRINGFIELD AVE	PARK ST	MAIN ST	E	AC	6	348	36	12,528	6/30/21	90	62	0	38	Surface Treatment - Slurry Seal	07-27-2022
1862	15701	SPRINGFIELD AVE	HUNTINGTON ST	CALIFORNIA ST	E	AAC	6	287	36	10,332	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1862	15702	SPRINGFIELD AVE	CALIFORNIA ST	DELWARE ST	E	AC	6	280	36	10,080	6/30/21	68	18	71	11	Surface Treatment - Slurry Seal	07-27-2022
1862	15849	SPRINGFIELD AVE	LAKE ST	PARK ST	E	AC	6	585	36	21,060	6/30/21	77	77	23	0	Surface Treatment - Slurry Seal	07-27-2022
1862	15850	SPRINGFIELD AVE	LAKE ST	ALABAMA ST	E	AAC	6	315	36	11,340	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1862	15855	SPRINGFIELD AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	436	36	15,696	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1864	15282	SPRINGTIME LN	LE CORTE DR	FORELLE DR	E	AC	4	527	36	18,684	4/8/24	64	15	78	7	New Construction	01-01-1980
1865	15584	SPRIT CIR	BROOKHURST ST	END	E	AAC	8	501	36	18,036	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1866	14365	SPYGLASS LN	PEPPERTREE DR	HAMILTON AVE	E	AC	8	177	36	6,150	7/13/17	57	37	60	3	Surface Treatment - Slurry Seal	05-11-2018
1867	14131	SQUIRES CIR	CROWN REEF LN	CDS	E	AC	7	160	36	7,260	2/12/20	82	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1868	14892	ST ANDREWS LN	GLENROY DR	KENILWORTH DR	E	AC	2	260	36	9,360	3/22/22	89	100	0	0	New Construction	01-01-1980
1868	15768	ST ANDREWS LN	EL DORADO DR	GLENROY DR	E	AC	2	741	36	27,816	3/22/22	92	88	0	12	New Construction	01-01-1980
1869	14325	ST AUGUSTINE DR	NEWLAND ST	ANTIGUA LN	E	AC	9	171	36	6,156	8/30/23	61	29	45	26	New Construction	01-01-1980
1869	15545	ST AUGUSTINE DR	ANTIGUA LN	SAND DOLLAR LN	E	AC	9	252	36	9,072	2/22/22	63	36	49	15	New Construction	01-01-1980
1869	15546	ST AUGUSTINE DR	SAND DOLLAR LN	BRETON LN	E	AC	9	769	36	27,684	8/30/23	32	6	90	4	New Construction	01-01-1980
1870	14842	ST CLOUD CIR	LANCASTER DR	CDS	E	AAC	4	213	32	8,066	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1871	15017	ST GEORGE LN	WARNER AVE	ST PAUL CIR	E	AC	5	335	36	13,200	3/29/22	88	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1872	14481	ST JOHN LN	HAMILTON AVE	CLEARBROOK DR	E	AAC	9	525	36	19,650	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1873	14864	ST PAUL CIR	ST GEORGE LN	END	E	AC	5	545	36	22,110	3/29/22	74	70	30	0	Surface Treatment - Slurry Seal	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1874	13300	STALLION CIR	ROOSEVELT LN	CDS	E	AC	2	275	36	11,150	4/5/22	55	33	64	3	New Construction	01-01-1980
1874	15117	STALLION CIR	PARLAY CIR	ROOSEVELT LN	E	AC	2	489	36	17,604	4/5/22	53	39	61	0	New Construction	01-01-1980
1875	15340	STANDISH LN	HOOKER DR	EDINGER AVE	E	AC	1	900	36	32,400	5/8/24	75	65	35	0	New Construction	01-01-1980
1876	14943	STANFIELD CIR	LARKMONT DR	END	E	AC	5	202	36	8,772	3/12/20	94	69	0	31	New Construction	01-01-1980
1877	13750	STANFORD LN	CORNELL DR	CITADEL DR	E	AC	1	780	36	27,792	3/30/22	90	38	62	0	New Construction	01-01-1980
1877	13762	STANFORD LN	CITADEL DR	END	E	AC	1	410	36	16,560	5/6/20	66	19	56	25	New Construction	01-01-1980
1878	15523	STAR DR	REEF LN	SKIMMER LN	E	AC	8	1,008	36	35,744	3/18/24	83	63	25	12	Surface Treatment - Slurry Seal	05-11-2018
1879	14305	STARBOARD CIR	SURGE LN	CDS	E	AAC	8	199	36	8,664	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1880	14465	STARDUST DR	SPA DR	NEVEDA DR	E	AC	1	808	36	29,088	4/8/22	84	100	0	0	New Construction	01-01-1980
1880	15590	STARDUST DR	NEVADA DR	HAMMON LN	E	AC	1	790	36	28,440	4/9/22	83	57	43	0	New Construction	01-01-1980
1881	15576	STARFIRE LN	HUDSON DR	DAYTONA CIR	E	AC	9	899	36	33,114	4/17/24	66	20	80	0	Surface Treatment - Slurry Seal	05-11-2019
1881	15825	STARFIRE LN	DAYTONA CIR	BANNING AVE	E	AC	9	294	36	10,584	4/17/24	88	55	45	0	Surface Treatment - Slurry Seal	05-11-2019
1882	13497	STARK ST	ALLEY MALAGA LN	MALAGA LN	E	AC	4	150	36	150	4/9/22	100	53	0	47	New Construction	01-01-1980
1882	14963	STARK ST	PARKSIDE LN	BEACH BLVD	E	AAC	4	660	36	23,760	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1882	9002	STARK ST	BEACH BLVD	MALAGA LN	E	AAC	4	738	78	56,064	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1883	13478	STARLIGHT CIR	WISHINGWELL LN	CDS	E	AAC	3	486	36	19,296	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1884	13630	STARMONT LN	GRIMSBY DR	BERSHIRE DR	E	AC	5	440	36	15,552	3/12/20	93	100	0	0	New Construction	01-01-1980
1885	15342	STARSHINE DR	EDWARDS ST	TULLOW LN	E	AC	3	412	36	14,544	3/30/22	95	100	0	0	New Construction	01-01-1980
1886	15861	STEEP LN	FOX CIR	ELLIS AVE	E	AC	4	321	36	11,268	5/13/24	85	84	16	0	New Construction	01-01-1980
1887	13403	STEINER CIR	ARMADA DR	CDS	E	AC	5	338	36	13,668	3/14/22	59	10	90	0	New Construction	01-01-1980
1888	14877	STELLRECHT CIR	SIMS ST	CDS	E	AC	2	397	36	15,792	3/22/22	91	86	0	14	New Construction	01-01-1980
1889	13647	STERLING AVE	PEMBERCO CIR	LISA LN	E	AC	4	282	33	9,306	5/9/24	57	21	79	0	New Construction	01-01-1980
1889	13648	STERLING AVE	LISA LN	WHARTON ST	E	AC	4	272	33	8,712	5/9/24	56	23	77	0	New Construction	01-01-1980
1889	15279	STERLING AVE	BEACH BLVD	PEMBERCO CIR	E	AC	4	906	33	29,634	5/9/24	64	27	71	2	New Construction	01-01-1980
1890	13980	STEVEN LN	KNEEP DR	RONNEY DR	E	AC	8	255	36	9,530	2/18/20	91	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1891	14752	STEWART ST	GARFIELD AVE	CLAY AVE	E	AC	7	1,320	30	39,600	5/6/24	90	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1891	14753	STEWART ST	ERNEST AVE	GARFIELD AVE	E	AAC	4	1,055	40	42,200	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1892	13213	STILES CIR	TRUMBELL DR	CDS	E	AAC	2	223	36	9,528	5/10/24	93	100	0	0	Overlay - AC Fabric	12-01-2017
1893	13393	STILL HARBOR LN	FENLEY DR	MC CARTHY DR	E	AC	5	460	36	17,310	3/14/22	38	14	86	0	Surface Treatment - Slurry Seal	10-01-2012
1893	13632	STILL HARBOR LN	WINTERGREEN DR	KISER DR	E	AC	5	260	36	10,110	3/28/22	95	100	0	0	New Construction - Initial	01-01-1980
1893	15170	STILL HARBOR LN	MC CARTHY DR	WINTERGREEN DR	E	AC	5	928	36	33,408	3/28/22	60	14	86	0	New Construction - Initial	01-01-1980
1894	14334	STILWELL DR	SHAW LN	MAGNOLIA ST	E	AC	9	179	36	6,444	8/30/23	24	4	96	0	New Construction - Initial	01-01-1980
1894	15551	STILWELL DR	KROLL LN	SHAW LN	E	AC	9	55	36	2,730	8/30/23	81	23	0	77	New Construction - Initial	01-01-1980
1895	13987	STINGRAY LN	ALBACORE DR	VELARDO DR	E	AC	8	709	36	27,524	3/7/22	81	28	69	3	Surface Treatment - Slurry Seal	02-08-2023
1896	13831	STONE CIR	AULNAY LN	END	E	AC	1	397	36	15,542	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
1897	13306	STONEHAVEN CIR	GRAHAM ST	CDS	E	AC	2	403	36	15,758	4/5/22	90	100	0	0	New Construction - Initial	01-01-1980
1898	13474	STONEWOOD DR	GOLDENWEST ST	BRIDGE LN	E	AAC	3	180	36	6,480	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1898	15214	STONEWOOD DR	BRIDGE LN	MOONGLOW LN	E	AAC	3	995	36	36,570	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1899	14542	STONINGTON CIR	CAPE MAY LN	CDS	E	AAC	9	118	32	5,276	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1900	14212	STONYBROOK DR	BROOKJURST ST	CRAIMER LN	E	AC	8	1,255	36	45,180	2/28/22	88	67	0	33	Surface Treatment - Slurry Seal	02-14-2023
1901	14156	STRATHCONA DR	KELVINGROVE LN	HARBOR ISLE LN	E	AAC	7	243	36	9,498	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1902	14351	STRATHMOOR LN	BLUEFIELD DR	EFFINGHAM DR	E	AC	8	515	36	18,540	4/10/24	53	7	35	58	New Construction - Initial	01-01-1980
1902	15558	STRATHMOOR LN	ATLANTA AVE	BLUEFIELD DR	E	AC	8	681	36	24,228	4/1/24	82	31	0	69	Surface Treatment - Slurry Seal	05-11-2018
1903	15949	SUBURBIA LN	EDYE DR	CDS	E	AAC	8	918	36	35,548	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1904	15213	SUGAR AVE	SHASTA LN	MC FADDEN AVE	E	AAC	4	678	32	21,696	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1905	13136	SUITE DR	FANTASIA LN	BALLAD LN	E	AC	2	800	36	28,800	3/24/22	71	33	67	0	New Construction - Initial	01-01-1980
1906	15360	SUMMER BREEZE LN	LITTLE HARBOR DR	CDS	E	AC	5	807	36	31,845	6/30/21	93	66	0	34	Surface Treatment - Slurry Seal	07-27-2022
1907	14490	SUMMER CIR	HIGHTIDE DR	CDS	E	AAC	9	307	32	11,324	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1908	15131	SUMMERCLOUD LN	CAMILLE DR	SHIELDS DR	E	AC	3	573	36	20,628	3/23/22	88	71	0	29	New Construction - Initial	01-01-1980
1909	14871	SUMMERDALE DR	TREEHAVEN LN	PINEHURST LN	E	AC	5	485	36	19,492	3/29/22	78	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1909	15771	SUMMERDALE DR	PINEHURST LN	ALLEY PINEHURST LN	E	AC	5	125	36	4,500	3/29/22	42	18	82	0	Surface Treatment - Slurry Seal	10-01-2012
1909	15772	SUMMERDALE DR	ALLEY PINEHURST LN	ALLEY GROVE CIR	E	AC	5	257	36	9,252	3/29/22	52	20	80	0	Surface Treatment - Slurry Seal	10-01-2012
1909	15773	SUMMERDALE DR	ALLEY GROVE CIR	FRASER LN	E	AC	5	594	36	21,384	3/29/22	69	46	54	0	Surface Treatment - Slurry Seal	01-10-2012
1910	15372	SUMMERFIELD LN	GARFIELD AVE	DEAUVILLE DR	E	AC	7	515	36	19,518	4/2/24	85	26	68	6	Surface Treatment - Slurry Seal	11-28-2019
1911	14497	SUMMERWIND LN	OCEANBREEZE LN	HARBORBREEZE LN	E	AC	9	504	36	18,894	3/26/24	93	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1911	15604	SUMMERWIND LN	OCEANCREST DR	OCEANBREEZE LN	E	AC	9	817	36	29,412	3/26/24	89	40	48	12	Surface Treatment - Slurry Seal	05-11-2019
1912	14458	SUMMIT DR	BEACON HILL LN	GOLDENWEST ST	E	AC	5	709	44	31,196	5/6/24	89	57	0	43	New Construction - Initial	01-01-1980
1912	14981	SUMMIT DR	SEAPOINT AVE	PENINSULA LN	E	AC	5	1,617	44	71,148	5/6/24	92	70	0	30	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1912	14984	SUMMIT DR	PENINSULA LN	BEACON HILL LN	E	AC	5	2,155	44	94,820	5/6/24	90	55	0	45	New Construction - Initial	01-01-1980
1913	15140	SUN DR	COD CIR	LIMELIGHT CIR	E	AAC	3	350	36	12,600	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1914	15256	SUNBREEZE DR	FLOWER LN	GRASS CIR	E	AAC	3	665	36	25,440	2/11/20	94	100	0	0	Overlay - AC Structural	10-01-2012
1915	13881	SUNBURST LN	MOONBEAM DR	BLUEBONNET DR	E	AC	3	365	36	14,140	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
1915	15349	SUNBURST LN	BLUEBONNET DR	END	E	AC	3	647	36	25,092	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
1916	13960	SUNCORAL DR	BAYWATER LN	PISMO LN	E	AC	7	251	36	9,036	2/19/20	85	28	72	0	New Construction - Initial	01-01-1980
1917	13407	SUNDANCE CIR	COLLINS LN	CDS	E	AC	5	222	36	9,492	3/14/22	92	100	0	0	New Construction - Initial	01-01-1980
1918	13146	SUNDANCER LN	SEASCAPE DR	RAGTIME CIR	E	AAC	2	378	36	13,608	5/7/24	93	100	0	0	Overlay - AC Fabric	12-01-2017
1918	15045	SUNDANCER LN	RAGTIME CIR	NIMBLE CIR	E	AAC	2	399	36	14,364	5/7/24	92	100	0	0	Overlay - AC Fabric	12-01-2017
1918	15046	SUNDANCER LN	NIMBLE CIR	REBEL CIR	E	AAC	2	309	36	11,124	5/7/24	93	100	0	0	Overlay - AC Fabric	12-01-2017
1918	15049	SUNDANCER LN	REBEL CIR	VENTURE DR	E	AAC	2	506	36	18,216	5/7/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
1919	14018	SUNDAY DR	TOBAGO LN	WARD ST	E	AC	8	455	32	14,560	3/2/22	73	19	80	1	Surface Treatment - Slurry Seal	02-08-2023
1920	15350	SUNFLOWER LN	CHESTNUT DR	MOONBEAM DR	E	AC	3	539	36	21,404	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
1921	13913	SUNKIST CIR	FLAGSTAFF LN	CDS	E	AAC	7	231	32	11,192	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1922	13481	SUNLIGHT DR	WISHINGWELL LN	CDS	E	AC	3	486	36	17,496	3/18/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1922	15217	SUNLIGHT DR	MAGELLAN LN	WISHINGWELL LN	E	AC	3	520	36	18,720	3/18/22	92	73	27	0	Surface Treatment - Slurry Seal	07-29-2020
1923	13688	SUNNYCREST LN	ROYAL OAK DR	END	E	AC	1	334	36	14,024	2/10/20	95	100	0	0	New Construction - Initial	01-01-1980
1923	13690	SUNNYCREST LN	ROYAL OAK DR	LARKSPUR CIR	E	AC	1	258	36	9,288	2/10/20	94	100	0	0	New Construction - Initial	01-01-1980
1923	13703	SUNNYCREST LN	LARCHWOOD DR	MAR VISTA DR	E	AC	1	259	36	9,324	2/10/20	93	55	0	45	New Construction - Initial	01-01-1980
1923	13704	SUNNYCREST LN	MAR VISTA DR	END	E	AC	1	481	36	19,316	2/10/20	93	100	0	0	New Construction - Initial	01-01-1980
1923	15297	SUNNYCREST LN	LARKSPUR CIR	LARCHWOOD DR	E	AC	1	770	36	27,720	2/10/20	92	94	0	6	New Construction - Initial	01-01-1980
1924	15508	SUNRIDGE DR	CHARWOOD LN	CRESTVIEW LN	E	AC	9	955	36	35,130	7/17/17	58	57	41	2	Surface Treatment - Slurry Seal	05-11-2018
1925	14457	SUNRISE DR	BEACH BLVD	BEACH BLVD	E	AC	9	131	46	6,026	8/30/23	94	100	0	0	New Construction - Initial	01-01-1980
1925	14613	SUNRISE DR	SEABREEZE DR	BEACH BLVD	E	AC	9	380	22	11,181	8/30/23	95	100	0	0	New Construction - Initial	01-01-1980
1926	14455	SUNSET CIR	BEACH BLVD	END	E	AC	9	270	32	8,640	8/24/23	84	51	17	32	New Construction - Initial	01-01-1980
1927	14989	SUNSHINE DR	MAGNOLIA ST FRONTAGE	JETT DR	E	AC	7	677	36	24,372	2/11/20	58	44	53	3	Surface Treatment - Slurry Seal	07-15-2021
1928	14303	SUNTAN CIR	AQUATIC LN	END	E	AAC	8	510	36	20,360	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1929	13125	SUNVIEW DR	SWEETBRIAR LN	DAWSON LN	E	AC	3	603	36	21,132	2/19/20	82	75	0	25	New Construction - Initial	01-01-1980
1931	14493	SURFCREST DR	VACATION LN	HARBORBREEZE LN	E	AC	9	259	36	9,324	3/26/24	80	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1931	15601	SURFCREST DR	SEASIDE LN	VACATION LN	E	AC	9	509	36	18,324	3/26/24	68	25	75	0	Surface Treatment - Slurry Seal	05-11-2019
1932	15356	SURFDALE LN	LAWN HAVEN DR	GARDEN CIR	E	AC	5	522	36	18,792	5/6/24	87	19	81	0	Surface Treatment - Slurry Seal	11-28-2019
1932	17100	SURFDALE LN	GARDEN CIR	SILVERBEACH CIR	E	AC	5	700	36	25,200	5/6/24	98	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1933	14503	SURFRIDER LN	PLAYA DR	CHRISTINE DR	E	AC	9	549	36	20,764	4/17/24	74	26	74	0	Surface Treatment - Slurry Seal	05-11-2019
1934	15025	SURFWOOD LN	ATLANTA AVE	BURLINGTON LN	E	AC	9	1,159	36	41,724	8/24/23	59	14	78	8	New Construction - Initial	01-01-1980
1935	15531	SURGE LN	EL CAPITAN DR	ATLANTA AVE	E	AAC	8	624	36	22,464	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1936	14432	SURVEYOR CIR	HAMILTON AVE	END	E	AC	9	496	41	22,336	8/30/23	86	15	63	22	New Construction - Initial	01-01-1980
1937	14499	SUSAN LN	BANNING AVE	CHRISTINE DR	E	AC	9	563	36	20,268	4/17/24	65	16	84	0	Surface Treatment - Slurry Seal	05-11-2019
1938	13796	SUSSEX CIR	ALEXANDRIA DR	END	E	AC	1	410	36	17,260	2/26/20	74	47	53	0	New Construction - Initial	01-01-1980
1939	15836	SUTTON LN	ADAMS AVE	CHASING CROSS DR	E	AAC	8	215	24	5,160	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1940	14005	SUVA LN	GARFILED AVE	SAMOA DR	E	AC	8	188	36	6,768	3/7/22	72	55	45	0	Surface Treatment - Slurry Seal	02-08-2023
1940	14006	SUVA LN	SAMOA DR	MAIKAI DR	E	AC	8	281	36	10,116	3/7/22	81	50	50	0	Surface Treatment - Slurry Seal	02-08-2023
1941	13814	SWAN LN	DOVEWOOD DR	ROBINWOOD DR	E	AC	1	1,040	36	37,440	3/21/22	60	31	69	0	New Construction - Initial	01-01-1980
1942	16021	SWANSEA LN	BURLCREST DR	CDS	E	AC	7	956	36	35,916	2/11/20	63	36	60	4	Surface Treatment - Slurry Seal	07-15-2021
1943	15345	SWEETBRIAR LN	SKYVIEW DR	GLEN DR	E	AC	3	492	36	17,424	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
1944	13566	SYCAMORE AVE	OAK LN	ASH ST	E	AC	4	447	36	16,092	3/31/22	82	100	0	0	New Construction - Initial	01-01-1980
1944	13577	SYCAMORE AVE	ASH ST	ELM ST	E	AC	4	436	36	15,696	3/31/22	86	92	0	8	New Construction - Initial	01-01-1980
1945	13755	SYDNEY DR	BOLSA PARK LN	END	E	AAC	1	294	36	12,084	5/6/20	93	66	0	34	New Construction - Initial	01-01-1980
1945	13765	SYDNEY DR	BOLSA PARK LN	BAYSIDE LN	E	AC	1	769	36	28,184	5/6/20	93	66	0	34	New Construction - Initial	01-01-1980
1946	15137	SYLVIA DR	DIANE LN	KETTLER LN	E	AC	3	521	36	18,756	3/18/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1947	13824	SYSTEM DR	CHEMICAL LN	MANUFACTURE LN	E	AC	1	614	40	25,060	4/1/22	64	39	61	0	New Construction - Initial	01-01-1980
1948	15333	TAFT LN	RENO CIR	CROSS DR	E	AAC	1	284	36	12,024	5/3/24	55	37	63	0	Overlay - AC Structural	05-11-2018
1949	14509	TAHITI CIR	MALIBU LN	CDS	E	AAC	9	266	32	10,012	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1838	14461	TALBERT AVE	GOTHARD ST	END	E	AC	4	747	40	31,380	5/9/24	88	43	57	0	New Construction - Initial	01-01-1980
1838	691	TALBERT AVE	SPRINGDALE ST	END	E	AC	3	1,566	30	46,980	4/4/22	60	23	77	0	New Construction - Initial	01-01-1980
1950	13456	TALEGATE DR	FIELDBURY LN	END	E	AAC	5	265	36	9,252	3/11/20	85	100	0	0	Overlay - AC Structural	10-01-2012
1951	14546	TALISMAN LN	SAYBROOK LN	PICKWICK CIR	E	AAC	2	348	36	12,528	5/10/24	86	49	51	0	Overlay - AC Fabric	12-01-2017
1952	15751	TAMARU DR	MINORU LN	NEWLAND ST	E	AAC	4	505	36	18,180	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1953	14932	TAMIKO CIR	PRICE DR	END	E	AC	5	385	36	15,360	3/9/20	95	100	0	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1954	14015	TANA DR	BIKINI LN	WARD ST	E	AAC	8	170	36	6,120	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1955	14206	TANBARK CIR	MEREDITH DR	CDS	E	AC	8	84	63	7,292	2/28/22	72	27	48	25	Surface Treatment - Slurry Seal	02-14-2023
1956	14466	TANGIERS DR	SPA DR	NEVEDA DR	E	AC	1	621	36	22,356	2/10/20	83	50	0	50	New Construction - Initial	01-01-1980
1957	15901	TARPON DR	WEAKFISH LN	SALMON LN	E	AC	8	1,020	36	36,720	3/7/22	79	23	77	0	Surface Treatment - Slurry Seal	02-08-2023
1958	13708	TASMAN DR	BAFFIN CIR	CAMBAY LN	E	AC	1	260	36	9,360	3/21/22	75	26	63	11	New Construction - Initial	01-01-1980
1958	15302	TASMAN DR	BOLSA CHICA ST	BAFFIN CIR	E	AC	1	930	36	33,480	3/21/22	68	27	66	7	New Construction - Initial	01-01-1980
1959	15159	TAURUS LN	ROCK DR	CAPSTONE DR	E	AC	3	573	36	21,628	2/11/20	48	30	70	0	New Construction - Initial	01-01-1980
1960	15273	TAYLOR DR	CAMABY LN	DELAWARE ST	E	AC	4	1,371	36	49,068	4/9/24	87	51	39	10	New Construction - Initial	01-01-1980
1960	15280	TAYLOR DR	BEACH BLVD	LISA LN	E	AAC	4	1,115	32	35,424	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1960	15813	TAYLOR DR	DELAWARE ST	BEACH BLVD	E	AAC	4	1,188	36	42,180	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1961	14384	TEAKWOOD LN	ALOHA DR	BANNING AVE	E	AC	9	168	36	6,048	3/27/24	95	100	0	0	New Construction - Initial	01-01-1980
1962	14949	TELHAN DR	BUSHARD ST FRONTAGE	ELMSFORD LN	E	AC	8	1,132	36	41,502	3/9/22	91	72	0	28	Surface Treatment - Slurry Seal	02-08-2023
1963	13273	TELLIM LN	WALTON DR	LENNOX DR	E	AC	3	712	36	25,344	3/16/22	80	100	0	0	New Construction - Initial	01-01-1980
1964	14599	TENOR DR	FANTASIA LN	END	E	AC	2	126	36	4,536	3/24/22	74	59	41	0	New Construction - Initial	01-01-1980
1965	12966	TENTH ST	PCH	WALNUT AVE	E	AC	6	375	50	18,750	6/22/21	75	35	43	22	Surface Treatment - Slurry Seal	07-27-2022
1965	12967	TENTH ST	WALNUT AVE	OLIVE AVE	E	AAC	6	395	46	18,170	6/22/21	68	29	46	25	Surface Treatment - Slurry Seal	07-27-2022
1965	12968	TENTH ST	PECAN AVE	ACACIA AVE	E	AAC	6	376	46	17,296	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1965	12969	TENTH ST	ACACIA AVE	PALM AVE	E	AC	6	370	46	17,020	6/22/21	71	39	37	24	Surface Treatment - Slurry Seal	07-27-2022
1965	12989	TENTH ST	MAIN ST	LAKE ST	E	AC	6	648	37	23,976	7/8/21	81	73	25	2	Surface Treatment - Slurry Seal	07-27-2022
1965	13073	TENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	380	46	17,480	6/22/21	72	31	29	40	Surface Treatment - Slurry Seal	07-27-2022
1965	13074	TENTH ST	PALM AVE	CREST AVE	E	AC	6	275	40	12,450	6/22/21	78	38	17	45	Surface Treatment - Slurry Seal	07-27-2022
1965	16031	TENTH ST	ORANGE AVE	PECAN AVE	E	AAC	6	380	46	17,480	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
1966	14234	TERN CIR	SANDPIPER LN	END	E	AC	9	361	36	12,996	8/24/23	70	41	59	0	New Construction - Initial	01-01-1980
1967	13391	TERRIER DR	MISTY LN	WRIGHTWOOD LN	E	AC	5	1,013	36	35,892	3/9/20	87	81	16	3	New Construction - Initial	01-01-1980
1968	14839	TERRY DR	LEAFWOOD CIR	HERITAGE LN	E	AC	4	256	36	9,216	4/6/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1968	14995	TERRY DR	BEACH BLVD	LEAFWOOD CIR	E	AAC	4	445	36	16,020	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1968	15756	TERRY DR	HERITAGE LN	MONTCLAIR LN	E	AC	4	788	36	28,368	4/6/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1968	15757	TERRY DR	MONTCLAIR LN	IRBY LN	E	AC	4	750	36	27,000	4/6/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1968	9001	TERRY DR	VIEWPOINT LN	BEACH BLVD	E	AAC	4	530	40	21,200	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1969	13525	THAMES LN	SEINE DR	RHINE DR	E	AC	4	406	36	14,616	3/18/22	82	42	58	0	Surface Treatment - Slurry Seal	07-29-2020
1969	15242	THAMES LN	HEIL AVE	SEINE DR	E	AC	4	382	36	13,752	3/18/22	71	28	72	0	Surface Treatment - Slurry Seal	07-29-2020
1970	14300	THESEUS DR	SUBURBIA LN	LAVONNE LN	E	AAC	8	962	36	34,632	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1971	12945	THIRD ST	OLIVE AVE	ORANGE AVE	E	AC	6	375	36	13,500	6/30/21	77	32	58	10	Surface Treatment - Slurry Seal	07-27-2022
1971	12946	THIRD ST	WALNUT AVE	OLIVE AVE	E	AC	6	355	36	12,780	6/30/21	80	35	65	0	Surface Treatment - Slurry Seal	07-27-2022
1972	12979	THIRTEENTH ST	ACACIA AVE	PALM AVE	E	AAC	6	390	46	17,940	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1972	12980	THIRTEENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/22/21	74	81	0	19	Surface Treatment - Slurry Seal	07-27-2022
1972	12981	THIRTEENTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	390	46	17,940	6/22/21	71	91	8	1	Surface Treatment - Slurry Seal	07-27-2022
1972	12982	THIRTEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	375	46	17,250	6/22/21	68	86	0	14	Surface Treatment - Slurry Seal	07-27-2022
1972	12983	THIRTEENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	390	46	17,940	6/22/21	73	89	0	11	Surface Treatment - Slurry Seal	07-27-2022
1972	12984	THIRTEENTH ST	PALM AVE	CREST AVE	E	AC	6	610	42	25,620	7/8/21	84	32	20	48	Surface Treatment - Slurry Seal	07-27-2022
1972	12985	THIRTEENTH ST	CREST AVE	MAIN ST	E	AAC	6	465	42	19,530	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1972	13081	THIRTEENTH ST	PCH	WALNUT AVE	E	AC	6	365	50	18,570	6/22/21	77	38	41	21	Surface Treatment - Slurry Seal	07-27-2022
1972	13123	THIRTEENTH ST	PARK ST	LAKE ST	E	AAC	6	625	37	23,125	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1972	50000	THIRTEENTH ST	MAIN ST	PARK ST	E	AAC	6	350	37	12,950	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1973	13652	THOMAS CIR	TAYLOR DR	END	E	AC	4	232	32	8,924	4/8/24	54	40	60	0	New Construction - Initial	01-01-1980
2302	60790	THOMPSON DR	HANSEN LN	LAMB LN	E	AC	8	400	36	14,400	3/2/22	95	100	0	0	New Construction - AC	01-01-2015
1974	15306	THOR DR	SPRINGDALE ST	END	E	AC	1	624	36	24,264	4/8/22	95	100	0	0	New Construction - Initial	01-01-1980
1975	13660	THUNDERBIRD CIR	STARDUST DR	END	E	AAC	1	310	36	12,410	5/8/24	72	56	44	0	Overlay - AC Fabric	10-01-2016
1976	14077	TIBBETT LN	INNSBRUCK DR	WOODLAWN DR	E	AAC	8	245	36	9,570	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1977	13521	TIBER LN	SEINE DR	RHINE DR	E	AC	4	758	36	28,038	3/31/22	91	55	45	0	Surface Treatment - Slurry Seal	07-29-2020
1978	14495	TIDE LN	HIGHTIDE DR	BANNING AVE	E	AAC	9	167	36	6,012	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1979	15478	TIDELAND LN	CLIFFWOOD DR	CLOUDHAVEN DR	E	AC	7	350	36	14,100	2/10/20	74	68	24	8	Surface Treatment - Slurry Seal	07-15-2021
1980	14336	TIDEWATER CIR	FLEET LN	CDS	E	AC	9	385	36	15,360	4/1/24	62	20	72	8	Surface Treatment - Slurry Seal	05-11-2018
1981	14884	TIFFANY CIR	KERN DR	CDS	E	AC	5	542	36	20,762	3/22/22	87	48	52	0	New Construction - Initial	01-01-1980
1982	13977	TIGERFISH CIR	VELARDO DR	CDS	E	AC	8	450	36	18,200	3/7/22	83	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1983	14515	TIKI CIR	LUAU LN	CDS	E	AAC	9	345	32	12,540	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1984	15790	TILBURG DR	APEL LN	FORBES LN	E	AC	5	775	36	27,900	3/29/22	65	22	70	8	New Construction - Initial	01-01-1980
1985	14289	TILLER CIR	SILVER STRAND DR	CDS	E	AC	8	529	36	20,244	3/6/24	70	100	0	0	Surface Treatment - Slurry Seal	05-11-2018

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1986	15714	TIMBER CIR	DELAWARE ST	CDS	E	AC	4	319	17	6,673	4/9/24	78	51	49	0	Surface Treatment - Slurry Seal	11-28-2019
1987	13156	TISBURY CIR	MISTRAL DR	CDS	E	AC	2	428	32	15,196	4/7/22	78	53	47	0	New Construction - Initial	01-01-1980
1988	14170	TITAN LN	CLOUDHAVEN DR	INDIANAPOLIS AVE	E	AC	7	156	36	5,616	2/10/20	34	33	67	0	Surface Treatment - Slurry Seal	07-15-2021
1989	14016	TOBAGO LN	KAMUELA DR	SUNDAY DR	E	AAC	8	254	36	9,144	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1989	15402	TOBAGO LN	SUNDAY DR	CHRISTMAS DR	E	AAC	8	765	36	27,540	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1990	14251	TOBERMORY CIR	COLBREGGAN DR	CDS	E	AAC	9	205	32	8,060	5/10/24	79	46	51	3	Overlay - AC Structural	05-11-2018
1991	13140	TOMAS LN	CHERYL DR	SISSON DR	E	AAC	2	268	36	9,648	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1991	15032	TOMAS LN	AUDREY DR	CHERYL DR	E	AAC	2	533	36	19,938	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1992	14003	TONGA LN	KAIMU DR	MAIKAI DR	E	AAC	8	270	36	9,720	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1993	15972	TOPEKA LN	SALT LAKE DR	DOLPHIN DR	E	AC	7	1,026	36	37,686	2/24/20	81	39	58	3	Surface Treatment - Slurry Seal	07-15-2021
1996	13945	TOPSIDE CIR	LOOKOUT LN	CDS	E	AAC	7	543	32	17,376	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1998	13396	TORIN DR	PRESCOTT LN	FLINTSTONE LN	E	AC	5	260	36	9,360	3/14/22	76	35	65	0	New Construction - Initial	01-01-1980
1999	14442	TORJIAN LN	HEIL AVE	GLORIA DR	E	AC	3	248	36	8,928	3/23/22	91	41	59	0	New Construction - Initial	01-01-1980
2000	14722	TORONTO AVE	CALIFORNIA ST	DELAWARE ST	E	AAC	6	285	36	9,479	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2000	15700	TORONTO AVE	HUNTINGTON ST	CALIFORNIA ST	E	AAC	6	298	36	9,896	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2000	15854	TORONTO AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	450	36	15,435	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2001	15234	TOULOUSE DR	ALLEY GOTHARD ST	CDS	E	AAC	3	378	36	16,908	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2001	15236	TOULOUSE DR	GOTHARD ST	ALLEY GOTHARD ST	E	AAC	3	151	36	5,436	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2002	16011	TOWAY LN	DOWN DR	END	E	AC	1	1,100	36	40,850	3/30/22	90	39	0	61	New Construction - Initial	01-01-1980
2004	13640	TRADEWIND CIR	GULF LN	CDS	E	AAC	4	233	32	8,956	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2005	15459	TRANQUIL LN	ADAMS AVE	GALLANT DR	E	AAC	7	990	36	36,390	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2006	13725	TRANSISTOR LN	ENGINEER DR	MACHINE DR	E	AC	1	1,141	40	45,640	5/5/20	95	100	0	0	New Construction - Initial	01-01-1980
2008	14123	TREASURE CIR	ADAMS AVE	CDS	E	AAC	7	116	34	5,444	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2009	14893	TREEHAVEN LN	SUMMERDALE DR	ROSEMONT DR	E	AC	5	595	36	23,676	3/29/22	67	27	73	0	Surface Treatment - Slurry Seal	10-01-2012
2010	13311	TREETOP CIR	GREENVIEW LN	END	E	AC	3	360	32	13,320	2/18/20	94	100	0	0	New Construction - Initial	01-01-1980
2011	14087	TRENTON LN	FORRESTAL DR	VALLEY FORGE DR	E	AC	8	260	36	10,360	2/25/22	86	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
2012	14048	TRIDENT LN	DOLPHIN DR	CLIPPER DR	E	AC	7	807	36	29,052	2/24/20	45	36	62	2	Surface Treatment - Slurry Seal	07-15-2021
2012	15414	TRIDENT LN	ANCHORAGE DR	DOLPHIN DR	E	AC	7	757	36	28,002	2/24/20	60	28	70	2	Surface Treatment - Slurry Seal	07-15-2021
2013	14976	TRINIDAD LN	EDINGER AVE	AQUARIUS DR	E	AAC	2	1,508	46	56,810	5/7/24	90	56	29	15	Overlay - AC Fabric	12-01-2017
2014	14857	TRIPP CIR	BRUSH DR	CDS	E	AAC	4	424	32	14,818	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2015	13707	TRITON LN	OCEANUS DR	ARGOSY AVE	E	AC	1	563	40	22,520	4/8/22	69	16	84	0	New Construction - Initial	01-01-1980
2016	13705	TROJAN CIR	MAR VISTA DR	END	E	AAC	1	481	36	19,116	5/7/24	69	68	28	4	Overlay - AC Fabric	10-01-2016
2017	14280	TROON LN	ZETLAND DR	DUMBRECK DR	E	AAC	8	236	36	9,876	3/18/24	79	58	0	42	Overlay - AC Structural	05-11-2018
2018	13319	TROPHY DR	LARK LN	GREENVIEW LN	E	AC	3	540	36	20,440	2/18/20	82	88	12	0	New Construction - Initial	01-01-1980
2019	13664	TROPICANA LN	CHINOOK DR	SANDS DR	E	AC	1	275	36	13,900	2/10/20	89	100	0	0	New Construction - Initial	01-01-1980
2020	15128	TRUDY LN	JEAN DR	SHIELDS DR	E	AC	3	1,282	36	46,152	3/23/22	87	100	0	0	New Construction - Initial	01-01-1980
2020	15816	TRUDY LN	HEIL AVE	JEAN DR	E	AC	3	438	36	15,768	3/23/22	85	45	55	0	New Construction - Initial	01-01-1980
2021	15940	TRUMBULL DR	PHELPS LN	SAYBROOK LN	E	AC	2	1,026	36	36,936	3/24/22	57	47	53	0	New Construction - Initial	01-01-1980
2022	15886	TRUXTON DR	ALLPORT LN	CAMFIELD LN	E	AAC	7	764	36	27,504	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2023	13378	TUCANA DR	TAURUS LN	GOLDENWEST ST	E	AC	3	317	36	10,824	2/11/20	83	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
2024	14074	TUCKAHOE CIR	INNSBRUCK DR	CDS	E	AC	8	365	32	13,180	3/9/22	94	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
2025	13286	TUFTS LN	LOYOLA DR	DEFIANCE DR	E	AC	3	257	36	10,252	3/16/22	87	100	0	0	New Construction - Initial	01-01-1980
2026	15021	TULLOW LN	STARSHINE DR	GLEN DR	E	AC	3	254	36	9,144	2/19/20	95	100	0	0	New Construction - Initial	01-01-1980
2026	16008	TULLOW LN	GLEN DR	LIMERICK DR	E	AC	3	1,030	36	36,792	2/19/20	86	100	0	0	New Construction - Initial	01-01-1980
2027	13618	TUNSTALL LN	MADDOX DR	NORMA DR	E	AC	3	792	36	28,512	3/18/22	86	91	0	9	New Construction - Initial	01-01-1980
2028	14920	TUSCAN CIR	ALLSTONE DR	END	E	AC	5	144	36	6,984	3/12/20	93	62	0	38	New Construction - Initial	01-01-1980
2029	14891	TWAIN LN	ROGERS DR	KERN DR	E	AC	5	989	36	35,604	3/22/22	85	69	31	0	New Construction - Initial	01-01-1980
2030	12976	TWELFTH ST	ACACIA AVE	PALM AVE	E	AC	6	370	46	17,020	6/22/21	67	35	65	0	New Construction - Initial	01-01-1980
2030	12977	TWELFTH ST	PECAN AVE	ACACIA AVE	E	AAC	6	375	46	17,250	12/17/21	100	0	0	0	Overlay - AC Fabric	12-17-2021
2030	12978	TWELFTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	375	48	19,680	6/22/21	90	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
2030	13079	TWELFTH ST	PCH	WALNUT AVE	E	AC	6	340	50	17,142	6/22/21	80	59	0	41	Surface Treatment - Slurry Seal	07-27-2022
2030	13080	TWELFTH ST	PALM AVE	CREST AVE	E	AC	6	298	46	13,708	7/8/21	92	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
2030	13082	TWELFTH ST	CREST AVE	MAIN ST	E	AC	6	415	43	17,845	7/8/21	80	46	54	0	Surface Treatment - Slurry Seal	07-27-2022
2030	13083	TWELFTH ST	MAIN ST	LAKE ST	E	AAC	6	885	47	41,595	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
2030	16027	TWELFTH ST	ORANGE AVE	PECAN AVE	E	AC	6	365	46	16,790	6/22/21	94	100	0	0	New Construction - Initial	01-01-1980
2030	50100	TWELFTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	375	46	17,250	6/22/21	88	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
2031	13014	TWENTIETH ST	ACACIA AVE	PALM AVE	E	AC	6	386	46	17,756	6/30/21	86	33	61	6	Surface Treatment - Slurry Seal	02-13-2024
2031	13015	TWENTIETH ST	PECAN AVE	ACACIA AVE	E	AC	6	415	46	19,090	6/30/21	91	61	0	39	Surface Treatment - Slurry Seal	07-27-2022

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2031	13016	TWENTIETH ST	WALNUT AVE	OLIVE AVE	E	AC	6	405	46	18,630	6/30/21	91	43	0	57	Surface Treatment - Slurry Seal	07-27-2022
2031	13017	TWENTIETH ST	PCH	WALNUT AVE	E	AC	6	370	46	17,020	6/30/21	91	94	0	6	Surface Treatment - Slurry Seal	07-27-2022
2031	13018	TWENTIETH ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/30/21	74	19	81	0	Surface Treatment - Slurry Seal	07-27-2022
2031	13096	TWENTIETH ST	ORANGE AVE	PECAN AVE	E	AC	6	390	46	17,940	6/30/21	92	85	0	15	Surface Treatment - Slurry Seal	07-27-2022
2032	13019	TWENTY-FIRST ST	ACACIA AVE	PALM AVE	E	AC	6	395	46	18,170	6/30/21	67	18	49	33	Surface Treatment - Slurry Seal	07-27-2022
2032	13020	TWENTY-FIRST ST	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/30/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
2032	13021	TWENTY-FIRST ST	WALNUT AVE	OLIVE AVE	E	AC	6	415	46	19,090	6/30/21	68	8	71	21	Surface Treatment - Slurry Seal	07-27-2022
2032	13022	TWENTY-FIRST ST	PCH	WALNUT AVE	E	AAC	6	370	50	18,500	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
2032	13023	TWENTY-FIRST ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/30/21	83	16	79	5	Surface Treatment - Slurry Seal	07-27-2022
2032	13097	TWENTY-FIRST ST	ORANGE AVE	PECAN AVE	E	AC	6	395	46	18,170	6/30/21	84	21	68	11	Surface Treatment - Slurry Seal	07-27-2022
2033	13024	TWENTY-SECOND ST	ACACIA AVE	PALM AVE	E	AC	6	395	46	18,170	6/30/21	91	48	0	52	Surface Treatment - Slurry Seal	07-27-2022
2033	13025	TWENTY-SECOND ST	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/30/21	92	69	0	31	Surface Treatment - Slurry Seal	07-27-2022
2033	13026	TWENTY-SECOND ST	WALNUT AVE	OLIVE AVE	E	AAC	6	395	46	18,860	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
2033	13027	TWENTY-SECOND ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/30/21	69	14	64	22	Surface Treatment - Slurry Seal	07-27-2022
2033	13028	TWENTY-SECOND ST	PCH	WALNUT AVE	E	AC	6	355	46	16,960	6/30/21	90	41	0	59	Surface Treatment - Slurry Seal	07-27-2022
2033	13098	TWENTY-SECOND ST	ORANGE AVE	PECAN AVE	E	AC	6	395	46	18,170	6/30/21	77	14	40	46	Surface Treatment - Slurry Seal	07-27-2022
2034	15204	TWINFORD LN	NORBOOK DR	MANOFIELD DR	E	AAC	5	511	36	18,396	3/11/20	80	100	0	0	Overlay - AC Structural	10-01-2012
2035	13277	TYEE LN	NYANZA DR	LAURELHURST DR	E	AC	3	260	36	10,110	3/16/22	87	100	0	0	New Construction - Initial	01-01-1980
2036	13922	TYLER CIR	HARDING LN	CDS	E	AC	7	520	37	22,860	4/2/24	91	72	28	0	Surface Treatment - Slurry Seal	11-28-2019
2037	13738	TYNDALL DR	BOLSA PARK LN	END	E	AC	1	294	36	12,084	5/6/20	54	8	90	2	New Construction - Initial	01-01-1980
2037	13746	TYNDALL DR	FIELDSTONE LN	BOLSA PARK LN	E	AC	1	769	36	28,184	5/6/20	87	100	0	0	New Construction - Initial	01-01-1980
2038	13150	TYPHOON LN	SAGAMORE DR	VENTURE DR	E	AAC	2	762	36	28,182	5/7/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
2039	13854	TYRONE CIR	TOWAY LN	END	E	AC	1	419	36	16,334	5/8/24	43	23	77	0	New Construction - Initial	01-01-1980
2040	13255	UNDERHILL LN	MYRTLE DR	SHAYNE DR	E	AC	3	1,020	36	36,720	3/17/22	94	90	0	10	New Construction - Initial	01-01-1980
2041	14460	UPLAND DR	QUEENS PARK LN	SPARKMAN LN	E	AAC	8	253	36	9,108	3/19/24	88	57	43	0	Overlay - AC Structural	05-11-2018
2042	13467	UPPERLAKE CIR	LAKEVIEW DR	END	E	AC	5	375	36	15,000	2/24/20	68	70	30	0	Surface Treatment - Slurry Seal	10-01-2012
2043	14715	UTICA AVE	DELAWARE ST	FLORIDA ST	E	AAC	6	625	36	22,500	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2043	14716	UTICA AVE	FLORIDA ST	BEACH BLVD	E	AAC	6	625	36	22,500	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2043	14717	UTICA AVE	LAKE ST	PARK ST	E	AC	6	650	36	23,400	7/8/21	79	37	19	44	Surface Treatment - Slurry Seal	07-27-2022
2043	14720	UTICA AVE	MAIN ST	END	E	AC	6	185	36	6,660	7/8/21	97	100	0	0	Surface Treatment - Slurry Seal	06-01-2021
2043	14721	UTICA AVE	ALABAMA ST	CDS	E	AAC	6	133	36	4,348	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2043	15001	UTICA AVE	LAKE ST	CDS	E	AC	6	184	36	7,040	7/8/21	67	36	64	0	Surface Treatment - Slurry Seal	07-27-2022
2043	15697	UTICA AVE	HUNTINGTON ST	DELAWARE ST	E	AAC	6	620	36	22,320	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2043	15698	UTICA AVE	PARK ST	MAIN ST	E	AC	6	365	36	13,140	7/8/21	82	36	13	51	Surface Treatment - Slurry Seal	07-27-2022
2043	15853	UTICA AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	465	36	16,740	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2044	14492	VACATION LN	SURFCREST DR	HIGHTIDE DR	E	AC	9	560	36	20,910	2/25/20	92	100	0	0	New Construction - Initial	01-01-1980
2045	14134	VAIL DR	NEWLAND ST	ALLPORT LN	E	AAC	7	173	36	6,228	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2046	14821	VALENCIA DR	HAGUE LN	CDS	E	AAC	4	553	36	21,158	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2046	15739	VALENCIA DR	GRANADA LN	ROTTERDAM LN	E	AAC	4	1,020	36	36,970	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2046	15740	VALENCIA DR	ROTTERDAM LN	HAGUE LN	E	AAC	4	535	36	19,260	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2047	13480	VALENTINE DR	GOLDENWEST ST	WISHINGWELL LN	E	AAC	3	671	36	24,156	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2047	13600	VALENTINE DR	WHITTIER LN	GOLDENWEST ST	E	AC	3	180	48	7,140	4/20/20	78	22	0	78	New Construction - Initial	01-01-1980
2048	14911	VALEWORTH CIR	GLENSTONE DR	CDS	E	AC	5	198	36	8,378	3/29/22	53	17	83	0	New Construction - Initial	01-01-1980
2049	13645	VALLEA CIR	STERLING AVE	END	E	AC	4	130	32	5,660	4/8/24	58	26	62	12	New Construction - Initial	01-01-1980
2050	13909	VALLEY CIR	GARFIELD AVE	CDS	E	AAC	7	549	34	19,916	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2051	15434	VALLEY FORGE DR	BROOKHURST ST	CANBERRA LN	E	AC	8	1,156	36	41,616	3/3/22	77	80	17	3	Surface Treatment - Slurry Seal	02-08-2023
2052	14795	VAN BUREN LN	MICHAEL DR	NEWMAN AVE	E	AC	4	781	36	27,828	5/13/24	76	24	76	0	Surface Treatment - Slurry Seal	11-28-2019
2052	15863	VAN BUREN LN	SLATER AVE	MICHAEL DR	E	AAC	4	541	36	18,888	5/13/24	81	66	33	1	New Construction - Initial	01-01-1980
2053	14825	VAN DYKE LN	AMSTERDAM DR	REMBRANDT DR	E	AC	4	491	36	17,676	3/31/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
2054	13829	VANE CIR	AULNAY LN	END	E	AC	1	397	36	15,542	5/8/24	47	32	68	0	New Construction - Initial	01-01-1980
2055	13697	VANGUARD LN	CORTEZ DR	SHEMAN DR	E	AC	1	272	36	12,292	2/10/20	90	100	0	0	New Construction - Initial	01-01-1980
2056	15239	VANTAGE DR	RHONE LN	CDS	E	AAC	4	682	36	27,052	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2057	14239	VARAS CIR	MATARO LN	END	E	AC	9	149	42	6,258	8/23/23	77	100	0	0	New Construction - Initial	01-01-1980
2058	13415	VARSITY DR	HIGHLAND LN	CDS	E	AC	5	383	36	13,788	4/4/22	49	22	67	11	New Construction - Initial	01-01-1980
2058	14413	VARSITY DR	HALLCROFT LN	IVORYCREST LN	E	AC	5	345	36	12,420	3/28/22	49	24	76	0	Surface Treatment - Slurry Seal	10-01-2012
2058	15578	VARSITY DR	HALLCROFT LN	EDWARDS ST	E	AC	5	1,418	36	51,048	3/28/22	61	65	35	0	Surface Treatment - Slurry Seal	10-01-2012
2060	15177	VATCHER DR	FLINTSTONE LN	EDWARDS ST	E	AC	5	1,335	36	48,060	3/14/22	57	16	84	0	New Construction - Initial	01-01-1980
2061	13041	VEERING CIR	SEVENTEENTH ST	CDS	E	AC	6	286	36	12,435	7/8/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2062	15587	VELARDO DR	WOODWARD LN	BUSHARD ST	E	AC	8	1,153	36	42,258	2/18/20	87	45	55	0	Surface Treatment - Slurry Seal	07-15-2021
2062	15906	VELARDO DR	BUSHARD ST	STINGRAY LN	E	AC	8	1,075	36	39,700	3/7/22	91	42	50	8	Surface Treatment - Slurry Seal	02-08-2023
2063	14033	VELVET CIR	FLAGSTONE LN	END	E	AC	7	466	34	15,844	8/21/23	34	6	88	6	Surface Treatment - Slurry Seal	03-01-2011
2064	15852	VENICE AVE	ALABAMA ST	HUNTINGTON ST	E	AC	6	450	36	16,100	7/8/21	82	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
2065	13160	VENTURE DR	TYPHOON LN	WALRUS LN	E	AC	2	254	36	9,894	4/7/22	91	100	0	0	New Construction - Initial	01-01-1980
2065	13184	VENTURE DR	WALRUS LN	SUNDANCER LN	E	AC	2	1,520	36	54,720	4/7/22	86	78	16	6	New Construction - Initial	01-01-1980
2065	13187	VENTURE DR	SUNDANCER LN	CDS	E	AC	2	189	32	7,848	4/7/22	88	50	0	50	New Construction - Initial	01-01-1980
2066	15090	VENTURI DR	BIRDIE LN	NASSAU LN	E	AC	3	1,421	36	51,156	3/23/22	64	27	48	25	New Construction - Initial	01-01-1980
2067	14169	VENUS CIR	CLOUDHAVEN DR	CDS	E	AAC	7	342	32	12,444	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2068	14190	VERDANT DR	GRAYSTONE LN	EVERGLADES LN	E	AAC	8	269	36	10,184	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2069	13344	VERLENE CIR	MARIE LN	CDS	E	AAC	3	229	36	9,934	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2070	14567	VERMONT LN	CORNWALL DR	END	E	AAC	8	228	24	5,472	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
2070	15635	VERMONT LN	KENISINGTON DR	CORNWALL DR	E	AAC	8	338	24	8,112	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
2071	15422	VERONICA DR	RODERICK LN	OCCIDENTAL LN	E	AAC	7	941	36	35,376	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2072	13861	VESPER CIR	WHITEOAK LN	END	E	AC	3	213	32	8,316	2/19/20	94	90	0	10	New Construction - Initial	01-01-1980
2073	13446	VESTRY CIR	PACEMONT DR	END	E	AAC	5	362	36	14,532	3/11/20	88	100	0	0	Overlay - AC Structural	10-01-2012
2074	15185	VIA ANGELINA DR	AVILLA LN	EL NOPAL LN	E	AAC	5	1,141	36	42,076	2/25/20	83	100	0	0	Overlay - AC Structural	10-01-2012
2075	13423	VIA CARONA DR	AVILLA LN	EL NOPAL LN	E	AAC	5	1,142	36	41,112	2/25/20	87	100	0	0	Overlay - AC Structural	10-01-2012
2076	13629	VIA ESPANA LN	SPICKARD DR	SLATER AVE	E	AC	3	166	36	5,400	2/25/20	88	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
2076	15184	VIA ESPANA LN	SLATER AVE	VIA ANGELINA DR	E	AAC	5	418	36	15,048	5/4/20	89	100	0	0	Overlay - AC Structural	10-01-2012
2078	13548	VICEROY CIR	ROSS LN	CDS	E	AAC	4	205	32	7,810	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2079	14196	VICKSBURG DR	EVERGLADES LN	REDWOOD LN	E	AAC	8	753	36	27,858	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2080	13776	VICTORIA LN	BOLSA AVE	ALEXANDRIA DR	E	AC	1	569	36	20,484	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
2080	13787	VICTORIA LN	ALEXANDRIA DR	OXFORD DR	E	AC	1	260	36	9,072	4/27/24	97	60	0	40	New Construction - Initial	01-01-1980
2080	13788	VICTORIA LN	CUMBERLAND DR	HALIFAX DR	E	AC	1	520	36	18,720	2/26/20	86	56	14	30	New Construction - Initial	01-01-1980
2080	13791	VICTORIA LN	MELBOURNE DR	END	E	AC	1	410	36	16,560	5/6/20	90	100	0	0	New Construction - Initial	01-01-1980
2080	13805	VICTORIA LN	HALIFAX DR	MELBOURNE DR	E	AC	1	260	36	9,072	2/26/20	85	68	32	0	New Construction - Initial	01-01-1980
2080	15318	VICTORIA LN	OXFORD DR	CUMBERLAND DR	E	AC	1	520	36	18,720	2/26/20	69	30	70	0	New Construction - Initial	01-01-1980
2083	13317	VIEW CIR	LARK LN	END	E	AC	3	252	36	10,572	2/18/20	94	100	0	0	New Construction - Initial	01-01-1980
2084	14994	VIEWPOINT LN	CHRYSLER CIR	TERRY DR	E	AC	4	689	36	24,804	4/6/22	83	36	64	0	Surface Treatment - Slurry Seal	07-29-2020
2084	15653	VIEWPOINT LN	TERRY DR	DAMASK DR	E	AC	4	549	36	20,264	4/6/22	73	19	81	0	Surface Treatment - Slurry Seal	07-29-2020
2085	13692	VIKING CIR	SUNNYCREST LN	END	E	AAC	1	352	32	13,064	5/7/24	76	100	0	0	Overlay - AC Fabric	10-01-2016
2086	14418	VILLA NUEVA DR	ALTAMIRANO LN	CARRANZA LN	E	AC	5	256	36	9,966	2/25/20	95	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
2086	15579	VILLA NUEVA DR	CARRANZA NL	QUINTANA LN	E	AC	5	512	36	18,432	2/25/20	94	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
2086	15580	VILLA NUEVA DR	QUINTANA LN	END	E	AC	5	381	36	13,428	2/25/20	93	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
2087	15650	VILLAGE DR	JETT DR	MAGNOLIA ST	E	AC	7	743	36	26,748	2/11/20	75	54	37	9	Surface Treatment - Slurry Seal	07-15-2021
2088	14403	VIM LN	SAGAMORE DR	AQUARIUS DR	E	AAC	2	257	36	9,252	5/7/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
2089	14779	VINCENT CIR	GOTHARD ST	END	E	AC	4	422	40	18,680	5/9/24	87	52	48	0	New Construction - Initial	01-01-1980
2090	15774	VINELAND DR	NEWQUIST LN	END	E	AC	2	304	36	10,944	3/22/22	92	100	0	0	New Construction - Initial	01-01-1980
2091	14124	VINTAGE DR	ADAMS AVE	AFTON CIR	E	AC	7	105	36	3,780	2/12/20	36	33	67	0	New Construction - Initial	01-01-1980
2091	15455	VINTAGE DR	AFTON CIR	KELSO DR	E	AC	7	750	36	27,750	4/15/20	18	10	84	6	New Construction - Initial	01-01-1980
2092	14126	VISCOUNT DR	IMPERIAL COVE LN	CROWN REEK LN	E	AC	7	250	36	9,750	2/12/20	35	32	67	1	Surface Treament- Single Chip Sea	07-15-2021
2093	13422	VISTA DEL SOL DR	AVILLA LN	EL NOPAL LN	E	AAC	5	1,142	36	41,112	2/25/20	90	100	0	0	Overlay - AC Structural	10-01-2012
2094	13613	VISTA DR	GREEN ST	ISLAND CIR	E	AC	2	184	36	7,650	4/7/22	76	32	68	0	New Construction - Initial	01-01-1980
2095	15490	VIVA CIR	CDS (S)	CDS (N)	E	AAC	8	237	32	11,584	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2096	14349	VOLANTE DR	CHUBASCO LN	INFERNO LN	E	AC	8	254	36	9,894	4/1/24	68	72	28	0	New Construction - Initial	01-01-1980
2097	13486	VOLGA DR	ALLEY GANGES LN	SHER LN	E	AC	4	817	36	29,412	3/18/22	78	23	77	0	Surface Treatment - Slurry Seal	07-29-2020
2098	14290	VOYAGER CIR	HORIZON LN	CDS	E	AC	8	510	36	18,360	3/6/24	91	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
2099	14819	WAAL CIR	HOLLAND DR	CDS	E	AC	4	560	36	21,410	4/6/22	89	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
2100	13917	WADEBRIDGE CIR	COLCHESTER LN	CDS	E	AC	7	332	32	10,624	4/2/24	90	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
2101	13541	WAGERS CIR	ROSS LN	CDS	E	AAC	4	244	32	9,058	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2102	13568	WAGON DR	NICHOLS ST	DAIRYVIEW CIR	E	AAC	4	181	36	6,516	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
2103	13128	WAIKIKI LN	EDINGER AVE	TRAVELWAY	E	AC	2	140	36	5,040	3/24/22	63	27	73	0	New Construction - Initial	01-01-1980
2103	15031	WAIKIKI LN	TRAVELWAY	KONA DR	E	AC	2	587	36	21,132	3/24/22	83	46	54	0	New Construction - Initial	01-01-1980
2103	15035	WAIKIKI LN	KONA DR	HILO CIR	E	AAC	2	272	36	9,792	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
2103	15041	WAIKIKI LN	HILO CIR	SCENARIO DR	E	AAC	2	816	36	29,376	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
2104	14853	WAITE LN	HEIL AVE	BRUSH DR	E	AAC	4	526	36	19,436	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2105	13997	WALLEYE LN	BASS DR	VELARDO DR	E	AC	8	450	36	16,950	3/7/22	85	33	60	7	Surface Treatment - Slurry Seal	02-08-2023

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2106	14518	WALLINGFORD LN	GATESHEAD DR	HARWICH LN	E	AAC	9	696	36	25,806	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1994	12929	WALNUT AVE	ELEVENTH ST	FOURTEENTH ST	E	AC	6	930	39	36,270	6/23/21	74	38	36	26	Surface Treatment - Slurry Seal	07-27-2022
1994	12933	WALNUT AVE	EIGHTH ST	ELEVENTH ST	E	AAC	6	880	38	33,440	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
1994	12939	WALNUT AVE	SIXTH ST	EIGHTH ST	E	AC	6	560	37	20,720	7/8/21	78	52	47	1	Surface Treatment - Slurry Seal	07-27-2022
1994	13108	WALNUT AVE	TWENTIETH ST	GOLDENWEST ST	E	AAC	6	915	36	32,940	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1994	13109	WALNUT AVE	SEVENTEENTH ST	TWENTIETH ST	E	AAC	6	875	36	31,500	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1994	13114	WALNUT AVE	FOURTEENTH ST	SEVENTEENTH ST	E	AC	6	875	36	31,500	6/23/21	66	14	42	44	Surface Treatment - Slurry Seal	07-27-2022
2107	13159	WALRUS LN	AQUARIUS DR	VENTURE DR	E	AAC	2	677	36	25,122	5/7/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
2108	16004	WALTON DR	GIARC LN	MARJAN LN	E	AC	3	1,291	36	47,226	3/16/22	92	100	0	0	New Construction - Initial	01-01-1980
2109	13132	WALTZ CIR	PRELUDE DR	CDS	E	AC	2	412	36	16,332	3/24/22	92	100	0	0	New Construction - Initial	01-01-1980
2110	13340	WANDA CIR	MARILYN DR	END	E	AAC	3	320	36	13,070	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2111	13201	WANDERER LN	HUMBOLDT DR	CAROUSEL LN	E	AC	2	631	36	23,716	4/7/22	86	50	47	3	New Construction - Initial	01-01-1980
2111	15055	WANDERER LN	CAROUSEL LN	HUMBOLDT DR	E	AC	2	578	36	20,520	4/7/22	90	38	0	62	New Construction - Initial	01-01-1980
2112	15430	WARBURTON DR	BUSHARD ST FRONTAGE	ELMSFORD LN	E	AC	8	1,124	36	40,464	3/9/22	94	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
2295	60720	WARDLOW LN	PIONEER DR	SHERIDAN DR	E	AC	7	480	36	17,280	2/18/20	94	38	0	62	New Construction - AC	01-01-2014
2113	15424	WARFIELD DR	SANDERSON LN	OCCIDENTAL LN	E	AC	7	681	36	25,266	2/18/20	65	37	44	19	Surface Treatment - Slurry Seal	07-15-2021
1997	14535	WARNER AVE	WEATHERLY LN	SCEPTRE LN	E	AC	2	720	63	45,360	4/9/22	89	59	41	0	New Construction - Initial	01-01-1980
1997	14986	WARNER AVE	WARNER AVE	PINEHURST LN	E	AC	5	751	36	27,036	3/29/22	58	16	84	0	Surface Treatment - Slurry Seal	10-01-2012
2114	13141	WARREN LN	AUDREY DR	SISSON DR	E	AC	2	850	36	30,600	3/24/22	50	28	71	1	New Construction - Initial	01-01-1980
2114	15027	WARREN LN	EDINGER AVE	AUDREY DR	E	AAC	2	300	36	10,800	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
2115	14217	WARWICK DR	CRAIMER LN	RAVENWOOD LN	E	AAC	8	254	36	9,144	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
2116	13529	WASHINGTON AVE	LYNDON ST	NICHOLS ST	E	ACT	4	530	36	19,080	3/31/22	85	47	53	0	Surface Treatment - Slurry Seal	07-29-2020
2117	14525	WATCH HARBOR DR	BUSHARD ST	WOOD ISLAND LN	E	AC	9	167	36	5,724	4/24/24	85	65	35	0	Surface Treatment - Slurry Seal	05-11-2019
2118	14068	WATERBURY LN	YORKTOWN AVE	GREENWICH DR	E	AC	7	172	36	6,192	2/18/20	78	6	94	0	Surface Treatment - Slurry Seal	07-15-2021
2118	14069	WATERBURY LN	HYANNIS PORT DR	CAPE COD DR	E	AC	7	262	36	10,182	2/18/20	55	13	87	0	Surface Treatment - Slurry Seal	07-15-2021
2118	15389	WATERBURY LN	KNEEP DR	YORKTOWN AVE	E	AC	8	1,190	36	43,590	2/18/20	72	31	57	12	Surface Treatment - Slurry Seal	07-15-2021
2118	15425	WATERBURY LN	GREENWICH DR	HYANNIS PORT DR	E	AC	7	792	36	28,512	2/18/20	88	73	27	0	Surface Treatment - Slurry Seal	07-15-2021
2119	14360	WATERFRONT DR	BUSHARD ST	PINETREE LN	E	AAC	8	169	36	5,796	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
2119	15553	WATERFRONT DR	BOWSPRIT LN	BUSHARD ST	E	AC	9	517	36	19,362	3/20/24	89	100	0	0	New Construction - Initial	01-01-1980
2120	14543	WATERWAY CIR	HEIL AVE	CDS	E	AAC	2	446	34	16,414	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
2121	13941	WAVE CIR	PLUM TREE LN	CDS	E	AAC	7	434	32	15,138	7/14/21	100	0	0	0	Overlay - AC Structural	07-14-2021
2122	13304	WAVERIDER CIR	BOLSA CHICA ST	CDS	E	AC	2	203	36	8,558	4/7/22	69	24	76	0	New Construction - Initial	01-01-1980
2123	13229	WAVERLY LN	ROUNDHILL DR	EDGEWATER LN	E	AC	2	262	36	9,432	4/7/22	70	66	34	0	New Construction - Initial	01-01-1980
2124	15040	WAYFARER LN	HUMBOLDT DR	CDS	E	AC	2	980	36	36,780	4/7/22	89	79	0	21	New Construction - Initial	01-01-1980
2125	13985	WEAKFISH LN	FLOUNDER DR	POLLACK DR	E	AAC	8	260	36	9,072	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
2125	15392	WEAKFISH LN	POLLACK DR	CDS	E	AAC	8	830	32	26,560	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
2126	15079	WEATHERLY LN	WARNER AVE	ALADDIN DR	E	AC	2	291	36	10,476	4/9/22	81	32	68	0	New Construction - Initial	01-01-1980
2127	13329	WEBER CIR	MYTINGER LN	CDS	E	AC	3	419	36	16,434	3/23/22	84	55	31	14	New Construction - Initial	01-01-1980
2128	15410	WEEMS LN	KINGSDALE DR	END	E	AAC	7	649	36	23,364	8/21/23	74	51	49	0	Overlay - AC Structural	03-01-2011
2129	13835	WELDE CIR	AULNAY LN	END	E	AC	1	397	36	15,542	5/8/24	95	100	0	0	New Construction - Initial	01-01-1980
2130	13631	WELLBANK LN	LANCEFIELD DR	WOODBORO DR	E	AC	5	353	36	14,208	3/12/20	91	63	0	37	New Construction - Initial	01-01-1980
2131	13463	WELLBROOK CIR	GLENFOX DR	END	E	AAC	5	267	36	11,112	2/24/20	82	100	0	0	Overlay - AC Structural	10-01-2012
2132	14435	WELLINGTON CIR	MARIANA CIR	CDS	E	AAC	2	500	32	11,836	5/6/24	84	100	0	0	Overlay - AC Fabric	12-01-2017
2133	14437	WELLINGTON DR	MARIANA CIR	PEALE LN	E	AC	2	198	32	6,336	4/9/22	99	100	0	0	New Construction - Initial	01-01-1980
2134	14905	WENDY CIR	FRANS LN	CDS	E	AC	5	263	36	10,718	3/29/22	91	53	47	0	New Construction - Initial	01-01-1980
2135	13926	WENLOCK CIR	WORCHESTER LN	CDS	E	AAC	7	116	31	7,008	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2136	14203	WESLEY CIR	LAWSON LN	CDS	E	AAC	8	410	32	15,120	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2138	14276	WESTCLIFF DR	CHARWOOD LN	CRESTVIEW LN	E	AC	9	954	36	34,344	5/7/24	59	19	80	1	Surface Treatment - Slurry Seal	05-11-2018
2139	13466	WESTLAKE CIR	INLET DR	END	E	AC	5	478	36	19,208	2/24/20	51	35	64	1	Surface Treatment - Slurry Seal	10-01-2012
2140	13231	WESTPORT DR	LOWELL CIR	COURTNEY LN	E	AC	2	647	36	23,292	3/29/22	66	45	55	0	New Construction - Initial	01-01-1980
2140	15076	WESTPORT DR	DAVENPORT DR	BLAIR LN	E	AC	2	1,135	36	40,660	3/29/22	64	45	55	0	New Construction - Initial	01-01-1980
2140	15077	WESTPORT DR	BLAIR LN	LOWELL CIR	E	AC	2	644	36	23,184	3/29/22	60	26	73	1	New Construction - Initial	01-01-1980
2141	14046	WESTWINDS LN	ALBATROSS DR	SHORE CIR	E	AC	7	260	36	10,110	2/19/20	81	39	61	0	Surface Treatment - Slurry Seal	07-15-2021
2141	14052	WESTWINDS LN	SKIFF CIR	CLIPPER DR	E	AAC	7	260	36	9,360	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2141	15415	WESTWINDS LN	SHORE CIR	BREAKERS DR	E	AC	7	520	36	18,720	2/19/20	75	49	51	0	Surface Treatment - Slurry Seal	07-15-2021
2141	15416	WESTWINDS LN	BREAKERS DR	SKIFF CIR	E	AC	7	780	36	28,080	2/19/20	71	21	79	0	Surface Treatment - Slurry Seal	07-15-2021
2142	15916	WEYMOUTH LN	FALMOUTH DR	BURNHAM CIR	E	AAC	7	926	36	33,336	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2143	15277	WHARTON ST	GLADYS AVE	KINER AVE	E	AAC	4	864	33	29,512	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2144	14856	WHEELER CIR	BRUSH DR	CDS	E	AAC	4	424	32	14,818	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2145	15158	WHETMORE LN	CAPSTONE DR	SPICKARD DR	E	AC	3	950	36	36,700	2/11/20	95	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
2146	14866	WHISTLER CIR	HERBERT LN	CDS	E	AC	5	193	36	8,198	3/22/22	92	100	0	0	New Construction - Initial	01-01-1980
2147	13924	WHITBURN CIR	WEYMOUTH LN	CDS	E	AAC	7	150	32	8,212	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2148	14316	WHITE HORSE LN	MARTINIQUE DR	SABLE DR	E	AC	9	1,022	36	36,792	8/30/23	95	90	0	10	New Construction - Initial	01-01-1980
2149	16012	WHITEOAK LN	RED COACH DR	STARSHINE DR	E	AC	3	776	36	28,686	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
2150	13943	WHITESAILS DR	YACHT LN	CDS	E	AAC	7	439	32	15,298	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2151	15707	WHITESANDS DR	YORKTOWN AVE	END	E	AAC	6	345	36	13,120	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2152	14192	WHITETREE CIR	BAY MEADOW DR	END	E	AC	8	426	34	16,284	2/23/22	79	15	53	32	Surface Treatment - Slurry Seal	02-13-2023
2153	15975	WHITFORD LN	BRIGHTON DR	BERSHIRE DR	E	AC	5	1,100	36	40,350	3/12/20	89	43	54	3	New Construction - Initial	01-01-1980
2154	13469	WHITNEY DR	RUSHMOOR LN	END	E	AC	4	535	36	22,860	5/13/24	89	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
2154	15210	WHITNEY DR	CASCADE LN	RUSHMOOR LN	E	AC	4	550	36	19,800	5/13/24	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
2155	15999	WHITTIER LN	AUBURN DR	BRIDGEWATER DR	E	AC	3	780	36	30,080	3/16/22	77	100	0	0	New Construction - Initial	01-01-1980
2156	15699	WICHITA AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	450	36	16,200	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2157	13872	WICKLOW LN	LIMERICK DR	END	E	AC	3	291	36	12,276	2/19/20	75	60	33	7	New Construction - Initial	01-01-1980
2157	15346	WICKLOW LN	GLEN DR	LIMERICK DR	E	AC	3	1,039	36	37,404	2/19/20	80	76	21	3	New Construction - Initial	01-01-1980
2158	13863	WILD CHERRY CIR	RED COACH DR	END	E	AC	3	227	32	8,764	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
2159	13864	WILD PLUM CIR	RED COACH DR	END	E	AC	3	227	32	9,064	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
2160	14889	WILD ROSE LN	BRANNEN DR	LIEGE DR	E	AC	5	256	36	9,216	3/29/22	65	29	70	1	New Construction - Initial	01-01-1980
2160	15788	WILD ROSE LN	LIEGE DR	NORDINA DR	E	AC	5	1,380	36	49,930	3/29/22	63	14	77	9	New Construction - Initial	01-01-1980
2161	13161	WILDFIRE CIR	AQUARIUS DR	CDS	E	AAC	2	411	36	16,596	5/7/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
2163	13848	WILLETT LN	ROYALIST DR	END	E	AC	1	530	36	20,330	5/8/24	82	62	35	3	New Construction - Initial	01-01-1980
2163	15339	WILLETT LN	PRISCILLA DR	ROYALIST DR	E	AC	1	1,040	36	37,440	5/8/24	86	61	39	0	New Construction - Initial	01-01-1980
2164	13969	WILLHELM CIR	RANDI LN	CDS	E	AC	8	330	32	12,360	2/19/20	75	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
2165	14956	WILLIAMS AVE	FLORIDA ST	BEACH BLVD	E	AC	7	660	36	23,760	4/9/24	80	39	45	16	Surface Treatment - Slurry Seal	11-28-2019
2166	14953	WILLOW LN	CHINOOK AVE	END	E	AC	1	397	36	14,292	4/8/22	82	74	26	0	New Construction - Initial	01-01-1980
2167	14187	WIND CAVE LN	MAMMOTH DR	BIG SUR DR	E	AC	8	833	36	30,488	3/1/22	82	57	31	12	Surface Treatment - Slurry Seal	02-13-2023
2168	14935	WINDCROFT DR	CRESTMOOR LN	HELENBROOK LN	E	AC	5	494	36	18,534	3/12/20	92	94	0	6	New Construction - Initial	01-01-1980
2169	13280	WINDEMEIR LN	LAURELHURST DR	LAFAYETTE DR	E	AC	3	258	36	10,038	3/16/22	72	24	61	15	New Construction - Initial	01-01-1980
2169	15105	WINDEMEIR LN	WALTON DR	LAURELHURST DR	E	AC	3	1,010	36	36,072	4/20/20	67	23	77	0	New Construction - Initial	01-01-1980
2170	15722	WINDFIELD DR	JAMESTOWN LN	GEORGETOWN LN	E	AC	4	283	40	11,320	5/13/24	82	51	44	5	Surface Treatment - Slurry Seal	11-01-2019
2171	13942	WINDLASS DR	YACHT LN	PLUM TREE LN	E	AAC	7	366	36	13,426	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2172	14486	WINDSONG CIR	SURFCREST DR	CDS	E	AC	9	475	36	18,600	3/26/24	71	32	68	0	Surface Treatment - Slurry Seal	05-11-2019
2173	14441	WINDSOR DR	CONCORD LN	BEDFORD LN	E	AC	2	267	36	9,862	4/5/22	57	16	84	0	New Construction - Initial	01-01-1980
2174	15413	WINDWARD LN	YORKTOWN AVE	ANCHORAGE DR	E	AC	7	432	36	15,552	2/19/20	59	0	74	26	Surface Treatment - Slurry Seal	07-15-2021
2175	13830	WINSLOW DR	AULNAY LN	END	E	AC	1	397	36	15,542	5/8/24	39	21	79	0	New Construction - Initial	01-01-1980
2175	13841	WINSLOW DR	ALDEN LN	MAYFLOWER LN	E	AC	1	260	36	9,360	5/7/24	95	100	0	0	New Construction - Initial	01-01-1980
2175	16010	WINSLOW DR	ALDEN LN	AULNAY LN	E	AC	1	1,041	36	37,476	5/7/24	90	32	68	0	New Construction - Initial	01-01-1980
2176	13633	WINTERGREEN DR	STILL HARBOR LN	LEWIS LN	E	AC	5	599	36	22,314	3/28/22	37	7	93	0	Surface Treatment - Slurry Seal	10-01-2012
2177	14272	WINTERWOOD CIR	CHARWOOD LN	CDS	E	AC	9	440	34	16,460	5/7/24	86	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
2178	13475	WISHINGWELL LN	STONEWOOD DR	CANDLELIGHT CIR	E	AAC	3	260	36	9,360	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2178	13476	WISHINGWELL LN	VALENTINE DR	SUNLIGHT DR	E	AAC	3	260	36	9,360	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2178	15215	WISHINGWELL LN	CANDLELIGHT CIR	VALENTINE DR	E	AAC	3	780	36	28,080	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2179	15617	WOOD ISLAND LN	CAPE MAY LN	CASTINE DR	E	AC	9	956	36	35,416	4/24/24	87	73	0	27	Surface Treatment - Slurry Seal	05-11-2019
2180	13384	WOODBORO DR	WHITFORD LN	BOLTON CIR	E	AC	5	340	36	11,952	3/12/20	91	100	0	0	New Construction - Initial	01-01-1980
2180	15165	WOODBORO DR	BOLTON CIR	WELLBANK LN	E	AC	5	1,214	36	44,704	5/5/20	92	100	0	0	New Construction - Initial	01-01-1980
2181	15509	WOODCREST DR	CHARWOOD LN	CRESTVIEW LN	E	AC	9	955	36	34,380	5/6/24	55	39	61	0	Surface Treatment - Slurry Seal	05-11-2018
2182	15796	WOODFERN LN	SLATER AVE	SERENE DR	E	AC	5	455	36	16,380	3/12/20	83	25	73	2	New Construction - Initial	01-01-1980
2183	15823	WOODLAWN DR	BUSHARD ST	TIBBETT LN	E	AC	8	1,199	36	42,943	3/9/22	95	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
2184	14286	WOODLEA LN	FRIARSCOURT DR	JURA DR	E	AC	8	783	36	28,188	3/19/24	79	37	62	1	New Construction - Initial	01-01-1980
2185	14521	WOODS HOLE DR	ROCKPORT LN	JONESPORT LN	E	AC	9	254	36	8,856	4/17/24	82	89	11	0	Surface Treatment - Slurry Seal	05-11-2019
2186	13862	WOODSIDE CIR	WHITEOAK LN	END	E	AC	3	213	32	8,316	2/19/20	67	47	53	0	New Construction - Initial	01-01-1980
2187	13249	WOODSTOCK LN	SOFTWIND DR	MONTECITO DR	E	AC	3	260	36	9,610	5/13/24	47	10	58	32	New Construction - Initial	01-01-1980
2187	15097	WOODSTOCK LN	MONTECITO DR	CHRISTY DR	E	AC	3	1,420	36	51,370	3/17/22	51	33	67	0	New Construction - Initial	01-01-1980
2188	15387	WOODWARD LN	VELARDO DR	CDS	E	AC	8	770	36	29,520	2/18/20	60	18	82	0	Surface Treatment - Slurry Seal	07-15-2021
2189	15723	WOODWIND DR	SAMPSON LN	GEORGETOWN LN	E	AC	4	911	40	37,190	5/13/24	75	33	67	0	Surface Treatment - Slurry Seal	11-01-2019
2190	13927	WORCHESTER LN	WENLOCK CIR	YORKTOWN AVE	E	AAC	7	174	36	6,264	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2190	15368	WORCHESTER LN	FALMOUTH DR	WENLOCK CIR	E	AAC	7	1,180	36	43,639	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2191	15152	WRENFIELD DR	EDWARDS ST	COBRA LN	E	AC	3	1,067	36	39,412	2/12/20	75	33	67	0	Surface Treatment - Slurry Seal	10-01-2012
2192	14922	WRIGHTWOOD LN	PRICE DR	MOSS DR	E	AC	5	225	36	9,100	3/9/20	84	69	17	14	New Construction - Initial	01-01-1980
2192	15169	WRIGHTWOOD LN	PINON DR	PADUA DR	E	AC	5	520	36	18,720	3/9/20	70	24	76	0	New Construction - Initial	01-01-1980
2192	15803	WRIGHTWOOD LN	MOSS DR	PINON DR	E	AC	5	940	36	33,840	3/9/20	59	21	79	0	New Construction - Initial	01-01-1980
2193	15373	YACHT LN	WINDLASS DR	KEEL DR	E	AAC	7	509	36	18,574	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2194	13757	YALE CIR	COLUMBIA LN	END	E	AC	1	543	36	21,048	5/6/20	72	34	62	4	New Construction - Initial	01-01-1980
2195	14326	YARMOUTH LN	ST AUGUSTINE DR	HATTERAS DR	E	AC	9	833	36	29,412	8/30/23	81	67	33	0	New Construction - Initial	01-01-1980
2196	14182	YELLOWSTONE DR	BUSHARD ST	BIG BEND LN	E	AAC	8	167	42	6,794	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2196	15484	YELLOWSTONE DR	BIG BEND LN	INTERIOR LN	E	AAC	8	1,012	36	36,932	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2197	13797	YORKSHIRE LN	OXFORD DR	CANTERBURY DR	E	AC	1	276	36	9,936	4/27/24	72	30	70	0	New Construction - Initial	01-01-1980
2197	13798	YORKSHIRE LN	CANTERBURY DR	CUMBERLAND DR	E	AC	1	276	36	9,936	4/27/24	84	49	48	3	New Construction - Initial	01-01-1980
2197	13800	YORKSHIRE LN	BRUNSWICK DR	MELBOURNE DR	E	AC	1	228	36	8,208	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
2197	15321	YORKSHIRE LN	CUMBERLAND DR	BRUNSWICK DR	E	AC	1	552	36	19,872	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
2082	14431	YORKTOWN AVE	BROOKHURST ST	MAUNA LN	E	AC	8	250	26	6,500	3/2/22	72	44	49	7	New Construction - Initial	01-01-1980
2198	13354	YOSEMITE CIR	SONOMA DR	CDS	E	AC	5	250	36	10,350	3/15/22	50	15	85	0	Surface Treatment - Slurry Seal	10-01-2012
2199	13689	YUCCA CIR	ROYAL OAK DR	END	E	AC	1	334	32	12,488	2/10/20	84	41	59	0	New Construction - Initial	01-01-1980
2200	14766	YUKON DR	HUNTINGTON ST	MANITOBA LN	E	AC	4	478	45	22,260	5/13/24	81	100	0	0	New Construction - Initial	01-01-1980
2201	14102	YVONNE DR	ALLEY MALLOY DR	INDIANAPOLIS AVE	E	AC	9	152	36	5,472	8/23/23	64	70	0	30	Surface Treatment - Slurry Seal	03-01-2011
2201	14103	YVONNE DR	MALLOY DR	ALLEY MALLOY DR	E	AAC	9	139	36	5,004	8/23/23	84	100	0	0	Overlay - AC Structural	03-01-2011
2202	14390	ZAMORA LN	NEOLANI DR	KEOKI CIR	E	AAC	9	251	36	9,036	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
2202	15575	ZAMORA LN	KEOKI CIR	MOKIHANA DR	E	AAC	9	761	36	27,396	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
2203	13687	ZANE CIR	ROYAL OAK DR	END	E	AC	1	350	32	13,200	2/10/20	94	100	0	0	New Construction - Initial	01-01-1980
2204	14811	ZEIDER LN	FRIESLAND DR	SLATER AVE	E	AC	4	1,180	36	42,480	3/25/24	66	38	54	8	Surface Treatment - Slurry Seal	07-29-2020
2205	14279	ZETLAND DR	PAISLEY LN	TROON LN	E	AC	8	783	36	28,188	3/18/24	86	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
2206	14189	ZION CIR	CARLSBAD LN	END	E	AC	8	363	36	14,568	2/23/22	85	33	0	67	Surface Treatment - Slurry Seal	02-13-2023
								318.9		**62,521,829**							

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
		Arterials / Collectors (MPAH)															
194	17	BOLSA AVE	DAN LN	SPRINGDALE ST	A	AC	~	1,325	38	50,350	4/27/24	24	20	58	22	New Construction - Initial	01-01-1980
194	173	BOLSA AVE	SPRINGDALE ST	DRAKE LN	A	AC	~	1,481	34	50,354	4/27/24	25	27	69	4	New Construction - Initial	01-01-1980
194	15	BOLSA AVE	GRAHAM ST	TRAVELWAY	A	AC	~	648	38	24,624	4/27/24	28	29	63	8	New Construction - Initial	01-01-1980
194	16	BOLSA AVE	TRAVELWAY	DAN LN	A	AC	~	609	38	23,142	4/27/24	29	16	71	13	New Construction - Initial	01-01-1980
194	17009	BOLSA AVE	DAN LN	TRAVELWAY	A	AC	~	609	38	23,142	4/27/24	30	18	62	20	New Construction - Initial	01-01-1980
194	20	BOLSA AVE	DRAKE LN	EDWARDS ST	A	AC	~	1,165	34	39,610	4/27/24	32	25	64	11	New Construction - Initial	01-01-1980
887	754	INDIANAPOLIS AVE	DELAWARE ST	LAKE ST	C	AC	~	1,517	19	28,823	5/1/24	36	7	86	7	New Construction - Initial	01-01-1980
194	615	BOLSA AVE	DRAKE LN	SPRINGDALE ST	A	AC	~	1,481	34	50,354	4/27/24	37	30	66	4	New Construction - Initial	01-01-1980
1838	95	TALBERT AVE	SPRINGDALE ST	IVORYCREST LN	A	AC	~	1,036	30	31,080	5/2/24	39	14	81	5	New Construction - Initial	01-01-1980
1127	794	MAGNOLIA ST	CARROLLTOWN DR	INDIANAPOLIS AVE	A	AC	~	1,524	40	60,960	5/10/24	41	22	72	6	New Construction - Initial	01-01-1980
194	24	BOLSA AVE	EDWARDS ST	VICTORIA LN	A	AAC	~	1,316	34	44,744	4/27/24	41	27	73	0	Overlay - AC Structural	07-01-2011
1670	815	SEVENTEENTH ST	MAIN ST	ADAMS AVE	A	AC	~	976	38	37,088	3/12/24	42	14	70	16	New Construction - Initial	01-01-1980
1751	247	SPRINGDALE ST	SLATER AVE	FRITCH DR	A	AC	~	1,462	40	58,480	5/2/24	42	41	43	16	New Construction - Initial	01-01-1980
887	312	INDIANAPOLIS AVE	LAKE ST	DELAWARE ST	C	AC	~	1,517	19	28,823	5/1/24	43	19	62	19	New Construction - Initial	01-01-1980
194	17010	BOLSA AVE	EDWARDS ST	DRAKE LN	A	AC	~	1,165	34	39,610	4/27/24	43	37	48	15	New Construction - Initial	01-01-1980
703	271	GARFIELD AVE	GOTHARD ST	MAIN ST	A	AC	~	1,238	45	55,710	3/5/24	44	60	30	10	New Construction - Initial	01-01-1980
1751	248	SPRINGDALE ST	FRITCH DR	TALBERT AVE	A	AC	~	1,185	40	47,400	5/2/24	45	53	37	10	New Construction - Initial	01-01-1980
1838	97	TALBERT AVE	IVORYCREST LN	FIELDBURY LN	A	AC	~	1,106	30	33,180	5/2/24	45	22	50	28	New Construction - Initial	01-01-1980
194	466	BOLSA AVE	VICTORIA LN	EDWARDS ST	A	AAC	~	1,316	46	60,536	4/27/24	45	29	71	0	Overlay - AC Structural	07-01-2011
500	319	DELAWARE ST	FRANKFORT AVE	INDIANAPOLIS AVE	C	AC	~	991	51	50,541	4/15/24	45	53	28	19	New Construction - Initial	01-01-1980
2082	721	YORKTOWN AVE	BROOKHURST ST	SALMON LN	C	AC	~	1,450	33	47,850	4/9/24	45	40	49	11	Surface Treatment - Slurry Seal	07-01-2011
1838	539	TALBERT AVE	FIELDBURY LN	IVORYCREST LN	A	AC	~	1,106	30	33,180	5/2/24	46	17	53	30	New Construction - Initial	01-01-1980
703	158	GARFIELD AVE	WARD ST	END	A	AC	~	1,505	22	33,110	4/2/24	47	43	38	19	New Construction - Initial	01-01-1980
1997	427	WARNER AVE	ROSS LN	NEWLAND ST	A	AC	~	1,189	37	49,641	5/10/24	47	14	63	23	New Construction - Initial	01-01-1980
194	25	BOLSA AVE	VICTORIA LN	GOLDENWEST ST	A	AAC	~	1,330	36	47,880	4/27/24	47	16	63	21	Overlay - AC Structural	07-01-2011
1838	540	TALBERT AVE	EDWARDS ST	FIELDBURY LN	A	AC	~	770	30	23,100	5/2/24	48	9	91	0	New Construction - Initial	01-01-1980
825	864	HEIL AVE	GOTHARD ST	SABOT LN	A	AC	~	1,154	61	70,394	5/8/24	48	44	40	16	New Construction - Initial	01-01-1980
1751	32	SPRINGDALE ST	MC FADDEN AVE	PRISCILLA DR	A	AAC	~	961	38	36,518	5/2/24	49	14	72	14	Overlay - AC Structural	06-21-2012
1751	475	SPRINGDALE ST	ROYALIST DR	PRISCILLA DR	A	AAC	~	1,040	38	39,520	5/2/24	50	19	68	13	Overlay - AC Structural	06-21-2013
1351	326	ORANGE AVE	ATLANTA AVE	THIRD ST	C	AC	~	657	25	16,425	5/1/24	50	36	53	11	New Construction - Initial	01-01-1980
1670	816	SEVENTEENTH ST	ADAMS AVE	PALM AVE	A	AC	~	1,625	35	56,875	3/12/24	50	10	88	2	New Construction - Initial	01-01-1980
500	318	DELAWARE ST	INDIANAPOLIS AVE	MEMPHIS AVE	C	AC	~	1,319	51	67,269	4/15/24	51	20	70	10	New Construction - Initial	01-01-1980
751	404	GRAHAM ST	HEIL AVE	OLD PIRATE LN	A	AC	~	1,178	60	55,680	5/3/24	51	19	58	23	New Construction - Initial	01-01-1980
566	211	EDINGER AVE	TRINIDAD LN	BONAIRE CIR	A	AC	~	1,644	44	72,336	5/6/24	53	54	44	2	New Construction - Initial	01-01-1980
569	229	EDWARDS ST	HEIL AVE	CRANDALL DR	A	AC	~	859	28	24,052	5/7/24	53	34	66	0	New Construction - Initial	01-01-1980
1751	33	SPRINGDALE ST	PRISCILLA DR	ROYALIST DR	A	AAC	~	1,040	38	39,520	5/2/24	53	18	80	2	Overlay - AC Structural	06-21-2012
789	516	HAMILTON AVE	POLYNESIAN LN	MAGNOLIA ST	C	AC	~	590	31	18,290	4/1/24	53	45	51	4	New Construction - Initial	01-01-1980
1838	537	TALBERT AVE	IVORYCREST LN	SPRINGDALE ST	A	AC	~	1,036	30	31,080	5/2/24	53	37	45	18	New Construction - Initial	01-01-1980
569	82	EDWARDS ST	CITY LIMIT NORTH	ROYAL OAK DR	A	AAC	~	394	13	5,122	5/7/24	54	50	50	0	Overlay - AC Structural	07-01-2011
569	201	EDWARDS ST	DOWN DR	EDINGER AVE	A	AC	~	1,431	60	85,860	5/7/24	54	37	63	0	New Construction - Initial	01-01-1980
194	459	BOLSA AVE	SPRINGDALE ST	DAN LN	A	AC	~	1,325	38	50,350	4/27/24	55	62	35	3	New Construction - Initial	01-01-1980
2082	884	YORKTOWN AVE	SALMON LN	BUSHARD ST	C	AC	~	1,190	33	39,270	4/9/24	55	29	63	8	Surface Treatment - Slurry Seal	07-01-2011
194	12	BOLSA AVE	BOLSA CHICA ST	GRAHAM ST	A	AC	~	2,718	38	103,284	4/27/24	55	47	28	25	New Construction - Initial	01-01-1980
566	210	EDINGER AVE	BONAIRE CIR	SAYBROOK LN	A	AC	~	1,417	72	102,024	5/6/24	56	55	44	1	New Construction - Initial	01-01-1980
743	9908	GOLDENWEST ST	SLATER AVE	RIO VISTA DR	A	AC	~	1,168	40	46,720	5/6/24	56	50	48	2	New Construction - Initial	01-01-1980
1351	362	ORANGE AVE	SEVENTEENTH ST	GOLDENWEST ST	C	AC	~	1,965	25	49,125	3/13/24	56	15	41	44	New Construction - Initial	01-01-1980
1670	373	SEVENTEENTH ST	ADAMS AVE	MAIN ST	A	AC	~	976	26	25,376	3/13/24	56	13	79	8	New Construction - Initial	01-01-1980
569	856	EDWARDS ST	LENNOX DR	EDINGER AVE	A	AC	~	892	28	27,226	5/7/24	56	35	64	1	New Construction - Initial	01-01-1980
743	27	GOLDENWEST ST	OXFORD DR	BRUNSWICK DR	A	AC	~	1,104	40	44,160	5/6/24	56	38	60	2	New Construction - Initial	01-01-1980
569	23	EDWARDS ST	CORNELL DR	HALIFAX DR	A	AC	~	520	60	31,200	5/7/24	56	39	61	0	New Construction - Initial	01-01-1980
825	447	HEIL AVE	SABOT LN	GOLDENWEST ST	A	AC	~	828	61	50,508	5/8/24	57	44	33	23	New Construction - Initial	01-01-1980
789	336	HAMILTON AVE	BUSHARD ST	VIA STRAITS LN	C	AC	~	1,067	31	33,077	3/26/24	57	28	69	3	New Construction - Initial	01-01-1980
743	391	GOLDENWEST ST	WARNER AVE	BETTY DR	A	AC	~	1,452	40	58,080	5/6/24	57	11	77	12	New Construction - Initial	01-01-1980
751	406	GRAHAM ST	OLD PIRATE LN	WARNER AVE	A	AC	~	1,466	60	61,960	5/3/24	57	12	59	29	New Construction - Initial	01-01-1980
746	240	GOTHARD ST	CEDAR AVE	SLATER AVE	A	AC	~	1,652	30	49,560	5/9/24	58	54	31	15	New Construction - Initial	01-01-1980
1351	315	ORANGE AVE	SIXTH ST	NINTH ST	C	AC	~	974	25	24,350	3/13/24	58	45	34	21	New Construction - Initial	01-01-1980
1351	804	ORANGE AVE	GOLDENWEST ST	SEVENTEENTH ST	C	AC	~	1,965	25	49,125	3/13/24	58	28	38	34	New Construction - Initial	01-01-1980
566	212	EDINGER AVE	TRINIDAD LN	END	A	AC	~	1,801	44	79,244	5/6/24	58	47	53	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1751	690	SPRINGDALE ST	TALBERT AVE	FRITCH DR	A	AC	~	1,185	40	47,400	5/2/24	58	59	41	0	New Construction - Initial	01-01-1980
746	161	GOTHARD ST	SLATER AVE	BELVA DR	A	AC	~	1,320	30	39,600	5/9/24	59	58	42	0	New Construction - Initial	01-01-1980
746	861	GOTHARD ST	WARNER AVE	PRINCE DR	A	AC	~	1,310	60	78,600	5/9/24	59	52	48	0	New Construction - Initial	01-01-1980
569	84	EDWARDS ST	MAR VISTA DR	BOLSA AVE	A	AAC	~	631	13	8,203	5/7/24	59	53	47	0	Overlay - AC Structural	07-01-2011
1351	768	ORANGE AVE	THIRD ST	ATLANTA AVE	C	AC	~	657	25	16,425	5/1/24	60	39	59	2	New Construction - Initial	01-01-1980
746	603	GOTHARD ST	BELVA DR	SLATER AVE	A	AC	~	1,320	30	39,600	5/9/24	60	54	32	14	New Construction - Initial	01-01-1980
703	713	GARFIELD AVE	MAIN ST	GOTHARD ST	A	AC	~	1,238	45	55,710	3/11/24	60	76	0	24	New Construction - Initial	01-01-1980
1995	157	WARD ST	GARFIELD AVE	TANA DR	C	AC	~	703	16	11,248	4/2/24	60	39	61	0	New Construction - Initial	01-01-1980
746	704	GOTHARD ST	PRODAN DR	TALBERT AVE	A	AC	~	1,020	30	30,600	5/9/24	60	48	30	22	New Construction - Initial	01-01-1980
1997	694	WARNER AVE	NICHOLS ST	GOTHARD ST	A	AC	~	1,321	50	66,050	5/10/24	60	50	48	2	New Construction - Initial	01-01-1980
743	470	GOLDENWEST ST	MC FADDEN AVE	BRUNSWICK DR	A	AC	~	740	40	28,750	5/6/24	61	37	49	14	New Construction - Initial	01-01-1980
746	706	GOTHARD ST	ELLIS AVE	MOUNTJOY DR	A	AC	~	561	30	16,830	5/9/24	61	46	39	15	New Construction - Initial	01-01-1980
746	860	GOTHARD ST	PRINCE DR	HEIL AVE	A	AC	~	1,330	60	79,800	5/9/24	61	56	44	0	New Construction - Initial	01-01-1980
569	83	EDWARDS ST	ROYAL OAK DR	MAR VISTA DR	A	AAC	~	1,287	13	16,731	5/7/24	61	54	46	0	Overlay - AC Structural	07-01-2011
1127	352	MAGNOLIA ST	INDIANAPOLIS AVE	CARROLTOWN DR	A	AC	~	1,524	40	60,960	5/10/24	61	42	58	0	New Construction - Initial	01-01-1980
789	60890	HAMILTON AVE	BROOKHURST ST	BRIDGE	C	AC	~	345	31	10,695	5/8/24	62	75	24	1	New Construction - AC	01-01-1980
789	779	HAMILTON AVE	BROOKHURST ST	VIA STRAITS LN	C	AC	~	1,573	31	48,763	5/8/24	62	77	16	7	New Construction - Initial	01-01-1980
1997	165	WARNER AVE	SCEPTRE LN	LOS PATOS AVE	A	AC	~	1,714	67	114,838	5/13/24	62	25	71	4	New Construction - Initial	01-01-1980
566	206	EDINGER AVE	MELODY LN	BOLSA CHICA ST	A	AC	~	1,451	60	87,060	5/7/24	62	29	66	5	New Construction - Initial	01-01-1980
569	22	EDWARDS ST	ALEXANDRA DR	CORNELL DR	A	AC	~	781	60	46,860	5/7/24	62	33	66	1	New Construction - Initial	01-01-1980
569	21	EDWARDS ST	BOLSA AVE	ALEXANDRIA DR	A	AC	~	569	60	35,390	5/7/24	62	33	59	8	New Construction - Initial	01-01-1980
703	597	GARFIELD AVE	BLUEFIN LN	BUSHARD ST	A	AC	~	585	33	19,305	3/11/24	62	25	0	75	New Construction - Initial	01-01-1980
789	74	HAMILTON AVE	MAGNOLIA ST	POLYNESIAN LN	C	AC	~	590	31	18,290	3/26/24	62	58	41	1	New Construction - Initial	01-01-1980
1185	99	MC FADDEN AVE	GOLDENWEST ST	GOTHARD ST	A	AC	~	2,341	60	140,460	5/13/24	62	39	61	0	New Construction - Initial	01-01-1980
746	241	GOTHARD ST	WARNER AVE	CEDAR AVE	A	AC	~	990	30	31,700	5/9/24	62	69	23	8	New Construction - Initial	01-01-1980
1127	353	MAGNOLIA ST	CARROLLTOWN DR	ATLANTA DR	A	AC	~	1,117	40	44,680	5/10/24	62	35	61	4	New Construction - Initial	01-01-1980
746	682	GOTHARD ST	SLATER AVE	CEDAR AVE	A	AC	~	1,652	30	49,560	5/9/24	63	50	29	21	New Construction - Initial	01-01-1980
789	73	HAMILTON AVE	POLYNESIAN LN	NORTHSHORE LN	A	AC	~	1,338	31	41,478	3/26/24	63	28	34	38	New Construction - Initial	01-01-1980
1351	758	ORANGE AVE	SEVENTEENTH ST	THIRTEENTH ST	C	AC	~	1,307	25	32,675	3/13/24	63	28	45	27	New Construction - Initial	01-01-1980
1997	136	WARNER AVE	LARK LN	SPRINGDALE ST	A	AC	~	1,173	42	51,516	5/10/24	63	33	59	8	New Construction - Initial	01-01-1980
746	262	GOTHARD ST	TALBERT AVE	PRODAN DR	A	AC	~	1,020	30	30,600	5/9/24	63	57	18	25	New Construction - Initial	01-01-1980
1997	137	WARNER AVE	GOLDENWEST ST	GOTHARD ST	A	AC	~	1,982	43	99,988	5/10/24	63	56	40	4	New Construction - Initial	01-01-1980
569	449	EDWARDS ST	HEIL AVE	EDGEMONT DR	A	AC	~	690	28	19,320	5/7/24	64	39	61	0	New Construction - Initial	01-01-1980
703	52	GARFIELD AVE	BROOKFIELD MANOR	BROOKHURST ST	A	AC	~	839	33	27,687	5/8/24	64	22	68	10	New Construction - Initial	01-01-1980
1503	79	RANCHO RD	GRAHAM ST	SPA DR	C	AC	~	777	16	12,432	5/8/24	64	13	87	0	New Construction - Initial	01-01-1980
746	683	GOTHARD ST	CEDAR AVE	WARNER AVE	A	AC	~	990	30	29,700	5/9/24	64	78	7	15	New Construction - Initial	01-01-1980
789	337	HAMILTON AVE	VIA STRAITS LN	BROOKHURST ST	C	AC	~	1,573	31	48,763	3/26/24	64	42	56	2	New Construction - Initial	01-01-1980
569	200	EDWARDS ST	MCFADDEN AVE	DOWN DR	A	AC	~	1,210	60	72,600	5/7/24	64	46	54	0	New Construction - Initial	01-01-1980
743	469	GOLDENWEST ST	BRUNSWICK DR	OXFORD DR	A	AC	~	1,104	40	44,160	5/6/24	64	32	68	0	New Construction - Initial	01-01-1980
743	833	GOLDENWEST ST	BETTY DR	WARNER AVE	A	AC	~	1,452	40	60,330	5/6/24	64	37	42	21	New Construction - Initial	01-01-1980
569	448	EDWARDS ST	EDGEMONT DR	LENNOX DR	A	AC	~	1,058	28	30,624	5/7/24	64	46	54	0	New Construction - Initial	01-01-1980
569	853	EDWARDS ST	MC FADDEN AVE	HALIFAX DR	A	AC	~	772	60	46,320	5/7/24	64	48	52	0	New Construction - Initial	01-01-1980
1838	249	TALBERT AVE	SPRINGDALE ST	END	A	AC	~	1,566	30	46,980	5/2/24	64	31	68	1	New Construction - Initial	01-01-1980
789	60900	HAMILTON AVE	BRIDGE	BROOKHURST ST	C	AC	~	345	32	11,040	5/10/24	65	43	43	14	New Construction - AC	01-01-1980
1997	231	WARNER AVE	PCH	SCEPTRE LN	A	AC	~	1,807	67	121,069	5/13/24	65	27	73	0	New Construction - Initial	01-01-1980
1997	869	WARNER AVE	NEWLAND ST	ROSS LN	A	AC	~	1,189	37	43,993	5/10/24	65	49	31	20	New Construction - Initial	01-01-1980
1290	255	NEWLAND ST	WARNER AVE	FRIESLAND DR	A	AC	~	1,466	30	43,980	4/29/24	65	28	54	18	New Construction - Initial	01-01-1980
1751	474	SPRINGDALE ST	PRISCILLA (E)	MC FADDEN AVE	A	AAC	~	961	38	36,518	5/2/24	65	31	68	1	Overlay - AC Structural	06-21-2012
1997	660	WARNER AVE	BOLSA CHICA ST	LYNN ST	A	AC	~	1,320	42	55,440	5/13/24	65	90	8	2	New Construction - Initial	01-01-1980
746	263	GOTHARD ST	PRODAN DR	MOUNTJOY DR	A	AC	~	1,054	30	31,620	5/9/24	65	54	16	30	New Construction - Initial	01-01-1980
1385	363	PALM AVE	SEVENTEENTH ST	GOLDENWEST ST	C	AC	~	1,965	24	47,160	4/30/24	65	61	39	0	New Construction - Initial	01-01-1980
1995	57	WARD ST	TANA DR	SUNDAY DR	C	AC	~	1,002	16	16,032	4/2/24	65	32	67	1	New Construction - Initial	01-01-1980
746	705	GOTHARD ST	MOUNTJOY DR	PRODAN DR	A	AC	~	1,054	30	31,620	5/9/24	65	55	14	31	New Construction - Initial	01-01-1980
1997	868	WARNER AVE	ROSS LN	MAGNOLIA ST	A	AC	~	1,450	37	53,650	5/10/24	66	38	45	17	New Construction - Initial	01-01-1980
743	103	GOLDENWEST ST	SUMMIT DR	YORKTOWN AVE	A	AC	~	1,424	42	66,308	5/10/24	66	32	33	35	New Construction - Initial	01-01-1980
743	9909	GOLDENWEST ST	EQUESTRIAN CENTER	ELLIS AVE	A	AC	~	681	40	30,740	5/6/24	66	58	42	0	New Construction - Initial	01-01-1980
1997	218	WARNER AVE	LYNN ST	BOLSA CHICA ST	A	AC	~	1,320	42	59,940	5/13/24	66	94	6	0	New Construction - Initial	01-01-1980
746	604	GOTHARD ST	TABLERT AVE	BELVA DR	A	AC	~	1,320	30	39,600	5/9/24	67	92	0	8	New Construction - Initial	01-01-1980
743	477	GOLDENWEST ST	BLUEBONNET DR	MC FADDEN AVE	A	AAC	~	828	40	33,120	5/6/24	68	28	67	5	Overlay - AC Structural	09-11-2007

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1751	476	SPRINGDALE ST	EDINGER AVE	ROYALIST DR	A	AAC	~	641	39	24,999	5/2/24	68	26	71	3	Overlay - AC Structural	06-21-2013
240	506	BROOKHURST ST	ADAMS AVE	CONTINENTAL DR	A	AC	~	917	39	36,763	4/2/24	68	10	62	28	New Construction - Initial	01-01-1980
743	581	GOLDENWEST ST	EQUESTRIAN CENTER	CENTRAL PARK	A	AC	~	1,959	40	81,860	5/6/24	68	63	31	6	New Construction - Initial	01-01-1980
1127	795	MAGNOLIA ST	ATLANTA AVE	CARROLLTOWN DR	A	AC	~	1,117	40	44,680	5/10/24	68	46	41	13	New Construction - Initial	01-01-1980
2082	279	YORKTOWN AVE	SALMON LN (N)	BROOKHURST ST	C	AC	~	1,450	33	47,850	4/10/24	68	28	44	28	Surface Treatment - Slurry Seal	07-01-2011
743	141	GOLDENWEST ST	GARFIELD AVE	SUMMIT DR	A	AC	~	1,236	41	52,676	5/9/24	68	78	15	7	New Construction - Initial	01-01-1980
194	467	BOLSA AVE	GOLDENWEST ST	VICTORIA LN	A	AAC	~	1,330	46	61,180	4/27/24	68	55	45	0	Overlay - AC Structural	07-01-2011
589	266	ELLIS AVE	CHAPEL LN	NEWLAND ST	A	AC	~	1,321	47	62,087	5/7/24	68	95	0	5	New Construction - Initial	01-01-1980
1997	661	WARNER AVE	BOLSA CHICA ST	PLAZA LN	A	AC	~	1,454	42	61,068	5/13/24	68	62	36	2	New Construction - Initial	01-01-1980
1997	579	WARNER AVE	GOTHARD ST	GOLDENWEST ST	A	AC	~	1,982	43	85,226	5/10/24	69	59	36	5	New Construction - Initial	01-01-1980
566	637	EDINGER AVE	SHERBECK LN	EDWARDS ST	A	AC	~	1,452	39	56,628	5/9/24	69	79	10	11	New Construction - Initial	01-01-1980
1670	365	SEVENTEENTH ST	ORANGE AVE	PALM AVE	A	AC	~	1,237	28	34,636	3/13/24	69	79	4	17	New Construction - Initial	01-01-1980
1997	672	WARNER AVE	LYNN ST	SANDRA LEE LN	A	AAC	~	1,185	42	49,770	5/13/24	69	75	7	18	Overlay - AC Structural	09-01-2006
746	264	GOTHARD ST	MOUNTJOY DR	ELLIS AVE	A	AC	~	561	30	16,830	5/9/24	69	62	38	0	New Construction - Initial	01-01-1980
1997	252	WARNER AVE	GOTHARD ST	NICHOLS ST	A	AC	~	1,321	50	60,492	5/10/24	69	63	37	0	New Construction - Initial	01-01-1980
566	196	EDINGER AVE	SHERBECK LN	GOLDENWEST ST	A	AC	~	1,192	39	46,488	4/29/24	69	83	0	17	New Construction - Initial	01-01-1980
1290	697	NEWLAND ST	FRIESLAND DR	WARNER AVE	A	AC	~	1,466	27	39,582	4/29/24	69	38	44	18	New Construction - Initial	01-01-1980
1997	70000	WARNER AVE	PCH	LOOP	P	AC	~	375	40	13,500	5/13/24	69	9	91	0	New Construction - AC	01-01-1980
1997	230	WARNER AVE	SANDRA LEE LN	LYNN ST	A	AC	~	1,185	42	52,770	5/13/24	69	74	26	0	New Construction - Initial	01-01-1980
1997	693	WARNER AVE	ASH ST	NICHOLS ST	A	AC	~	1,106	50	55,300	5/10/24	69	71	17	12	New Construction - Initial	01-01-1980
1997	426	WARNER AVE	MAGNOLIA ST	ROSS LN	A	AC	~	1,450	37	62,282	5/10/24	70	33	49	18	New Construction - Initial	01-01-1980
569	227	EDWARDS ST	SHIELDS DR	WARNER DR	A	AC	~	917	60	55,020	5/7/24	70	81	0	19	New Construction - Initial	01-01-1980
743	28	GOLDENWEST ST	BRUNSWICK DR	MCFADDEN AVE	A	AC	~	740	40	29,600	5/6/24	70	41	51	8	New Construction - Initial	01-01-1980
789	879	HAMILTON AVE	BUSHARD ST	NORTHSHORE LN	C	AC	~	714	31	22,134	5/8/24	70	67	33	0	New Construction - Initial	01-01-1980
1385	809	PALM AVE	GOLDENWEST ST	OFELIA LN	A	AC	~	1,476	31	45,756	4/30/24	70	21	79	0	New Construction - Initial	01-01-1980
743	138	GOLDENWEST ST	RIO VISTA DR	CENTRAL PARK	A	AC	~	1,478	40	62,870	5/6/24	70	47	27	26	New Construction - Initial	01-01-1980
1838	98	TALBERT AVE	FIELDBURY LN	EDWARDS ST	A	AC	~	770	30	23,100	5/2/24	70	18	82	0	New Construction - Initial	01-01-1980
500	320	DELAWARE ST	ATLANTA AVE	FRANKFORT AVE	C	AC	~	1,671	60	100,260	4/15/24	70	58	27	15	New Construction - Initial	01-01-1980
1290	267	NEWLAND ST	ELLIS AVE	MODALE DR	A	AAC	~	1,322	30	39,660	5/9/24	70	91	9	0	Overlay - AC Structural	07-01-2011
1751	689	SPRINGDALE ST	FRITCH DR	SLATER AVE	A	AC	~	1,462	40	58,480	5/2/24	71	76	0	24	New Construction - Initial	01-01-1980
1185	412	MC FADDEN AVE	SALISBURY LN	GOLDENWEST ST	A	AC	~	810	60	48,600	5/13/24	71	54	25	21	New Construction - Initial	01-01-1980
1655	591	SEAPOINT AVE	PALM AVE	CHERRHILL LN	A	AC	~	1,218	32	38,976	5/9/24	71	42	51	7	New Construction - Initial	01-01-1980
703	155	GARFIELD AVE	BUSHARD ST (N)	BLUEFIN LN	A	AC	~	585	33	19,305	5/7/24	71	100	0	0	New Construction - Initial	01-01-1980
746	162	GOTHARD ST	BELVA DR	TALBERT AVE	A	AC	~	1,320	30	39,600	5/9/24	71	93	7	0	New Construction - Initial	01-01-1980
240	338	BROOKHURST ST	HAMILTON AVE	TRAVELWAY	A	AC	~	1,316	39	54,824	5/10/24	71	39	31	30	New Construction - Initial	01-01-1980
569	228	EDWARDS ST	CRANDALL DR	SHIELDS DR	A	AC	~	863	28	24,164	5/7/24	71	72	28	0	New Construction - Initial	01-01-1980
195	651	BOLSA CHICA ST	HEIL AVE	OAHU DR	A	AAC	~	1,098	38	41,724	5/10/24	71	46	53	1	Overlay - AC Structural	09-11-2007
1290	424	NEWLAND ST	HEIL AVE	LAMAR DR	A	AC	~	931	60	55,860	4/29/24	71	48	52	0	New Construction - Initial	01-01-1980
9	313	ADAMS AVE	LAKE ST	DELAWARE ST	A	AC	~	1,517	32	48,544	4/3/24	71	63	37	0	New Construction - Initial	01-01-1980
569	375	EDWARDS ST	ELLIS AVE	OVERLOOK DR	A	AC	~	691	30	20,730	5/3/24	71	55	0	45	New Construction - Initial	01-01-1980
703	494	GARFIELD AVE	BROOKHURST ST	BROOKFIELD MANOR	A	AC	~	839	33	27,687	3/11/24	71	47	18	35	New Construction - Initial	01-01-1980
566	638	EDINGER AVE	GOLDENWEST ST	SHERBECK LN	A	AC	~	1,192	39	46,488	5/9/24	71	75	25	0	New Construction - Initial	01-01-1980
1997	578	WARNER AVE	SPRINGDALE ST	LARK LN	A	AC	~	1,173	42	49,266	5/10/24	71	48	22	30	New Construction - Initial	01-01-1980
500	14998	DELAWARE ST	ATLANTA AVE	END	C	AC	~	874	30	26,220	5/1/24	72	36	0	64	New Construction	01-01-1980
1127	115	MAGNOLIA ST	ATLANTA AVE	STILWELL DR	A	AC	~	1,346	33	49,668	5/9/24	72	93	7	0	New Construction - Initial	01-01-1980
566	195	EDINGER AVE	EDWARDS ST	SHERBECK LN	A	AC	~	1,452	39	56,628	4/29/24	72	92	8	0	New Construction - Initial	01-01-1980
1290	335	NEWLAND ST	EDISON AVE	PCH	A	AAC	~	1,524	42	54,008	5/8/24	72	28	69	3	Overlay - AC Structural	09-11-2007
703	270	GARFIELD AVE	GOLDENWEST ST	GOTHARD ST	A	AC	~	1,320	38	50,160	5/9/24	72	62	17	21	New Construction - Initial	01-01-1980
566	183	EDINGER AVE	GOTHARD ST	SHER LN	A	AC	~	1,711	31	53,041	5/9/24	72	59	35	6	New Construction - Initial	01-01-1980
9	504	ADAMS AVE	BROOKHURST ST	SUTTON LN	A	AAC	~	1,161	40	46,440	3/19/24	72	32	42	26	Overlay - AC Structural	09-11-2007
240	781	BROOKHURST ST	BANNING AVE	TRAVELWAY	A	AC	~	1,578	43	69,854	3/27/24	72	53	23	24	New Construction - Initial	01-01-1980
746	857	GOTHARD ST	390' S/O MURDY	EDINGER AVE	A	AAC	~	1,556	60	93,360	5/9/24	72	68	30	2	Overlay - AC Structural	07-01-2010
1290	124	NEWLAND ST	MODALE DR	KINGSPORT DR	A	AAC	~	937	30	28,110	4/8/24	72	100	0	0	Overlay - AC Structural	07-01-2011
1997	662	WARNER AVE	GRAHAM ST	PLAZA LN	A	AC	~	1,202	42	50,484	5/13/24	72	62	22	16	New Construction - Initial	01-01-1980
1503	360	RANCHO RD	SPA DR	ASTRONAUTICS LN	C	AC	~	1,445	18	26,010	5/8/24	73	49	51	0	New Construction - Initial	01-01-1980
195	843	BOLSA CHICA ST	OAHU DR	EDINGER AVE	A	AAC	~	1,543	37	57,091	5/10/24	73	34	58	8	Overlay - AC Structural	09-11-2007
703	51	GARFIELD AVE	BLUEFIN LN	BROOKFIELD MANOR	A	AC	~	1,213	33	40,029	5/7/24	73	88	0	12	New Construction - Initial	01-01-1980
569	6	EDWARDS ST	LENNOX DR	EDGEMONT DR	A	AC	~	1,058	28	29,624	5/7/24	73	56	44	0	New Construction - Initial	01-01-1980
743	580	GOLDENWEST ST	CENTRAL PARK	RIO VISTA DR	A	AC	~	1,478	40	62,620	5/6/24	73	68	32	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
589	10	ELLIS AVE	ASHLEY DR	REPAIR LN	A	AC	~	674	36	24,264	5/9/24	73	93	0	7	New Construction - Initial	01-01-1980
789	778	HAMILTON AVE	VIA STRAITS LN	BUSHARD ST	C	AC	~	1,067	31	33,077	5/8/24	73	65	35	0	New Construction - Initial	01-01-1980
500	385	DELAWARE ST	MAIN ST	GARFIELD AVE	C	AAC	~	1,405	60	84,300	4/9/24	73	25	15	60	Overlay - AC Structural	07-01-2011
789	437	HAMILTON AVE	NORTHSHORE LN	BUSHARD ST	C	AC	~	714	31	22,134	4/1/24	73	36	20	44	New Construction - Initial	01-01-1980
1351	756	ORANGE AVE	THIRTEENTH ST	NINTH ST	C	AC	~	1,302	25	32,550	3/13/24	73	27	44	29	New Construction - Initial	01-01-1980
1724	395	SLATER AVE	JEFFERSON LN	NEWLAND ST	A	AC	~	1,088	30	32,640	3/25/24	73	62	35	3	New Construction - Initial	01-01-1980
743	583	GOLDENWEST ST	SUMMIT DR	GARFIELD AVE	A	AC	~	1,236	42	59,012	5/9/24	73	82	13	5	New Construction - Initial	01-01-1980
1997	219	WARNER AVE	PLAZA LN	BOLSA CHICA ST	A	AC	~	1,454	42	64,068	5/13/24	73	75	3	22	New Construction - Initial	01-01-1980
743	90	GOLDENWEST ST	HEIL AVE	MADDOX DR	A	AAC	~	533	40	21,320	5/6/24	73	100	0	0	Overlay - AC Structural	09-11-2007
1751	174	SPRINGDALE ST	BOLSA AVE	ENGINEER DR	A	AAC	~	685	39	26,715	4/29/24	73	38	24	38	Overlay - AC Structural	06-21-2012
743	139	GOLDENWEST ST	CENTRAL PARK	EQUESTRIAN CENTER	A	AC	~	1,959	40	82,360	5/6/24	73	53	47	0	New Construction - Initial	01-01-1980
1385	841	PALM AVE	SURF DR	SEAPOINT DR	C	AC	~	665	31	22,865	4/30/24	73	77	14	9	New Construction - Initial	01-01-1980
1655	590	SEAPOINT AVE	CHERRHILL LN	DORAL DR	A	AC	~	830	32	26,560	5/9/24	74	14	80	6	New Construction - Initial	01-01-1980
1290	566	NEWLAND ST	KINGSPORT DR	MODALE DR	A	AAC	~	937	27	25,299	5/10/24	74	100	0	0	Overlay - AC Structural	07-01-2011
566	88	EDINGER AVE	FANTASIA LN	MELODY AVE	A	AC	~	1,060	60	63,600	5/7/24	74	48	44	8	New Construction - Initial	01-01-1980
569	250	EDWARDS ST	CENTRAL PARK DR	TALBERT AVE	A	AAC	~	1,070	30	32,100	5/3/24	74	76	6	18	Overlay - AC Structural	07-01-2011
330	50490	CENTER AVE	ONE PACIFIC PLAZA	FITNESS CENTER ENTRANCE	C	AAC	~	333	60	19,980	5/8/24	74	84	9	7	Overlay - AC Structural	04-01-2012
743	239	GOLDENWEST ST	BETTY DR	SLATER AVE	A	AC	~	1,193	39	46,527	5/6/24	74	29	71	0	New Construction - Initial	01-01-1980
743	450	GOLDENWEST ST	RIO VISTA DR	SLATER AVE	A	AC	~	1,166	40	46,640	5/6/24	74	41	59	0	New Construction - Initial	01-01-1980
746	163	GOTHARD ST	ELLIS AVE	PROMENADE PARKWAY DR	A	AC	~	949	27	27,123	5/9/24	74	75	0	25	New Construction - Initial	01-01-1980
746	626	GOTHARD ST	HEIL AVE	390' S/O MURDY	A	AAC	~	1,085	60	65,100	5/9/24	74	91	2	7	Overlay - AC Structural	07-01-2010
589	261	ELLIS AVE	HUNTINGTON ST	DELAWARE ST	A	AAC	~	699	60	41,940	5/10/24	74	37	62	1	Overlay - AC Structural	07-01-2006
743	478	GOLDENWEST ST	BREELAND DR	BLUEBONNET DR	A	AAC	~	1,170	40	46,800	5/6/24	74	40	58	2	Overlay - AC Structural	09-11-2007
330	181	CENTER AVE	HUNTINGTON VILLAGE	ONE PACIFIC PLAZA	C	AAC	~	667	61	40,687	5/8/24	74	78	13	9	Overlay - AC Structural	04-01-2012
566	624	EDINGER AVE	BEACH BLVD	SHER LN	A	AC	~	1,590	31	49,290	5/8/24	75	67	28	5	New Construction - Initial	01-01-1980
1503	802	RANCHO RD	ASTRONAUTICS LN	SPA DR	C	AC	~	1,445	22	31,790	5/8/24	75	44	39	17	New Construction - Initial	01-01-1980
1997	220	WARNER AVE	PLAZA LN	GRAHAM ST	A	AC	~	1,202	42	52,984	5/13/24	75	77	6	17	New Construction - Initial	01-01-1980
743	863	GOLDENWEST ST	WARNER AVE	NORMA DR	A	AAC	~	1,316	40	52,640	5/6/24	75	82	0	18	Overlay - AC Structural	09-11-2007
195	472	BOLSA CHICA ST	EDINGER AVE	ROBINWOOD DR	A	AAC	~	780	36	28,080	5/9/24	75	22	78	0	Overlay - AC Structural	09-11-2007
1290	130	NEWLAND ST	PUERTO DR	ATLANTA AVE	A	AAC	~	720	60	43,200	5/8/24	75	77	7	16	Overlay - AC Structural	09-11-2007
1290	709	NEWLAND ST	MODALE DR	ELLIS AVE	A	AAC	~	1,322	27	35,694	5/9/24	75	99	0	1	Overlay - AC Structural	07-01-2011
9	305	ADAMS AVE	DELAWARE ST	BEACH BL	A	AC	~	1,320	33	43,560	4/3/24	75	41	21	38	New Construction - Initial	01-01-1980
589	386	ELLIS AVE	GOLDENWEST ST	ASHLEY DR	A	AC	~	763	36	27,468	5/9/24	75	100	0	0	New Construction - Initial	01-01-1980
703	716	GARFIELD AVE	LISTER LN	BEACH BL	A	AC	~	1,363	38	51,794	3/5/24	75	95	5	0	New Construction - Initial	01-01-1980
751	402	GRAHAM ST	EDINGER AVE	MEADOWLARK DR	A	AC	~	1,485	60	89,100	5/3/24	75	59	27	14	New Construction - Initial	01-01-1980
569	159	EDWARDS ST	TALBERT AVE	ELLIS AVE	A	AC	~	1,576	25	39,400	5/3/24	75	52	0	48	New Construction - Initial	01-01-1980
1751	171	SPRINGDALE ST	BRIARCLIFF DR	SKYLAB RD	A	AAC	~	1,084	33	35,772	4/29/24	75	91	9	0	Overlay - AC Structural	06-21-2012
195	405	BOLSA CHICA ST	PEARCE ST	WARNER AVE	A	AAC	~	1,321	38	50,198	5/10/24	76	41	25	34	Overlay - AC Structural	09-11-2007
569	414	EDWARDS ST	EDINGER AVE	LENNOX DR	A	AC	~	892	28	26,476	5/7/24	76	76	24	0	New Construction - Initial	01-01-1980
743	545	GOLDENWEST ST	YORKTOWN AVE	SUMMIT DR	A	AC	~	1,424	42	61,808	5/9/24	76	68	32	0	New Construction - Initial	01-01-1980
566	205	EDINGER AVE	SAYBROOK LN	FANTASIA LN	A	AC	~	1,491	72	107,352	5/7/24	76	50	42	8	New Construction - Initial	01-01-1980
743	421	GOLDENWEST ST	NORMA DR	WARNER AVE	A	AAC	~	1,316	40	52,640	5/6/24	76	30	64	6	Overlay - AC Structural	09-11-2007
1290	152	NEWLAND ST	HAMILTON AVE	EDISON AVE	A	AAC	~	848	48	40,704	5/8/24	76	48	50	2	Overlay - AC Structural	09-11-2007
1290	567	NEWLAND ST	GARFIELD AVE	KINGSPORT DR	A	AAC	~	385	27	10,395	5/8/24	76	100	0	0	Overlay - AC Structural	07-01-2011
1385	805	PALM AVE	GOLDENWEST ST	SEVENTEENTH ST	C	AC	~	1,965	24	47,160	4/30/24	76	58	42	0	New Construction - Initial	01-01-1980
195	531	BOLSA CHICA ST	PEARCE ST	HEIL AVE	A	AAC	~	1,321	38	50,198	5/10/24	76	57	43	0	Overlay - AC Structural	09-11-2007
1290	425	NEWLAND ST	ARNETT DR	WARNER AVE	A	AC	~	866	60	51,960	4/29/24	76	44	47	9	New Construction - Initial	01-01-1980
1997	576	WARNER AVE	SCULPIN LN	GOLDENWEST ST	A	AC	~	1,123	43	48,289	5/10/24	76	64	34	2	New Construction - Initial	01-01-1980
70	2	ARGOSY AVE	NEWSBOY CIR	GRAHAM ST	C	AAC	~	1,621	60	97,260	5/1/24	76	100	0	0	Overlay - AC Structural	07-22-2014
1385	399	PALM AVE	SEAPOINT DR	SURF DR	C	AC	~	665	28	19,370	4/30/24	76	68	32	0	New Construction - Initial	01-01-1980
9	755	ADAMS AVE	DELAWARE ST	LAKE ST	A	AC	~	1,517	32	48,544	4/3/24	76	79	6	15	New Construction - Initial	01-01-1980
500	355	DELAWARE ST	ADAMS AVE	UTICA AVE	C	AC	~	1,320	60	79,200	4/15/24	76	98	0	2	New Construction - Initial	01-01-1980
1290	125	NEWLAND ST	KINGSPORT DR	GARFIELD AVE	A	AAC	~	385	30	11,550	4/8/24	76	100	0	0	Overlay - AC Structural	07-01-2011
1351	757	ORANGE AVE	NINTH ST	SIXTH ST	C	AC	~	974	25	24,350	3/13/24	76	37	37	26	New Construction - Initial	01-01-1980
1670	364	SEVENTEENTH ST	PCH	ORANGE AVE	A	AC	~	1,239	28	34,692	3/13/24	76	93	7	0	New Construction - Initial	01-01-1980
1751	172	SPRINGDALE ST	CHINOOK DR	BRIARCLIFF DR	A	AAC	~	1,048	42	44,016	4/29/24	76	90	10	0	Overlay - AC Structural	06-21-2012
1751	613	SPRINGDALE ST	SKYLAB RD	BRIARCLIFF DR	A	AAC	~	1,084	33	35,772	4/29/24	76	84	16	0	Overlay - AC Structural	06-21-2012
566	625	EDINGER AVE	SHER LN	GOTHARD ST	A	AC	~	1,711	31	53,041	5/8/24	76	67	17	16	New Construction - Initial	01-01-1980
1185	409	MC FADDEN AVE	LA SALLE LN	EDWARDS ST	A	AAC	~	1,165	60	69,900	4/29/24	76	31	69	0	Overlay - AC Structural	09-11-2007

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1751	170	SPRINGDALE ST	SKYLAB RD	BOLSA AVE	A	AAC	~	1,435	33	54,855	4/29/24	77	86	3	11	Overlay - AC Structural	06-21-2012
1997	666	WARNER AVE	LARK LN	GRAHAM ST	A	AC	~	1,473	42	61,866	5/10/24	77	41	30	29	New Construction - Initial	01-01-1980
1017	322	LAKE ST	SIXTH ST	INDIANAPOLIS AVE	A	AC	~	1,107	29	32,103	5/1/24	77	37	50	13	New Construction - Initial	01-01-1980
1997	232	WARNER AVE	SPRINGDALE ST	SEA AIRA	A	AC	~	1,351	42	60,376	5/10/24	77	79	19	2	New Construction - Initial	01-01-1980
240	738	BROOKHURST ST	INDIANAPOLIS AVE	PECK DR	A	AC	~	1,000	39	39,000	3/18/24	77	69	0	31	New Construction - Initial	01-01-1980
258	297	BUSHARD ST	ADAMS AVE	YELLOWSTONE DR	C	AAC	~	1,354	60	81,240	3/20/24	77	64	0	36	Overlay - AC Structural	09-01-2006
500	431	DELAWARE ST	MEMPHIS AVE	ADAMS AVE	C	AC	~	1,321	60	79,260	4/15/24	77	88	0	12	New Construction - Initial	01-01-1980
589	452	ELLIS AVE	REPAIR LN	ASHLEY DR	A	AC	~	674	36	24,264	5/9/24	77	90	10	0	New Construction - Initial	01-01-1980
703	493	GARFIELD AVE	BROOKFIELD MANOR	BLUEFIN LN	A	AC	~	1,213	33	40,029	3/11/24	77	50	0	50	New Construction - Initial	01-01-1980
703	717	GARFIELD AVE	NEWLAND ST	LISTER LN	A	AC	~	1,281	38	48,678	4/8/24	77	100	0	0	New Construction - Initial	01-01-1980
751	31	GRAHAM ST	MC FADDEN AVE	RESEARCH DR	A	AC	~	1,116	28	35,248	5/1/24	77	37	0	63	New Construction - Initial	01-01-1980
1385	582	PALM AVE	CHERRYHILL LN	SURF DR	C	AC	~	2,090	22	48,480	4/30/24	77	96	0	4	New Construction - Initial	01-01-1980
2082	839	YORKTOWN AVE	DELAWARE ST	LAKE ST	C	AC	~	1,601	31	49,631	4/15/24	77	63	0	37	New Construction - Initial	01-01-1980
569	236	EDWARDS ST	FREEBORN DR	SLATER AVE	A	AAC	~	1,444	30	43,320	5/3/24	77	100	0	0	Overlay - AC Structural	07-01-2011
589	828	ELLIS AVE	ASHLEY DR	GOLDENWEST ST	A	AC	~	763	36	27,468	5/9/24	77	100	0	0	New Construction - Initial	01-01-1980
1751	197	SPRINGDALE ST	EDINGER AVE	MEADOWLARK DR	A	AAC	~	1,455	39	56,745	5/2/24	77	100	0	0	Overlay - AC Structural	06-21-2013
258	294	BUSHARD ST	PETTSWOOD DR	ADAMS AVE	C	AAC	~	903	60	54,180	5/7/24	77	63	0	37	Overlay - AC Structural	02-01-2007
569	838	EDWARDS ST	CENTRAL PARK DR	ARMADA DR	A	AAC	~	1,657	30	49,710	5/3/24	77	91	9	0	Overlay - AC Structural	07-01-2011
1997	577	WARNER AVE	ASH ST	BEACH BLVD	A	AC	~	874	38	33,212	5/10/24	77	33	65	2	New Construction - Initial	01-01-1980
569	538	EDWARDS ST	ARMADA DR	SLATER AVE	A	AAC	~	990	30	29,700	5/3/24	77	100	0	0	Overlay - AC Structural	07-01-2011
1290	123	NEWLAND ST	FRIESLAND DR.(W)	SLATER AVE	A	AC	~	1,175	30	35,250	4/29/24	77	43	4	53	New Construction - Initial	01-01-1980
743	417	GOLDENWEST ST	LAURELHURST DR	HEIL AVE	A	AAC	~	1,450	40	58,000	5/6/24	77	68	20	12	Overlay - AC Structural	09-11-2007
825	629	HEIL AVE	LANDAU LN	NEWLAND ST	C	AC	~	1,332	34	45,288	5/8/24	77	79	18	3	New Construction - Initial	01-01-1980
1997	251	WARNER AVE	NICHOLS ST	ASH ST	A	AC	~	1,106	50	49,192	5/10/24	77	63	37	0	New Construction - Initial	01-01-1980
1997	234	WARNER AVE	EDWARDS ST	SCULPIN LN	A	AC	~	1,518	43	71,606	5/10/24	78	96	4	0	New Construction - Initial	01-01-1980
569	692	EDWARDS ST	TALBERT AVE	CENTRAL PARK DR	A	AAC	~	1,070	30	32,100	5/3/24	78	100	0	0	Overlay - AC Structural	07-01-2011
1385	367	PALM AVE	OFELIA LN	GOLDENWEST ST	C	AC	~	1,476	29	48,804	4/30/24	78	64	36	0	New Construction - Initial	01-01-1980
743	451	GOLDENWEST ST	ELLIS AVE	EQUESTRIAN CENTER	A	AC	~	681	40	27,240	5/6/24	78	97	0	3	New Construction - Initial	01-01-1980
743	7000	GOLDENWEST ST	MADDOX DR	HEIL AVE	A	AAC	~	533	40	21,320	5/6/24	78	73	17	10	Overlay - AC Structural	09-11-2007
1185	410	MC FADDEN AVE	EDWARDS ST	SALISBURY LN	A	AC	~	1,835	60	110,100	5/13/24	78	48	35	17	New Construction - Initial	01-01-1980
887	309	INDIANAPOLIS AVE	DELAWARE ST	BEACH BLVD	C	AC	~	1,320	33	43,560	5/1/24	78	35	0	65	New Construction - Initial	01-01-1980
589	829	ELLIS AVE	GOTHARD ST	REPAIR LN	A	AC	~	545	36	19,620	5/9/24	78	70	30	0	New Construction - Initial	01-01-1980
1655	149	SEAPOINT AVE	CHERRHILL LN	PALM AVE	A	AC	~	1,218	32	41,476	5/9/24	78	25	69	6	New Construction - Initial	01-01-1980
240	881	BROOKHURST ST	EFFINGHAM DR	ATLANTA AVE	A	AC	~	1,196	41	51,036	3/19/24	78	100	0	0	New Construction - Initial	01-01-1980
500	160	DELAWARE ST	UTICA AVE	YORKTOWN AVE	C	AC	~	1,321	60	79,260	4/15/24	78	61	12	27	New Construction - Initial	01-01-1980
703	273	GARFIELD AVE	DELAWARE ST	BEACH BL	A	AAC	~	1,321	40	52,840	3/5/24	78	26	5	69	Overlay - AC Structural	06-12-2012
703	497	GARFIELD AVE	WARD ST	SUVA LN	A	AC	~	844	33	27,852	4/8/24	78	96	0	4	New Construction - Initial	01-01-1980
1127	116	MAGNOLIA ST	HAMILTION AVE	BERMUDA DR	A	AC	~	1,447	32	46,304	3/27/24	78	100	0	0	New Construction - Initial	01-01-1980
1127	347	MAGNOLIA ST	STILWELL DR	HAMILTON AVE	A	AC	~	1,293	40	51,720	5/9/24	78	91	0	9	New Construction - Initial	01-01-1980
1670	807	SEVENTEENTH ST	PALM AVE	ORANGE AVE	A	AC	~	1,237	28	34,636	3/12/24	78	74	25	1	New Construction - Initial	01-01-1980
2082	822	YORKTOWN AVE	LAKE ST	MAIN ST	C	AC	~	1,174	31	36,394	4/15/24	78	42	0	58	New Construction - Initial	01-01-1980
1290	128	NEWLAND ST	ADAMS AVE	KELSO DR	A	AAC	~	959	60	57,540	5/7/24	78	93	0	7	Overlay - AC Structural	09-11-2007
1716	763	SIXTH ST	LAKE ST	ORANGE AVE	C	AC	~	1,068	25	26,100	4/30/24	78	51	21	28	New Construction - Initial	01-01-1980
1724	7003	SLATER AVE	WOODFERN LN	GRAHAM ST	A	AAC	~	646	24	15,504	5/2/24	78	88	12	0	Overlay - AC Structural	07-01-2010
1751	614	SPRINGDALE ST	BRIARCLIFF DR (W)	CHINOOK DR	A	AAC	~	1,048	42	44,016	4/29/24	78	100	0	0	Overlay - AC Structural	06-12-2012
1997	233	WARNER AVE	SCULPIN LN	EDWARDS ST	A	AC	~	1,290	42	61,914	5/10/24	78	96	4	0	New Construction - Initial	01-01-1980
1997	40200	WARNER AVE	SEA AIRA	EDWARDS ST	A	AC	~	1,351	42	56,742	5/10/24	78	88	12	0	New Construction - Initial	01-01-1980
9	723	ADAMS AVE	LAWSON LN	BROOKHURST ST	A	AAC	~	1,115	40	44,600	5/8/24	78	37	62	1	Overlay - AC Structural	09-11-2007
1290	565	NEWLAND ST	SLATER AVE	FRIESLAND DR	A	AC	~	1,175	27	31,725	4/29/24	78	74	26	0	New Construction - Initial	01-01-1980
1751	18	SPRINGDALE ST	ENGINEER DR	MACHINE DR	A	AAC	~	1,142	39	44,538	4/29/24	78	65	9	26	Overlay - AC Structural	06-21-2012
589	259	ELLIS AVE	DELAWARE ST	MAIN ST	A	AAC	~	1,109	60	66,540	5/9/24	79	28	69	3	Overlay - AC Thin	07-01-2006
743	416	GOLDENWEST ST	EDINGER AVE	LAURELHURST DR	A	AAC	~	1,190	40	47,600	5/6/24	79	58	34	8	Overlay - AC Structural	09-11-2007
825	627	HEIL AVE	RHONE LN	GOTHARD ST	A	AC	~	815	61	49,715	5/8/24	79	100	0	0	New Construction - Initial	01-01-1980
569	677	EDWARDS ST	FREEBORN DR	WARNER DR	A	AAC	~	1,197	30	35,910	5/3/24	79	97	3	0	Overlay - AC Structural	07-01-2011
1997	135	WARNER AVE	BEACH BLVD	ASH ST	A	AC	~	874	43	41,522	5/10/24	79	70	29	1	New Construction - Initial	01-01-1980
743	41	GOLDENWEST ST	ELLIS AVE	ERNEST AVE	A	AC	~	1,585	40	65,650	5/9/24	79	100	0	0	New Construction - Initial	01-01-1980
1290	429	NEWLAND ST	LAMAR DR	ARNETT DR	A	AC	~	844	60	50,640	4/29/24	79	61	37	2	New Construction - Initial	01-01-1980
1751	19	SPRINGDALE ST	MACHINE DR	MC FADDEN AVE	A	AAC	~	817	39	31,863	4/29/24	79	60	0	40	Overlay - AC Structural	06-21-2012
1017	765	LAKE ST	SIXTH ST	ALLEY ORANGE AVE	A	AAC	~	1,015	29	29,435	5/1/24	79	69	31	0	Overlay - AC Structural	11-01-2006

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
9	13122	ADAMS AVE	SUTTON LN	BROOKHURST ST	A	AC	~	1,161	40	46,440	3/19/24	79	23	0	77	New Construction - Initial	01-01-1980
258	298	BUSHARD ST	YELLOWSTONE DR	INDIANAPOLIS AVE	C	AAC	~	1,288	60	77,280	3/20/24	79	100	0	0	Overlay - AC Structural	09-01-2006
569	377	EDWARDS ST	OVERLOOK DR	CROSSWIND DR	A	AC	~	880	30	26,400	5/3/24	79	70	0	30	New Construction - Initial	01-01-1980
569	96	EDWARDS ST	SLATER AVE	ARMADA DR	A	AAC	~	990	30	29,700	5/3/24	79	96	0	4	Overlay - AC Structural	07-01-2011
703	487	GARFIELD AVE	MAGNOLIA ST	LINDSAY LN	A	AAC	~	778	15	11,670	3/11/24	79	24	76	0	Overlay - AC Structural	07-01-2010
70	408	ARGOSY AVE	BOLSA CHICA ST	NEWSBOY CIR	C	AAC	~	1,096	60	65,760	5/1/24	79	100	0	0	Overlay - AC Structural	07-22-2014
569	670	EDWARDS ST	SHIELDS DR	CRANDALL DR	A	AC	~	863	28	24,164	5/7/24	79	100	0	0	New Construction - Initial	01-01-1980
1751	639	SPRINGDALE ST	MEADOWLARK DR	EDINGER AVE	A	AAC	~	1,455	39	56,745	5/2/24	79	98	0	2	Overlay - AC Structural	06-21-2013
1997	224	WARNER AVE	GRAHAM ST	LARK LN	A	AC	~	1,473	42	63,366	5/10/24	79	63	18	19	New Construction - Initial	01-01-1980
1751	198	SPRINGDALE ST	MEADOWLARK DR	HEIL AVE	A	AAC	~	1,185	39	46,215	5/2/24	79	100	0	0	Overlay - AC Structural	06-21-2013
195	209	BOLSA CHICA ST	OAHU DR	HEIL AVE	A	AAC	~	1,098	38	41,724	5/10/24	80	70	30	0	Overlay - AC Structural	09-11-2007
589	265	ELLIS AVE	MAIN ST	CHAPEL LN	A	AC	~	1,321	47	62,087	5/10/24	80	91	0	9	New Construction - Initial	01-01-1980
569	671	EDWARDS ST	CRANDALL DR	HEIL AVE	A	AC	~	859	28	30,552	5/7/24	80	100	0	0	New Construction - Initial	01-01-1980
1751	612	SPRINGDALE ST	BOLSA AVE	SKYLAB RD	A	AAC	~	1,435	33	50,855	4/29/24	80	83	4	13	Overlay - AC Structural	06-21-2012
1751	640	SPRINGDALE ST	HEIL AVE	MEADOWLARK DR	A	AAC	~	1,185	39	46,215	5/2/24	80	100	0	0	Overlay - AC Structural	06-21-2013
195	89	BOLSA CHICA ST	HEIL AVE	PEARCE ST	A	AC	~	1,321	38	50,198	5/10/24	80	59	37	4	New Construction - Initial	01-01-1980
569	235	EDWARDS ST	WARNER AVE	WRENFIELD DR	A	AAC	~	1,197	30	35,910	5/3/24	80	100	0	0	Overlay - AC Structural	07-01-2011
1385	140	PALM AVE	SURF DR	CHERRYHILL LN	C	AC	~	2,090	22	47,480	4/30/24	80	74	26	0	New Construction - Initial	01-01-1980
743	858	GOLDENWEST ST	LAURELHURST DR	EDINGER AVE	A	AAC	~	1,190	40	47,600	5/6/24	80	70	30	0	Overlay - AC Structural	09-11-2007
9	501	ADAMS AVE	CROWN REEF LN	NEWLAND ST	A	AAC	~	1,037	40	41,480	4/3/24	80	94	0	6	Overlay - AC Structural	08-01-2017
9	747	ADAMS AVE	BEACH BLVD	DELAWARE ST	A	AC	~	1,320	33	43,560	4/3/24	80	83	0	17	New Construction - Initial	01-01-1980
240	344	BROOKHURST ST	EFFINGHAM DR	HAMILTON AVE	A	AC	~	1,446	39	56,394	3/6/24	80	27	36	37	New Construction - Initial	01-01-1980
240	786	BROOKHURST ST	HAMILTON AVE	EFFINGHAM DR	A	AC	~	1,446	41	61,786	3/6/24	80	48	15	37	New Construction - Initial	01-01-1980
703	275	GARFIELD AVE	LISTER LN	NEWLAND ST	A	AC	~	1,281	39	49,959	4/8/24	80	97	0	3	New Construction - Initial	01-01-1980
746	593	GOTHARD ST	GARFIELD AVE	ERNEST AVE	A	AC	~	1,053	32	33,696	3/11/24	80	36	0	64	New Construction - Initial	01-01-1980
1290	127	NEWLAND ST	DEEPVIEW DR	ADAMS AVE	A	AAC	~	1,193	60	71,580	4/3/24	80	60	38	2	Overlay - AC Structural	09-11-2007
2082	380	YORKTOWN AVE	MAIN ST	LAKE ST	A	AC	~	1,174	31	36,394	4/15/24	80	33	24	43	New Construction - Initial	01-01-1980
85	327	ATLANTA AVE	ORANGE AVE	HUNTINGTON ST	A	AC	~	726	19	13,794	5/1/24	80	45	0	55	New Construction - Initial	01-01-1980
1751	34	SPRINGDALE ST	ROYALIST DR (E)	EDINGER AVE	A	AAC	~	641	39	24,999	5/2/24	80	58	42	0	Overlay - AC Structural	06-21-2013
1290	354	NEWLAND ST	KELSO DR	INDIANAPOLIS AVE	A	AAC	~	1,683	60	100,980	5/8/24	80	84	0	16	Overlay - AC Structural	09-11-2007
1751	226	SPRINGDALE ST	DOYLE DR	WARNER AVE	A	AAC	~	1,191	40	53,140	5/2/24	80	68	4	28	Overlay - AC Structural	06-21-2013
566	182	EDINGER AVE	SHER LN	BEACH BL	A	AC	~	1,590	31	49,290	5/9/24	80	55	27	18	New Construction - Initial	01-01-1980
589	387	ELLIS AVE	REPAIR LN	GOTHARD ST	A	AC	~	545	36	19,620	5/9/24	81	88	0	12	New Construction - Initial	01-01-1980
743	36	GOLDENWEST ST	BLUEBONNET DR	BREELAND DR	A	AAC	~	1,170	40	46,800	5/6/24	81	47	34	19	Overlay - AC Structural	10-29-2007
743	7001	GOLDENWEST ST	EDINGER AVE	BREELAND DR	A	AAC	~	643	40	25,720	5/6/24	81	58	42	0	Overlay - AC Structural	09-11-2007
825	630	HEIL AVE	NEWLAND ST	MONROE LN	A	AC	~	1,397	60	83,820	5/8/24	81	58	42	0	New Construction - Initial	01-01-1980
743	37	GOLDENWEST ST	BREELAND DR	EDINGER AVE	A	AAC	~	643	40	25,720	5/6/24	81	57	20	23	Overlay - AC Structural	09-11-2007
743	859	GOLDENWEST ST	HEIL AVE	LAURELHURST DR	A	AAC	~	1,450	40	58,000	5/6/24	81	89	11	0	Overlay - AC Structural	09-11-2007
751	175	GRAHAM ST	BOLSA AVE	ARGOSY AVE	A	AC	~	1,200	60	72,000	5/1/24	81	46	11	43	New Construction - Initial	01-01-1980
751	199	GRAHAM ST	RESEARCH DR	EDINGER AVE	A	AC	~	1,525	28	47,700	5/1/24	81	57	0	43	New Construction - Initial	01-01-1980
1716	321	SIXTH ST	ORANGE AVE	LAKE ST	C	AC	~	1,068	25	26,100	4/30/24	81	62	23	15	New Construction - Initial	01-01-1980
9	725	ADAMS AVE	MAGNOLIA ST	CROWN REEF LN	A	AAC	~	1,608	40	64,320	4/3/24	81	98	0	2	Overlay - AC Structural	08-01-2017
240	296	BROOKHURST ST	PECK DR	INDIANAPOLIS AVE	A	AC	~	1,000	39	40,250	3/6/24	81	63	0	37	New Construction - Initial	01-01-1980
258	346	BUSHARD ST	PANACEA DR	HAMILTON AVE	C	AC	~	1,450	60	87,000	4/1/24	81	40	60	0	New Construction - Initial	01-01-1980
703	712	GARFIELD AVE	GOTHARD ST	GOLDENWEST ST	A	AC	~	1,320	43	56,760	3/11/24	81	61	6	33	New Construction - Initial	01-01-1980
1351	314	ORANGE AVE	NINTH ST	THIRTEENTH ST	C	AC	~	1,302	25	32,550	3/13/24	81	35	41	24	New Construction - Initial	01-01-1980
1724	609	SLATER AVE	MISTY LN	WOODFERN LN	A	AAC	~	807	24	19,368	5/2/24	81	80	20	0	Overlay - AC Structural	07-01-2010
1751	616	SPRINGDALE ST	ENGINEER DR	BOLSA AVE	A	AAC	~	685	39	26,715	4/29/24	81	72	12	16	Overlay - AC Structural	06-21-2012
1724	535	SLATER AVE	SPRINGDALE ST	MISTY LN	A	AC	~	1,193	24	28,632	5/2/24	81	70	30	0	Overlay - AC Structural	07-01-2010
9	281	ADAMS AVE	BROOKHURST ST	LAWSON LN	A	AAC	~	1,115	40	44,600	5/7/24	81	73	26	1	Overlay - AC Structural	09-11-2007
1385	368	PALM AVE	CHERRYHILL LN (N)	OFELIA LN	C	AC	~	2,210	29	66,840	4/30/24	81	75	25	0	New Construction - Initial	01-01-1980
1724	94	SLATER AVE	SPRINGDALE ST	CORONADO LN	A	AAC	~	1,173	30	35,190	5/2/24	81	100	0	0	Overlay - AC Structural	07-01-2010
195	401	BOLSA CHICA ST	EDINGER AVE	OAHU DR	A	AAC	~	1,543	41	63,263	5/10/24	82	83	0	17	Overlay - AC Structural	09-11-2007
258	284	BUSHARD ST	GARFIELD AVE	FLOUNDER DR	C	AAC	~	1,450	60	87,000	5/7/24	82	78	0	22	Overlay - AC Structural	02-01-2007
1724	536	SLATER AVE	CORONADO LN	SPRINGDALE ST	A	AAC	~	1,173	30	35,190	5/2/24	82	62	36	2	Overlay - AC Structural	07-01-2010
1724	684	SLATER AVE	EDWARDS ST	CORONADO LN	A	AAC	~	1,466	30	43,980	5/2/24	82	77	20	3	Overlay - AC Structural	07-01-2010
195	847	BOLSA CHICA ST	WARNER AVE	PEARCE ST	A	AAC	~	1,321	38	50,198	5/10/24	82	81	19	0	Overlay - AC Structural	03-01-2007
569	678	EDWARDS ST	SLATER AVE	FREEBORN DR	A	AAC	~	1,444	30	43,320	5/3/24	82	100	0	0	Overlay - AC Structural	07-01-2011
825	628	HEIL AVE	BEACH BLVD	SILVER LN	A	AAC	~	1,320	61	80,520	5/8/24	82	43	57	0	Overlay - AC Structural	09-11-2007

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1017	764	LAKE ST	INDIANAPOLIS AVE	SIXTH ST	A	AC	~	1,107	29	32,103	5/1/24	82	55	33	12	New Construction - Initial	01-01-1980
1655	370	SEAPOINT AVE	GARFIELD AVE	DORAL DR	A	AC	~	1,637	32	54,384	5/9/24	82	68	32	0	New Construction - Initial	01-01-1980
195	523	BOLSA CHICA ST	BOLSA AVE	SKYLAB WEST	A	AAC	~	1,432	36	51,552	5/9/24	82	30	46	24	Overlay - AC Structural	09-11-2007
569	818	EDWARDS ST	GARFIELD AVE	CROSSWIND DR	A	AC	~	1,068	30	32,040	5/3/24	82	78	0	22	New Construction - Initial	01-01-1980
653	876	FIRST ST	ORANGE AVE	PCH	A	AC	~	1,132	36	43,252	5/1/24	82	100	0	0	New Construction - Initial	01-01-1980
1751	460	SPRINGDALE ST	MACHINE DR	ENGINEER DR	A	AAC	~	1,142	39	44,538	4/29/24	82	100	0	0	Overlay - AC Structural	06-21-2012
9	282	ADAMS AVE	MAGNOLIA ST	HARBOR ISLE LN	A	AAC	~	1,116	40	44,640	3/20/24	82	29	62	9	Overlay - AC Structural	09-11-2007
240	519	BROOKHURST ST	BUSHARD ST	BANNING AVE	A	AC	~	2,434	43	106,662	3/27/24	82	100	0	0	New Construction - Initial	01-01-1980
240	791	BROOKHURST ST	ATLANTA AVE	CLIFF DR	A	AC	~	1,345	39	52,455	3/18/24	82	100	0	0	New Construction - Initial	01-01-1980
703	274	GARFIELD AVE	BEACH BL	LISTER LN	A	AC	~	1,363	38	51,794	3/5/24	82	70	0	30	New Construction - Initial	01-01-1980
703	546	GARFIELD AVE	SADDLEBACK LN	EDWARDS ST	A	AC	~	1,320	40	52,800	3/11/24	82	45	0	55	New Construction - Initial	01-01-1980
1716	324	SIXTH ST	PCH	ORANGE AVE	C	AC	~	1,260	25	32,400	4/30/24	82	90	10	0	New Construction - Initial	01-01-1980
1724	390	SLATER AVE	BEACH BLVD	JEFFERSON LN	A	AC	~	1,550	30	46,500	3/25/24	82	100	0	0	New Construction - Initial	01-01-1980
1997	674	WARNER AVE	SEA AIRA	SPRINGDALE ST	A	AC	~	1,351	42	56,742	5/10/24	82	86	10	4	New Construction - Initial	01-01-1980
751	403	GRAHAM ST	MEADOWLARK DR	HEIL AVE	A	AC	~	1,161	60	69,660	5/3/24	82	98	0	2	New Construction - Initial	01-01-1980
569	396	EDWARDS ST	ARMADA DR	CENTRAL PARK DR	A	AAC	~	1,657	30	49,710	5/3/24	82	100	0	0	Overlay - AC Structural	07-01-2011
825	17014	HEIL AVE	BLACKBEARD LN	SEAVIEW LN	A	AC	~	1,358	61	82,838	5/10/24	82	83	0	17	New Construction - Initial	01-01-1980
743	534	GOLDENWEST ST	NORMA DR	MADDOX DR	A	AAC	~	787	40	31,480	5/6/24	82	88	12	0	Overlay - AC Structural	09-11-2007
825	17013	HEIL AVE	SEAVIEW LN	SAYBROOK LN	A	AC	~	1,321	61	80,581	5/10/24	82	100	0	0	New Construction - Initial	01-01-1980
1655	811	SEAPOINT AVE	PCH	PALM AVE	A	AC	~	1,206	33	42,048	5/9/24	82	90	0	10	New Construction - Initial	01-01-1980
1751	225	SPRINGDALE ST	HEIL AVE	DOYLE DR	A	AAC	~	1,450	33	49,100	5/2/24	82	81	0	19	Overlay - AC Structural	06-21-2013
1997	134	WARNER AVE	GOLDENWEST ST	SCULPIN LN	A	AC	~	1,123	43	56,763	5/10/24	83	88	11	1	New Construction - Initial	01-01-1980
1290	129	NEWLAND ST	INDIANAPOLIS AVE	PUERTO DR	A	AAC	~	1,931	60	115,860	5/8/24	83	86	11	3	Overlay - AC Structural	09-11-2007
825	631	HEIL AVE	MONROE LN	BEACH BL	A	AC	~	1,240	60	74,400	5/8/24	83	67	33	0	New Construction - Initial	01-01-1980
1655	812	SEAPOINT AVE	DORAL DR	GARFIELD AVE	A	AC	~	1,637	32	54,134	5/9/24	83	54	43	3	New Construction - Initial	01-01-1980
569	817	EDWARDS ST	OVERLOOK DR	ELLIS AVE	A	AC	~	691	30	20,730	5/3/24	83	46	0	54	New Construction - Initial	01-01-1980
746	371	GOTHARD ST	GARFIELD AVE	MAIN ST	A	AC	~	1,320	32	42,240	5/9/24	83	76	0	24	New Construction - Initial	01-01-1980
1751	668	SPRINGDALE ST	WARNER AVE	DOYLE DR	A	AAC	~	1,191	40	47,640	5/2/24	83	96	0	4	Overlay - AC Structural	06-21-2013
240	295	BROOKHURST ST	ADAMS AVE	PECK AVE	A	AC	~	1,649	39	66,811	3/6/24	83	75	0	25	New Construction - Initial	01-01-1980
240	50510	BROOKHURST ST	TRAVELWAY	HAMILTON AVE	A	AC	~	1,316	41	56,956	3/27/24	83	54	0	46	New Construction - Initial	01-01-1980
240	737	BROOKHURST ST	PECK DR	ADAMS AVE	A	AC	~	1,649	39	64,311	3/18/24	83	47	0	53	New Construction - Initial	01-01-1980
240	790	BROOKHURST ST	CLIFF DR	INDIANAPOLIS AVE	A	AC	~	1,295	39	53,005	3/18/24	83	100	0	0	New Construction - Initial	01-01-1980
258	345	BUSHARD ST	ATLANTA AVE	PANACEA DR	C	AAC	~	1,190	60	71,400	4/1/24	83	45	40	15	Overlay - AC Structural	09-01-2006
1716	766	SIXTH ST	ORANGE AVE	PCH	C	AC	~	1,260	25	31,500	4/30/24	83	88	0	12	New Construction - Initial	01-01-1980
1751	461	SPRINGDALE ST	MC FADDEN AVE	MACHINE DR	A	AAC	~	817	39	31,863	4/29/24	83	100	0	0	Overlay - AC Structural	06-21-2012
2082	442	YORKTOWN AVE	BUSHARD ST	SALMON LN	C	AC	~	1,190	33	39,270	4/10/24	83	40	58	2	Surface Treatment - Slurry Seal	07-01-2011
2082	584	YORKTOWN AVE	MAIN ST	GOLDENWEST ST	C	AC	~	1,417	40	56,680	4/15/24	83	77	0	23	Surface Treatment - Slurry Seal	07-22-2014
569	376	EDWARDS ST	CROSSWIND DR	GARFIELD AVE	A	AC	~	1,068	30	32,040	5/3/24	83	100	0	0	New Construction - Initial	01-01-1980
1017	308	LAKE ST	ADAMS AVE	UTICA AVE	A	AC	~	1,321	29	38,309	5/1/24	83	45	55	0	New Construction - Initial	01-01-1980
825	865	HEIL AVE	SILVER LN	RHONE LN	A	AC	~	1,165	61	71,065	5/8/24	83	85	12	3	New Construction - Initial	01-01-1980
1385	810	PALM AVE	OFELIA LN	CHERRYHILL LN	C	AC	~	2,210	31	68,510	4/30/24	83	87	13	0	New Construction - Initial	01-01-1980
1724	166	SLATER AVE	GRAHAM ST	WOODFERN LN	A	AAC	~	646	30	19,380	5/2/24	83	100	0	0	Overlay - AC Structural	07-01-2010
1997	392	WARNER AVE	BEACH BLVD	ROTTERDAM LN	A	AAC	~	1,449	37	59,771	5/10/24	83	95	5	0	Overlay - AC Structural	06-21-2016
9	280	ADAMS AVE	LAWSON LN	CITY LIMIT	A	AAC	~	1,229	40	49,160	5/8/24	84	38	12	50	Overlay - AC Structural	09-11-2007
743	681	GOLDENWEST ST	SLATER AVE	BETTY DR	A	AC	~	1,193	39	46,527	5/6/24	84	70	28	2	New Construction - Initial	01-01-1980
195	81	BOLSA CHICA ST	SKYLAB WEST	BOLSA AVE	A	AAC	~	1,432	36	51,552	5/8/24	84	56	44	0	Overlay - AC Structural	09-11-2007
1724	242	SLATER AVE	CORONADO LN	EDWARDS ST	A	AAC	~	1,466	30	43,980	5/2/24	84	100	0	0	Overlay - AC Structural	07-01-2010
1751	667	SPRINGDALE ST	DOYLE DR	HEIL AVE	A	AAC	~	1,450	33	51,350	5/2/24	84	100	0	0	Overlay - AC Structural	06-21-2013
743	92	GOLDENWEST ST	MADDOX DR	NORMA DR	A	AAC	~	787	40	31,480	5/6/24	84	53	21	26	Overlay - AC Structural	09-11-2007
1997	675	WARNER AVE	EDWARDS ST	SEA AIRA	A	AC	~	1,290	42	54,180	5/10/24	84	86	14	0	New Construction - Initial	01-01-1980
330	145	CENTER AVE	GOTHARD ST	HUNTINGTON VILLAGE	C	AAC	~	1,355	61	82,655	5/8/24	84	88	12	0	Overlay - AC Structural	06-21-2016
1127	117	MAGNOLIA ST	BERMUDA DR	BANNING AVE	A	AC	~	1,150	32	38,550	3/27/24	84	100	0	0	New Construction - Initial	01-01-1980
1351	316	ORANGE AVE	THIRTEENTH ST	SEVENTEENTH ST	C	AC	~	1,307	25	32,675	3/13/24	84	63	23	14	New Construction - Initial	01-01-1980
1351	767	ORANGE AVE	SIXTH ST	THIRD ST	C	AAC	~	952	25	22,390	3/13/24	84	51	49	0	Overlay - AC Structural	09-11-2007
1724	837	SLATER AVE	NEWLAND ST	JEFFERSON LN	A	AC	~	1,088	30	32,640	3/25/24	84	100	0	0	New Construction - Initial	01-01-1980
2082	291	YORKTOWN AVE	HARDING LN (S)	NEWLAND ST	C	AAC	~	782	33	25,806	4/10/24	84	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	397	YORKTOWN AVE	LAKE ST	DELAWARE ST	C	AC	~	1,601	31	49,631	4/15/24	84	64	0	36	New Construction - Initial	01-01-1980
2082	798	YORKTOWN AVE	VASILE CIR	BEACH BLVD	C	AAC	~	927	33	30,591	4/10/24	84	42	0	58	Surface Treatment - Slurry Seal	07-01-2011
1503	133	RANCHO RD	ASTRONAUTICS LN	BOLSA CHICA ST	C	AC	~	1,220	18	21,960	5/8/24	84	60	40	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
751	176	GRAHAM ST	ARGOSY AVE	MC FADDEN AVE	A	AC	~	1,441	60	86,460	5/1/24	84	62	0	38	New Construction - Initial	01-01-1980
1290	435	NEWLAND ST	ST AUGUSTINE DR	HAMILTON AVE	A	AC	~	1,185	60	71,100	5/8/24	84	71	19	10	New Construction - Initial	01-01-1980
746	813	GOTHARD ST	MAIN ST	GARFIELD AVE	A	AC	~	1,320	32	42,240	5/9/24	84	34	0	66	New Construction - Initial	01-01-1980
240	520	BROOKHURST ST	PCH	BUSHARD ST	A	AC	~	1,235	45	55,575	5/6/24	84	87	13	0	New Construction - Initial	01-01-1980
746	150	GOTHARD ST	PROMENADE PARKWAY DR	ERNEST DR	A	AC	~	819	27	22,113	5/9/24	84	94	0	6	New Construction - Initial	01-01-1980
1655	369	SEAPOINT AVE	PALM AVE	PCH	A	AC	~	1,206	33	42,798	5/9/24	84	100	0	0	New Construction - Initial	01-01-1980
569	7	EDWARDS ST	EDGEMONT DR	HEIL AVE	A	AC	~	690	28	25,820	5/7/24	85	89	11	0	New Construction - Initial	01-01-1980
569	819	EDWARDS ST	CROSSWIND DR	OVERLOOK DR	A	AC	~	880	30	26,400	5/3/24	85	79	16	5	New Construction - Initial	01-01-1980
1724	167	SLATER AVE	WOODFERN LN	MISTY LN	A	AAC	~	807	30	24,210	5/2/24	85	84	16	0	Overlay - AC Structural	07-01-2010
1017	323	LAKE ST	ALLEY ORANGE AVE	SIXTH ST	A	AC	~	1,015	29	29,435	5/1/24	85	90	10	0	New Construction - Initial	01-01-1980
1838	153	TALBERT AVE	BEACH BLVD	CEMETERY	A	AAC	~	1,411	33	46,563	4/27/24	85	75	19	6	Overlay - AC Structural	11-01-2016
240	439	BROOKHURST ST	ATLANTA AVE	EFFINGHAM DR	A	AC	~	1,196	39	49,644	3/6/24	85	82	18	0	New Construction - Initial	01-01-1980
589	39	ELLIS AVE	EDWARDS ST	GOLDENWEST ST	A	AC	~	2,640	40	105,600	5/7/24	85	75	0	25	New Construction - Initial	01-01-1980
1127	118	MAGNOLIA ST	BANNING AVE	PCH	C	AC	~	1,468	33	48,444	4/17/24	85	100	0	0	New Construction - Initial	01-01-1980
1130	379	MAIN ST	YORKTOWN AVE	CLAY AVE	A	AAC	~	1,370	33	49,210	3/12/24	85	20	0	80	Overlay - AC Structural	06-01-2015
1995	599	WARD ST	TANA DR	GARFIELD AVE	C	AC	~	703	16	11,248	4/2/24	85	100	0	0	New Construction - Initial	01-01-1980
2082	733	YORKTOWN AVE	NEWLAND ST	HARDING LN	C	AAC	~	782	33	25,806	4/10/24	85	45	0	55	Surface Treatment - Slurry Seal	07-01-2011
1185	413	MC FADDEN AVE	GOTHARD ST	SUGAR AVE	A	AC	~	1,787	40	71,480	5/13/24	85	45	44	11	New Construction - Initial	01-01-1980
743	483	GOLDENWEST ST	ERNEST AVE	ELLIS AVE	A	AC	~	1,585	40	65,900	5/9/24	85	62	8	30	New Construction - Initial	01-01-1980
1724	93	SLATER AVE	MISTY LN	SPRINGDALE ST	A	AAC	~	1,193	30	35,790	5/2/24	85	84	16	0	Overlay - AC Structural	07-01-2010
1838	258	TALBERT AVE	CEMETERY	NEWLAND ST	A	AAC	~	1,228	33	40,524	4/27/24	85	56	6	38	Overlay - AC Structural	11-01-2016
195	11	BOLSA CHICA ST	BOLSA AVE	ARGOSY AVE	A	AAC	~	1,200	36	43,200	5/8/24	86	58	18	24	Overlay - AC Structural	09-11-2007
589	702	ELLIS AVE	HUNTINGTON ST	GOTHARD ST	A	AAC	~	1,346	36	48,456	5/10/24	86	82	15	3	Overlay - AC Structural	07-01-2006
1290	432	NEWLAND ST	ATLANTA AVE	ST AUGUSTINE DR	A	AC	~	1,454	60	87,240	5/8/24	86	42	27	31	New Construction - Initial	01-01-1980
566	91	EDINGER AVE	GOLDENWEST ST	GOTHARD ST	A	AC	~	1,982	39	77,298	4/29/24	86	46	40	14	New Construction - Initial	01-01-1980
743	35	GOLDENWEST ST	MCFADDEN AVE	BLUEBONNET DR	A	AAC	~	828	40	33,120	5/6/24	86	66	28	6	Overlay - AC Structural	10-29-2007
1017	50420	LAKE ST	ORANGE AVE	ALLEY ORANGE AVE	A	AC	~	322	40	12,880	5/1/24	86	44	52	4	New Construction - Initial	01-01-1980
1655	148	SEAPOINT AVE	DORAL DR	CHERRHILL LN	A	AC	~	830	32	28,060	5/9/24	86	100	0	0	New Construction - Initial	01-01-1980
85	329	ATLANTA AVE	DELAWARE ST	BEACH BL	A	AC	~	1,285	33	42,405	4/25/24	86	27	0	73	New Construction - Initial	01-01-1980
240	77	BROOKHURST ST	BANNING AVE	BUSHARD ST	A	AC	~	2,434	43	108,412	4/17/24	86	92	0	8	New Construction - Initial	01-01-1980
500	383	DELAWARE ST	GARFIELD AVE	CLAY AVE	C	AAC	~	1,320	60	79,200	4/9/24	86	68	0	32	Overlay - AC Structural	07-01-2011
703	105	GARFIELD AVE	SADDLEBACK LN	GOLDENWEST ST	A	AC	~	1,320	40	52,800	3/11/24	86	81	0	19	New Construction - Initial	01-01-1980
1127	109	MAGNOLIA ST	HYDE PARK DR	SEAHURST DR	A	AC	~	825	40	33,000	3/5/24	86	32	68	0	New Construction - Initial	01-01-1980
1290	290	NEWLAND ST	YORKTOWN AVE	DEEPVIEW DR	A	AAC	~	1,447	60	86,820	4/3/24	86	98	0	2	Overlay - AC Structural	09-11-2007
2082	356	YORKTOWN AVE	BEACH BLVD (S)	VASILE CIR	C	AAC	~	927	33	30,591	4/10/24	86	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	730	YORKTOWN AVE	WATERBURY LN	MAGNOLIA ST	C	AC	~	1,521	33	50,193	4/9/24	86	97	0	3	Surface Treatment - Slurry Seal	07-01-2011
751	641	GRAHAM ST	EDINGER AVE	RESEARCH DR	A	AC	~	1,525	28	43,950	5/1/24	86	68	0	32	New Construction - Initial	01-01-1980
258	285	BUSHARD ST	FLOUNDER DR	YORKTOWN AVE	C	AAC	~	1,190	60	71,400	5/7/24	87	86	14	0	Overlay - AC Structural	02-01-2007
703	44	GARFIELD AVE	PLUM TREE LN	LINDSAY LN	A	AAC	~	1,335	33	44,055	5/10/24	87	96	0	4	Overlay - AC Structural	07-01-2010
1838	595	TALBERT AVE	CEMETERY	BEACH BLVD	A	AAC	~	1,411	29	40,919	4/27/24	87	57	42	1	Overlay - AC Structural	11-01-2016
825	17015	HEIL AVE	BOLSA CHICA ST	BLACKBEARD LN	A	AC	~	1,282	61	78,202	5/10/24	87	39	61	0	New Construction - Initial	01-01-1980
1185	179	MC FADDEN AVE	ELECTRONIC LN	SPRINGDALE ST	A	AAC	~	734	60	44,040	5/3/24	87	68	0	32	Overlay - AC Structural	09-11-2007
1997	393	WARNER AVE	ROTTERDAM LN	NEWLAND ST	A	AAC	~	1,188	37	49,516	5/10/24	87	74	26	0	Overlay - AC Structural	06-21-2016
9	59	ADAMS AVE	NEWLAND ST	CROWN REEF LN	A	AAC	~	1,037	40	41,480	4/3/24	87	74	0	26	Overlay - AC Structural	08-01-2017
9	724	ADAMS AVE	HARBOR ISLE LN	MAGNOLIA ST	A	AAC	~	1,116	40	44,640	3/20/24	87	71	0	29	Overlay - AC Structural	09-11-2007
258	340	BUSHARD ST	BANNING AVE	BROOKHURST ST	C	AC	~	1,968	60	118,080	3/27/24	87	68	0	32	New Construction - Initial	01-01-1980
258	350	BUSHARD ST	INDIANAPOLIS AVE	ERSKINE DR	C	AAC	~	1,182	60	70,920	3/19/24	87	100	0	0	Overlay - AC Structural	09-01-2006
589	260	ELLIS AVE	GOTHARD ST	HUNTINGTON ST	A	AAC	~	1,346	36	48,456	5/10/24	87	43	54	3	Overlay - AC Structural	07-01-2006
703	45	GARFIELD AVE	LINDSAY LN	MAGNOLIA ST	A	AAC	~	778	33	25,674	4/3/24	87	92	0	8	Overlay - AC Structural	07-01-2010
703	47	GARFIELD AVE	RANDI LN	PAULINE LN	A	AAC	~	935	33	30,855	3/5/24	87	29	0	71	Overlay - AC Structural	06-21-2013
703	547	GARFIELD AVE	GOLDENWEST ST	SADDLEBACK LN	A	AC	~	1,320	40	52,800	3/11/24	87	97	0	3	New Construction - Initial	01-01-1980
703	598	GARFIELD AVE	KIPAHULU DR	BROOKHURST ST	A	AC	~	681	33	22,473	4/8/24	87	91	0	9	New Construction - Initial	01-01-1980
789	515	HAMILTON AVE	NORTHSHORE LN	POLYNESIAN LN	C	AC	~	1,338	31	41,478	4/1/24	87	69	12	19	New Construction - Initial	01-01-1980
1724	686	SLATER AVE	GOLDENWEST ST	MAYOR LN	A	AAC	~	1,345	30	40,350	3/25/24	87	93	0	7	Overlay - AC Structural	07-01-2010
1724	832	SLATER AVE	JEFFERSON LN	BEACH BLVD	A	AC	~	1,550	30	46,500	3/25/24	87	92	0	8	New Construction - Initial	01-01-1980
2082	142	YORKTOWN AVE	GOLDENWEST ST	MAIN ST	C	AAC	~	1,417	40	56,680	4/15/24	87	91	0	9	Overlay - AC Structural	07-22-2014
2082	303	YORKTOWN AVE	NEWLAND ST (S)	WINDWARD LN	C	AAC	~	1,452	33	47,916	4/10/24	87	96	0	4	Surface Treatment - Slurry Seal	07-01-2011
2082	799	YORKTOWN AVE	HARDING LN	VASILE CIR	C	AAC	~	936	33	30,888	4/10/24	87	67	0	33	Surface Treatment - Slurry Seal	07-01-2011
258	441	BUSHARD ST	YORKTOWN AVE	WOODLAWN DR	C	AAC	~	712	60	42,720	5/7/24	87	85	15	0	Overlay - AC Structural	02-01-2007

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
887	753	INDIANAPOLIS AVE	NEWLAND ST	FARNSWORTH LN	C	AC	~	1,325	24	31,800	5/1/24	87	84	0	16	Overlay-Rubber Hot Mix	02-14-2019
195	80	BOLSA CHICA ST	RANCHO RD	SKYLAB WEST	A	AAC	~	702	36	25,272	5/8/24	87	82	18	0	Overlay - AC Structural	09-11-2007
195	456	BOLSA CHICA ST	MCFADDEN AVE	TASMAN DR	A	AAC	~	854	36	30,744	5/9/24	87	46	51	3	Overlay - AC Structural	09-11-2007
1185	180	MC FADDEN AVE	SPRINGDALE ST	LA SALLE LN	A	AAC	~	1,481	60	88,860	4/29/24	87	75	25	0	Overlay - AC Structural	09-11-2007
1127	552	MAGNOLIA ST	YORKTOWN AVE	SEAHURST DR	A	AC	~	845	40	33,800	5/7/24	88	76	0	24	New Construction - Initial	01-01-1980
1997	834	WARNER AVE	ROTTERDAM LN	BEACH BLVD	A	AAC	~	1,449	37	53,613	5/10/24	88	94	6	0	Overlay - AC Structural	06-21-2016
566	533	EDINGER AVE	GOTHARD ST	GOLDENWEST ST	A	AC	~	1,982	39	77,298	5/9/24	88	46	50	4	New Construction - Initial	01-01-1980
746	605	GOTHARD ST	PROMENADE PARKWAY DR	ELLIS AVE	A	AC	~	949	27	27,873	5/9/24	88	56	0	44	New Construction - Initial	01-01-1980
1017	750	LAKE ST	UTICA AVE	ADAMS AVE	A	AC	~	1,321	29	38,309	5/1/24	88	65	31	4	Surface Treatment - Slurry Seal	07-22-2014
1503	575	RANCHO RD	BOLSA CHICA ST	ASTRONAUTICS LN	C	AC	~	1,220	22	26,840	5/8/24	88	95	0	5	New Construction - Initial	01-01-1980
9	283	ADAMS AVE	CROWN REEF LN	MAGNOLIA ST	A	AAC	~	1,608	40	64,320	4/3/24	88	100	0	0	Overlay - AC Structural	08-01-2017
9	306	ADAMS AVE	BEACH BLVD	ROTHERT LN	A	AAC	~	1,562	40	62,480	4/3/24	88	30	0	70	Overlay - AC Structural	06-21-2016
240	339	BROOKHURST ST	TRAVELWAY	BANNING AVE	A	AC	~	1,578	43	69,854	4/17/24	88	95	0	5	New Construction - Initial	01-01-1980
240	348	BROOKHURST ST	INDIANAPOLIS AVE	CLIFF DR	A	AC	~	1,295	39	53,005	3/6/24	88	61	14	25	New Construction - Initial	01-01-1980
258	351	BUSHARD ST	ERSKINE DR	ATLANTA AVE	C	AAC	~	1,460	60	87,600	3/19/24	88	95	0	5	Overlay - AC Structural	09-01-2006
500	384	DELAWARE ST	YORKTOWN AVE	CLAY AVE	C	AAC	~	1,320	60	79,200	4/9/24	88	97	0	3	Overlay - AC Structural	07-01-2011
703	104	GARFIELD AVE	EDWARDS ST(S)	SADDLEBACK LN	A	AC	~	1,320	40	52,800	3/11/24	88	100	0	0	New Construction - Initial	01-01-1980
703	106	GARFIELD AVE	SEAPOINT AVE	EDWARDS ST	A	AC	~	1,261	40	50,440	3/11/24	88	100	0	0	New Construction - Initial	01-01-1980
703	496	GARFIELD AVE	SUVA LN	KIPAHULU DR	A	AC	~	1,118	33	36,894	4/8/24	88	93	0	7	New Construction - Initial	01-01-1980
1127	108	MAGNOLIA ST	GARFIELD AVE	HYDE PARK DR	A	AC	~	970	40	38,800	3/5/24	88	57	20	23	New Construction - Initial	01-01-1980
1127	734	MAGNOLIA ST	ADAMS AVE	PIONEER DR	A	AC	~	880	40	35,200	5/8/24	88	68	0	32	New Construction - Initial	01-01-1980
1127	789	MAGNOLIA ST	HAMILTON AVE	STILWELL DR	A	AC	~	1,293	40	51,720	4/1/24	88	100	0	0	New Construction - Initial	01-01-1980
1670	374	SEVENTEENTH ST	PALM AVE	ADAMS AVE	A	AC	~	1,625	27	43,875	3/13/24	88	100	0	0	New Construction - Initial	01-01-1980
1670	806	SEVENTEENTH ST	ORANGE AVE	PCH	A	AC	~	1,239	28	34,692	3/13/24	88	100	0	0	New Construction - Initial	01-01-1980
1995	276	WARD ST	SUNDAY DR	YORKTOWN AVE	C	AC	~	935	25	23,375	4/2/24	88	100	0	0	New Construction - Initial	01-01-1980
1995	499	WARD ST	SUNDAY DR	TANA DR	C	AC	~	1,002	16	16,032	4/2/24	88	85	0	15	New Construction - Initial	01-01-1980
2082	278	YORKTOWN AVE	BROOKHURST ST (S)	CANBERRA LN	C	AC	~	1,236	33	40,788	4/9/24	88	100	0	0	New Construction - Initial	01-01-1980
2082	744	YORKTOWN AVE	BEACH BLVD	DELAWARE ST	C	AC	~	1,321	33	43,593	4/15/24	88	53	0	47	Surface Treatment - Slurry Seal	07-01-2011
330	146	CENTER AVE	FITNESS CENTER ENTRANCE	BEACH BLVD	C	AAC	~	1,322	61	80,642	5/8/24	88	87	13	0	Overlay - AC Structural	04-01-2012
746	151	GOTHARD ST	ERNEST AVE	GARFIELD AVE	A	AC	~	1,053	32	33,696	5/9/24	88	69	1	30	New Construction - Initial	01-01-1980
1472	14610	PACIFIC VIEW	TWIN DOLPHIN DR	BEACH BLVD	A	AC	~	1,262	30	37,860	4/30/24	88	100	0	0	New Construction	01-01-1980
1997	835	WARNER AVE	NEWLAND ST	ROTTERDAM LN	A	AAC	~	1,188	37	43,956	5/10/24	88	60	17	23	Overlay - AC Structural	06-21-2016
887	310	INDIANAPOLIS AVE	BEACH BLVD	FARNSWORTH LN	C	AC	~	1,325	24	31,800	5/1/24	88	81	19	0	Overlay-Rubber Hot Mix	02-14-2019
1472	50540	PACIFIC VIEW	BEACH BLVD	TWIN DOLPHIN DR	A	AC	~	1,262	30	37,860	4/30/24	88	71	0	29	New Construction - Initial	01-01-1980
1838	388	TALBERT AVE	GOTHARD ST	KOVACS LN	A	AAC	~	1,663	40	66,520	4/27/24	88	77	23	0	Overlay - AC Structural	06-21-2016
195	453	BOLSA CHICA ST	ARGOSY AVE	BOLSA AVE	A	AAC	~	1,200	36	43,200	5/9/24	88	58	42	0	Overlay - AC Structural	09-11-2007
887	311	INDIANAPOLIS AVE	FARNSWORTH LN	NEWLAND ST	C	AC	~	1,325	24	31,800	5/1/24	88	100	0	0	Overlay-Rubber Hot Mix	02-14-2019
1838	700	TALBERT AVE	NEWLAND ST	CEMETERY	A	AAC	~	1,228	33	40,524	4/27/24	88	73	0	27	Overlay - AC Structural	11-01-2016
1127	110	MAGNOLIA ST	SEAHURST DR	YORKTOWN AVE	A	AC	~	845	40	33,800	5/7/24	89	72	28	0	New Construction - Initial	01-01-1980
1838	389	TALBERT AVE	KOVACS LN	BEACH BLVD	A	AAC	~	1,637	40	65,480	4/27/24	89	87	6	7	Overlay - AC Structural	06-21-2016
9	58	ADAMS AVE	ROTHERT LN	NEWLAND ST	A	AAC	~	1,083	40	43,320	4/3/24	89	30	0	70	Overlay - AC Structural	06-21-2016
240	78	BROOKHURST ST	BUSHARD ST	PCH	A	AC	~	1,235	45	55,575	4/17/24	89	68	0	32	New Construction - Initial	01-01-1980
703	156	GARFIELD AVE	BROOKHURST ST	KIPAHULU DR	A	AC	~	681	33	22,473	4/8/24	89	64	0	36	New Construction - Initial	01-01-1980
703	43	GARFIELD AVE	NEWLAND ST	PLUM TREE LN	A	AAC	~	532	33	17,556	4/3/24	89	100	0	0	Overlay - AC Structural	07-01-2010
887	508	INDIANAPOLIS AVE	KELVINGROVE LN	MAGNOLIA ST	A	AC	~	880	24	21,120	3/20/24	89	100	0	0	New Construction - Initial	01-01-1980
887	752	INDIANAPOLIS AVE	FARNSWORTH LN	BEACH BLVD	C	AC	~	1,325	24	31,800	5/1/24	89	100	0	0	Overlay-Rubber Hot Mix	02-14-2019
1017	307	LAKE ST	UTICA AVE	YORKTOWN AVE	A	AC	~	1,012	29	29,348	4/15/24	89	69	31	0	Surface Treatment - Slurry Seal	07-22-2014
1130	814	MAIN ST	YORKTOWN AVE	SEVENTEENTH ST	A	AAC	~	1,445	33	49,185	3/12/24	89	100	0	0	Overlay - AC Structural	06-13-2012
1724	243	SLATER AVE	EDWARDS ST	MAYOR LN	A	AAC	~	1,293	30	38,790	3/25/24	89	100	0	0	Overlay - AC Structural	07-01-2010
1724	244	SLATER AVE	MAYOR LN	GOLDENWEST ST	A	AAC	~	1,345	30	40,350	3/25/24	89	100	0	0	Overlay - AC Structural	07-01-2010
1838	830	TALBERT AVE	KOVACS LN	GOTHARD ST	A	AAC	~	1,663	40	66,520	4/27/24	89	81	19	0	Overlay - AC Structural	06-21-2016
1838	831	TALBERT AVE	BEACH BLVD	KOVACS LN	A	AAC	~	1,637	40	65,480	4/27/24	89	100	0	0	Overlay - AC Structural	06-21-2016
1994	875	WALNUT AVE	FIRST ST	SIXTH ST	C	AC	~	1,654	18	34,820	4/30/24	89	59	0	41	Surface Treatment - Slurry Seal	07-27-2022
1995	718	WARD ST	YORKTOWN AVE	SUNDAY DR	C	AC	~	935	25	23,375	4/2/24	89	100	0	0	New Construction - Initial	01-01-1980
746	443	GOTHARD ST	CENTER AVE	MC FADDEN AVE	A	AAC	~	1,425	60	85,500	5/9/24	89	88	7	5	Overlay - AC Structural	03-21-2016
743	484	GOLDENWEST ST	GARFIELD AVE	ERNEST AVE	A	AC	~	1,055	38	40,090	5/9/24	90	62	0	38	New Construction - Initial	01-01-1980
1185	177	MC FADDEN AVE	GRAHAM ST	COMPUTER LN	A	AAC	~	925	60	55,500	5/3/24	90	89	0	11	Overlay - AC Structural	09-11-2007
746	586	GOTHARD ST	EDINGER AVE	CENTER AVE	A	AAC	~	1,321	60	79,260	5/9/24	90	74	26	0	Overlay - AC Structural	03-21-2016
258	293	BUSHARD ST	WOODLAWN DR	PETTSWOOD DR	C	AAC	~	1,025	60	61,500	5/7/24	90	52	22	26	Overlay - AC Structural	02-01-2007

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
195	455	BOLSA CHICA ST	TASMAN DR	ARGOSY AVE	A	AAC	~	587	36	21,132	5/9/24	90	56	44	0	Overlay - AC Structural	09-11-2007
9	60	ADAMS AVE	DERBYSHIRE LN	SUTTON LN	A	AC	~	663	40	26,520	3/19/24	90	100	0	0	New Construction - Initial	01-01-1980
85	513	ATLANTA AVE	KIMBERWICK LN	BEACHWOOD LN	A	AC	~	978	33	32,274	4/25/24	90	41	0	59	Overlay-Rubber Hot Mix	07-01-2019
258	438	BUSHARD ST	HAMILTON AVE	MOKIHANA DR	C	AC	~	1,190	60	71,400	3/27/24	90	94	0	6	New Construction - Initial	01-01-1980
703	55	GARFIELD AVE	SUVA LN	WARD ST	A	AC	~	844	33	27,852	4/8/24	90	100	0	0	New Construction - Initial	01-01-1980
887	742	INDIANAPOLIS AVE	EVERGLADES LN	BUSHARD ST	C	AC	~	1,451	24	34,824	3/19/24	90	100	0	0	New Construction - Initial	01-01-1980
1127	555	MAGNOLIA ST	MEDITERRANEAN DR	ADAMS DR	A	AAC	~	895	33	31,785	3/20/24	90	55	0	45	Overlay - AC Structural	06-13-2012
1127	560	MAGNOLIA ST	PCH	BANNING AVE	C	AC	~	1,468	33	48,444	4/17/24	90	77	23	0	New Construction - Initial	01-01-1980
1351	325	ORANGE AVE	THIRD ST	SIXTH ST	C	AC	~	952	25	23,800	3/13/24	90	60	19	21	New Construction - Initial	01-01-1980
4060	50400	TWIN DOLPHIN DR	PCH	PACIFIC VIEW AVE	C	AC	~	490	65	24,500	8/30/23	90	100	0	0	New Construction - Initial	01-01-1980
2082	50	YORKTOWN AVE	WATERBURY LN (S)	BUSHARD ST	C	AC	~	1,123	33	37,059	4/10/24	90	92	0	8	Surface Treatment - Slurry Seal	07-01-2011
2082	746	YORKTOWN AVE	MAGNOLIA ST	WINDWARD LN	C	AAC	~	1,192	33	39,336	4/9/24	90	95	0	5	Surface Treatment - Slurry Seal	07-01-2011
751	473	GRAHAM ST	RESEARCH DR	MCFADDEN AVE	A	AC	~	1,116	28	34,248	5/1/24	90	72	15	13	New Construction - Initial	01-01-1980
195	522	BOLSA CHICA ST	SKYLAB WEST	RANCHO RD	A	AAC	~	702	36	25,272	5/9/24	91	100	0	0	Overlay - AC Structural	09-11-2007
1127	292	MAGNOLIA ST	PIONEER DR	ADAMS AVE	A	AC	~	880	40	35,200	5/8/24	91	89	0	11	New Construction - Initial	01-01-1980
195	30	BOLSA CHICA ST	ROBINWOOD DR	EDINGER AVE	A	AAC	~	780	36	28,080	5/8/24	91	77	23	0	Overlay - AC Structural	09-11-2007
195	471	BOLSA CHICA ST	ROBINWOOD DR	DOVEWOOD DR	A	AAC	~	1,040	36	37,440	5/9/24	91	64	36	0	Overlay - AC Structural	09-11-2007
9	722	ADAMS AVE	CITY LIMIT	LAWSON LN	A	AAC	~	1,229	40	49,160	5/8/24	91	95	0	5	Overlay - AC Structural	09-11-2007
1185	178	MC FADDEN AVE	COMPUTER LN	ELECTRONIC LN	A	AAC	~	923	60	55,380	5/3/24	91	93	0	7	Overlay - AC Structural	09-11-2007
9	502	ADAMS AVE	SUTTON LN (N)	DERBYSHIRE LN	A	AAC	~	663	40	26,520	3/19/24	91	100	0	0	Overlay - AC Structural	09-11-2007
9	61	ADAMS AVE	BUSHARD ST	DERBYSHIRE LN	A	AAC	~	818	40	32,720	3/19/24	91	100	0	0	Overlay - AC Structural	10-29-2007
9	731	ADAMS AVE	BUSHARD ST	HARBOR ISLE LN	A	AAC	~	1,527	40	61,080	3/20/24	91	100	0	0	Overlay - AC Structural	09-11-2007
85	71	ATLANTA AVE	BEACHWOOD LN	KIMBERWICK LN	A	AC	~	978	33	32,274	4/1/24	91	43	0	57	Overlay-Rubber Hot Mix	07-01-2019
258	341	BUSHARD ST	MOKIHANA DR	BANNING AVE	C	AC	~	1,450	60	87,000	3/27/24	91	100	0	0	New Construction - Initial	01-01-1980
703	485	GARFIELD AVE	PLUM TREE LN	NEWLAND ST	A	AAC	~	532	15	7,980	3/11/24	91	90	0	10	Overlay - AC Structural	07-01-2010
703	548	GARFIELD AVE	EDWARDS ST	SEAPOINT AVE	A	AC	~	1,261	40	50,440	3/11/24	91	47	0	53	New Construction - Initial	01-01-1980
887	743	INDIANAPOLIS AVE	BROOKHURST ST	EVERGLADES LN	A	AC	~	1,190	24	28,560	3/19/24	91	100	0	0	New Construction - Initial	01-01-1980
887	878	INDIANAPOLIS AVE	TITAN LN	KELVINGROVE LN	C	AC	~	775	24	18,600	3/20/24	91	57	0	43	New Construction - Initial	01-01-1980
1127	112	MAGNOLIA ST	MADELINE DR	PIONEER DR	A	AC	~	763	40	30,520	5/8/24	91	92	0	8	New Construction - Initial	01-01-1980
1127	557	MAGNOLIA ST	STILWELL DR	ATLANTA AVE	A	AC	~	1,346	40	53,840	4/1/24	91	100	0	0	New Construction - Initial	01-01-1980
1127	558	MAGNOLIA ST	BERMUDA DR	HAMILTON AVE	A	AC	~	1,447	33	47,751	3/26/24	91	67	0	33	New Construction - Initial	01-01-1980
1127	589	MAGNOLIA ST	BEDEL DR	MEDITERRANEAN DR	A	AAC	~	955	33	33,015	3/20/24	91	100	0	0	Overlay - AC Structural	06-13-2012
1130	372	MAIN ST	SEVENTEENTH ST	YORKTOWN AVE	A	AAC	~	1,445	33	50,185	3/12/24	91	73	21	6	Overlay - AC Structural	06-13-2012
1130	710	MAIN ST	DELAWARE ST	ELLIS AVE	A	AAC	~	1,824	38	69,312	3/12/24	91	39	0	61	Overlay - AC Structural	08-06-2018
2082	288	YORKTOWN AVE	MAGNOLIA ST (S)	WATERBURY LN	A	AC	~	1,521	33	50,193	4/10/24	91	59	0	41	Surface Treatment - Slurry Seal	07-01-2011
2082	302	YORKTOWN AVE	DELAWARE ST	BEACH BLVD	C	AC	~	1,321	33	43,593	4/15/24	91	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	357	YORKTOWN AVE	VASILE CIR (S)	HARDING LN	C	AAC	~	936	33	30,888	4/10/24	91	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	492	YORKTOWN AVE	BUSHARD ST (N)	WATERBURY LN	C	AC	~	1,123	33	37,059	4/9/24	91	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
566	86	EDINGER AVE	GRAHAM ST	CLUBHOUSE LN	A	AAC	~	1,210	65	78,650	4/27/24	91	98	0	2	Overlay - AC Structural	06-21-2016
743	42	GOLDENWEST ST	ERNEST AVE	GARFIELD AVE	A	AC	~	1,055	38	46,390	5/9/24	91	41	0	59	New Construction - Initial	01-01-1980
1127	553	MAGNOLIA ST	MADELINE DR	YORKTOWN AVE	A	AC	~	998	40	39,920	5/8/24	91	46	43	11	New Construction - Initial	01-01-1980
1472	50530	PACIFIC VIEW	TWIN DOLPHIN DR (W)	HUNTINGTON ST	A	AC	~	972	30	29,160	4/30/24	91	100	0	0	New Construction - Initial	01-01-1980
195	29	BOLSA CHICA ST	DOVEWOOD DR	ROBINWOOD DR	A	AAC	~	1,040	36	37,440	5/8/24	91	75	25	0	Overlay - AC Structural	09-11-2007
1994	433	WALNUT AVE	SIXTH ST	FIRST ST	C	AC	~	1,654	18	34,552	4/30/24	91	66	0	34	Surface Treatment - Slurry Seal	07-27-2022
569	601	EDWARDS ST	ELLIS AVE	TALBERT AVE	A	AC	~	1,576	25	39,400	5/3/24	92	100	0	0	New Construction - Initial	01-01-1980
195	849	BOLSA CHICA ST	DOVEWOOD DR	MCFADDEN AVE	A	AAC	~	822	36	29,592	5/9/24	92	67	33	0	Overlay - AC Structural	03-01-2007
85	330	ATLANTA AVE	BEACH BL	SCHOONER LN	A	AAC	~	1,145	33	37,785	4/25/24	92	52	0	48	Overlay - AC Structural	06-21-2016
703	48	GARFIELD AVE	PAULINE LN	BUSHARD ST	A	AAC	~	890	33	29,370	3/5/24	92	100	0	0	Overlay - AC Structural	06-21-2013
887	299	INDIANAPOLIS AVE	TITAN LN	BUSHARD ST	C	AC	~	988	24	23,712	3/20/24	92	100	0	0	New Construction - Initial	01-01-1980
887	300	INDIANAPOLIS AVE	BUSHARD ST	EVERGLADES LN	C	AC	~	1,451	24	34,824	3/19/24	92	100	0	0	New Construction - Initial	01-01-1980
887	436	INDIANAPOLIS AVE	KELVINGROVE LN	TITAN LN	C	AC	~	775	24	18,600	3/20/24	92	100	0	0	New Construction - Initial	01-01-1980
887	741	INDIANAPOLIS AVE	BUSHARD ST	TITAN LN	A	AC	~	988	24	23,712	3/20/24	92	100	0	0	New Construction - Initial	01-01-1980
1017	749	LAKE ST	YORKTOWN AVE	UTICA AVE	A	AC	~	1,012	29	29,348	4/15/24	92	100	0	0	New Construction - Initial	01-01-1980
1127	113	MAGNOLIA ST	ADAMS AVE	MEDITERRANEAN DR	A	AAC	~	895	33	31,535	3/20/24	92	81	0	19	Overlay - AC Structural	06-13-2012
1127	147	MAGNOLIA ST	MEDITERRANEAN DR	BEDEL DR	A	AAC	~	955	33	33,515	3/20/24	92	100	0	0	Overlay - AC Structural	06-13-2012
1130	269	MAIN ST	DELAWARE ST	PROMENADE PKWY	A	AC	~	1,243	40	49,720	3/12/24	92	100	0	0	New Construction - Initial	01-01-1980
1130	821	MAIN ST	CLAY AVE	YORKTOWN AVE	A	AAC	~	1,370	33	48,360	3/12/24	92	85	0	15	Overlay - AC Structural	07-22-2014
1724	685	SLATER AVE	MAYOR LN	EDWARDS ST	A	AAC	~	1,293	30	38,790	3/25/24	92	88	0	12	Overlay - AC Structural	07-01-2010
2082	719	YORKTOWN AVE	WARD ST	CANBERRA LN	C	AC	~	1,414	33	46,662	4/2/24	92	100	0	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
195	13	BOLSA CHICA ST	ARGOSY AVE	TASMAN AVE	A	AAC	~	587	36	21,132	5/8/24	92	100	0	0	Overlay - AC Structural	09-11-2007
566	85	EDINGER AVE	CLUBHOUSE LN	SPRINGDALE ST	A	AAC	~	1,371	64	87,744	4/27/24	92	100	0	0	Overlay - AC Structural	06-21-2016
825	645	HEIL AVE	GRAHAM ST	DEL MAR LN	A	AC	~	997	61	60,817	5/9/24	93	100	0	0	Overlay-Rubber Hot Mix	02-14-2019
1127	111	MAGNOLIA ST	YORKTOWN AVE	MADELINE DR	A	AC	~	998	40	39,920	5/8/24	93	100	0	0	New Construction - Initial	01-01-1980
1503	521	RANCHO RD	SPA DR	GRAHAM ST	C	AC	~	777	26	20,202	5/8/24	93	100	0	0	New Construction - Initial	01-01-1980
85	769	ATLANTA AVE	HUNTINGTON ST	ORANGE AVE	A	AC	~	726	19	13,794	5/1/24	93	100	0	0	New Construction - Initial	01-01-1980
743	366	GOLDENWEST ST	ORANGE AVE	PALM AVE	A	AAC	~	1,236	44	57,884	4/30/24	93	89	11	0	Overlay - AC Structural	06-21-2013
1997	60920	WARNER AVE	LOOP	LOOP	P	AC	~	275	28	11,300	5/13/24	93	100	0	0	New Construction - AC	01-01-1980
111	76	BANNING AVE	TIDE LN	BROOKHURST LN	C	AC	~	1,086	61	66,246	3/26/24	93	100	0	0	New Construction - Initial	01-01-1980
240	349	BROOKHURST ST	CLIFF DR	ATLANTA AVE	A	AC	~	1,348	39	55,072	3/6/24	93	74	0	26	New Construction - Initial	01-01-1980
500	50240	DELAWARE ST	ELLIS AVE	MAIN ST	C	AC	~	1,240	60	74,400	4/9/24	93	67	0	33	Overlay-Rubber Hot Mix	12-02-2019
703	486	GARFIELD AVE	LINDSAY LN	PLUM TREE LN	A	AAC	~	1,335	15	20,025	3/11/24	93	100	0	0	Overlay - AC Structural	07-01-2010
703	490	GARFIELD AVE	BUSHARD ST	PAULINE LN	A	AAC	~	890	21	18,690	3/11/24	93	100	0	0	Overlay - AC Structural	06-21-2013
703	714	GARFIELD AVE	DELAWARE ST	MAIN ST	A	AC	~	1,403	45	63,135	3/5/24	93	65	0	35	New Construction - Initial	01-01-1980
703	715	GARFIELD AVE	BEACH BL	DELWARE ST	A	AAC	~	1,321	39	51,519	3/5/24	93	100	0	0	Overlay - AC Structural	06-12-2012
746	592	GOTHARD ST	ERNEST AVE	PROMENADE PARKWAY DR	A	AC	~	819	27	23,863	3/11/24	93	100	0	0	New Construction - Initial	01-01-1980
825	658	HEIL AVE	DEL MAR LN	BOLSA CHICA ST	A	AC	~	1,654	61	100,894	5/9/24	93	100	0	0	Overlay-Rubber Hot Mix	02-14-2019
887	66	INDIANAPOLIS AVE	MAGNOLIA ST	KELVINGROVE LN	C	AC	~	880	24	21,120	3/20/24	93	100	0	0	New Construction - Initial	01-01-1980
1127	114	MAGNOLIA ST	BEDEL DR	INDIANAPOLIS AVE	A	AAC	~	794	33	29,952	3/20/24	93	100	0	0	Overlay - AC Structural	06-13-2012
1127	550	MAGNOLIA ST	HYDE PARK DR	GARFIELD AVE	A	AC	~	970	40	38,800	3/5/24	93	67	0	33	New Construction - Initial	01-01-1980
1127	551	MAGNOLIA ST	SEAHURST DR	HYDE PARK DR	A	AC	~	825	40	33,000	3/5/24	93	60	0	40	New Construction - Initial	01-01-1980
1130	359	MAIN ST	GARFIELD AVE	HOLLY ST	A	AC	~	819	40	33,510	3/12/24	93	100	0	0	New Construction - Initial	01-01-1980
2082	277	YORKTOWN AVE	CANBERRA LN	WARD ST	C	AC	~	1,414	33	46,662	4/2/24	93	100	0	0	New Construction - Initial	01-01-1980
2082	304	YORKTOWN AVE	WINDWARD LN (S)	MAGNOLIA ST	C	AAC	~	1,192	33	39,336	4/10/24	93	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	7002	YORKTOWN AVE	WINDWARD LN	NEWLAND ST	A	AAC	~	1,452	33	47,916	4/10/24	93	100	0	0	Surface Treatment - Slurry Seal	07-01-2011
2082	720	YORKTOWN AVE	CANBERRA LN	BROOKHURST ST	C	AC	~	1,236	33	40,788	4/2/24	93	100	0	0	New Construction - Initial	01-01-1980
195	407	BOLSA CHICA ST	MCFADDEN AVE	DOVEWOOD DR	A	AAC	~	822	36	29,592	5/8/24	93	100	0	0	Overlay - AC Structural	09-11-2007
743	361	GOLDENWEST ST	PCH	ORANGE AVE	A	AAC	~	1,239	44	58,516	4/30/24	93	78	0	22	Overlay - AC Structural	06-21-2013
825	446	HEIL AVE	CLUBHOUSE LN	GRAHAM ST	A	AC	~	1,257	61	76,677	5/7/24	93	100	0	0	Surface Treatment - Slurry Seal	02-14-2019
1472	17003	PACIFIC VIEW	HUNTINGTON ST	TWIN DOLPHIN DR	A	AC	~	972	30	29,160	4/30/24	93	100	0	0	New Construction	01-01-1980
743	823	GOLDENWEST ST	DEEP HARBOR LN	YORKTOWN AVE	A	AAC	~	1,393	42	60,756	4/30/24	94	74	14	12	Overlay - AC Structural	06-21-2013
195	14	BOLSA CHICA ST	TASMAN DR	MCFADDEN AVE	A	AAC	~	854	36	30,744	5/8/24	94	100	0	0	Overlay - AC Structural	09-11-2007
743	803	GOLDENWEST ST	ORANGE AVE	PCH	A	AAC	~	1,239	42	55,038	4/30/24	94	75	0	25	Overlay - AC Structural	06-21-2012
9	13120	ADAMS AVE	DERBYSHIRE LN	BUSHARD ST	A	AC	~	818	40	32,720	3/19/24	94	100	0	0	New Construction - Initial	01-01-1980
9	289	ADAMS AVE	HARBOR ISLE LN	BUSHARD ST	A	AAC	~	1,527	40	65,960	4/2/24	94	100	0	0	Overlay - AC Structural	09-11-2007
9	748	ADAMS AVE	ROTHERT LN	BEACH BLVD	A	AAC	~	1,562	40	62,480	4/3/24	94	75	0	25	Overlay - AC Structural	08-01-2017
85	70	ATLANTA AVE	MAGNOLIA ST	BEACHWOOD LN	A	AC	~	868	33	28,644	4/1/24	94	63	0	37	Overlay-Rubber Hot Mix	07-01-2019
703	488	GARFIELD AVE	RANDI LN (S)	MAGNOLIA ST	A	AAC	~	820	21	17,220	3/11/24	94	100	0	0	Overlay - AC Structural	06-21-2013
703	54	GARFIELD AVE	KIPAHULU DR	SUVA LN	A	AC	~	1,118	33	36,894	4/8/24	94	100	0	0	New Construction - Initial	01-01-1980
887	301	INDIANAPOLIS AVE	EVERGLADES LN	BROOKHURST LN	A	AC	~	1,190	24	28,560	3/19/24	94	100	0	0	New Construction - Initial	01-01-1980
1127	559	MAGNOLIA ST	BANNING AVE	BERMUDA DR	A	AC	~	1,150	33	39,950	3/26/24	94	90	0	10	New Construction - Initial	01-01-1980
1130	143	MAIN ST	HOLLY ST	CLAY AVE	A	AAC	~	834	40	35,610	3/12/24	94	38	0	62	Overlay - AC Structural	07-11-2014
743	808	GOLDENWEST ST	PALM AVE	ORANGE AVE	A	AAC	~	1,236	42	54,412	4/30/24	94	84	16	0	Overlay - AC Structural	06-21-2013
743	381	GOLDENWEST ST	YORKTOWN AVE	DEEP HARBOR LN	A	AAC	~	1,393	42	60,756	4/30/24	94	83	0	17	Overlay - AC Structural	06-21-2013
743	382	GOLDENWEST ST	DEEP HARBOR LN	PALM AVE	A	AAC	~	1,360	42	59,370	4/30/24	94	89	0	11	Overlay - AC Structural	06-21-2013
825	632	HEIL AVE	GOLDENWEST ST	FOUNTAIN LN	A	AAC	~	1,452	61	88,572	5/7/24	94	100	0	0	Overlay - AC Structural	06-21-2016
825	633	HEIL AVE	EDWARDS ST	TRUDY LN	A	AC	~	1,310	61	79,910	5/7/24	95	88	0	12	New Construction - Initial	01-01-1980
27	659	ALGONQUIN ST	WARNER AVE	PEARCE DR	C	AC	~	1,575	60	94,500	5/6/24	95	100	0	0	Overlay-Rubber Hot Mix	12-02-2019
743	824	GOLDENWEST ST	PALM AVE	DEEP HARBOR LN	A	AAC	~	1,360	44	62,840	4/30/24	95	100	0	0	Overlay - AC Structural	06-21-2013
825	862	HEIL AVE	FOUNTAIN LN	EDWARDS ST	A	AAC	~	1,191	61	72,651	5/7/24	95	100	0	0	Overlay - AC Structural	06-21-2016
887	154	INDIANAPOLIS AVE	NEWLAND ST	IVES LN	C	AAC	~	1,362	24	32,688	5/1/24	95	100	0	0	Overlay - AC Structural	07-01-2017
887	507	INDIANAPOLIS AVE	MAGNOLIA ST	IVES LN	A	AAC	~	1,281	24	30,744	5/1/24	95	100	0	0	Overlay - AC Structural	07-01-2017
887	596	INDIANAPOLIS AVE	IVES LN	NEWLAND ST	C	AAC	~	1,362	24	32,688	5/1/24	95	100	0	0	Overlay - AC Structural	07-01-2017
887	65	INDIANAPOLIS AVE	IVES LN	MAGNOLIA ST	A	AAC	~	1,281	24	30,744	5/1/24	95	100	0	0	Overlay - AC Structural	07-01-2017
825	646	HEIL AVE	SPRINGDALE ST	CLUBHOUSE LN	A	AC	~	1,391	61	84,851	5/7/24	95	100	0	0	Surface Treatment - Slurry Seal	02-14-2019
9	500	ADAMS AVE	NEWLAND ST	ROTHERT LN	A	AAC	~	1,083	40	43,320	4/3/24	95	100	0	0	Overlay - AC Structural	08-01-2017
85	331	ATLANTA AVE	SCHOONER LN	NEWLAND ST	A	AAC	~	1,497	33	49,401	4/25/24	95	100	0	0	Overlay - AC Structural	06-21-2016
85	333	ATLANTA AVE	BUSHARD ST	STRATHMOOR LN	A	AC	~	1,450	33	47,850	3/18/24	95	100	0	0	New Construction - Initial	01-01-1980
85	509	ATLANTA AVE	MIRAMAR LN	NEWLAND ST	A	AAC	~	929	33	30,657	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
85	510	ATLANTA AVE	LEASURE LN	MIRAMAR LN	A	AAC	~	849	33	28,017	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017
85	511	ATLANTA AVE	MAGNOLIA ST	LEASURE LN	A	AAC	~	863	33	28,479	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017
85	512	ATLANTA AVE	BEACHWOOD LN	MAGNOLIA ST	A	AC	~	868	33	28,644	4/25/24	95	100	0	0	Overlay-Rubber Hot Mix	07-01-2019
85	514	ATLANTA AVE	BUSHARD ST	KIMBERWICK LN	A	AC	~	797	33	26,301	4/2/24	95	100	0	0	Overlay-Rubber Hot Mix	07-01-2019
85	67	ATLANTA AVE	NEWLAND ST	MIRAMAR LN	A	AAC	~	929	33	30,657	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017
85	68	ATLANTA AVE	MIRAMAR LN	LEASURE LN	A	AAC	~	849	33	28,017	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017
85	69	ATLANTA AVE	LEASURE LN	MAGNOLIA ST	A	AAC	~	863	33	28,479	4/25/24	95	100	0	0	Overlay - AC Structural	10-01-2017
85	771	ATLANTA AVE	BEACH BL	DELAWARE ST	A	AC	~	1,285	33	42,405	4/25/24	95	90	0	10	New Construction - Initial	01-01-1980
85	772	ATLANTA AVE	SCHOONER LN	BEACH BLVD	A	AAC	~	1,145	33	37,785	4/25/24	95	100	0	0	Overlay - AC Structural	06-21-2016
85	773	ATLANTA AVE	NEWLAND ST	SCHOONER LN	A	AAC	~	1,497	33	49,401	4/25/24	95	100	0	0	Overlay - AC Structural	06-21-2016
85	774	ATLANTA AVE	BROOKHUST ST	STRATHMOOR LN	A	AC	~	1,190	33	39,270	3/18/24	95	100	0	0	New Construction - Initial	01-01-1980
85	775	ATLANTA AVE	STRATHMOOR LN	BUSHARD LN	A	AC	~	1,450	33	47,850	3/18/24	95	100	0	0	New Construction - Initial	01-01-1980
111	440	BANNING AVE	BUSHARD ST	TIDE LN	C	AC	~	569	61	34,709	3/26/24	95	100	0	0	New Construction - Initial	01-01-1980
240	101	BROOKHURST ST	YORKTOWN AVE	CONSTITUTION DR	A	AC	~	950	39	39,050	3/6/24	95	100	0	0	New Construction - Initial	01-01-1980
240	287	BROOKHURST ST	TRAVELWAY	YORKTOWN AVE	A	AC	~	1,300	39	53,200	3/6/24	95	100	0	0	New Construction - Initial	01-01-1980
240	505	BROOKHURST ST	CONTINENTAL DR	CONSTITUTION DR	A	AC	~	768	39	32,952	4/8/24	95	100	0	0	New Construction - Initial	01-01-1980
240	543	BROOKHURST ST	CONSTITUTION DR	YORKTOWN DR	A	AC	~	950	39	39,300	4/8/24	95	100	0	0	New Construction - Initial	01-01-1980
240	63	BROOKHURST ST	CONSTITUTION DR	CONTINENTAL DR	A	AC	~	768	39	29,952	3/6/24	95	100	0	0	New Construction - Initial	01-01-1980
240	64	BROOKHURST ST	CONTINENTAL DR	ADAMS AVE	A	AC	~	917	39	38,763	3/6/24	95	100	0	0	New Construction - Initial	01-01-1980
240	728	BROOKHURST ST	TRAVELWAY	GARFIELD AVE	A	AC	~	1,336	39	55,104	4/8/24	95	100	0	0	New Construction - Initial	01-01-1980
240	729	BROOKHURST ST	YORKTOWN AVE	TRAVELWAY	A	AC	~	1,300	39	51,700	4/8/24	95	100	0	0	New Construction - Initial	01-01-1980
703	272	GARFIELD AVE	MAIN ST	DELAWARE ST	A	AC	~	1,403	45	63,135	3/5/24	95	100	0	0	New Construction - Initial	01-01-1980
703	46	GARFIELD AVE	MAGNOLIA ST	RANDI LN	A	AAC	~	820	33	27,060	3/5/24	95	100	0	0	Overlay - AC Structural	06-21-2013
703	489	GARFIELD AVE	PAULINE LN	RANDI LN	A	AAC	~	935	21	19,635	3/11/24	95	100	0	0	Overlay - AC Structural	06-21-2013
789	102	HAMILTON AVE	SURVEYOR CIR	MAGNOLIA ST	C	AC	~	1,570	50	78,500	4/1/24	95	100	0	0	New Construction - Initial	01-01-1980
789	334	HAMILTON AVE	NEWLAND ST	SURVEYOR CIR	C	AC	~	1,070	40	42,800	4/25/24	95	100	0	0	New Construction - Initial	01-01-1980
789	776	HAMILTON AVE	SURVEYOR CIR	NEWLAND ST	C	AC	~	1,070	27	28,890	4/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1127	554	MAGNOLIA ST	PIONEER DR	MADELINE DR	A	AC	~	763	40	30,520	3/20/24	95	100	0	0	New Construction - Initial	01-01-1980
1127	556	MAGNOLIA ST	INDIANAPOLIS AVE	BEDEL DR	A	AC	~	794	33	28,202	3/20/24	95	100	0	0	New Construction - Initial	01-01-1980
1130	268	MAIN ST	ELLIS AVE	DELAWARE ST	A	AAC	~	1,824	44	83,256	3/12/24	95	100	0	0	Overlay - AC Structural	08-06-2018
1130	358	MAIN ST	PROMENADE PKWY	GARFIELD AVE	A	AAC	~	742	39	31,188	3/11/24	95	100	0	0	Overlay - AC Structural	06-21-2016
1130	585	MAIN ST	CLAY AVE	HOLLY ST	A	AAC	~	834	39	32,526	3/12/24	95	100	0	0	Overlay - AC Structural	07-21-2014
1130	711	MAIN ST	PROMENADE PKWY	DELAWARE ST	A	AAC	~	1,243	40	51,220	3/12/24	95	100	0	0	Overlay - AC Structural	06-21-2016
1130	800	MAIN ST	GARFIELD AVE	PROMENADE PKWY	A	AAC	~	742	37	27,454	3/12/24	95	100	0	0	Overlay - AC Structural	06-21-2016
1130	801	MAIN ST	HOLLY ST	GARFIELD AVE	A	AAC	~	819	41	36,579	3/12/24	95	100	0	0	Overlay - AC Structural	07-22-2014
1724	17006	SLATER AVE	GOLDENWEST ST	FLOWER LN	A	AC	~	1,149	30	34,470	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	17008	SLATER AVE	GOTHARD ST	FLOWER LN	A	AC	~	834	30	25,020	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	253	SLATER AVE	GOTHARD ST	NICHOLS ST	A	AC	~	1,320	30	39,600	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	254	SLATER AVE	NICHOLS ST	QUEENS LN	A	AC	~	1,155	30	34,650	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	687	SLATER AVE	FLOWER LN	GOLDENWEST ST	A	AC	~	1,149	30	34,470	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	695	SLATER AVE	NICHOLS ST	GOTHARD ST	A	AC	~	1,320	30	39,600	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	696	SLATER AVE	QUEENS LN	NICHOLS ST	A	AC	~	1,155	30	34,650	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
1724	836	SLATER AVE	BEACH BLVD	QUEENS LN	A	AC	~	825	30	24,750	3/25/24	95	100	0	0	New Construction - Initial	01-01-1980
825	634	HEIL AVE	TRUDY LN	SPRINGDALE ST	A	AC	~	1,334	61	81,374	5/7/24	95	100	0	0	New Construction - Initial	01-01-1980
27	842	ALGONQUIN ST	PEARCE DR	HEIL AVE	C	AC	~	1,321	60	79,260	5/6/24	96	100	0	0	Overlay-Rubber Hot Mix	12-02-2019
240	286	BROOKHURST ST	GARFIELD AVE	TRAVELWAY	A	AC	~	1,336	39	53,354	3/6/24	96	46	0	54	New Construction - Initial	01-01-1980
653	434	FIRST ST	PCH	ORANGE AVE	A	AAC	~	1,132	36	40,752	5/1/24	96	100	0	0	Overlay - AC Structural	03-01-2010
1017	430	LAKE ST	INDIANAPOLIS AVE	ELEVENTH ST	A	AAC	~	1,320	29	38,280	5/1/24	96	47	26	27	Overlay - AC Structural	07-22-2014
1290	126	NEWLAND ST	BRIDGEPORT DR	YORKTOWN AVE	A	AC	~	1,156	60	69,360	5/7/24	96	100	0	0	New Construction - Initial	01-01-1980
1290	398	NEWLAND ST	GARFIELD AVE	BRIDGEPORT DR	A	AC	~	1,485	60	89,100	5/7/24	96	100	0	0	New Construction - Initial	01-01-1980
1017	317	LAKE ST	ELEVENTH ST	ADAMS AVE	A	AAC	~	1,320	29	38,280	5/1/24	96	56	27	17	Overlay - AC Structural	07-22-2014
1130	50230	MAIN ST	ELLIS AVE	BEACH BLVD	A	AAC	~	251	60	15,060	5/10/24	96	100	0	0	Overlay - AC Structural	08-06-2018
566	194	EDINGER AVE	BALLANTINE LN	EDWARDS ST	A	AC	~	1,201	39	46,839	4/27/24	96	69	31	0	Overlay-Rubber Hot Mix	07-01-2019
1472	60830	PACIFIC VIEW	HUNTINGTON ST	FIRST ST	C	AC	~	1,334	22	34,400	4/30/24	96	48	52	0	New Construction - AC	01-01-2016
1290	131	NEWLAND ST	EDINGER AVE	END	A	AC	~	1,321	60	79,260	4/29/24	96	0	0	100	New Construction - Initial	01-01-1980
566	193	EDINGER AVE	SPRINGDALE ST	BALLANTINE LN	A	AC	~	1,444	39	56,316	4/27/24	97	77	0	23	Overlay-Rubber Hot Mix	07-01-2019
566	635	EDINGER AVE	BALLANTINE LN	SPRINGDALE ST	A	AC	~	1,444	39	56,316	4/27/24	97	73	27	0	Overlay-Rubber Hot Mix	07-01-2019
194	457	BOLSA AVE	TRAVELWAY	GRAHAM ST	A	AC	~	648	38	24,624	4/27/24	97	16	0	84	New Construction - Initial	01-01-1980
85	328	ATLANTA AVE	HUNTINGTON ST	DELAWARE ST	A	AC	~	701	21	14,721	5/1/24	97	80	0	20	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1017	759	LAKE ST	ADAMS AVE	ELEVENTH ST	A	AAC	~	1,320	29	38,280	5/1/24	97	74	0	26	Overlay - AC Structural	07-22-2014
566	636	EDINGER AVE	EDWARDS ST	BALLANTINE LN	A	AC	~	1,201	39	46,839	4/27/24	97	100	0	0	Overlay-Rubber Hot Mix	07-01-2019
194	454	BOLSA AVE	GRAHAM ST	BOLSA CHICA ST	A	AC	~	2,718	38	103,284	4/27/24	97	11	0	89	New Construction - Initial	01-01-1980
1017	872	LAKE ST	ELEVENTH ST	INDIANAPOLIS AVE	A	AAC	~	1,320	29	38,280	5/1/24	97	83	0	17	Overlay - AC Structural	07-22-2014
1472	60840	PACIFIC VIEW	FIRST ST	HUNTINGTON ST	C	AC	~	1,334	15	27,150	4/30/24	98	100	0	0	New Construction - AC	01-01-2016
566	202	EDINGER AVE	WARREN LN	GRAHAM ST	A	AC	~	1,523	62	94,426	4/27/24	98	100	0	0	Overlay-Rubber Hot Mix	12-02-2019
1724	17007	SLATER AVE	FLOWER LN	GOTHARD ST	A	AC	~	834	30	25,020	3/25/24	98	76	0	24	New Construction - Initial	01-01-1980
1724	394	SLATER AVE	QUEENS LN	BEACH BLVD	A	AC	~	825	30	24,750	3/25/24	98	76	0	24	New Construction - Initial	01-01-1980
85	770	ATLANTA AVE	DELAWARE ST	HUNTINGTON ST	A	AC	~	701	40	28,040	4/25/24	98	100	0	0	New Construction - Initial	01-01-1980
566	87	EDINGER AVE	BOLSA CHICA ST	WARREN LN	A	AC	~	1,194	62	74,028	4/27/24	98	100	0	0	Overlay-Rubber Hot Mix	12-02-2019
1751	237	SPRINGDALE ST	WARNER AVE	PALO ALTO DR	A	AC	~	1,450	40	58,000	5/2/24	99	100	0	0	New Construction - Initial	01-01-1980
1751	238	SPRINGDALE ST	PALO ALTO DR	SLATER AVE	A	AC	~	1,190	40	47,600	5/2/24	99	100	0	0	New Construction - Initial	01-01-1980
1751	679	SPRINGDALE ST	PALO ALTO DR	WARNER AVE	A	AC	~	1,450	40	58,000	5/2/24	99	100	0	0	New Construction - Initial	01-01-1980
1751	680	SPRINGDALE ST	SLATER AVE	PALO ALTO DR	A	AC	~	1,190	40	47,600	5/2/24	99	100	0	0	New Construction - Initial	01-01-1980
1997	164	WARNER AVE	LOS PATOS AVE	SANDRA LEE LN	A	AC	~	1,238	40	55,384	5/13/24	99	100	0	0	New Construction - Initial	01-01-1980
1997	606	WARNER AVE	SANDRA LEE LN	LOS PATOS AVE	A	AC	~	1,238	36	44,568	5/13/24	99	100	0	0	New Construction - Initial	01-01-1980
751	221	GRAHAM ST	WARNER AVE	KENILWORTH DR	A	AC	~	1,190	30	35,700	5/3/24	99	100	0	0	New Construction - Initial	01-01-1980
751	222	GRAHAM ST	KENILWORTH DR	SLATER AVE	A	AC	~	1,450	30	43,500	5/3/24	99	100	0	0	New Construction - Initial	01-01-1980
751	663	GRAHAM ST	KENILWORTH DR	WARNER AVE	A	AC	~	1,190	30	35,700	5/3/24	99	100	0	0	New Construction - Initial	01-01-1980
751	664	GRAHAM ST	SLATER AVE	KENILWORTH DR	A	AC	~	1,450	30	43,500	5/3/24	99	100	0	0	New Construction - Initial	01-01-1980
566	100	EDINGER AVE	BEACH BL	NEWLAND ST	A	AC	~	2,638	31	81,778	4/29/24	100	100	0	0	New Construction - Initial	01-01-1980
566	542	EDINGER AVE	NEWLAND ST	BEACH BLVD	A	AC	~	2,638	31	81,778	4/29/24	100	100	0	0	New Construction - Initial	01-01-1980
85	332	ATLANTA AVE	STRATHMOOR LN	BROOKHURST ST	A	AC	~	1,190	33	39,270	3/18/24	100	52	29	19	New Construction - Initial	01-01-1980
85	72	ATLANTA AVE	KIMBERWICK LN	BUSHARD ST	A	AC	~	797	33	26,301	4/1/24	100	100	0	0	Overlay-Rubber Hot Mix	07-01-2019
111	342	BANNING AVE	MALIBU LN	BUSHARD ST	C	AC	~	1,086	61	66,246	3/26/24	100	0	0	0	New Construction - Initial	01-01-1980
111	343	BANNING AVE	MAGNOLIA ST	MALIBU LN	C	AC	~	1,658	61	101,138	3/26/24	100	0	0	0	New Construction - Initial	01-01-1980
743	26	GOLDENWEST ST	BOLSA AVE	OXFORD DR	A	AC	~	797	40	31,880	5/6/24	100	0	0	0	New Construction - Initial	01-01-1980
743	468	GOLDENWEST ST	OXFORD DR	BOLSA AVE	A	AC	~	797	40	36,880	5/6/24	100	0	0	0	New Construction - Initial	01-01-1980
1127	50550	MAGNOLIA ST	WARNER AVE	BRIDGE	A	AC	~	1,280	60	86,600	5/13/24	100	0	0	0	New Construction - AC	01-01-1980
1290	120	NEWLAND ST	TALBERT AVE	SPRINGHURST AVE	A	AC	~	900	30	27,000	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	121	NEWLAND ST	SPRINGHURST AVE	NEWGATE DR	A	AC	~	1,207	30	36,210	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	122	NEWLAND ST	NEWGATE DR	ELLIS AVE	A	AC	~	534	30	16,020	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	256	NEWLAND ST	SLATER AVE	PASEO CIR	A	AC	~	1,346	30	40,380	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	257	NEWLAND ST	PASEO CIR	TALBERT AVE	A	AC	~	1,287	30	38,610	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	562	NEWLAND ST	SPRINGHURST AVE	TALBERT AVE	A	AC	~	900	27	24,300	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	563	NEWLAND ST	NEWGATE DR	SPRINGHURST AVE	A	AC	~	1,207	27	32,589	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	564	NEWLAND ST	ELLIS AVE	NEWGATE DR	A	AC	~	534	27	14,418	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	698	NEWLAND ST	PASEO CIR	SLATER AVE	A	AC	~	1,346	27	36,342	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1290	699	NEWLAND ST	TALBERT AVE	PASEO CIR	A	AC	~	1,287	27	34,749	4/29/24	100	0	0	0	New Construction - Initial	01-01-1980
1631	17011	SAYBROOK LN	HEIL AVE	SANTA BARBARA LN	A	AC	~	1,317	60	79,020	5/6/24	100	0	0	0	New Construction - Initial	01-01-1980
1631	17012	SAYBROOK LN	SANTA BARBARA LN	EDINGER AVE	A	AC	~	1,326	60	79,560	5/6/24	100	0	0	0	New Construction - Initial	01-01-1980
								167.9		**34,298,620**							
		Locals															
2091	15455	VINTAGE DR	AFTON CIR	KELSO DR	E	AC	7	750	36	27,750	4/15/20	18	10	84	6	New Construction - Initial	01-01-1980
1053	15473	KELVINGROVE LN	INDIANAPOLIS AVE	CDS	E	AC	7	493	32	17,576	2/11/20	21	41	57	2	New Construction	01-01-1980
785	14412	FRITCH DR	SPRINGDALE ST	STILL HARBOR LN	E	AC	5	180	36	6,480	3/28/22	21	4	96	0	New Construction	01-01-1980
1541	15911	PLUM TREE LN	GARFIELD AVE	WINDLASS DR	E	AC	7	438	36	16,018	2/19/20	22	10	89	1	Surface Treatment - Slurry Seal	07-14-2021
451	15408	CLARKDALE DR	EDGEWOOD LN	END	E	AC	7	720	34	24,480	8/21/23	23	5	77	18	Surface Treatment - Slurry Seal	03-01-2011
1218	15964	MADELINE DR	MAGNOLIA ST	OCCIDENTAL LN	E	AC	7	1,121	36	41,106	2/18/20	24	3	92	5	New Construction	01-01-1980
686	13362	ENCINO CIR	SANTA YNEZ DR	CDS	E	AC	5	350	36	13,950	3/15/22	24	19	81	0	Surface Treatment - Slurry Seal	10-01-2012
188	14320	BARBADOS CIR	DORSETT DR	CDS	E	AC	9	570	36	22,020	8/30/23	24	6	94	0	New Construction	01-01-1980
1894	14334	STILWELL DR	SHAW LN	MAGNOLIA ST	E	AC	9	179	36	6,444	8/30/23	24	4	96	0	New Construction - Initial	01-01-1980
147	14730	ARIANA CIR	ALSUNA LN	CDS (E)	E	AC	6	140	32	6,840	6/29/21	27	8	73	19	New Construction	01-01-1980
842	13259	GOVIN CIR	NORMANDY LN	CDS	E	AC	3	238	32	8,866	3/17/22	27	16	83	1	New Construction	01-01-1980
1646	14708	RIVERVIEW CIR	OCEANHILL DR	CDS	E	AC	6	248	32	9,436	8/15/23	27	6	94	0	Surface Treatment - Slurry Seal	03-01-2011
1277	14411	MC CARTHY DR	SPRINGDALE ST	STILL HARBOR LN	E	AC	5	180	36	6,480	3/14/22	28	9	91	0	New Construction	01-01-1980
620	13855	DOWN DR	TOWAY LN	EDWARDS ST	E	AC	1	531	36	19,366	5/8/24	29	19	81	0	New Construction	01-01-1980
4040	50210	KENBROOK DR	BELLFIELD LN	FOSS LN	E	AC	5	567	33	18,711	3/28/22	29	15	78	7	New Construction - Initial	01-01-1980
1023	15882	JOLIET AVE	FLORIDA ST	GEORGIA ST	E	AC	6	345	37	12,765	8/15/23	29	10	89	1	Surface Treatment - Slurry Seal	03-01-2011

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
239	15163	BERSHIRE DR	SHOREHAM LN	STAMONT LN	E	AC	5	782	36	27,504	3/12/20	30	12	88	0	New Construction	01-01-1980
5350	60540	16TH ST	PCH	PACIFIC AVE N	E	AC	2	158	22	3,476	5/21/20	30	2	77	21	New Construction - Initial	01-01-1980
862	14420	GRIMSBY DR	TALBERT AVE	BELLFIELD LN	E	AC	5	160	36	4,760	3/28/22	30	6	94	0	New Construction	01-01-1980
1125	13400	LARCREST CIR	FOXSHIELD DR	CDS	E	AC	5	250	36	10,250	3/28/22	30	5	95	0	New Construction	01-01-1980
1067	14105	KILKENNY LN	ALLEY MALLOY DR	INDIANAPOLIS AVE	E	AC	9	152	36	5,472	8/23/23	30	7	93	0	Surface Treatment - Slurry Seal	03-01-2011
200	14248	BASTIA LN	ATLANTA AVE	ATLANTA AVE	E	AC	9	72	36	2,592	7/10/16	31	43	48	9	New Construction	01-01-1980
608	13454	DOLPHINWOOD DR	OXBORO LN	END	E	AC	5	186	36	6,408	3/11/20	31	12	88	0	New Construction	01-01-1980
312	13947	BRIDGEWAY LN	GARFIELD AVE	BROOKSIDE DR	E	AC	7	410	36	14,760	2/19/20	32	18	80	2	Surface Treatment - Slurry Seal	07-15-2021
477	13405	COLLINS CIR	ARNADA DR	CDS	E	AC	5	338	36	13,668	3/14/22	32	6	94	0	New Construction	01-01-1980
1162	13621	LIDO LN	MARIPOSA DR	SANTA YNEZ DR	E	AC	5	320	36	12,660	3/15/22	32	7	92	1	New Construction - Initial	01-01-1980
1063	14902	KERN DR	BERLIN LN	CDS	E	AC	5	105	36	5,030	3/22/22	32	14	83	3	New Construction	01-01-1980
1836	13856	SLIGO CIR	CARRIE LN	END	E	AC	1	419	36	16,334	4/1/22	32	9	91	0	New Construction	01-01-1980
349	14663	CALIFORNIA ST	NASHVILLE AVE	OSWEGO AVE	E	AC	6	330	36	11,880	8/15/23	32	18	82	0	Surface Treatment - Slurry Seal	03-01-2011
654	15962	EDGEWOOD LN	DEEPVIEW DR	CLARKDALE DR	E	AC	7	1,049	36	37,764	8/21/23	32	4	85	11	Surface Treatment - Slurry Seal	03-01-2011
1869	15546	ST AUGUSTINE DR	SAND DOLLAR LN	BRETON LN	E	AC	9	769	36	27,684	8/30/23	32	6	90	4	New Construction	01-01-1980
381	13379	CARDIFF CIR	MARYPORT DR	END	E	AC	5	75	36	3,950	5/13/24	32	34	66	0	New Construction	01-01-1980
1809	15162	SHOREHAM LN	BRIGHTON DR	BERSHIRE DR	E	AC	5	913	36	32,292	3/12/20	33	7	93	0	New Construction	01-01-1980
691	14741	ENGLAND ST	YORKTOWN AVE	CDS	E	AAC	6	537	36	22,365	7/8/21	33	26	64	10	Overlay - AC Structural	11-28-2019
1139	15489	LAWSON LN	NIAGARA DR	MEREDITH DR	E	AC	8	516	35	18,060	2/28/22	33	7	81	12	New Construction - Initial	01-01-1980
4040	50220	KENBROOK DR	FOSS LN	SPRINGDALE ST	E	AC	5	180	33	5,440	3/28/22	33	5	95	0	New Construction - Initial	01-01-1980
1157	13634	LEWIS LN	GALIPEAN DR	WINTERGREEN DR	E	AC	5	531	36	19,866	3/28/22	33	18	79	3	New Construction - Initial	01-01-1980
1561	13291	PRAIRIE DR	DOLORES ST	ALLEY LE GRAND LN	E	AC	2	201	36	8,556	3/29/22	33	5	93	2	New Construction	01-01-1980
344	13564	CAIN AVE	PALMDALE ST	END	E	AC	3	199	26	5,174	4/6/22	33	43	57	0	New Construction	01-01-1980
1988	14170	TITAN LN	CLOUDHAVEN DR	INDIANAPOLIS AVE	E	AC	7	156	36	5,616	2/10/20	34	33	67	0	Surface Treatment - Slurry Seal	07-15-2021
113	13360	ALTA VISTA CIR	SANTA YNEZ DR	END	E	AC	5	350	36	13,950	3/15/22	34	10	78	12	Surface Treatment - Slurry Seal	10-01-2012
581	15407	DEEPVIEW DR	EDGEWOOD LN	RUMFORD LN	E	AC	7	588	36	21,168	8/21/23	34	10	82	8	Surface Treatment - Slurry Seal	03-01-2011
2063	14033	VELVET CIR	FLAGSTONE LN	END	E	AC	7	466	34	15,844	8/21/23	34	6	88	6	Surface Treatment - Slurry Seal	03-01-2011
835	13268	GOLD CIR	FLINT DR	CDS	E	AC	3	168	32	6,626	5/13/24	35	31	69	0	New Construction	01-01-1980
2092	14126	VISCOUNT DR	IMPERIAL COVE LN	CROWN REEK LN	E	AC	7	250	36	9,750	2/12/20	35	32	67	1	Surface Treament- Single Chip Sea	07-15-2021
4050	50250	LOOKOUT LN	NAPLES DR	KEEL DR	E	AC	7	500	35	17,500	2/19/20	35	15	84	1	Surface Treatment - Slurry Seal	07-15-2021
1219	13623	MADERA LN	SANTA YNEZ DR	CDS	E	AC	5	485	36	19,020	3/15/22	35	23	75	2	Surface Treatment - Slurry Seal	10-01-2012
341	13837	CABOT CIR	WINSLOW DR	END	E	AC	1	339	36	13,454	5/8/24	36	28	53	19	New Construction	01-01-1980
2091	14124	VINTAGE DR	ADAMS AVE	AFTON CIR	E	AC	7	105	36	3,780	2/12/20	36	33	67	0	New Construction - Initial	01-01-1980
1508	13806	PELICAN LN	MC FADDEN AVE	ALLEY MC FADDEN AVE	E	AC	1	161	36	5,796	3/21/22	36	10	84	6	New Construction	01-01-1980
1792	14562	SHEFFIELD LN	CORNWALL DR	RALEIGH DR	E	AC	8	125	24	3,000	3/9/22	37	16	84	0	New Construction	01-01-1980
683	13355	ELSINORE CIR	SONOMA DR	CDS	E	AC	5	179	36	7,994	3/15/22	37	12	85	3	Surface Treatment - Slurry Seal	10-01-2012
427	13718	CHEMICAL LN	MC FADDEN AVE.	RESEARCH DR	E	AC	1	1,116	40	44,640	3/21/22	37	8	84	8	New Construction	01-01-1980
1575	13827	PRODUCER LN	MC FADDEN AVE	RESEARCH DR	E	AC	1	1,116	40	44,640	3/21/22	37	7	86	7	New Construction	01-01-1980
2176	13633	WINTERGREEN DR	STILL HARBOR LN	LEWIS LN	E	AC	5	599	36	22,314	3/28/22	37	7	93	0	Surface Treatment - Slurry Seal	10-01-2012
1089	13570	KOLEDO LN	ALLEY SLATER AVE	SLATER AVE	E	AC	4	150	36	5,400	4/6/22	37	20	80	0	New Construction	01-01-1980
22	13843	ALBION DR	PLYMOUTH LN	ALDEN LN	E	AC	1	780	36	28,080	5/8/24	37	12	76	12	New Construction	01-01-1980
124	14171	ANCHOR CIR	CLOUDHAVEN DR	CDS	E	AC	7	164	32	6,748	2/10/20	38	52	48	0	Surface Treatment - Slurry Seal	07-15-2021
260	13627	BLUE FOX CIR	CAPSTONE DR	END	E	AC	3	321	36	14,056	2/11/20	38	19	81	0	Surface Treatment - Slurry Seal	10-01-2012
323	13948	BROOKSIDE DR	BRIDGEWAY LN	HOMESTEAD LN	E	AC	7	306	36	11,016	2/19/20	38	21	79	0	Surface Treatment - Slurry Seal	07-15-2021
1893	13393	STILL HARBOR LN	FENLEY DR	MC CARTHY DR	E	AC	5	460	36	17,310	3/14/22	38	14	86	0	Surface Treatment - Slurry Seal	10-01-2012
1779	14219	SEVEN SEAS LN	INDIANAPOLIS AVE	INDIANAPOLIS AVE	E	AC	9	204	36	7,344	8/24/23	38	15	85	0	New Construction	01-01-1980
2175	13830	WINSLOW DR	AULNAY LN	END	E	AC	1	397	36	15,542	5/8/24	39	21	79	0	New Construction - Initial	01-01-1980
482	13825	COMMERCE LN	MC FADDEN AVE	RESEARCH DR	E	AC	1	1,116	40	44,640	3/21/22	39	8	83	9	New Construction	01-01-1980
681	15880	ELMIRA AVE	CALIFORNIA ST	DELAWARE ST	E	AC	9	330	37	12,210	8/24/23	39	26	69	5	New Construction	01-01-1980
888	15470	HARBOR ISLE LN	ADAMS AVE	GUSS DR	E	AC	7	1,151	36	42,186	2/11/20	40	33	57	10	Surface Treatment - Slurry Seal	07-15-2021
593	14036	DENVER LN	YORKTOWN AVE	SALT LAKE DR	E	AC	7	166	36	5,976	2/24/20	40	51	49	0	Surface Treatment - Slurry Seal	07-15-2021
237	15777	BERLIN LN	ROGERS DR	KERN DR	E	AC	5	1,238	36	44,818	3/22/22	40	12	87	1	New Construction	01-01-1980
1144	15542	LEASURE LN	ATLANTA AVE	SATTERFIELD DR	E	AC	9	433	36	16,338	8/30/23	40	22	73	5	New Construction - Initial	01-01-1980
392	15921	CARRIE LN	SLIGO CIR	EDINGER AVE	E	AC	1	1,169	36	42,084	5/8/24	41	24	76	0	New Construction	01-01-1980
1274	15337	MAYFLOWER LN	MC FADDEN AVE	PRISCILLA DR	E	AC	1	961	36	34,846	5/8/24	41	10	70	20	New Construction	01-01-1980
558	14402	DAN LN	BOLSA AVE	BUCKINGHAM DR	E	AC	1	314	40	12,560	2/10/20	41	19	81	0	New Construction	01-01-1980
1246	15150	MARCELLENA DR	LIDO LN	GURNEY LN	E	AC	5	529	36	20,184	3/15/22	41	14	86	0	Surface Treatment - Slurry Seal	10-01-2012
1153	13598	LENNOX DR	BRIMHALL LN	EDWARDS ST	E	AC	3	180	36	6,480	3/17/22	41	12	88	0	New Construction - Initial	01-01-1980
1623	14862	REMINGTON LN	WARNER AVE	ROGERS DR	E	AC	5	191	36	6,876	3/22/22	41	35	65	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1562	13838	PRATT CIR	WINSLOW DR	END	E	AC	1	339	36	13,454	3/30/22	41	17	83	0	New Construction	01-01-1980
227	15103	BELLINGER DR	BALLANTINE LN	CDS	E	AC	3	880	36	32,930	4/1/22	41	29	71	0	New Construction	01-01-1980
2288	50370	ADAMS AVE FRONTAGE	VINTAGE LN	CROWN REEF LN	E	AC	7	505	30	15,150	2/12/20	42	23	76	1	Surface Treatment - Slurry Seal	07-15-2021
210	15380	BAYWATER LN	SUNCORAL DR	CLIFFSIDE DR	E	AC	7	646	36	23,506	2/19/20	42	17	71	12	Surface Treatment - Slurry Seal	07-15-2021
595	13363	DESTRY CIR	MARCELLENA DR	CDS	E	AC	5	135	36	6,300	3/15/22	42	13	87	0	Surface Treatment - Slurry Seal	10-01-2012
1319	13361	MIRA LOMA CIR	SANTA YNEZ DR	CDS	E	AC	5	350	36	13,950	3/15/22	42	26	74	0	Surface Treatment - Slurry Seal	10-01-2012
1909	15771	SUMMERDALE DR	PINEHURST LN	ALLEY PINEHURST LN	E	AC	5	125	36	4,500	3/29/22	42	18	82	0	Surface Treatment - Slurry Seal	10-01-2012
537	15330	CROSS DR	GRAHAM ST	ALLEY TAFT LN	E	AC	1	548	36	19,728	4/1/22	42	17	83	0	New Construction	01-01-1980
970	14977	HUNTINGTON VILLAGE	MC FADDEN AVE	CENTER AVE	E	AC	4	1,711	44	75,284	4/1/22	42	30	65	5	New Construction	01-01-1980
141	14332	ARCEL CIR	KROLL LN	END	E	AC	9	167	32	7,844	8/30/23	42	6	91	3	New Construction	01-01-1980
1680	16009	ROYALIST DR	WILLET LN	STANDISH LN	E	AC	1	780	36	28,080	5/8/24	42	24	70	6	New Construction	01-01-1980
133	13853	ANTRIM CIR	TOWAY LN	END	E	AC	1	419	36	16,334	5/8/24	43	11	63	26	New Construction	01-01-1980
2039	13854	TYRONE CIR	TOWAY LN	END	E	AC	1	419	36	16,334	5/8/24	43	23	77	0	New Construction - Initial	01-01-1980
247	15401	BIKINI LN	SAMOA DR	KUKUI DR	E	AC	8	802	36	30,372	3/3/22	43	9	86	5	New Construction	01-01-1980
869	13622	GURNEY LN	ATHENA DR	MARCELLENA DR	E	AC	5	400	36	15,540	3/15/22	43	24	76	0	Surface Treatment - Slurry Seal	10-01-2012
1365	13597	MYCROFT LN	SHAYNE DR	HEIL AVE	E	AC	3	170	36	6,120	3/17/22	43	13	86	1	New Construction	01-01-1980
486	13826	COMPUTER LN	MC FADDEN AVE	RESEARCH DR	E	AC	1	1,116	40	44,640	3/21/22	43	21	78	1	New Construction	01-01-1980
1023	15876	JOLIET AVE	DELAWARE ST	ENGLAND ST	E	AC	6	331	37	12,247	8/15/23	43	19	81	0	New Construction	01-01-1980
1542	13836	PLYMOUTH LN	ROYALIST DR	EDINGER AVE	E	AC	1	640	36	23,040	5/7/24	44	7	93	0	New Construction	01-01-1980
1680	15336	ROYALIST DR	SPRINGDALE ST	PLYMOUTH LN	E	AC	1	811	36	29,196	5/7/24	44	12	88	0	New Construction	01-01-1980
715	15974	FALKIRK LN	RIDGEBURY DR	END	E	AC	5	1,100	36	39,024	3/12/20	44	12	82	6	New Construction	01-01-1980
754	16001	FLINT DR	BALLANTINE LN	EDWARDS ST	E	AC	3	1,201	36	43,236	3/17/22	44	22	75	3	New Construction	01-01-1980
1063	15782	KERN DR	BERLIN LN	TIFFANY CIR	E	AC	5	849	36	30,564	3/22/22	44	27	73	0	New Construction	01-01-1980
969	14648	HUNTINGTON ST	BALTIMORE AVE	CHICAGO AVE	E	AC	9	329	37	12,173	8/14/23	44	10	79	11	New Construction	01-01-1980
2012	14048	TRIDENT LN	DOLPHIN DR	CLIPPER DR	E	AC	7	807	36	29,052	2/24/20	45	36	62	2	Surface Treatment - Slurry Seal	07-15-2021
126	13712	ANDAMAN LN	CASPIAN CIR	ALLEY MCFADDEN AVE	E	AC	1	147	36	5,292	3/21/22	45	7	93	0	New Construction	01-01-1980
714	13238	FAIRWAY LN	SNEAD DR	MEADOWLARK DR	E	AC	3	737	36	26,782	3/23/22	45	9	80	11	New Construction	01-01-1980
1259	15091	MARSHALL DR	ACE LN	NASSAU LN	E	AC	3	1,165	36	42,440	3/23/22	45	15	84	1	New Construction	01-01-1980
169	13350	AUTUMN CIR	CDS	ROSEMONT DR	E	AC	5	320	36	13,020	3/29/22	45	21	79	0	New Construction	01-01-1980
1280	14428	MC LAREN LN	ANNIK DR	BRABHAM DR	E	AC	8	260	36	9,360	2/18/20	46	19	81	0	Surface Treatment - Slurry Seal	07-15-2021
1460	15098	ORLANDO DR	SPRINGDALE ST	BRADBURY LN	E	AC	3	668	36	24,048	3/17/22	46	12	88	0	New Construction	01-01-1980
1629	15933	RESEARCH DR	CHEMICAL LN	GRAHAM ST	E	AC	1	1,170	40	46,800	3/21/22	46	17	79	4	New Construction	01-01-1980
195	15765	BOLSA CHICA ST	WARNER AVE	LOS PATOS AVE	E	AC	2	1,326	100	97,600	3/22/22	46	13	80	7	New Construction - Initial	01-01-1980
812	14879	GERSHWIN DR	GRAHAM ST	BERLIN LN	E	AC	5	167	36	6,012	3/22/22	46	20	80	0	New Construction	01-01-1980
347	13203	CALHOUN DR	PHELPS LN	SAYBROOK LN	E	AC	2	621	36	22,356	3/24/22	46	29	71	0	New Construction	01-01-1980
581	14030	DEEPVIEW DR	RUMFORD LN	DOREMERE DR	E	AC	7	171	36	6,156	8/21/23	46	9	91	0	Surface Treatment - Slurry Seal	03-01-2011
617	15541	DORSETT DR	MIRAMAR LN	POSTON LN	E	AC	9	1,279	36	46,794	8/30/23	46	18	78	4	New Construction	01-01-1980
626	13375	DREY LN	CAPSTONE DR	MANHATTAN DR	E	AC	3	697	36	25,092	2/11/20	47	37	63	0	Surface Treatment - Slurry Seal	10-01-2012
167	14041	AUSTIN DR	PHOENIX LN	TOPEKA LN	E	AC	7	252	36	9,072	2/24/20	47	44	56	0	Surface Treatment - Slurry Seal	07-15-2021
1185	15591	MC FADDEN AVE	PELICAN LN	CHEMICAL LN	E	AC	1	1,028	60	61,030	3/21/22	47	12	80	8	New Construction	01-01-1980
641	13852	DUNN DR	TOWAY LN	EDWARDS ST	E	AC	1	531	36	19,116	3/30/22	47	9	91	0	New Construction	01-01-1980
2187	13249	WOODSTOCK LN	SOFTWIND DR	MONTECITO DR	E	AC	3	260	36	9,610	5/13/24	47	10	58	32	New Construction - Initial	01-01-1980
2054	13829	VANE CIR	AULNAY LN	END	E	AC	1	397	36	15,542	5/8/24	47	32	68	0	New Construction - Initial	01-01-1980
5350	60990	16TH ST	END N	PCH	E	AC	2	77	26	2,002	5/6/24	48	100	0	0	New Construction - AC	01-01-1980
149	13409	ARMADA DR	COLLINS CIR	EDWARDS ST	E	AC	5	308	36	11,088	5/13/24	48	16	74	10	New Construction	01-01-1980
1959	15159	TAURUS LN	ROCK DR	CAPSTONE DR	E	AC	3	573	36	21,628	2/11/20	48	30	70	0	New Construction - Initial	01-01-1980
131	15583	ANNIK DR	MC LAREN LN.	HICKORY LN	E	AC	8	940	36	35,340	2/18/20	48	33	67	0	Surface Treatment - Slurry Seal	07-15-2021
717	13410	FALLINGWATER DR	FLINTSTONE LN.	EDWARDS ST	E	AC	5	1,335	36	48,060	3/14/22	48	11	89	0	New Construction	01-01-1980
692	14896	ENGLEWOOD CIR	FREEBORN DR	CDS	E	AC	5	364	36	16,704	3/15/22	48	19	69	12	Surface Treatment - Slurry Seal	10-01-2012
1082	15271	KISER DR	STILL HARBOR LN	PRESCOTT LN	E	AC	5	858	36	32,388	3/28/22	48	38	62	0	Surface Treatment - Slurry Seal	10-01-2012
1529	15269	PINEHURST LN	SUMMERDALE DR	PALO ALTO DR	E	AC	5	860	36	32,100	3/29/22	48	32	68	0	Surface Treatment - Slurry Seal	10-01-2012
844	13305	GRAHAM PL	HEIL AVE	CDS	E	AC	2	550	36	21,050	4/5/22	48	36	64	0	New Construction	01-01-1980
1669	15118	ROOSEVELT LN	STALLION CIR	PEARCE ST	E	AC	2	515	36	18,540	4/5/22	48	19	72	9	New Construction	01-01-1980
681	15867	ELMIRA AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	330	37	12,210	8/24/23	48	29	51	20	New Construction	01-01-1980
1542	13846	PLYMOUTH LN	PRISCILLA DR	ROYALIST DR	E	AC	1	1,040	36	37,440	5/8/24	48	48	52	0	New Construction	01-01-1980
2288	50380	ADAMS AVE FRONTAGE	CROWN REEF LN	MAYPORT LN	E	AC	7	683	30	20,490	2/12/20	49	20	80	0	Surface Treatment - Slurry Seal	07-15-2021
1632	13599	REUBENS DR	BALLANTINE LN	BRIMHALL LN	E	AC	3	1,014	36	36,504	3/17/22	49	16	83	1	New Construction	01-01-1980
151	15172	ARROWHEAD DR	STILL HARBOR LN	CDS	E	AC	5	336	36	13,596	3/28/22	49	57	43	0	Surface Treatment - Slurry Seal	10-01-2012
2058	14413	VARSITY DR	HALLCROFT LN	IVORYCREST LN	E	AC	5	345	36	12,420	3/28/22	49	24	76	0	Surface Treatment - Slurry Seal	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1629	15332	RESEARCH DR	COMPUTER LN	PRODUCER LN	E	AC	1	1,097	40	43,880	4/1/22	49	7	81	12	New Construction	01-01-1980
2058	13415	VARSITY DR	HIGHLAND LN	CDS	E	AC	5	383	36	13,788	4/4/22	49	22	67	11	New Construction - Initial	01-01-1980
999	14032	IVY CIR	FLAGSTONELN	END	E	AC	7	466	34	15,844	8/21/23	49	16	57	27	Surface Treatment - Slurry Seal	03-01-2011
1558	14323	POSTON LN	DORSETT DR	STILLWELL DR	E	AC	9	659	36	24,474	8/30/23	49	14	86	0	New Construction	01-01-1980
1583	13850	PURITAN CIR	ROYALIST DR	END	E	AC	1	530	36	20,330	5/8/24	49	53	42	5	New Construction	01-01-1980
550	13251	DAGNY CIR	NATIONAL LN	CDS	E	AAC	3	343	36	13,598	5/13/24	49	33	64	3	Overlay - AC Structural	05-11-2018
2304	60810	KELLEY CIR	PRESCOTT LN	CDS	E	AC	5	410	36	18,360	5/13/24	50	21	79	0	New Construction - AC	01-01-1980
5440	60680	25TH ST	PCH	PACIFIC AVE N	E	AC	2	215	22	4,730	5/21/20	50	26	42	32	New Construction - Initial	01-01-1980
2198	13354	YOSEMITE CIR	SONOMA DR	CDS	E	AC	5	250	36	10,350	3/15/22	50	15	85	0	Surface Treatment - Slurry Seal	10-01-2012
1014	13266	JEREVA CIR	FLINT DR	CDS	E	AC	3	99	32	4,418	3/17/22	50	44	56	0	New Construction	01-01-1980
1313	13611	MILO ST	LYNN ST	HOSKINS ST	E	AC	2	330	36	11,664	3/22/22	50	14	86	0	New Construction	01-01-1980
585	13180	DEL MAR LN	MEADOWLARK DR	CALIENTE DR	E	AC	2	863	36	31,068	3/24/22	50	10	90	0	New Construction	01-01-1980
1090	15033	KONA DR	WAIKIKI LN	BOLSA CHICA ST	E	AC	2	670	36	24,120	3/24/22	50	27	73	0	New Construction	01-01-1980
2114	13141	WARREN LN	AUDREY DR	SISSON DR	E	AC	2	850	36	30,600	3/24/22	50	28	71	1	New Construction - Initial	01-01-1980
1572	15338	PRISCILLA DR	PLYMOUTH LN	MAYFLOWER LN	E	AC	1	1,040	36	37,690	3/30/22	50	21	79	0	New Construction	01-01-1980
1169	14692	LINCOLN AVE	ALLEY ENGLAND ST	FLORIDA ST	E	AC	6	165	37	6,105	8/15/23	50	35	40	25	Surface Treatment - Slurry Seal	03-01-2011
969	14649	HUNTINGTON ST	ATLANTA AVE	BALTIMORE AVE	E	AC	9	335	37	12,395	8/24/23	50	14	86	0	New Construction	01-01-1980
403	15507	CASTLEGATE DR	LANTERN LN	BUSHARD ST	E	AC	9	548	36	19,506	5/8/24	51	32	68	0	Surface Treatment - Slurry Seal	05-11-2018
837	15156	GOLDEN VIEW LN	ROCK DR	FENWICK DR	E	AC	3	726	36	27,636	2/11/20	51	43	57	0	Surface Treatment - Slurry Seal	10-01-2012
258	14597	BUSHARD ST	LITCHFIELD DR	VELARDO DR	E	AC	8	259	28	7,252	2/18/20	51	19	77	4	New Construction	01-01-1980
2139	13466	WESTLAKE CIR	INLET DR	END	E	AC	5	478	36	19,208	2/24/20	51	35	64	1	Surface Treatment - Slurry Seal	10-01-2012
1415	14895	NORTHFIELD LN	MEADOWCREST DR	FREEBORN DR	E	AC	5	610	36	21,960	3/15/22	51	16	84	0	Surface Treatment - Slurry Seal	10-01-2012
2187	15097	WOODSTOCK LN	MONTECITO DR	CHRISTY DR	E	AC	3	1,420	36	51,370	3/17/22	51	33	67	0	New Construction - Initial	01-01-1980
8	13246	ACE LN	VENTURI DR	MARSHALL DR	E	AC	3	257	36	9,502	3/23/22	51	30	70	0	New Construction	01-01-1980
1631	13222	SAYBROOK LN	DAVENPORT DR	WESTPORT DR	E	AC	2	472	36	16,992	3/24/22	51	23	77	0	New Construction	01-01-1980
1409	14913	NORDINA DR	FORBES LN	CHAPPARAL LN	E	AC	5	249	36	9,214	3/29/22	51	11	89	0	New Construction	01-01-1980
969	14647	HUNTINGTON ST	CHICAGO AVE	DETROIT AVE	E	AC	9	330	37	12,210	8/14/23	51	7	92	1	New Construction	01-01-1980
1296	15847	MEMPHIS AVE	LAKE ST	ALABAMA ST	E	AC	6	372	36	13,392	8/14/23	51	21	79	0	Surface Treatment - Slurry Seal	03-01-2011
691	14671	ENGLAND ST	JOILET AVE	KNOXVILLE AVE	E	AC	6	330	37	11,883	8/15/23	51	22	78	0	Surface Treatment - Slurry Seal	03-01-2011
936	14709	HILLCREST CIR	OCEANHILL DR	CDS	E	AC	6	248	32	9,436	8/15/23	51	14	86	0	New Construction	01-01-1980
627	15494	DRIFTWOOD DR	BEACH BLVD	END	E	AC	9	351	36	12,636	8/24/23	51	43	52	5	New Construction	01-01-1980
798	15588	GARRETT CIR	CLANCY LN	CDS	E	AC	8	990	36	37,990	3/7/22	52	4	94	2	Surface Treatment - Slurry Seal	02-08-2023
1423	13394	NUTWOOD CIR	PRESCOTT LN	CDS	E	AC	5	340	36	13,490	3/14/22	52	12	85	3	Surface Treatment - Slurry Seal	10-01-2012
943	13265	HILTON LN	BELLINGER DR	FLINT DR	E	AC	3	352	36	12,672	3/17/22	52	38	62	0	New Construction	01-01-1980
714	15089	FAIRWAY LN	MEADOWLARD DR.	MIDDLECOFF DR	E	AC	3	835	36	30,310	3/23/22	52	22	78	0	New Construction	01-01-1980
293	15059	BRANFORD DR	EDGEWATER LN	SAYBROOK LN	E	AC	2	814	36	29,304	3/24/22	52	33	67	0	New Construction	01-01-1980
1525	13207	PIERSON DR	PHELPS LN	SAYBROOK LN	E	AC	2	734	36	26,424	3/24/22	52	29	62	9	New Construction	01-01-1980
1909	15772	SUMMERDALE DR	ALLEY PINEHURST LN	ALLEY GROVE CIR	E	AC	5	257	36	9,252	3/29/22	52	20	80	0	Surface Treatment - Slurry Seal	10-01-2012
678	13581	ELM ST	CYPRESS AVE	CDS	E	AC	4	443	36	17,448	3/31/22	52	33	67	0	New Construction	01-01-1980
1426	15259	OAK LN	WARNER AVE	SYCAMORE AVE	E	AC	4	397	36	14,292	3/31/22	52	10	87	3	New Construction	01-01-1980
1480	13561	PALMDALE ST	WARNER AVE	CAIN AVE	E	AC	3	330	38	12,540	4/6/22	52	21	79	0	New Construction	01-01-1980
223	15075	BEDFORD LN	DAVENPORT DR	WESTPORT DR	E	AC	2	573	36	20,628	4/7/22	52	34	66	0	New Construction	01-01-1980
969	14659	HUNTINGTON ST	LINCOLN AVE	MEMPHIS AVE	E	AC	6	330	37	11,877	8/14/23	52	13	81	6	New Construction	01-01-1980
1088	14702	KNOXVILLE AVE	ALLEY ENGLAND ST	FLORIDA ST	E	AC	6	165	37	6,105	8/15/23	52	48	52	0	Surface Treatment - Slurry Seal	03-01-2011
1088	14703	KNOXVILLE AVE	FLORIDA ST	BEACH BLVD	E	AC	6	660	37	24,420	8/15/23	52	31	62	7	Surface Treatment - Slurry Seal	03-01-2011
1169	14687	LINCOLN AVE	CALIFORNIA ST	ALLEY CALIFORNIA ST	E	AAC	6	160	37	5,920	8/15/23	52	44	56	0	Overlay - AC Structural	03-01-2011
1169	14690	LINCOLN AVE	ALLEY DELAWARE ST	ENGLAND ST	E	AC	6	160	36	5,760	8/15/23	52	47	53	0	Surface Treatment - Slurry Seal	03-01-2011
1312	14329	MILNE DR	ANTIGUA LN	SAND DOLLAR LN	E	AC	9	252	36	9,572	8/30/23	52	17	80	3	New Construction	01-01-1980
1572	13832	PRISCILLA DR	SPRINGDALE ST	AULNAY LN	E	AC	1	551	36	19,836	5/8/24	52	36	50	14	New Construction	01-01-1980
915	15893	HAZELBROOK DR	RAMONA LN	BUSHARD ST	E	AC	7	1,122	36	40,392	2/11/20	53	37	62	1	Surface Treatment - Slurry Seal	07-15-2021
1288	14151	MEDITERRANEAN DR	MAGNOLIA ST	HARBOR ISLE LN	E	AC	7	1,117	36	40,212	2/11/20	53	33	62	5	Surface Treatment - Slurry Seal	07-15-2021
697	15779	ERWIN LN	FREEBORN DR	CDS	E	AC	5	592	36	22,662	2/18/20	53	14	74	12	Surface Treatment - Slurry Seal	10-01-2012
672	16029	ELEVENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	390	46	17,940	6/30/21	53	32	44	24	New Construction	01-01-1980
1253	14405	MARIPOSA DR	CORONADO LN	LIDO LN	E	AC	5	262	36	9,432	3/15/22	53	43	57	0	Surface Treatment - Slurry Seal	10-01-2012
1185	15592	MC FADDEN AVE	CHEMICAL LN	INDUSTRY LN	E	AC	1	914	44	40,216	3/21/22	53	6	83	11	New Construction	01-01-1980
1854	13816	SPARROW DR	ORIOLE LN	HUMMINGBIRD LN	E	AC	1	980	36	35,280	3/21/22	53	14	81	5	New Construction	01-01-1980
2048	14911	VALEWORTH CIR	GLENSTONE DR	CDS	E	AC	5	198	36	8,378	3/29/22	53	17	83	0	New Construction - Initial	01-01-1980
1874	15117	STALLION CIR	PARLAY CIR	ROOSEVELT LN	E	AC	2	489	36	17,604	4/5/22	53	39	61	0	New Construction	01-01-1980
16	15659	ALABAMA ST	HARTFORD AVE	INDIANAPOLIS AVE	E	AC	9	330	38	12,540	8/14/23	53	14	86	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
969	14661	HUNTINGTON ST	INDIANAPOLIS AVE	JOILET AVE	E	AC	6	330	40	13,200	8/14/23	53	38	62	0	New Construction	01-01-1980
1088	14699	KNOXVILLE AVE	DELAWARE ST	ALLEY DELAWARE ST	E	AAC	6	171	37	6,327	8/15/23	53	48	52	0	Overlay - AC Structural	03-01-2011
722	14221	FARNSWORTH LN	KINGFISHER DR	MARY CIR	E	AC	9	262	36	9,432	8/23/23	53	35	65	0	New Construction	01-01-1980
1845	15451	SOMERVILLE LN	MALLOY DR	END	E	AC	9	390	36	14,040	8/23/23	53	19	81	0	Surface Treatment - Slurry Seal	03-01-2011
275	14321	BOLIN CIR	LEASURE LN	END	E	AC	9	176	32	7,132	8/30/23	53	31	67	2	New Construction - Initial	01-01-1980
1578	14757	PROFESSIONAL CIR	FLORIDA ST	CDS	E	AC	4	314	22	6,908	4/8/24	53	17	69	14	Surface Treatment - Slurry Seal	11-28-2019
1902	14351	STRATHMOOR LN	BLUEFIELD DR	EFFINGHAM DR	E	AC	8	515	36	18,540	4/10/24	53	7	35	58	New Construction - Initial	01-01-1980
1793	14264	SHELL HARBOR CIR	FIVE HARBORS DR	CDS	E	AAC	9	317	32	11,644	5/6/24	54	13	57	30	Overlay - AC Structural	05-11-2018
2037	13738	TYNDALL DR	BOLSA PARK LN	END	E	AC	1	294	36	12,084	5/6/20	54	8	90	2	New Construction - Initial	01-01-1980
749	13811	FLAMINGO CIR	BLUEBIRD LN	END	E	AC	1	530	36	20,330	3/21/22	54	8	92	0	New Construction	01-01-1980
1271	13145	MAUI CIR	WAIKIKI LN	CDS	E	AC	2	535	36	19,260	3/24/22	54	17	83	0	New Construction	01-01-1980
476	15171	COLLIE LN	FENLEY DR	ARROWHEAD DR	E	AC	5	1,125	36	40,500	3/28/22	54	59	41	0	New Construction	01-01-1980
1529	15829	PINEHURST LN	WARNER AVE	SUMMERDALE DR	E	AC	5	595	36	21,420	3/29/22	54	41	59	0	Surface Treatment - Slurry Seal	10-01-2012
1426	15260	OAK LN	SYCAMORE AVE	ALLEY ASH ST	E	AC	4	933	36	33,588	3/31/22	54	36	63	1	New Construction	01-01-1980
427	15328	CHEMICAL LN	RESEARCH DR	PRODUCTION DR	E	AC	1	834	40	33,360	4/1/22	54	27	61	12	New Construction	01-01-1980
693	13191	ENSIGN CIR	HUMBOLDT DR	CDS	E	AC	2	315	32	11,580	4/7/22	54	15	65	20	New Construction	01-01-1980
463	13591	CLUBHOUSE LN	CASTLE DR	MANGRUM DR	E	AC	3	260	36	9,360	4/9/22	54	14	86	0	New Construction	01-01-1980
16	15665	ALABAMA ST	ALLEY BALTIMORE AVE	CHICAGO AVE	E	AC	9	494	37	18,278	8/14/23	54	8	64	28	New Construction	01-01-1980
774	50410	FRANKFORT AVE	LAKE ST	ALABAMA ST	E	AC	9	390	50	19,500	8/24/23	54	35	64	1	New Construction - Initial	01-01-1980
938	14612	HILLHEAD CIR	LOCHLEA LN	CDS	E	AC	9	576	33	21,708	8/30/23	54	38	50	12	New Construction	01-01-1980
1973	13652	THOMAS CIR	TAYLOR DR	END	E	AC	4	232	32	8,924	4/8/24	54	40	60	0	New Construction - Initial	01-01-1980
320	15506	BROOKDALE LN	CASTLEGATE DR	SUNRIDGE DR	E	AC	9	579	36	20,844	5/6/24	54	30	70	0	Surface Treatment - Slurry Seal	05-11-2018
1948	15333	TAFT LN	RENO CIR	CROSS DR	E	AAC	1	284	36	12,024	5/3/24	55	37	63	0	Overlay - AC Structural	05-11-2018
1288	14144	MEDITERRANEAN DR	SWANSEA LN	MAGNOLIA ST	E	AC	7	179	36	6,444	2/11/20	55	29	67	4	Surface Treatment - Slurry Seal	07-15-2021
1285	14145	MEANDER LN	RATH CIR	CHARFORD DR	E	AC	7	593	36	21,348	2/12/20	55	34	64	2	Surface Treatment - Slurry Seal	07-15-2021
2118	14069	WATERBURY LN	HYANNIS PORT DR	CAPE COD DR	E	AC	7	262	36	10,182	2/18/20	55	13	87	0	Surface Treatment - Slurry Seal	07-15-2021
824	13866	GLEN DR	TULLOW LN	END	E	AC	3	315	32	11,580	2/19/20	55	31	55	14	New Construction	01-01-1980
1806	14045	SHOAL CIR	WESTWINDS LN	CDS	E	AC	7	232	36	9,602	2/19/20	55	34	66	0	Surface Treatment - Slurry Seal	07-15-2021
1787	15441	SHANGRI LA DR	LEXINGTON LN	ARAGON CIR	E	AC	8	824	36	31,664	3/3/22	55	27	70	3	New Construction	01-01-1980
440	15099	CHRISTY DR	BRADBURY LN	WOODSTOCK LN	E	AC	3	524	36	19,114	3/17/22	55	32	64	4	New Construction	01-01-1980
616	14906	DORITA DR	WILD ROSE LN	SPRINGDALE ST	E	AC	5	177	36	6,372	3/29/22	55	12	85	3	New Construction	01-01-1980
1680	13847	ROYALIST DR	PLYMOUTH LN	WILLETT LN	E	AC	1	260	36	9,360	3/30/22	55	16	84	0	New Construction	01-01-1980
1874	13300	STALLION CIR	ROOSEVELT LN	CDS	E	AC	2	275	36	11,150	4/5/22	55	33	64	3	New Construction	01-01-1980
691	14672	ENGLAND ST	INDIANAPOLIS AVE	JOILET AVE	E	AAC	6	330	37	11,877	8/15/23	55	30	70	0	Overlay - AC Structural	03-01-2011
1229	14119	MALLOY DR	SOMERVILLE LN	YVONNE DR	E	AC	9	291	36	10,476	8/23/23	55	25	67	8	Surface Treatment - Slurry Seal	03-01-2011
596	15666	DETROIT AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	37	17,945	8/24/23	55	41	59	0	New Construction	01-01-1980
1179	15534	LOCHLEA LN	ATLANTA AVE	GALLEY DR	E	AC	9	573	36	23,884	8/24/23	55	11	85	4	New Construction	01-01-1980
1711	14786	SAMPSON LN	WOODWIND DR	CDS	E	AC	4	540	40	22,800	5/8/24	55	27	73	0	Surface Treatment - Slurry Seal	11-01-2019
2181	15509	WOODCREST DR	CHARWOOD LN	CRESTVIEW LN	E	AC	9	955	36	34,380	5/6/24	55	39	61	0	Surface Treatment - Slurry Seal	05-11-2018
433	14358	CHEVY CHASE DR	PINETREE LN	LEMONTREE LN	E	AC	8	727	36	26,672	7/26/17	56	52	41	7	Surface Treatment - Slurry Seal	05-11-2018
846	15902	GRAND DR	WATERBURY LN	CDS	E	AC	8	1,026	36	38,736	2/18/20	56	24	76	0	Surface Treatment - Slurry Seal	07-15-2021
1656	13961	ROCKCREST LN	SAILPORT DR	YORKTOWN AVE	E	AC	7	173	33	5,019	2/19/20	56	64	36	0	Surface Treatment - Slurry Seal	07-15-2021
1674	14034	ROTHERT LN	FLAXMAN DR	NEW BRITAIN LN	E	AAC	7	465	36	16,740	2/24/20	56	24	68	8	Overlay - AC Structural	03-01-2011
671	13721	ELECTRONIC LN	MACHINE DR	MC FADDEN AVE	E	AC	1	817	40	32,680	5/5/20	56	22	78	0	New Construction	01-01-1980
2288	17020	ADAMS AVE FRONTAGE	DERBYSHIRE LN	SIDCUP LN	E	AC	8	672	28	18,816	3/11/22	56	30	70	0	New Construction - Initial	01-01-1980
202	13402	BAXTER CIR	AMADA DR	CDS	E	AC	5	338	36	13,668	3/14/22	56	8	92	0	New Construction	01-01-1980
1371	13358	NAPA CIR	OJAI LN	CDS	E	AC	5	216	36	10,266	3/15/22	56	48	52	0	Surface Treatment - Slurry Seal	10-01-2012
291	15096	BRADBURY LN	DAGNY CIR	HEIL AVE	E	AC	3	963	36	34,668	3/17/22	56	31	61	8	New Construction	01-01-1980
923	15767	HERBERT LN	ROGERS DR	RENOIR CIR	E	AC	5	500	36	18,000	3/22/22	56	40	60	0	New Construction	01-01-1980
1199	13226	LOWELL CIR	WESTPORT DR	CDS	E	AC	2	479	36	18,744	3/24/22	56	38	62	0	New Construction	01-01-1980
16	14624	ALABAMA ST	ALLEY FRANKFORT AVE.	FRANKFORT AVE	E	AC	9	167	37	6,179	8/14/23	56	22	47	31	New Construction	01-01-1980
1150	15611	LEILANI DR	MAILBU LN	BUSHARD ST	E	AC	9	894	36	32,934	4/17/24	56	21	79	0	Surface Treatment - Slurry Seal	05-11-2019
1417	15300	NORTHRIDGE LN	LARCHWOOD DR	END	E	AAC	1	742	36	28,712	5/7/24	56	45	55	0	Overlay - AC Fabric	10-01-2016
1889	13648	STERLING AVE	LISA LN	WHARTON ST	E	AC	4	272	33	8,712	5/9/24	56	23	77	0	New Construction	01-01-1980
1889	13647	STERLING AVE	PEMBERCO CIR	LISA LN	E	AC	4	282	33	9,306	5/9/24	57	21	79	0	New Construction	01-01-1980
1866	14365	SPYGLASS LN	PEPPERTREE DR	HAMILTON AVE	E	AC	8	177	36	6,150	7/13/17	57	37	60	3	Surface Treatment - Slurry Seal	05-11-2018
184	14165	BANCROFT CIR	HAZELBROOK DR	CDS	E	AC	7	496	36	19,356	2/10/20	57	40	60	0	Surface Treatment - Slurry Seal	07-15-2021
813	14444	GETTYSBURG DR	MAGNOLIA ST FRONTAGE	LOTUS LN	E	AC	7	1,036	36	37,296	2/18/20	57	29	70	1	Surface Treatment - Slurry Seal	07-15-2021
289	13973	BRABHAM DR	MC LAREN LN	HICKORY LN	E	AC	8	940	36	33,840	2/19/20	57	27	73	0	Surface Treatment - Slurry Seal	07-15-2021

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
5230	60380	5TH ST	PCH	PACIFIC S	E	AC	2	276	23	6,348	5/6/20	57	24	76	0	New Construction - Initial	01-01-1980
756	15175	FLINTSTONE LN	AMADA DR	VATCHER DR	E	AC	5	866	36	31,926	3/14/22	57	25	64	11	New Construction	01-01-1980
2060	15177	VATCHER DR	FLINTSTONE LN	EDWARDS ST	E	AC	5	1,335	36	48,060	3/14/22	57	16	84	0	New Construction - Initial	01-01-1980
340	13715	BUSINESS DR	CHEMICAL LN	GRAHAM ST	E	AC	1	1,170	40	46,800	3/21/22	57	23	76	1	New Construction	01-01-1980
1576	13722	PRODUCT LN	MC FADDEN AVE	RESEARCH DR	E	AC	1	1,116	40	44,640	3/21/22	57	17	83	0	New Construction	01-01-1980
2021	15940	TRUMBULL DR	PHELPS LN	SAYBROOK LN	E	AC	2	1,026	36	36,936	3/24/22	57	47	53	0	New Construction - Initial	01-01-1980
134	15787	APEL LN	BRANNED DR	TILBURG DR	E	AC	5	1,279	36	46,294	3/29/22	57	14	86	0	New Construction	01-01-1980
873	14824	HAGUE LN	AMSTERDAM DR	EDAM CIR	E	AC	4	245	36	8,820	3/31/22	57	17	83	0	Surface Treatment - Slurry Seal	07-29-2020
1224	14832	MAJOR CIR	B ST	CDS	E	AC	4	303	34	11,552	3/31/22	57	24	76	0	Surface Treatment - Slurry Seal	07-29-2020
2173	14441	WINDSOR DR	CONCORD LN	BEDFORD LN	E	AC	2	267	36	9,862	4/5/22	57	16	84	0	New Construction - Initial	01-01-1980
16	15681	ALABAMA ST	INDIANAPOLIS AVE	ALLEY KNOXVILLE AVE	E	AC	6	495	37	18,315	8/14/23	57	29	63	8	Surface Treatment - Slurry Seal	03-01-2011
758	15683	FLORIDA ST	KNOXVILLE AVE	MEMPHIS AVE	E	AC	6	661	36	23,796	8/15/23	57	39	61	0	Surface Treatment - Slurry Seal	03-01-2011
806	14632	GENEVA AVE	FLORIDA ST	INDIANAPOLIS AVE	E	AC	9	378	37	13,986	8/15/23	57	28	63	9	New Construction	01-01-1980
748	15961	FLAGSTONE LN	DEEPVIEW DR	CLARKDALE DR	E	AC	7	1,041	36	37,476	8/21/23	57	30	68	2	Surface Treatment - Slurry Seal	03-01-2011
909	15549	HATTERAS DR	SEAFORTH LN	BRETON LN	E	AC	9	533	36	19,938	8/30/23	57	32	63	5	New Construction	01-01-1980
659	16015	EFFINGHAM DR	STRATHMOOR LN	BROOKHURST ST	E	AC	8	1,195	36	43,020	4/10/24	57	14	67	19	Surface Treatment - Slurry Seal	05-11-2018
977	14361	INDIAN WELLS CIR	LEMONTREE LN	CDS	E	AC	8	499	36	19,464	7/13/17	58	51	45	4	Surface Treatment - Slurry Seal	05-11-2018
1513	14363	PENSACOLA CIR	PEPPERTREE DR	CDS	E	AC	8	334	32	12,188	7/13/17	58	26	71	3	Surface Treatment - Slurry Seal	05-11-2018
1924	15508	SUNRIDGE DR	CHARWOOD LN	CRESTVIEW LN	E	AC	9	955	36	35,130	7/17/17	58	57	41	2	Surface Treatment - Slurry Seal	05-11-2018
1927	14989	SUNSHINE DR	MAGNOLIA ST FRONTAGE	JETT DR	E	AC	7	677	36	24,372	2/11/20	58	44	53	3	Surface Treatment - Slurry Seal	07-15-2021
1810	13468	SHOREVEIW CIR	LAKEVIEW DR	END	E	AC	5	237	32	9,084	2/24/20	58	43	51	6	Surface Treatment - Slurry Seal	10-01-2012
4070	50440	EDWARDS ST FRONTAGE	MEADOW CREST DR	FREEBORN DR	E	AC	5	611	30	18,330	3/15/22	58	23	74	3	Surface Treatment - Slurry Seal	01-10-2012
1481	15142	PALO ALTO DR	SPRINGDALE ST	PINEHURST LN	E	AC	5	700	36	26,340	3/15/22	58	46	54	0	Surface Treatment - Slurry Seal	10-01-2012
280	13267	BONDURANT CIR	FLINT DR	CDS	E	AC	3	99	32	4,418	3/17/22	58	30	70	0	New Construction - Initial	01-01-1980
174	13709	BAFFIN CIR	TASMAN DR	END	E	AC	1	545	36	20,870	3/21/22	58	12	88	0	New Construction	01-01-1980
585	13587	DEL MAR LN	CALIENTE DR	ALLEY HEIL AVE	E	AC	2	140	36	5,040	3/24/22	58	38	62	0	New Construction	01-01-1980
1519	15065	PHELPS LN	CALHOUN DR	DALE DR	E	AC	2	420	36	15,120	3/24/22	58	54	46	0	New Construction	01-01-1980
1997	14986	WARNER AVE	WARNER AVE	PINEHURST LN	E	AC	5	751	36	27,036	3/29/22	58	16	84	0	Surface Treatment - Slurry Seal	10-01-2012
1165	13513	LILAC LN	ELK CIR	ALLEY WARNER AVE	E	AC	3	137	32	4,384	4/7/22	58	91	0	9	New Construction	01-01-1980
1620	13297	REGINA CIR	HEIL AVE	CDS	E	AC	2	592	36	22,562	4/9/22	58	16	84	0	New Construction	01-01-1980
16	15678	ALABAMA ST	NASHVILLE AVE	OSWEGO AVE	E	AC	6	330	36	11,880	8/15/23	58	15	59	26	Surface Treatment - Slurry Seal	03-01-2011
1088	14700	KNOXVILLE AVE	ALLEY DELAWARE ST	ENGLAND ST	E	AC	6	160	37	5,920	8/15/23	58	45	55	0	Surface Treatment - Slurry Seal	03-01-2011
1169	14688	LINCOLN AVE	ALLEY CALIFORNIA ST	DELAWARE ST	E	AAC	6	169	37	5,957	8/15/23	58	42	58	0	Overlay - AC Structural	03-01-2011
1067	14104	KILKENNY LN	MALLOY DR	ALLEY MALLOY DR	E	AC	9	139	36	5,004	8/23/23	58	20	80	0	Surface Treatment - Slurry Seal	03-01-2011
1073	15884	KINGFISHER DR	FARNSWORTH LN	ALICANTE LN	E	AC	9	911	36	32,796	8/23/23	58	50	50	0	New Construction	01-01-1980
305	15540	BRETON LN	ST AUGUSTINE DR	CDS	E	AC	9	584	32	20,188	8/30/23	58	28	72	0	New Construction	01-01-1980
2049	13645	VALLEA CIR	STERLING AVE	END	E	AC	4	130	32	5,660	4/8/24	58	26	62	12	New Construction - Initial	01-01-1980
944	15505	HINGHAM DR	LANTERN LN	MONTAUK CIR	E	AC	9	370	36	14,070	5/10/24	59	17	78	5	Surface Treatment - Slurry Seal	05-11-2018
1542	13844	PLYMOUTH LN	ALBION DR	PRISCILLA DR	E	AC	1	260	36	9,360	5/8/24	59	42	58	0	New Construction	01-01-1980
2138	14276	WESTCLIFF DR	CHARWOOD LN	CRESTVIEW LN	E	AC	9	954	36	34,344	5/7/24	59	19	80	1	Surface Treatment - Slurry Seal	05-11-2018
1789	15211	SHASTA LN	WHITNEY DR	SUGAR AVE	E	AC	4	1,290	36	46,440	5/13/24	59	27	72	1	Surface Treatment - Slurry Seal	07-29-2020
333	15464	BURLCREST DR	MEANDER LN	BRENTSTONE LN	E	AC	7	527	36	19,722	2/12/20	59	32	68	0	Surface Treatment - Slurry Seal	07-15-2021
2174	15413	WINDWARD LN	YORKTOWN AVE	ANCHORAGE DR	E	AC	7	432	36	15,552	2/19/20	59	0	74	26	Surface Treatment - Slurry Seal	07-15-2021
2192	15803	WRIGHTWOOD LN	MOSS DR	PINON DR	E	AC	5	940	36	33,840	3/9/20	59	21	79	0	New Construction - Initial	01-01-1980
1887	13403	STEINER CIR	ARMADA DR	CDS	E	AC	5	338	36	13,668	3/14/22	59	10	90	0	New Construction	01-01-1980
1334	13250	MONTECITO DR	ANGLER LN	WOODSTOCK LN	E	AC	3	1,012	36	36,432	3/17/22	59	52	48	0	New Construction	01-01-1980
1063	14883	KERN DR	TIFFANY CIR	RENOIR CIR	E	AC	5	354	36	12,744	3/22/22	59	36	59	5	New Construction	01-01-1980
868	13320	GUMM DR	TRUDY LN	END	E	AC	3	672	36	24,192	3/23/22	59	17	82	1	New Construction	01-01-1980
1234	15264	MANDRELL DR	ALLEY OAK LN	ASH ST	E	AC	4	437	36	16,232	3/31/22	59	21	65	14	New Construction	01-01-1980
803	13301	GELDING CIR	ROOSEVELT LN	CDS	E	AC	2	275	36	11,150	4/5/22	59	23	77	0	New Construction	01-01-1980
127	14538	ANDERSON ST	COAST CIR	PCH	E	AC	2	220	31	6,820	4/9/22	59	87	0	13	New Construction	01-01-1980
173	14707	BACKBAY CIR	OCEANHILL DR	CDS	E	AC	6	266	32	10,012	8/15/23	59	10	79	11	Surface Treatment - Slurry Seal	03-01-2011
1169	14691	LINCOLN AVE	ENGLAND ST	ALLEY ENGLAND ST	E	AC	6	165	37	6,031	8/15/23	59	56	44	0	Surface Treatment - Slurry Seal	03-01-2011
722	15496	FARNSWORTH LN	MARY CIR	SNOWVBIRD DR	E	AC	9	782	36	28,152	8/23/23	59	56	44	0	New Construction	01-01-1980
1934	15025	SURFWOOD LN	ATLANTA AVE	BURLINGTON LN	E	AC	9	1,159	36	41,724	8/24/23	59	14	78	8	New Construction - Initial	01-01-1980
603	14341	DOCKSIDE CIR	PIER DR	CDS	E	AAC	9	372	36	14,892	4/1/24	59	16	83	1	Overlay - AC Structural	05-11-2018
904	13642	HARTLUND ST	LE CONTE DR	CDS	E	AC	4	475	34	17,950	4/8/24	59	17	71	12	Surface Treatment - Slurry Seal	11-28-2019
1243	15301	MAR VISTA DR	SUNNYCREST LN	EDWARDS ST	E	AAC	1	452	36	16,272	5/7/24	59	44	56	0	Overlay - AC Fabric	10-01-2016
1118	14273	LANCELOT LN	WOODCREST DR	COMSTOCK DR	E	AC	9	502	36	18,822	5/6/24	60	48	52	0	Surface Treatment - Slurry Seal	05-11-2018

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
430	14071	CHESAPEAKE LN	GRODON DDR	ADAMS AVE	E	AC	7	1,063	36	39,268	2/18/20	60	25	71	4	Surface Treatment - Slurry Seal	07-15-2021
2188	15387	WOODWARD LN	VELARDO DR	CDS	E	AC	8	770	36	29,520	2/18/20	60	18	82	0	Surface Treatment - Slurry Seal	07-15-2021
394	14038	CARSON DR	NEWLAND AVE	SACRAMENTO LN	E	AC	7	167	36	6,012	2/24/20	60	70	30	0	Surface Treatment - Slurry Seal	07-15-2021
2012	15414	TRIDENT LN	ANCHORAGE DR	DOLPHIN DR	E	AC	7	757	36	28,002	2/24/20	60	28	70	2	Surface Treatment - Slurry Seal	07-15-2021
1564	15173	PRESCOTT LN	KELLEY CIR	KISER DR	E	AC	5	1,129	36	41,394	3/14/22	60	16	83	1	New Construction	01-01-1980
1162	15147	LIDO LN	FREEBORN DR	MARIPOSA DR	E	AC	5	953	36	35,240	3/15/22	60	18	82	0	Surface Treatment - Slurry Seal	10-01-2012
1354	13624	MORRO BAY LN	SANTA YNEZ DR	SLATER AVE	E	AC	5	170	36	6,120	3/15/22	60	49	51	0	Surface Treatment - Slurry Seal	10-01-2012
1643	13258	RINGO CIR	NORMANDY LN	CDS	E	AC	3	238	32	8,866	3/17/22	60	10	74	16	New Construction	01-01-1980
1941	13814	SWAN LN	DOVEWOOD DR	ROBINWOOD DR	E	AC	1	1,040	36	37,440	3/21/22	60	31	69	0	New Construction - Initial	01-01-1980
652	13230	EDGEWATER LN	DAVENPORT DR	WAVERLY LN	E	AC	2	1,678	36	60,408	3/24/22	60	22	74	4	New Construction	01-01-1980
1893	15170	STILL HARBOR LN	MC CARTHY DR	WINTERGREEN DR	E	AC	5	928	36	33,408	3/28/22	60	14	86	0	New Construction - Initial	01-01-1980
2140	15077	WESTPORT DR	BLAIR LN	LOWELL CIR	E	AC	2	644	36	23,184	3/29/22	60	26	73	1	New Construction - Initial	01-01-1980
1838	691	TALBERT AVE	SPRINGDALE ST	END	E	AC	3	1,566	30	46,980	4/4/22	60	23	77	0	New Construction - Initial	01-01-1980
143	13176	ARDSLEY CIR	HUMBOLDT DR	CDS	E	AC	2	406	32	14,492	4/7/22	60	21	79	0	New Construction	01-01-1980
969	15672	HUNTINGTON ST	ELMIRA AVE	FRANKFORT AVE	E	AC	9	329	40	13,160	8/14/23	60	51	35	14	New Construction	01-01-1980
1169	14685	LINCOLN AVE	HUNTINGTON ST	CALIFORNIA ST	E	AAC	6	330	37	12,210	8/15/23	60	32	68	0	Overlay - AC Structural	03-01-2011
475	15499	COLIMA LN	CASTILLIAN DR	END	E	AC	9	535	36	19,260	8/23/23	60	15	85	0	New Construction	01-01-1980
1073	14225	KINGFISHER DR	CATAMARAN LN	FARNSWORTH LN	E	AC	9	591	36	21,276	8/23/23	60	30	70	0	New Construction	01-01-1980
596	15667	DETROIT AVE	CALIFORNIA ST	DELAWARE ST	E	AC	9	354	36	12,744	8/24/23	60	20	77	3	New Construction	01-01-1980
1742	15501	SCHOONER LN	SNOWBIRD DR	ATLANTA AVE	E	AC	9	311	36	11,196	8/24/23	60	32	63	5	New Construction	01-01-1980
753	15552	FLEET LN	TIDEWATER CIR	CDS	E	AC	9	349	36	12,564	3/20/24	60	17	70	13	Surface Treatment - Slurry Seal	05-11-2018
954	13851	HOOKER DR	WILLETT LN	STANDISH LN	E	AC	1	780	36	28,080	5/8/24	60	50	42	8	New Construction	01-01-1980
939	13975	HILLSBORO CIR	LITCHFIELD DR	CDS	E	AC	8	510	36	20,160	2/18/20	61	61	39	0	Surface Treatment - Slurry Seal	07-15-2021
326	13801	BRUNSWICK DR	YORKSHIRE LN	GOLDENWEST ST	E	AC	1	550	36	19,512	2/26/20	61	14	85	1	New Construction	01-01-1980
1331	14927	MONTBURY CIR	SERENE DR	END	E	AC	5	420	36	16,920	3/12/20	61	29	61	10	New Construction	01-01-1980
149	15980	ARMADA DR	FLINTSTONE LN	COLLINS CIR	E	AC	5	1,013	36	36,468	3/14/22	61	17	70	13	New Construction	01-01-1980
1297	13256	MERCIER LN	MYRTLE DR	SHAYNE DR	E	AC	3	1,020	36	36,720	3/17/22	61	17	77	6	New Construction	01-01-1980
2058	15578	VARSITY DR	HALLCROFT LN	EDWARDS ST	E	AC	5	1,418	36	51,048	3/28/22	61	65	35	0	Surface Treatment - Slurry Seal	10-01-2012
1676	15078	ROUNDHILL DR	DAVENPORT DR	BLAIR LN	E	AC	2	1,407	36	50,430	3/29/22	61	35	65	0	New Construction	01-01-1980
1088	14701	KNOXVILLE AVE	ENGLAND ST	ALLEY ENGLAND ST	E	AC	6	165	37	6,105	8/15/23	61	53	0	47	Surface Treatment - Slurry Seal	03-01-2011
5	15842	ACACIA AVE	LAKE ST	ALABAMA ST	E	AC	9	372	36	13,392	8/24/23	61	8	77	15	New Construction	01-01-1980
1869	14325	ST AUGUSTINE DR	NEWLAND ST	ANTIGUA LN	E	AC	9	171	36	6,156	8/30/23	61	29	45	26	New Construction	01-01-1980
1663	14427	ROLF CIR	HARTLUND ST	CDS	E	AC	4	121	32	5,372	4/8/24	61	41	59	0	Surface Treatment - Slurry Seal	11-28-2019
422	15956	CHARWOOD LN	SUNRIDGE DR	FIRESIDE DR	E	AC	9	1,262	36	46,932	5/7/24	62	26	74	0	Surface Treatment - Slurry Seal	05-11-2018
367	13373	CANIS CIR	TAURUS LN	END	E	AC	3	222	28	6,216	2/11/20	62	41	59	0	Surface Treatment - Slurry Seal	10-01-2012
5270	60420	8TH ST	PACIFIC N	PCH	E	AC	2	180	21	3,780	5/6/20	62	10	77	13	New Construction - Initial	01-01-1980
726	15978	FENLEY DR	STILL HARBOR LN	FLINTSTONE LN	E	AC	5	1,135	36	42,360	3/14/22	62	19	81	0	New Construction	01-01-1980
1185	14469	MC FADDEN AVE	BOLSA CHICA ST	PELICAN LN	E	AC	1	520	60	31,200	3/21/22	62	13	87	0	New Construction	01-01-1980
1236	15083	MANGRUM DR	BIRDIE LN	END	E	AC	3	1,216	36	43,776	3/23/22	62	27	72	1	New Construction	01-01-1980
792	15174	GALIPEAN DR	COLLIE LN	PRESCOTT LN	E	AC	5	633	36	22,788	3/28/22	62	29	71	0	New Construction	01-01-1980
427	13822	CHEMICAL LN	PRODUCTION DR	SYSTEM DR	E	AC	1	339	40	13,560	4/1/22	62	25	75	0	New Construction	01-01-1980
865	14814	GUILDERS DR	MARKEN LN	JEFFERSON LN	E	AC	4	780	36	28,330	4/6/22	62	13	87	0	Surface Treatment - Slurry Seal	07-29-2020
1397	13169	NIANTIC CIR	MISTRAL DR	CDS	E	AC	2	405	32	14,460	4/7/22	62	38	27	35	New Construction	01-01-1980
969	14662	HUNTINGTON ST	HARTFORD AVE	INDIANAPOLIS AVE	E	AC	9	329	36	11,844	8/14/23	62	49	51	0	New Construction	01-01-1980
405	14227	CATAMARAN LN	KINGFISHER DR	SNOWBIRD DR	E	AC	9	1,044	36	37,584	8/23/23	62	16	84	0	New Construction	01-01-1980
1505	15845	PECAN AVE	LAKE ST	ALABAMA ST	E	AC	9	372	37	13,764	8/24/23	62	13	87	0	New Construction	01-01-1980
1779	14101	SEVEN SEAS LN	INDIANAPOLIS AVE	END	E	AC	9	536	36	19,296	8/24/23	62	31	65	4	New Construction	01-01-1980
1735	15543	SATTERFIELD DR	LEASURE LN	SHAW LN	E	AC	9	687	36	25,482	8/30/23	62	26	72	2	New Construction	01-01-1980
1980	14336	TIDEWATER CIR	FLEET LN	CDS	E	AC	9	385	36	15,360	4/1/24	62	20	72	8	Surface Treatment - Slurry Seal	05-11-2018
1572	13845	PRISCILLA DR	AULNAY LN	PLYMOUTH LN	E	AC	1	261	36	9,396	5/8/24	62	47	53	0	New Construction	01-01-1980
1021	15892	JOHSON LN	GUSS DR	BROWNING DR	E	AC	7	750	36	27,000	2/11/20	63	57	43	0	Surface Treatment - Slurry Seal	07-15-2021
1942	16021	SWANSEA LN	BURLCREST DR	CDS	E	AC	7	956	36	35,916	2/11/20	63	36	60	4	Surface Treatment - Slurry Seal	07-15-2021
445	13979	CINDY LN	KNEEP DR	GRAND DR	E	AC	8	1,020	36	36,720	2/18/20	63	29	71	0	Surface Treatment - Slurry Seal	07-15-2021
732	15202	FIELDBURY LN	TALEGATE DR	NORBROOK DR	E	AC	5	875	36	31,212	3/11/20	63	39	61	0	Surface Treatment - Slurry Seal	10-01-2012
1869	15545	ST AUGUSTINE DR	ANTIGUA LN	SAND DOLLAR LN	E	AC	9	252	36	9,072	2/22/22	63	36	49	15	New Construction	01-01-1980
1024	14216	JON DAY DR	CRAIMER LN	RAVENWOOD LN	E	AC	8	313	36	12,268	2/28/22	63	24	76	0	Surface Treatment - Slurry Seal	02-14-2023
1652	15932	ROBINWOOD DR	BOLSA CHICA ST	HUMMINGBIRD LN	E	AC	1	1,190	36	42,840	3/21/22	63	36	63	1	New Construction	01-01-1980
1502	13608	PEARCE ST	SIMS ST	BLANTON ST	E	AC	2	330	36	11,880	3/22/22	63	19	81	0	New Construction	01-01-1980
2103	13128	WAIKIKI LN	EDINGER AVE	TRAVELWAY	E	AC	2	140	36	5,040	3/24/22	63	27	73	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2160	15788	WILD ROSE LN	LIEGE DR	NORDINA DR	E	AC	5	1,380	36	49,930	3/29/22	63	14	77	9	New Construction - Initial	01-01-1980
344	13563	CAIN AVE	GOTHARD ST	PALMDALE ST	E	AC	3	345	36	12,420	4/6/22	63	28	72	0	New Construction	01-01-1980
464	14615	COAST CIR	PACIFIC CIR	ANDERSON ST	E	AC	2	73	51	3,723	4/9/22	63	100	0	0	New Construction	01-01-1980
16	14654	ALABAMA ST	MEMPHIS AVE	NASHVILLE AVE	E	AC	6	329	37	12,173	8/14/23	63	27	54	19	New Construction	01-01-1980
183	14628	BALTIMORE AVE	HUNTINGTON ST	ALLEY HUNTINGTON ST	E	AC	9	156	37	5,772	8/14/23	63	44	56	0	New Construction	01-01-1980
1023	15873	JOLIET AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	485	37	17,723	8/15/23	63	58	35	7	Overlay - AC Structural	03-01-2011
1719	14327	SAND DOLLAR LN	ST AUGUSTINE DR	MILNE DR	E	AC	9	758	36	27,788	8/30/23	63	23	71	6	New Construction	01-01-1980
753	14335	FLEET LN	TIDEWATER CIR	PIER DR	E	AAC	9	622	36	23,142	3/20/24	63	24	76	0	Overlay - AC Structural	05-11-2018
742	15510	FIRESIDE DR	CHARWOOD LN	CRESTVIEW LN	E	AC	9	954	36	35,844	5/7/24	63	27	73	0	Surface Treatment - Slurry Seal	05-11-2018
294	15776	BRANNEN DR	APEL LN	SPRINGDALE ST	E	AC	5	940	36	33,840	5/13/24	64	26	73	1	New Construction	01-01-1980
1200	14059	LOWMEAD DR	BRIARLY LN	LEECREST LN	E	AC	7	628	36	24,108	2/24/20	64	27	73	0	Surface Treatment - Slurry Seal	07-15-2021
490	13724	CONNECTOR LN	ENGINEER DR	MACHINE DR	E	AC	1	1,141	40	45,640	5/5/20	64	24	68	8	New Construction	01-01-1980
756	13397	FLINTSTONE LN	FENLEY DR	AMADA DR	E	AC	5	780	36	28,080	3/14/22	64	17	78	5	New Construction	01-01-1980
508	13356	CORONADO LN	SONOMA DR	CDS	E	AC	5	179	36	7,794	3/15/22	64	48	52	0	New Construction	01-01-1980
354	15303	CAMBAY LN	ALLEY MC FADDEN AVE	END	E	AC	1	826	36	29,736	3/21/22	64	20	80	0	New Construction	01-01-1980
2066	15090	VENTURI DR	BIRDIE LN	NASSAU LN	E	AC	3	1,421	36	51,156	3/23/22	64	27	48	25	New Construction - Initial	01-01-1980
719	15938	FANTASIA LN	EDINGER AVE	TENOR DR	E	AC	2	875	36	31,500	3/24/22	64	14	86	0	New Construction	01-01-1980
762	15791	FORBES LN	APEL LN	NORDINA DR	E	AC	5	1,190	36	43,090	3/29/22	64	24	76	0	New Construction	01-01-1980
2140	15076	WESTPORT DR	DAVENPORT DR	BLAIR LN	E	AC	2	1,135	36	40,660	3/29/22	64	45	55	0	New Construction - Initial	01-01-1980
1577	15329	PRODUCTION DR	CHEMICAL LN	GRAHAM ST	E	AC	1	1,170	40	46,320	4/1/22	64	37	61	2	New Construction	01-01-1980
1947	13824	SYSTEM DR	CHEMICAL LN	MANUFACTURE LN	E	AC	1	614	40	25,060	4/1/22	64	39	61	0	New Construction - Initial	01-01-1980
15	14534	AIRPORT CIR	CDS	WARNER AVE	E	AC	2	664	36	25,154	4/5/22	64	30	67	3	New Construction	01-01-1980
1336	13302	MOODY CIR	PEARCE ST	CDS	E	AC	2	259	36	10,574	4/5/22	64	35	46	19	New Construction	01-01-1980
1480	13562	PALMDALE ST	CAIN AVE	CEDAR AVE	E	AC	3	660	38	25,080	4/6/22	64	10	77	13	New Construction	01-01-1980
16	14655	ALABAMA ST	ALLEY MEMPHIS AVE	MEMPHIS AVE	E	AC	6	165	37	6,105	8/14/23	64	36	59	5	New Construction	01-01-1980
969	15673	HUNTINGTON ST	DETROIT AVE	ELMIRA AVE	E	AC	9	330	38	12,540	8/14/23	64	53	33	14	New Construction	01-01-1980
1075	15409	KINGSDALE DR	COLDWATER LN	EDGEWOOD LN	E	AC	7	835	36	30,060	8/21/23	64	33	59	8	New Construction	01-01-1980
399	14243	CASTILIAN DR	COLIMA LN.	MISSION LN	E	AC	9	902	36	32,472	8/23/23	64	29	71	0	New Construction	01-01-1980
1361	14117	MUNSTER DR	SOMERVILLE LN	LONDONDERRY LN	E	AC	9	577	36	20,772	8/23/23	64	24	76	0	Surface Treatment - Slurry Seal	03-01-2011
2201	14102	YVONNE DR	ALLEY MALLOY DR	INDIANAPOLIS AVE	E	AC	9	152	36	5,472	8/23/23	64	70	0	30	Surface Treatment - Slurry Seal	03-01-2011
561	13655	DANCY CIR	SPRINGTIME LN	CDS	E	AC	4	223	32	8,636	4/8/24	64	31	69	0	Surface Treatment - Slurry Seal	11-28-2019
1864	15282	SPRINGTIME LN	LE CORTE DR	FORELLE DR	E	AC	4	527	36	18,684	4/8/24	64	15	78	7	New Construction	01-01-1980
1180	14356	LOCKHAVEN CIR	EFFINGHAM DR	CDS	E	AC	8	495	36	19,320	4/10/24	64	12	71	17	New Construction	01-01-1980
1120	14474	LANDFALL DR	BUSHARD ST	HILARIA CIR	E	AC	9	166	36	5,976	4/25/24	64	27	56	17	Surface Treatment - Slurry Seal	05-11-2019
1574	14776	PRODAN DR	GOTHARD ST	ENTERPRISE LN	E	AC	4	402	40	16,830	5/9/24	64	30	70	0	Surface Treatment - Slurry Seal	11-28-2019
1889	15279	STERLING AVE	BEACH BLVD	PEMBERCO CIR	E	AC	4	906	33	29,634	5/9/24	64	27	71	2	New Construction	01-01-1980
1687	13470	RUSHMOOR LN	ETNA CIR	SUGAR AVE	E	AC	4	682	36	24,336	5/13/24	65	28	72	0	Surface Treatment - Slurry Seal	07-29-2020
582	14162	DEERVALE LN	CANDLEWOOD DR	HAZELBROOK DR	E	AC	7	743	36	26,748	2/10/20	65	38	51	11	Surface Treatment - Slurry Seal	07-15-2021
379	15990	CAPSTONE DR	BLUE FOX CIR	WHETMORE LN	E	AC	3	893	36	34,648	2/11/20	65	44	56	0	Surface Treatment - Slurry Seal	10-01-2012
2113	15424	WARFIELD DR	SANDERSON LN	OCCIDENTAL LN	E	AC	7	681	36	25,266	2/18/20	65	37	44	19	Surface Treatment - Slurry Seal	07-15-2021
314	15810	BRIGHTON DR	CRESTMOOR LN	WHITFORD LN	E	AC	5	670	36	25,120	3/12/20	65	21	49	30	New Construction	01-01-1980
1206	14942	LUDLOW CIR	AMDERTON LN	END	E	AC	5	258	36	11,088	3/12/20	65	30	70	0	New Construction	01-01-1980
480	14186	COLONIAL CIR	MAMMOTH DR	CDS	E	AC	8	579	32	20,028	3/1/22	65	31	68	1	Surface Treatment - Slurry Seal	02-13-2023
795	13710	GALWAY CIR	ANDAMAN LN	END	E	AC	1	530	36	20,330	3/21/22	65	7	91	2	New Construction	01-01-1980
1508	15324	PELICAN LN	ALLEY MC FADDEN AVE	DOVEWOOD DR	E	AC	1	660	36	23,760	3/21/22	65	25	75	0	New Construction	01-01-1980
621	13323	DOYLE DR	SPRINGDALE ST	LOVELL LN	E	AC	3	520	36	18,720	3/23/22	65	13	87	0	New Construction	01-01-1980
1374	15086	NASSAU LN	SNEAD DR	VENTURI DR	E	AC	3	998	36	35,928	3/23/22	65	25	75	0	New Construction	01-01-1980
1231	13224	MALTA CIR	COURTNEY LN	CDS	E	AC	2	716	36	27,276	3/24/22	65	32	68	0	New Construction	01-01-1980
1984	15790	TILBURG DR	APEL LN	FORBES LN	E	AC	5	775	36	27,900	3/29/22	65	22	70	8	New Construction - Initial	01-01-1980
2160	14889	WILD ROSE LN	BRANNEN DR	LIEGE DR	E	AC	5	256	36	9,216	3/29/22	65	29	70	1	New Construction - Initial	01-01-1980
152	13576	ASH ST	SYCAMORE AVE	CYPRESS AVE	E	AC	4	424	36	15,264	3/31/22	65	34	42	24	New Construction	01-01-1980
152	15267	ASH ST	WARNER AVE	SYCAMORE AVE	E	AC	4	398	36	14,328	3/31/22	65	28	70	2	New Construction	01-01-1980
410	15257	CEDAR AVE	GOTHARD ST	END	E	AC	3	545	36	19,620	4/6/22	65	59	27	14	New Construction	01-01-1980
255	13223	BLAIR LN	WESTPORT DR	ROUNDHILL DR	E	AC	2	163	36	5,868	4/7/22	65	48	52	0	New Construction	01-01-1980
16	15677	ALABAMA ST	OSWEGO AVE	ALLEY ADAMS AVE	E	AC	6	470	36	16,920	8/15/23	65	16	83	1	Surface Treatment - Slurry Seal	03-01-2011
1023	15881	JOLIET AVE	ENGLAND ST	FLORIDA ST	E	AC	6	330	37	12,210	8/15/23	65	37	36	27	New Construction	01-01-1980
1296	15691	MEMPHIS AVE	FLORIDA ST	BEACH BLVD	E	AC	6	660	36	23,472	8/15/23	65	21	79	0	Surface Treatment - Slurry Seal	03-01-2011
216	14111	BEAM CIR	SEAPORT DR	END	E	AAC	9	155	32	4,960	8/21/23	65	46	54	0	Overlay - AC Structural	03-01-2011
349	14641	CALIFORNIA ST	FRANKFORT AVE	GENEVA AVE	E	AC	9	330	37	12,210	8/24/23	65	100	0	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1221	13639	MAGIC CIR	HARTLUND ST	CDS	E	AC	4	121	32	5,372	4/8/24	65	44	56	0	Surface Treatment - Slurry Seal	11-28-2019
1937	14499	SUSAN LN	BANNING AVE	CHRISTINE DR	E	AC	9	563	36	20,268	4/17/24	65	16	84	0	Surface Treatment - Slurry Seal	05-11-2019
727	14406	FENWICK DR	GOLDEN VIEW LN	MARGARITA LN	E	AC	3	126	36	5,536	2/11/20	66	50	50	0	Surface Treatment - Slurry Seal	10-01-2012
125	15973	ANCHORAGE DR	TOPEKA LN	TRIDENT LN	E	AC	7	1,275	36	46,650	2/24/20	66	32	62	6	Surface Treatment - Slurry Seal	07-15-2021
543	13803	CUMBERLAND DR	YORKSHIRE LN	END	E	AC	1	440	36	17,340	2/26/20	66	30	70	0	New Construction	01-01-1980
543	15322	CUMBERLAND DR	VICTORIA LN	YORKSHIRE LN	E	AC	1	780	36	27,792	2/26/20	66	38	62	0	New Construction	01-01-1980
1877	13762	STANFORD LN	CITADEL DR	END	E	AC	1	410	36	16,560	5/6/20	66	19	56	25	New Construction	01-01-1980
1772	12944	SECOND ST	WALNUT AVE	OLIVE AVE	E	AC	6	385	36	13,860	6/22/21	66	43	57	0	Surface Treatment - Slurry Seal	07-27-2022
1994	13114	WALNUT AVE	FOURTEENTH ST	SEVENTEENTH ST	E	AC	6	875	36	31,500	6/23/21	66	14	42	44	Surface Treatment - Slurry Seal	07-27-2022
1685	14184	RUNNING SPRINGS LN	KINGS CANYON DR	MAMMOTH DR	E	AC	8	253	36	9,858	3/1/22	66	9	76	15	Surface Treatment - Slurry Seal	02-13-2023
1101	15144	LA MESA LN	PALO ALTO DR	POINT LOMA DR	E	AC	5	1,020	36	36,720	3/15/22	66	61	39	0	New Construction	01-01-1980
163	15109	AUBURN DR	REDLANDS LN	WHITTIER LN	E	AC	3	1,245	36	45,570	3/16/22	66	56	44	0	New Construction	01-01-1980
1437	13706	OCEANUS DR	TRITON LN	GRAHAM ST	E	AC	1	2,027	40	81,080	3/21/22	66	24	76	0	New Construction	01-01-1980
338	13325	BUSBY LN	JEAN DR	SHIELDS DR	E	AC	3	1,280	36	46,080	3/23/22	66	26	74	0	New Construction	01-01-1980
1367	15993	MYTINGER LN	GLORIA DR	CAMILLE DR	E	AC	3	859	36	30,924	3/23/22	66	24	75	1	New Construction	01-01-1980
518	15080	COURTNEY LN	WESTPORT DR	EDGEWATER LN	E	AC	2	551	36	19,836	3/24/22	66	48	52	0	New Construction	01-01-1980
882	15982	HAMSHIRE DR	SPRINGDALE ST	HALLCROFT LN	E	AC	5	1,191	36	42,876	3/28/22	66	22	59	19	New Construction	01-01-1980
2140	13231	WESTPORT DR	LOWELL CIR	COURTNEY LN	E	AC	2	647	36	23,292	3/29/22	66	45	55	0	New Construction - Initial	01-01-1980
1521	14594	PICCADILLY LN	ADAMS AVE	ADAMS AVE	E	AC	8	68	50	3,400	4/6/22	66	45	55	0	New Construction	01-01-1980
242	15254	BETTY DR	GOLDENWEST ST	CDS	E	AC	3	957	36	35,952	4/7/22	66	31	46	23	New Construction	01-01-1980
1169	14689	LINCOLN AVE	DELAWARE ST	ALLEY DELAWARE ST	E	AC	6	171	36	5,868	8/15/23	66	54	46	0	Surface Treatment - Slurry Seal	03-01-2011
596	15868	DETROIT AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	330	37	12,210	8/24/23	66	42	58	0	New Construction	01-01-1980
681	14629	ELMIRA AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	37	17,945	8/24/23	66	67	29	4	New Construction	01-01-1980
2204	14811	ZEIDER LN	FRIESLAND DR	SLATER AVE	E	AC	4	1,180	36	42,480	3/25/24	66	38	54	8	Surface Treatment - Slurry Seal	07-29-2020
1640	14357	RICHMOND CIR	EFFINGHAM DR	CDS	E	AC	8	495	36	19,320	4/10/24	66	16	53	31	New Construction	01-01-1980
1202	15610	LUAU LN	MOLOKAI DR	LANAI CIR	E	AC	9	514	36	18,504	4/17/24	66	18	79	3	Surface Treatment - Slurry Seal	05-11-2019
1881	15576	STARFIRE LN	HUDSON DR	DAYTONA CIR	E	AC	9	899	36	33,114	4/17/24	66	20	80	0	Surface Treatment - Slurry Seal	05-11-2019
766	15728	FOREST LN	DARSY DR	NEWMAN AVE	E	AC	4	530	36	19,830	5/13/24	67	50	50	0	Surface Treatment - Slurry Seal	11-28-2019
871	13662	HACIENDA DR	DUNES LN	END	E	AAC	1	290	36	11,690	5/8/24	67	57	43	0	Overlay - AC Fabric	10-01-2016
1748	14153	SCOUGALL CIR	JOHNSON LN	CDS	E	AC	7	323	32	11,836	2/11/20	67	96	0	4	Surface Treatment - Slurry Seal	07-15-2021
2186	13862	WOODSIDE CIR	WHITEOAK LN	END	E	AC	3	213	32	8,316	2/19/20	67	47	53	0	New Construction - Initial	01-01-1980
1531	13392	PINON DR	MISTY LN	WRIGHTWOOD LN	E	AC	5	1,013	36	35,892	3/9/20	67	10	83	7	New Construction	01-01-1980
2169	15105	WINDEMEIR LN	WALTON DR	LAURELHURST DR	E	AC	3	1,010	36	36,072	4/20/20	67	23	77	0	New Construction - Initial	01-01-1980
2030	12976	TWELFTH ST	ACACIA AVE	PALM AVE	E	AC	6	370	46	17,020	6/22/21	67	35	65	0	New Construction - Initial	01-01-1980
1488	13033	PARK ST	THIRTEENTH ST	ADAMS AVE	E	AC	6	646	37	23,902	6/29/21	67	20	58	22	Surface Treatment - Slurry Seal	07-27-2022
2032	13019	TWENTY-FIRST ST	ACACIA AVE	PALM AVE	E	AC	6	395	46	18,170	6/30/21	67	18	49	33	Surface Treatment - Slurry Seal	07-27-2022
2043	15001	UTICA AVE	LAKE ST	CDS	E	AC	6	184	36	7,040	7/8/21	67	36	64	0	Surface Treatment - Slurry Seal	07-27-2022
2288	50330	ADAMS AVE FRONTAGE	PICCADILLY LN	END	E	AC	8	348	25	8,700	3/3/22	67	49	44	7	New Construction - Initial	01-01-1980
1279	13404	MC KINNEY CIR	ARMADA DR	CDS	E	AC	5	338	36	13,668	3/14/22	67	13	83	4	New Construction	01-01-1980
170	13352	AVALON LN	PALO ALTO DR	POINT LOMA DR	E	AC	5	1,025	36	36,900	3/15/22	67	50	50	0	Surface Treatment - Slurry Seal	10-01-2012
1283	14874	MEADOWCREST DR	NORTHFIELD LN	EDWARDS ST	E	AC	5	540	36	20,580	3/15/22	67	30	70	0	Surface Treatment - Slurry Seal	10-01-2012
380	13437	CARBECK DR	BELLFIELD LN	FOSS LN	E	AC	5	863	36	31,068	3/28/22	67	58	42	0	New Construction	01-01-1980
2009	14893	TREEHAVEN LN	SUMMERDALE DR	ROSEMONT DR	E	AC	5	595	36	23,676	3/29/22	67	27	73	0	Surface Treatment - Slurry Seal	10-01-2012
16	15662	ALABAMA ST	PECAN AVE	ALLEY FRANKFORT AVE	E	AC	9	246	37	9,102	8/14/23	67	21	72	7	New Construction	01-01-1980
969	14660	HUNTINGTON ST	JOILET AVE	KNOXVILLE AVE	E	AC	6	330	40	13,200	8/14/23	67	70	28	2	Surface Treatment - Slurry Seal	03-01-2011
806	15670	GENEVA AVE	ALLEY HARTFORD AVE	FLORIDA ST	E	AC	9	280	37	10,360	8/15/23	67	19	54	27	New Construction	01-01-1980
1023	15874	JOLIET AVE	HUNTINGTON ST	CALIFORNIA ST	E	AAC	6	330	37	12,210	8/15/23	67	67	26	7	Overlay - AC Structural	03-01-2011
1229	15452	MALLOY DR	YVONNE DR	DUBLIN LN	E	AC	9	1,326	36	47,736	8/21/23	67	17	81	2	Surface Treatment - Slurry Seal	03-01-2011
544	15532	CUPAR LN	CDS	CDS	E	AC	9	944	36	38,718	8/30/23	67	73	27	0	New Construction	01-01-1980
254	14350	BLACKFIN CIR	CHUBASCO LN	CDS	E	AC	8	228	36	9,708	4/1/24	67	69	31	0	Surface Treatment - Slurry Seal	05-11-2018
327	15759	BRUSH DR	WAITE LN	HART CIR	E	AC	4	526	36	18,936	5/9/24	67	25	75	0	Surface Treatment - Slurry Seal	07-29-2020
1668	15155	ROOK DR	GOLDEN VIEW LN	TAURUS LN	E	AC	3	1,000	36	37,500	2/11/20	68	38	47	15	Surface Treatment - Slurry Seal	10-01-2012
982	14423	INLET DR	EDWARDS ST	CLEARWATER CIR	E	AC	5	155	36	5,580	2/24/20	68	27	73	0	Surface Treatment - Slurry Seal	10-01-2012
2042	13467	UPPERLAKE CIR	LAKEVIEW DR	END	E	AC	5	375	36	15,000	2/24/20	68	70	30	0	Surface Treatment - Slurry Seal	10-01-2012
690	13719	ENGINEER DR	GRAHAM ST	PIPELINE LN	E	AC	1	1,347	40	53,560	5/5/20	68	14	59	27	New Construction	01-01-1980
1965	12967	TENTH ST	WALNUT AVE	OLIVE AVE	E	AAC	6	395	46	18,170	6/22/21	68	29	46	25	Surface Treatment - Slurry Seal	07-27-2022
1972	12982	THIRTEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	375	46	17,250	6/22/21	68	86	0	14	Surface Treatment - Slurry Seal	07-27-2022
1752	12853	SEA CANYON CIR	MORNING TIDE DR	CDS	E	AC	5	363	32	14,055	6/30/21	68	15	77	8	Surface Treatment - Slurry Seal	07-27-2022
1862	15702	SPRINGFIELD AVE	CALIFORNIA ST	DELWARE ST	E	AC	6	280	36	10,080	6/30/21	68	18	71	11	Surface Treatment - Slurry Seal	07-27-2022

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2032	13021	TWENTY-FIRST ST	WALNUT AVE	OLIVE AVE	E	AC	6	415	46	19,090	6/30/21	68	8	71	21	Surface Treatment - Slurry Seal	07-27-2022
530	13086	CREST AVE	ELEVENTH ST	TWELTH ST	E	AC	6	675	43	29,025	7/8/21	68	40	52	8	Surface Treatment - Slurry Seal	07-27-2022
523	14214	CRAILET DR	KENWORTH CIR	CRAIMER LN	E	AC	8	1,006	36	36,216	2/25/22	68	16	77	7	Surface Treatment - Slurry Seal	02-14-2023
1159	15442	LEXINGTON LN	LURLINE DR	ADAMS AVE	E	AC	8	1,358	36	48,888	2/28/22	68	39	61	0	Surface Treatment - Slurry Seal	02-08-2023
4070	50430	EDWARDS ST FRONTAGE	ARMADA DR	VATCHER DR	E	AC	5	864	30	25,920	3/14/22	68	22	65	13	New Construction - Initial	01-01-1980
1153	16003	LENNOX DR	EDWARDS ST	WINDEMEIR LN	E	AC	3	1,104	36	39,744	3/17/22	68	62	31	7	New Construction - Initial	01-01-1980
619	13809	DOVEWOOD DR	BOLSA CHICA ST	PELICAN LN	E	AC	1	520	36	18,720	3/21/22	68	37	63	0	New Construction	01-01-1980
1958	15302	TASMAN DR	BOLSA CHICA ST	BAFFIN CIR	E	AC	1	930	36	33,480	3/21/22	68	27	66	7	New Construction - Initial	01-01-1980
1374	13237	NASSAU LN	MANGRUM DR	SNEAD DR	E	AC	3	311	36	11,196	3/23/22	68	22	78	0	New Construction	01-01-1980
731	13399	FERNPOINT CIR	HAMSHIRE DR	CDS	E	AC	5	429	36	17,244	3/28/22	68	38	52	10	New Construction	01-01-1980
416	14912	CHAPPARAL LN	LIEGE DR	NORDINA DR	E	AC	5	1,409	36	50,724	3/29/22	68	21	79	0	New Construction	01-01-1980
549	13579	CYPRESS AVE	ASH ST.	ELM ST	E	AC	4	436	36	15,696	3/31/22	68	70	30	0	New Construction	01-01-1980
549	13580	CYPRESS AVE	ELM ST	BEACH BLVD	E	AC	4	439	36	15,804	3/31/22	68	62	30	8	New Construction	01-01-1980
850	13298	GRAZ CIR	STALLION CIR	CDS	E	AC	2	291	36	11,726	4/5/22	68	32	63	5	New Construction	01-01-1980
903	15871	HARTFORD AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	37	17,945	8/14/23	68	35	65	0	New Construction	01-01-1980
1296	15688	MEMPHIS AVE	ALABAMA ST	HUNTINGTON ST	E	AC	6	485	36	17,460	8/14/23	68	9	90	1	New Construction	01-01-1980
903	14636	HARTFORD AVE	CALIFORNIA ST	DELAWARE ST	E	AC	9	330	37	12,210	8/15/23	68	55	25	20	New Construction	01-01-1980
371	15654	CAPE COTTAGE LN	NORTHPORT DR	SOUTHPORT DR	E	AC	9	1,245	36	44,820	8/21/23	68	10	90	0	Surface Treatment - Slurry Seal	03-01-2011
1382	15658	NEW BRITAIN LN	ROTHERT LN	END	E	AC	9	773	36	27,828	8/21/23	68	23	77	0	Surface Treatment - Slurry Seal	03-01-2011
116	15885	ALVARADO DR	COLIMA LN	MISSION LN	E	AC	9	906	36	32,616	8/23/23	68	14	86	0	New Construction	01-01-1980
839	14230	GOSHAWK LN	REILLY DR	KINGFISHER DR	E	AC	9	985	36	35,460	8/24/23	68	73	27	0	New Construction	01-01-1980
1691	14319	SABLE DR	MIRAMAR LN	BRETON LN	E	AC	9	270	36	9,720	8/30/23	68	27	73	0	New Construction	01-01-1980
1931	15601	SURFCREST DR	SEASIDE LN	VACATION LN	E	AC	9	509	36	18,324	3/26/24	68	25	75	0	Surface Treatment - Slurry Seal	05-11-2019
2096	14349	VOLANTE DR	CHUBASCO LN	INFERNO LN	E	AC	8	254	36	9,894	4/1/24	68	72	28	0	New Construction - Initial	01-01-1980
758	14742	FLORIDA ST	YORKTOWN AVE	WILLIAMS AVE	E	AC	7	660	36	23,760	4/9/24	68	29	71	0	Surface Treatment - Slurry Seal	11-28-2019
5000	60030	NORTH PACIFIC	10TH ST	BROADWAY	E	AC	2	728	25	18,200	5/6/24	68	13	87	0	New Construction - Initial	01-01-1980
470	14265	COHASSET LN	INDIANAPOLIS AVE	HINGHAM DR	E	AC	9	370	36	13,320	5/8/24	68	21	79	0	Surface Treatment - Slurry Seal	05-11-2018
786	13667	FRONTIER CIR	CALNEVA LN	END	E	AAC	1	530	36	19,080	5/8/24	68	52	48	0	Overlay - AC Fabric	10-01-2016
2016	13705	TROJAN CIR	MAR VISTA DR	END	E	AAC	1	481	36	19,116	5/7/24	69	68	28	4	Overlay - AC Fabric	10-01-2016
12	14164	ADRIAN CIR	END	HAZELBROOK DR	E	AC	7	496	36	19,356	2/10/20	69	35	52	13	Surface Treatment - Slurry Seal	07-15-2021
1412	13626	NORINO DR	COBRA LN	GOLDEN VIEW LN	E	AC	3	253	36	9,108	2/12/20	69	53	47	0	Surface Treatment - Slurry Seal	10-01-2012
1431	15423	OCCIDENTAL LN	VERONICA DR	MADELINE DR	E	AC	7	827	36	31,272	2/18/20	69	4	77	19	Surface Treatment - Slurry Seal	07-15-2021
930	13971	HICKORY LN	HYDE PARK DR	BRABHAM DR	E	AC	8	1,286	36	47,296	2/19/20	69	29	53	18	Surface Treatment - Slurry Seal	07-15-2021
700	15837	ESTUARY LN	DOLPHIN DR	ADAMS AVE	E	AC	7	1,451	36	52,236	2/24/20	69	25	74	1	Surface Treatment - Slurry Seal	07-15-2021
2080	15318	VICTORIA LN	OXFORD DR	CUMBERLAND DR	E	AC	1	520	36	18,720	2/26/20	69	30	70	0	New Construction - Initial	01-01-1980
531	14947	CRESTMOOR LN	BRIGHTON DR	MARYPORT DR	E	AC	5	306	36	11,016	3/12/20	69	22	77	1	New Construction	01-01-1980
2033	13027	TWENTY-SECOND ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/30/21	69	14	64	22	Surface Treatment - Slurry Seal	07-27-2022
1581	15397	PUA DR	KIPAHULU LN	MOOREA LN	E	AC	8	1,102	36	39,672	3/7/22	69	18	82	0	South Gate Slurry Seal	02-08-2023
1194	14900	LOS PATOS AVE	GREEN ST	BOLSA CHICA ST	E	AC	2	660	36	23,112	3/22/22	69	46	53	1	New Construction	01-01-1980
1409	15795	NORDINA DR	CHAPPARAL LN	WILD ROSE LN	E	AC	5	767	36	27,862	3/29/22	69	31	69	0	New Construction	01-01-1980
1909	15773	SUMMERDALE DR	ALLEY GROVE CIR	FRASER LN	E	AC	5	594	36	21,384	3/29/22	69	46	54	0	Surface Treatment - Slurry Seal	01-10-2012
494	13717	CONTAINER LN	MC FADDEN AVE	RESEARCH DR	E	AC	1	1,116	40	44,640	4/1/22	69	34	66	0	New Construction	01-01-1980
488	14440	CONCORD LN	DAVENPORT DR	WINDSOR DR	E	AC	2	409	36	14,974	4/5/22	69	24	76	0	New Construction	01-01-1980
2122	13304	WAVERIDER CIR	BOLSA CHICA ST	CDS	E	AC	2	203	36	8,558	4/7/22	69	24	76	0	New Construction - Initial	01-01-1980
2015	13707	TRITON LN	OCEANUS DR	ARGOSY AVE	E	AC	1	563	40	22,520	4/8/22	69	16	84	0	New Construction - Initial	01-01-1980
16	15664	ALABAMA ST	CHICAGO AVE	DETROIT AVE	E	AC	9	329	37	12,173	8/14/23	69	18	67	15	New Construction	01-01-1980
969	14646	HUNTINGTON ST	FRANKFORT AVE	GENEVA AVE	E	AC	9	330	40	13,200	8/14/23	69	83	0	17	New Construction	01-01-1980
1296	14682	MEMPHIS AVE	DELAWARE ST	FLORIDA ST	E	AAC	6	661	36	23,508	8/15/23	69	27	58	15	Overlay - AC Structural	03-01-2011
1767	14106	SEASHELL CIR	SEALROCK DR	END	E	AAC	9	151	36	5,436	8/21/23	69	73	0	27	Overlay - AC Structural	03-01-2011
1263	14222	MARY CIR	FARNSWORTH LN	END	E	AC	9	321	32	10,272	8/24/23	69	69	31	0	New Construction	01-01-1980
1187	14312	LOMOND DR	LOCHLEA LN	NEWLAND ST	E	AC	9	660	39	26,766	8/30/23	69	34	66	0	New Construction	01-01-1980
1704	15516	SALINE DR	REEF LN	PEBBLE LN	E	AC	8	760	36	31,360	3/6/24	69	95	0	5	Surface Treatment - Slurry Seal	05-11-2018
1670	15003	SEVENTEENTH ST	HUNTINGTON ST	DELAWARE ST	E	AC	7	1,043	56	58,408	3/13/24	69	27	65	8	Surface Treatment - Slurry Seal	11-28-2019
622	14293	DRAGON CIR	NATIONAL LN	CDS	E	AC	8	491	36	20,716	3/18/24	69	43	49	8	New Construction	01-01-1980
1389	15370	NEWHAVEN LN	BRIDGEPORT DR	ALLEY GILFORD CIR	E	AC	7	877	36	31,572	4/2/24	69	30	67	3	Surface Treatment - Slurry Seal	11-28-2019
3000	20000	KELVIN LN	ELLSWORTH DR	CARROLTOWN DR	E	AC	9	902	36	32,472	5/9/24	69	52	40	8	Surface Treatment - Slurry Seal	05-11-2018
333	14138	BURLCREST DR	BRENTSTONE LN	SWANSEA LN	E	AC	7	469	36	17,634	2/11/20	70	40	60	0	Surface Treatment - Slurry Seal	07-15-2021
1285	15463	MEANDER LN	BURLCREST DR	RATH CIR	E	AC	7	600	36	22,350	2/12/20	70	19	79	2	Surface Treatment - Slurry Seal	07-15-2021
1015	13978	JERRILYN LN	GRAND DR	KREPP DR	E	AC	8	1,020	36	36,720	2/18/20	70	42	58	0	Surface Treatment - Slurry Seal	07-15-2021

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
228	14058	BELLMEAD DR	BRIARLY LN	FELCLIFF LN	E	AC	7	1,027	36	36,972	2/24/20	70	20	78	2	Surface Treatment - Slurry Seal	07-15-2021
2192	15169	WRIGHTWOOD LN	PINON DR	PADUA DR	E	AC	5	520	36	18,720	3/9/20	70	24	76	0	New Construction - Initial	01-01-1980
1176	13906	LITTLE HARBOR DR	SUMMER BREEZE LN	GOLDENWEST ST	E	AC	5	130	36	5,526	6/30/21	70	18	43	39	Surface Treatment - Slurry Seal	07-27-2022
1605	15832	RANGER LN	CUTTY SARK DR	ADAMS AVE	E	AC	8	1,163	36	41,868	2/28/22	70	28	69	3	Surface Treatment - Slurry Seal	02-08-2023
1791	15998	SHAYNE DR	GENTRY LN	CDS	E	AC	3	1,012	36	37,932	3/17/22	70	32	56	12	New Construction	01-01-1980
1728	13179	SANTA ANITA LN	MEADOWLARK DR	CALIENTE DR	E	AC	2	863	36	31,068	3/23/22	70	31	51	18	New Construction	01-01-1980
878	15178	HALLCROFT LN	HAMSHIRE DR	VARSITY DR	E	AC	5	532	36	19,152	3/28/22	70	38	60	2	New Construction	01-01-1980
777	14909	FRANS LN	GLENSTONE DR	CDS	E	AC	5	193	36	8,198	3/29/22	70	13	87	0	New Construction	01-01-1980
1626	13828	RENO CIR	TAFT LN	END	E	AC	1	127	52	6,604	4/1/22	70	52	42	6	New Construction	01-01-1980
1327	13636	MONA LN	BETTY DR	END	E	AC	3	126	36	4,536	4/7/22	70	81	19	0	New Construction	01-01-1980
2123	13229	WAVERLY LN	ROUNDHILL DR	EDGEWATER LN	E	AC	2	262	36	9,432	4/7/22	70	66	34	0	New Construction - Initial	01-01-1980
349	14666	CALIFORNIA ST	JOILET AVE	KNOXVILLE AVE	E	AAC	6	330	37	11,988	8/14/23	70	59	41	0	Overlay - AC Structural	03-01-2011
969	14645	HUNTINGTON ST	GENEVA AVE	HARTFORD AVE	E	AC	9	331	38	12,578	8/14/23	70	100	0	0	New Construction	01-01-1980
16	15660	ALABAMA ST	GENEVA AVE	HARTFORD AVE	E	AC	9	330	36	11,880	8/15/23	70	24	59	17	New Construction	01-01-1980
629	15406	DRYBANK DR	COLDWATER LN	EDGEWOOD LN	E	AC	7	735	36	26,460	8/17/23	70	23	67	10	Surface Treatment - Slurry Seal	03-01-2011
774	15879	FRANKFORT AVE	CALIFORNIA ST	DELAWARE ST	E	AC	9	330	36	11,880	8/17/23	70	49	51	0	New Construction	01-01-1980
1753	14112	SEA CIR	SEAPORT DR	END	E	AAC	9	155	32	4,960	8/21/23	70	79	0	21	Overlay - AC Structural	03-01-2011
349	14642	CALIFORNIA ST	ELMIRA AVE	FRANKFORT AVE	E	AC	9	329	40	13,160	8/24/23	70	89	0	11	New Construction	01-01-1980
774	14630	FRANKFORT AVE	HILL ST	CDS	E	AC	9	666	28	21,076	8/24/23	70	53	13	34	New Construction	01-01-1980
1722	14232	SANDPIPER LN	ALLEY INDIANAPOLIS AVE	REILLY DR	E	AC	9	140	36	5,040	8/24/23	70	56	44	0	New Construction	01-01-1980
1966	14234	TERN CIR	SANDPIPER LN	END	E	AC	9	361	36	12,996	8/24/23	70	41	59	0	New Construction - Initial	01-01-1980
85	14247	ATLANTA AVE	BASTIA LN	END	E	AC	9	527	26	13,702	8/30/23	70	69	31	0	New Construction	01-01-1980
1617	15521	REEF LN	SALINE DR	LEVEE DR	E	AC	8	904	36	34,544	3/6/24	70	79	21	0	Surface Treatment - Slurry Seal	05-11-2018
1985	14289	TILLER CIR	SILVER STRAND DR	CDS	E	AC	8	529	36	20,244	3/6/24	70	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1483	15557	PANACEA DR	BUSHARD ST	CDS	E	AC	8	401	36	15,936	4/1/24	70	62	38	0	Surface Treatment - Slurry Seal	05-11-2018
894	13682	HARDWICK CIR	EDGEVIEW LN	END	E	AAC	1	530	36	20,830	5/7/24	70	75	25	0	Overlay - AC Structural	10-01-2016
396	14951	CASCADE ST	NORTH CITY LIMIT	ANACAPA DR	E	AAC	1	131	36	4,716	5/7/24	70	41	59	0	Overlay - AC Fabric	10-01-2016
1518	13808	PHEASANT CIR	PELICAN LN	END	E	AAC	1	380	36	14,930	5/9/24	71	44	56	0	Overlay - AC Fabric	10-01-2016
1595	13701	QUILL CIR	MAR VISTA DR	END	E	AAC	1	480	36	19,080	5/7/24	71	78	22	0	Overlay - AC Fabric	10-01-2016
322	14783	BROOKSHIRE LN	WINDFIELD DR	TALBERT AVE	E	AC	4	344	46	15,324	5/13/24	71	33	31	36	Surface Treatment - Slurry Seal	11-01-2019
306	13674	BRIARCLIFF DR	SPRINGDALE ST	CHATEAU LN	E	AC	1	180	36	6,480	2/10/20	71	37	63	0	New Construction	01-01-1980
2141	15416	WESTWINDS LN	BREAKERS DR	SKIFF CIR	E	AC	7	780	36	28,080	2/19/20	71	21	79	0	Surface Treatment - Slurry Seal	07-15-2021
5250	60400	6TH ST	PACIFIC N	PCH	E	AC	2	197	25	4,925	5/6/20	71	34	66	0	New Construction - Initial	01-01-1980
1965	12969	TENTH ST	ACACIA AVE	PALM AVE	E	AC	6	370	46	17,020	6/22/21	71	39	37	24	Surface Treatment - Slurry Seal	07-27-2022
1972	12981	THIRTEENTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	390	46	17,940	6/22/21	71	91	8	1	Surface Treatment - Slurry Seal	07-27-2022
770	12995	FOURTEENTH ST	CREST AVE	LOMA AVE	E	AC	6	845	45	41,745	6/30/21	71	30	46	24	Surface Treatment - Slurry Seal	07-27-2022
385	14099	CARMANIA LN	ORONSAY CR	ADAMS AVE	E	AC	8	729	36	26,244	2/28/22	71	25	60	15	Surface Treatment - Slurry Seal	02-08-2023
1232	15895	MAMMOTH DR	EVERGLADES LN	RUNNING SPRINGS LN	E	AC	8	1,032	36	36,576	3/1/22	71	18	82	0	Surface Treatment - Slurry Seal	02-13-2023
2288	50310	ADAMS AVE FRONTAGE	CARMANIA LN (N)	RANGER LN	E	AC	8	520	25	13,000	3/3/22	71	29	50	21	Surface Treatment - Slurry Seal	02-08-2023
252	14093	BISMARK DR	BROOKHURST ST	MATSONIA LN	E	AC	8	886	36	31,896	3/3/22	71	59	37	4	Surface Treatment - Slurry Seal	02-08-2023
1969	15242	THAMES LN	HEIL AVE	SEINE DR	E	AC	4	382	36	13,752	3/18/22	71	28	72	0	Surface Treatment - Slurry Seal	07-29-2020
1457	13819	ORIOLE LN	SPARROW DR	SKYLARK DR	E	AC	1	260	36	9,610	3/21/22	71	51	48	1	New Construction	01-01-1980
1822	13289	SIMS ST	PRAIRE DR	PEARCE ST	E	AC	2	660	36	23,760	3/22/22	71	23	77	0	New Construction	01-01-1980
525	13330	CRANDALL DR	MYTINGER LN	EDWARDS ST	E	AC	3	530	36	19,080	3/23/22	71	47	51	2	New Construction	01-01-1980
1905	13136	SUITE DR	FANTASIA LN	BALLAD LN	E	AC	2	800	36	28,800	3/24/22	71	33	67	0	New Construction - Initial	01-01-1980
1514	13411	PEPPER LN	VATCHER DR	BALMORAL DR	E	AC	5	253	36	9,108	4/4/22	71	33	65	2	New Construction	01-01-1980
1553	15684	PORTLAND AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	485	36	16,884	8/14/23	71	46	48	6	Overlay - AC Structural	03-01-2011
660	14231	EGRET LN	RELL DR	KINGFISHER DR	E	AC	9	982	36	35,352	8/24/23	71	35	65	0	New Construction	01-01-1980
1756	14223	SEABIRD CIR	FARNSWORTH LN	END	E	AC	9	321	32	10,272	8/24/23	71	73	27	0	New Construction	01-01-1980
305	14328	BRETON LN	ST AUGUSTINE DR	HATTERAS DR	E	AC	9	833	36	30,738	8/30/23	71	100	0	0	New Construction	01-01-1980
1523	15556	PIER DR	FLEET LN	NORTHSHORE LN	E	AAC	9	302	36	11,622	3/20/24	71	20	80	0	Overlay - AC Structural	05-11-2018
10	14372	ADELIA CIR	CDS	POLYNESIAN LN	E	AC	9	480	36	18,780	3/26/24	71	41	59	0	New Construction	01-01-1980
2172	14486	WINDSONG CIR	SURFCREST DR	CDS	E	AC	9	475	36	18,600	3/26/24	71	32	68	0	Surface Treatment - Slurry Seal	05-11-2019
1041	14381	KAPAA DR	KIOWA LN	KANEHOE LN	E	AC	9	930	36	32,904	3/27/24	71	34	64	2	Surface Treatment - Slurry Seal	05-11-2019
741	14343	FIREBRAND LN	ATLANTA AVE	ORIENT DR	E	AC	8	173	36	6,228	4/1/24	71	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
446	15316	CITADEL DR	COLUMBIA LN	EDWARDS ST	E	AC	1	645	36	23,220	5/7/24	71	33	67	0	New Construction	01-01-1980
713	13671	FAIRVIEW LN	ANACAPA DR	BRIARCLIFF DR	E	AAC	1	786	36	30,046	5/7/24	71	61	39	0	Overlay - AC Fabric	10-01-2016
1330	14266	MONTAUK CIR	HINGHAM DR	CDS	E	AC	9	279	32	11,478	5/8/24	71	29	53	18	Surface Treatment - Slurry Seal	05-11-2018
393	14261	CARROLLTOWN DR	MAGNOLIA ST	KELVIN LN	E	AC	9	176	36	6,336	5/9/24	71	45	49	6	Surface Treatment - Slurry Seal	05-11-2018

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
832	15294	GLENWOOD DR	SPRINGDALE ST	SHINKLE CIR	E	AAC	1	899	36	32,364	5/7/24	71	54	45	1	Overlay - AC Fabric	10-01-2016
2197	13797	YORKSHIRE LN	OXFORD DR	CANTERBURY DR	E	AC	1	276	36	9,936	4/27/24	72	30	70	0	New Construction - Initial	01-01-1980
1054	13685	KELSEY CIR	EDGEVIEW LN	END	E	AAC	1	530	36	20,830	5/7/24	72	91	9	0	Overlay - AC Structural	10-01-2016
1975	13660	THUNDERBIRD CIR	STARDUST DR	END	E	AAC	1	310	36	12,410	5/8/24	72	56	44	0	Overlay - AC Fabric	10-01-2016
1647	14974	RIVIERA DR	STARDUST DR	HAMMON LN	E	AAC	1	1,028	36	37,008	5/8/24	72	30	70	0	Overlay - AC Fabric	10-01-2016
1718	13666	SAN SOUCI CIR	CALNEVA LN	END	E	AAC	1	530	36	19,080	5/8/24	72	80	20	0	Overlay - AC Fabric	10-01-2016
462	15894	CLOUDHAVEN DR	MOONCREST CIR	TIDELAND LN	E	AC	7	721	36	27,456	2/10/20	72	58	42	0	Surface Treatment - Slurry Seal	07-15-2021
1243	15925	MAR VISTA DR	NORTHRIDGE LN	SUNNYCREST LN	E	AC	1	1,300	36	46,800	2/10/20	72	29	66	5	New Construction	01-01-1980
2118	15389	WATERBURY LN	KNEEP DR	YORKTOWN AVE	E	AC	8	1,190	36	43,590	2/18/20	72	31	57	12	Surface Treatment - Slurry Seal	07-15-2021
5200	60350	2ND ST	NORTH PACIFIC	SOUTH PACIFIC	E	AC	2	200	25	5,000	5/6/20	72	52	29	19	New Construction - Initial	01-01-1980
2194	13757	YALE CIR	COLUMBIA LN	END	E	AC	1	543	36	21,048	5/6/20	72	34	62	4	New Construction - Initial	01-01-1980
1965	13073	TENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	380	46	17,480	6/22/21	72	31	29	40	Surface Treatment - Slurry Seal	07-27-2022
1505	13104	PECAN AVE	TWENTIETH ST	GOLDENWEST ST	E	AC	6	795	36	28,920	6/23/21	72	10	72	18	Surface Treatment - Slurry Seal	07-27-2022
1955	14206	TANBARK CIR	MEREDITH DR	CDS	E	AC	8	84	63	7,292	2/28/22	72	27	48	25	Surface Treatment - Slurry Seal	02-14-2023
2082	14431	YORKTOWN AVE	BROOKHURST ST	MAUNA LN	E	AC	8	250	26	6,500	3/2/22	72	44	49	7	New Construction - Initial	01-01-1980
1940	14005	SUVA LN	GARFILED AVE	SAMOA DR	E	AC	8	188	36	6,768	3/7/22	72	55	45	0	Surface Treatment - Slurry Seal	02-08-2023
2294	15628	BUSHARD ST FRONTAGE	INNSBRUCK DR	WOODLAWN DR	E	AC	8	252	27	6,804	3/9/22	72	14	72	14	Surface Treatment - Slurry Seal	02-08-2023
1136	16005	LAURELHURST DR	WINDEMEIR LN	GOLDENWEST ST	E	AC	3	1,540	36	54,864	3/16/22	72	59	35	6	New Construction - Initial	01-01-1980
2169	13280	WINDEMEIR LN	LAURELHURST DR	LAFAYETTE DR	E	AC	3	258	36	10,038	3/16/22	72	24	61	15	New Construction - Initial	01-01-1980
315	15101	BRIMHALL LN	REUBENS DR	MYRTLE DR	E	AC	3	660	36	24,260	3/17/22	72	22	76	2	New Construction	01-01-1980
354	13714	CAMBAY LN	ALLEY MC FADDEN AVE	MC FADDEN AVE	E	AC	1	159	36	5,724	3/21/22	72	80	0	20	New Construction	01-01-1980
134	14903	APEL LN	TILBURG DR	FRANS LN	E	AC	5	421	36	15,156	3/29/22	72	21	79	0	New Construction	01-01-1980
1676	13232	ROUNDHILL DR	BLAIR LN	COURTNEY LN	E	AC	2	1,169	36	41,884	3/29/22	72	77	23	0	New Construction	01-01-1980
152	15266	ASH ST	CYPRESS AVE	MANDRELL DR	E	AC	4	675	36	24,300	3/31/22	72	56	44	0	New Construction	01-01-1980
1678	14424	ROYAL DR	ROSS LN	LANDAU LN	E	AC	4	245	36	8,820	3/31/22	72	17	83	0	Surface Treatment - Slurry Seal	07-29-2020
1629	15331	RESEARCH DR	GRAHAM ST	COMPUTER LN	E	AC	1	925	40	37,000	4/1/22	72	28	72	0	New Construction	01-01-1980
1028	13532	JUDY CIR	LUCIA LN	CDS	E	AC	4	350	32	12,450	4/6/22	72	31	69	0	Surface Treatment - Slurry Seal	07-29-2020
16	15680	ALABAMA ST	ALLEY KNOXVILLE AVE	ALLEY LINCOLN AVE	E	AC	6	330	37	12,210	8/14/23	72	41	42	17	Surface Treatment - Slurry Seal	03-01-2011
349	14668	CALIFORNIA ST	HARTFORD AVE	INDIANAPOLIS AVE	E	AC	9	329	37	12,173	8/14/23	72	100	0	0	New Construction	01-01-1980
810	14675	GEORGIA ST	INDIANAPOLIS AVE	JOILET AVE	E	AC	6	331	37	11,840	8/15/23	72	38	45	17	New Construction	01-01-1980
1088	14697	KNOXVILLE AVE	CALIFORNIA ST	ALLEY CALIFORNIA ST	E	AC	6	160	37	5,920	8/15/23	72	29	50	21	New Construction	01-01-1980
282	14619	BOOTHBAY CIR	PORT GREENWICH LN	END	E	AC	9	453	34	15,402	8/21/23	72	17	83	0	Surface Treatment - Slurry Seal	03-01-2011
556	14031	DALLAS CIR	FLAGSTONE LN	END	E	AC	7	466	34	15,844	8/21/23	72	25	67	8	Surface Treatment - Slurry Seal	03-01-2011
898	14110	HARPOON CIR	SEAPORT DR	END	E	AAC	9	238	32	7,616	8/21/23	72	76	24	0	Overlay - AC Structural	03-01-2011
29	14237	ALICANTE LN	KINGFISHER DR	ALVARADO DR.	E	AC	9	482	36	17,352	8/23/23	72	100	0	0	New Construction	01-01-1980
183	14627	BALTIMORE AVE	ALLEY ALABAMA ST	HUNTINGTON ST	E	AC	9	161	37	5,957	8/24/23	72	54	39	7	New Construction	01-01-1980
349	14644	CALIFORNIA ST	CHICAGO AVE	DETROIT AVE	E	AC	9	328	36	11,808	8/24/23	72	38	62	0	New Construction	01-01-1980
648	14452	EBBTIDE CIR	BEACH BLVD	END	E	AC	9	270	32	8,640	8/24/23	72	45	53	2	New Construction	01-01-1980
1079	14382	KIOWA LN	BERMUDA DR	KAHULUI DR	E	AC	9	256	36	8,928	3/27/24	72	34	64	2	Surface Treatment - Slurry Seal	05-11-2018
1418	14342	NORTHSHORE LN	PIER DR	HAMILTON AVE	E	AC	9	169	36	5,796	4/1/24	72	31	53	16	Surface Treatment - Slurry Seal	05-11-2018
376	14506	CAPISTRANO LN	BANNING AVE	CHRISTINE DR	E	AC	9	1,001	36	36,036	4/17/24	72	17	81	2	Surface Treatment - Slurry Seal	05-11-2019
963	14400	HUDSON DR	IMPALA LN	STARFIRE LN	E	AC	9	558	36	21,588	4/24/24	72	17	83	0	New Construction	01-01-1980
1120	15577	LANDFALL DR	DIRIGO CIR	BRANTA CIR	E	AC	9	260	36	10,360	4/25/24	72	25	42	33	Surface Treatment - Slurry Seal	05-11-2019
1585	13810	QUAIL CIR	BLUEBIRD LN	END	E	AAC	1	530	36	20,330	5/9/24	72	28	72	0	Overlay - AC Fabric	10-01-2016
487	14275	COMSTOCK DR	CHARWOOD LN	LANCELOT LN	E	AC	9	701	36	25,986	5/6/24	72	51	49	0	Surface Treatment - Slurry Seal	05-11-2018
1211	14274	LYMAN DR	CRESTVIEW LN	BUSHARD ST	E	AC	9	166	36	5,976	5/6/24	73	28	72	0	Surface Treatment - Slurry Seal	05-11-2018
222	15467	BEDEL DR	MANSARD LN	VILLAGE DR	E	AC	7	408	36	14,688	2/11/20	73	45	55	0	Surface Treatment - Slurry Seal	07-15-2021
1031	13374	JULIP LN	ROCK DR	CAPSTONE DR	E	AC	3	573	36	20,340	2/11/20	73	83	17	0	Surface Treatment - Slurry Seal	10-01-2012
1175	15907	LITCHFIELD DR	WOODWARD LN	BUSHARD ST	E	AC	8	1,098	36	39,528	2/18/20	73	12	69	19	Surface Treatment - Slurry Seal	07-15-2021
1264	15809	MARYPORT DR	FALKIRK LN	CRESTMOOR LN	E	AC	5	521	36	18,756	3/12/20	73	39	61	0	New Construction	01-01-1980
906	13758	HARVARD CIR	COLUMBIA LN	END	E	AC	1	543	36	21,048	5/6/20	73	34	66	0	New Construction	01-01-1980
1972	12983	THIRTEENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	390	46	17,940	6/22/21	73	89	0	11	Surface Treatment - Slurry Seal	07-27-2022
530	12991	CREST AVE	MAIN ST	ELEVENTH ST	E	AC	6	612	43	27,795	7/8/21	73	58	30	12	Surface Treatment - Slurry Seal	07-27-2022
1805	13100	SHIPLEY ST	ADAMS AVE	CDS	E	AC	6	464	36	17,250	7/8/21	73	37	47	16	Surface Treatment - Slurry Seal	07-27-2022
407	14176	CATHAY CIR	INTERIOR LN	CDS	E	AC	8	379	32	13,628	2/23/22	73	43	57	0	Surface Treatment - Slurry Seal	02-13-2023
1919	14018	SUNDAY DR	TOBAGO LN	WARD ST	E	AC	8	455	32	14,560	3/2/22	73	19	80	1	Surface Treatment - Slurry Seal	02-08-2023
2294	15629	BUSHARD ST FRONTAGE	WOODLAWN DR	TELHAN DR	E	AC	8	506	27	13,662	3/9/22	73	19	81	0	Surface Treatment - Slurry Seal	02-08-2023
508	15146	CORONADO LN	SLATER AVE	SONOMA AVE	E	AC	5	682	36	24,324	3/15/22	73	60	40	0	Surface Treatment - Slurry Seal	10-01-2012
1317	13138	MINUET DR	FANTASIA LN	BALLAD LN	E	AC	2	800	36	29,300	3/24/22	73	31	69	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1739	15047	SCENARIO DR	OPERA LN	WAIKIKI LN	E	AC	2	781	36	28,116	3/24/22	73	9	91	0	New Construction	01-01-1980
678	13578	ELM ST	SYCAMORE AVE	CYPRESS AVE	E	AC	4	424	36	15,264	3/31/22	73	58	37	5	New Construction	01-01-1980
1037	14823	KAMPEN LN	AMSTERDAM DR	VALENCIA DR	E	AC	4	1,010	36	36,360	3/31/22	73	34	66	0	Surface Treatment - Slurry Seal	07-29-2020
1681	13542	ROYER CIR	ROSS LN	CDS	E	AC	4	244	32	9,058	3/31/22	73	23	76	1	Surface Treatment - Slurry Seal	07-29-2020
724	14449	FELCLIFF LN	ADAMS AVE	CROWN REEF LN	E	AC	7	127	36	4,572	4/6/22	73	100	0	0	New Construction	01-01-1980
2084	15653	VIEWPOINT LN	TERRY DR	DAMASK DR	E	AC	4	549	36	20,264	4/6/22	73	19	81	0	Surface Treatment - Slurry Seal	07-29-2020
499	14980	CORAL CAY LN	PCH	BLUEWATER LN	E	AC	2	415	36	15,440	4/9/22	73	21	79	0	New Construction	01-01-1980
1683	14029	RUMFORD LN	POE DR	DEEPVIEW DR	E	AAC	7	520	36	18,720	8/17/23	73	58	28	14	Overlay - AC Structural	03-01-2011
1582	14241	PUERTO DR	MISSION LN	NEWLAND ST	E	AC	9	167	36	6,012	8/23/23	73	79	0	21	New Construction	01-01-1980
774	15669	FRANKFORT AVE	DELAWARE ST	HILL ST	E	AC	9	943	32	30,176	8/24/23	73	89	0	11	New Construction	01-01-1980
283	14473	BORBA CIR	DAKAR LN	CDS	E	AC	9	276	32	11,332	4/25/24	73	32	0	68	Surface Treatment - Slurry Seal	05-11-2019
1642	13702	RIDGEVIEW CIR	MAR VISTA DR	END	E	AAC	1	480	36	19,280	5/7/24	73	77	23	0	Overlay - AC Fabric	10-01-2016
1315	15502	MINERVA LN	ELLSWORTH DR	ELLSWORTH DR	E	AAC	9	512	32	16,384	5/9/24	73	42	26	32	Overlay - AC Structural	05-11-2018
424	14257	CHAUCER LN	ELLSWORTH DR	CARROLLTOWN DR	E	AAC	9	902	36	32,472	5/8/24	73	62	37	1	Overlay - AC Structural	05-11-2018
1666	15726	RONALD RD	ALLEY RONALD RD	BEACH BLVD	E	AC	4	1,310	36	48,410	5/9/24	73	23	75	2	New Construction	01-01-1980
1687	15212	RUSHMOOR LN	WHITNEY DR	ETNA CIR	E	AC	4	626	36	22,536	5/13/24	73	32	68	0	Surface Treatment - Slurry Seal	07-29-2020
876	14268	HALF LEAGUE DR	BEACHWOOD LN	SNUG HARBOR CIR	E	AC	9	250	36	9,750	5/6/24	74	22	78	0	Surface Treatment - Slurry Seal	05-11-2018
956	14259	HOPETOWN LN	SPENCER CIR	CARROLLTOWN DR	E	AC	9	300	36	10,800	5/9/24	74	39	60	1	New Construction	01-01-1980
1979	15478	TIDELAND LN	CLIFFWOOD DR	CLOUDHAVEN DR	E	AC	7	350	36	14,100	2/10/20	74	68	24	8	Surface Treatment - Slurry Seal	07-15-2021
302	15891	BRENTSTONE LN	BURLCREST DR	CHARFORD DR	E	AC	7	1,183	36	42,588	2/11/20	74	30	70	0	Surface Treatment - Slurry Seal	07-15-2021
325	15472	BROWNING DR	HARBOR ISLE LN	CDS	E	AC	7	557	32	20,124	2/11/20	74	78	18	4	Surface Treatment - Slurry Seal	07-15-2021
1186	15912	LOMBARDY LN	LORRAINE DR	YORKTOWN AVE	E	AC	7	685	36	24,660	2/19/20	74	33	67	0	Surface Treatment - Slurry Seal	07-15-2021
1938	13796	SUSSEX CIR	ALEXANDRIA DR	END	E	AC	1	410	36	17,260	2/26/20	74	47	53	0	New Construction - Initial	01-01-1980
1474	15164	PADUA DR	WHITFORD LN	WRIGHTWOOD LN	E	AC	5	1,295	36	45,820	3/9/20	74	27	63	10	New Construction	01-01-1980
1533	13723	PIPELINE LN	ENGINEER DR	MACHINE DR	E	AC	1	1,141	40	45,320	5/5/20	74	35	60	5	New Construction	01-01-1980
5450	60700	26TH ST	PACIFIC S	END	E	AC	2	28	30	840	5/21/20	74	18	0	82	New Construction - Initial	01-01-1980
1972	12980	THIRTEENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/22/21	74	81	0	19	Surface Treatment - Slurry Seal	07-27-2022
1994	12929	WALNUT AVE	ELEVENTH ST	FOURTEENTH ST	E	AC	6	930	39	36,270	6/23/21	74	38	36	26	Surface Treatment - Slurry Seal	07-27-2022
1528	13035	PINE ST	ADAMS AVE	SPRINGFIELD AVE	E	AC	6	645	37	23,865	6/29/21	74	32	57	11	Surface Treatment - Slurry Seal	07-27-2022
2031	13018	TWENTIETH ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/30/21	74	19	81	0	Surface Treatment - Slurry Seal	07-27-2022
1345	14008	MOOREA LN	PUA DR	KUKUI DR	E	AC	8	260	36	9,360	3/7/22	74	47	42	11	Surface Treatment - Slurry Seal	02-08-2023
1731	15149	SANTA YNEZ DR	MIRA LOMA CIR	MADERA LN	E	AC	5	511	36	19,280	3/15/22	74	25	75	0	Surface Treatment - Slurry Seal	10-01-2012
1366	16002	MYRTLE DR	GENTRY LN	BRIMHALL LN	E	AC	3	1,016	36	37,076	3/17/22	74	80	20	0	New Construction	01-01-1980
1411	13263	NORGROVE CIR	SILVERWOOD DR	CDS	E	AC	3	140	32	5,730	3/17/22	74	31	69	0	New Construction	01-01-1980
126	13713	ANDAMAN LN	ALLEY MCFADDEN AVE	MCFADDEN AVE	E	AC	1	159	36	5,724	3/21/22	74	21	79	0	New Construction	01-01-1980
619	15325	DOVEWOOD DR	PELICAN LN	HUMMINGBIRD LN	E	AC	1	670	36	24,370	3/21/22	74	45	55	0	New Construction	01-01-1980
833	15129	GLORIA DR	TRUDY LN	TORJIAN LN	E	AC	3	1,140	36	41,040	3/23/22	74	23	77	0	New Construction	01-01-1980
1634	13583	RHAPSODY DR	FANTASIA LN	MELODY LN	E	AC	2	1,060	36	38,910	3/24/22	74	46	54	0	New Construction	01-01-1980
1964	14599	TENOR DR	FANTASIA LN	END	E	AC	2	126	36	4,536	3/24/22	74	59	41	0	New Construction - Initial	01-01-1980
587	13401	DELLGLEN CIR	FOXSHIELD DR	CDS	E	AC	5	360	36	14,760	3/28/22	74	39	51	10	New Construction	01-01-1980
1751	14529	SPRINGDALE ST	LITTLEFIELD DR	END	E	AC	5	225	80	18,000	3/28/22	74	62	38	0	New Construction	01-01-1980
1873	14864	ST PAUL CIR	ST GEORGE LN	END	E	AC	5	545	36	22,110	3/29/22	74	70	30	0	Surface Treatment - Slurry Seal	10-01-2012
575	13551	DE VILLE CIR	LANDAU LN	CDS	E	AC	4	518	36	18,648	3/31/22	74	32	68	0	Surface Treatment - Slurry Seal	07-29-2020
16	15661	ALABAMA ST	FRANKFORT AVE	GENEVA AVE	E	AC	9	328	37	12,136	8/14/23	74	30	40	30	New Construction	01-01-1980
16	15679	ALABAMA ST	ALLEY LINCOLN AVE	ALLEY MEMPHIS AVE	E	AC	6	330	37	12,210	8/14/23	74	40	51	9	New Construction	01-01-1980
183	14626	BALTIMORE AVE	ALABAMA ST	ALLEY ALABAMA ST	E	AC	9	322	37	11,914	8/14/23	74	88	9	3	New Construction	01-01-1980
1088	14695	KNOXVILLE AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	6	330	37	12,210	8/15/23	74	29	63	8	New Construction	01-01-1980
1554	14677	PORTLAND CIR	HUNTINGTON ST	END	E	AAC	6	576	36	22,236	8/15/23	74	76	16	8	Overlay - AC Structural	03-01-2011
632	15450	DUBLIN LN	SEAPORT DR	MALLOY DR	E	AC	9	513	36	18,468	8/21/23	74	25	75	0	Surface Treatment - Slurry Seal	03-01-2011
2128	15410	WEEMS LN	KINGSDALE DR	END	E	AAC	7	649	36	23,364	8/21/23	74	51	49	0	Overlay - AC Structural	03-01-2011
200	14245	BASTIA LN	SNOWBIRD DR	ATLANTA AVE	E	AC	9	246	36	8,856	8/30/23	74	100	0	0	New Construction	01-01-1980
1933	14503	SURFRIDER LN	PLAYA DR	CHRISTINE DR	E	AC	9	549	36	20,764	4/17/24	74	26	74	0	Surface Treatment - Slurry Seal	05-11-2019
1842	14269	SNUG HARBOR CIR	HALF LEAGUE DR	CDS	E	AC	9	255	32	10,410	5/6/24	74	41	59	0	Surface Treatment - Slurry Seal	05-11-2018
123	15292	ANACAPA DR	CHATEAU LN	FAIRVIEW LN	E	AAC	1	780	36	30,580	5/7/24	74	73	27	0	Overlay - AC Fabric	10-01-2016
1875	15340	STANDISH LN	HOOKER DR	EDINGER AVE	E	AC	1	900	36	32,400	5/8/24	75	65	35	0	New Construction	01-01-1980
866	15275	GULF LN	ALLEY TALBERT AVE	CDS	E	AC	4	534	36	19,224	5/13/24	75	47	53	0	Surface Treatment - Slurry Seal	11-28-2019
2189	15723	WOODWIND DR	SAMPSON LN	GEORGETOWN LN	E	AC	4	911	40	37,190	5/13/24	75	33	67	0	Surface Treatment - Slurry Seal	11-01-2019
758	14756	FLORIDA ST	MAIN ST	PROFESSIONAL CIR	E	AC	4	221	36	7,956	5/9/24	75	16	56	28	Surface Treatment - Slurry Seal	11-28-2019
651	13681	EDGEVIEW LN	KELSEY CIR	LARCHWOOD DR	E	AC	1	260	36	9,360	2/10/20	75	28	72	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1473	14154	PADDOCK CIR	JOHNSON LN	CDS	E	AC	7	324	32	10,368	2/11/20	75	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
2087	15650	VILLAGE DR	JETT DR	MAGNOLIA ST	E	AC	7	743	36	26,748	2/11/20	75	54	37	9	Surface Treatment - Slurry Seal	07-15-2021
2191	15152	WRENFIELD DR	EDWARDS ST	COBRA LN	E	AC	3	1,067	36	39,412	2/12/20	75	33	67	0	Surface Treatment - Slurry Seal	10-01-2012
1092	15903	KREPP DR	WATERBURY LN	STEVEN LN	E	AC	8	960	36	36,060	2/18/20	75	36	64	0	Surface Treatment - Slurry Seal	07-15-2021
2141	15415	WESTWINDS LN	SHORE CIR	BREAKERS DR	E	AC	7	520	36	18,720	2/19/20	75	49	51	0	Surface Treatment - Slurry Seal	07-15-2021
2157	13872	WICKLOW LN	LIMERICK DR	END	E	AC	3	291	36	12,276	2/19/20	75	60	33	7	New Construction - Initial	01-01-1980
2164	13969	WILLHELM CIR	RANDI LN	CDS	E	AC	8	330	32	12,360	2/19/20	75	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
624	13802	DRESDEN CIR	YORKSHIRE LN	END	E	AC	1	440	36	17,340	2/26/20	75	36	64	0	New Construction	01-01-1980
1466	15319	OXFORD DR	VICTORIA LN	GOLDENWEST ST	E	AC	1	1,334	36	48,024	2/26/20	75	44	37	19	New Construction	01-01-1980
672	12972	ELEVENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/22/21	75	39	52	9	New Construction	01-01-1980
1965	12966	TENTH ST	PCH	WALNUT AVE	E	AC	6	375	50	18,750	6/22/21	75	35	43	22	Surface Treatment - Slurry Seal	07-27-2022
530	13124	CREST AVE	THIRTEENTH ST	FOURTEENTH ST	E	AC	6	265	45	12,175	7/8/21	75	41	9	50	Surface Treatment - Slurry Seal	07-27-2022
672	13084	ELEVENTH ST	MAIN ST	LAKE ST	E	AC	6	782	47	41,595	7/8/21	75	42	58	0	Surface Treatment - Slurry Seal	07-27-2022
291	13253	BRADBURY LN	PALISADE DR	DAGNY CIR	E	AC	3	367	36	13,212	3/17/22	75	18	82	0	New Construction	01-01-1980
262	15326	BLUEBIRD LN	QUAIL CIR	ROBINWOOD DR	E	AC	1	780	36	28,080	3/21/22	75	37	63	0	New Construction	01-01-1980
398	13711	CASPIAN CIR	ANDAMAN LN	END	E	AC	1	532	36	20,402	3/21/22	75	15	83	2	New Construction	01-01-1980
1457	13815	ORIOLE LN	ROBINWOOD DR	SPARROW DR	E	AC	1	260	36	9,360	3/21/22	75	28	72	0	New Construction	01-01-1980
1958	13708	TASMAN DR	BAFFIN CIR	CAMBAY LN	E	AC	1	260	36	9,360	3/21/22	75	26	63	11	New Construction - Initial	01-01-1980
1485	13240	PAR CIR	FAIRWAY LN	END	E	AC	3	348	32	12,386	3/23/22	75	49	51	0	New Construction	01-01-1980
518	15074	COURTNEY LN	DAVENPORT DR	WESTPORT DR	E	AC	2	1,182	36	42,552	3/24/22	75	54	46	0	New Construction	01-01-1980
585	13586	DEL MAR LN	ALLEY HEIL AVE	HEIL AVE	E	AC	2	154	36	5,544	3/24/22	75	23	77	0	New Construction	01-01-1980
1044	13139	KAUI LN	HONOLULU LN	HAWAII LN	E	AC	2	262	36	10,432	3/24/22	75	33	46	21	New Construction	01-01-1980
685	14978	EMERALD LN	FIR DR	CYPRESS AVE	E	AC	4	669	36	24,084	3/31/22	75	25	61	14	New Construction	01-01-1980
514	13189	COTUIT CIR	HUMBOLDT DR	CDS	E	AC	2	345	32	12,540	4/7/22	75	27	38	35	New Construction	01-01-1980
306	15293	BRIARCLIFF DR	CHATEAU LN	FAIRVIEW LN	E	AC	1	780	36	28,080	4/8/22	75	34	55	11	New Construction	01-01-1980
806	15865	GENEVA AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	330	40	13,200	8/15/23	75	100	0	0	New Construction	01-01-1980
1462	15848	OSWEGO AVE	LAKE ST	ALABAMA ST	E	AAC	6	372	37	13,764	8/15/23	75	34	66	0	Overlay - AC Structural	03-01-2011
722	14220	FARNSWORTH LN	INDIANAPOLIS AVE	ALLEY INDIANAPOLIS AVE	E	AC	9	152	36	5,472	8/23/23	75	39	44	17	New Construction	01-01-1980
526	14236	CRANE CIR	SANDPIPER LN	END	E	AC	9	357	36	12,852	8/24/23	75	35	60	5	New Construction	01-01-1980
1829	15525	SKIMMER LN	STAR DR	KITE DR	E	AC	8	1,014	36	36,504	3/18/24	75	38	41	21	Surface Treatment - Slurry Seal	05-11-2018
826	14295	GLENCAIRN LN	FRIARSCOURT DR.	SCOTTOUN DR	E	AC	8	1,033	36	37,188	3/19/24	75	33	67	0	New Construction	01-01-1980
758	15004	FLORIDA ST	SHAFFER CIR	GARFIELD AVE	E	AC	4	478	36	17,208	4/8/24	75	27	73	0	Surface Treatment - Slurry Seal	11-28-2019
106	14523	ALLISON CIR	JONESPORT LN	CDS	E	AC	9	215	32	8,680	4/24/24	75	52	48	0	Surface Treatment - Slurry Seal	05-11-2019
359	14479	CAMEO LN	CLEARBROOK DR	LANDFALL DR	E	AC	9	267	36	9,612	4/25/24	75	20	80	0	Surface Treatment - Slurry Seal	05-11-2019
393	15504	CARROLLTOWN DR	KELVIN LN	HOPETOWN LN	E	AC	9	760	36	27,360	5/8/24	75	64	27	9	Surface Treatment - Slurry Seal	05-11-2018
1405	14799	NOBLE CIR	FOREST LN	CDS	E	AC	4	400	34	15,100	5/13/24	75	66	34	0	Surface Treatment - Slurry Seal	11-28-2019
866	13638	GULF LN	TALBERT AVE	ALLEY TALBERT AVE	E	AC	4	159	36	5,724	5/13/24	76	41	59	0	Surface Treatment - Slurry Seal	11-28-2019
214	15955	BEACHWOOD LN	FIVE HARBORS DR	CAMEL LN	E	AC	9	868	36	31,248	5/6/24	76	43	57	0	Surface Treatment - Slurry Seal	05-11-2018
2085	13692	VIKING CIR	SUNNYCREST LN	END	E	AAC	1	352	32	13,064	5/7/24	76	100	0	0	Overlay - AC Fabric	10-01-2016
1122	14270	LANTERN LN	HINGHAM DR	CASTLEGATE DR	E	AAC	9	243	36	8,748	5/10/24	76	33	44	23	Overlay - AC Structural	05-11-2018
2052	14795	VAN BUREN LN	MICHAEL DR	NEWMAN AVE	E	AC	4	781	36	27,828	5/13/24	76	24	76	0	Surface Treatment - Slurry Seal	11-28-2019
4	14533	ABLE LN	SKYLAB RD	BOLSA AVE	E	AC	1	1,434	60	86,040	2/10/20	76	13	85	2	New Construction	01-01-1980
1018	14152	JETT DR	SUNSHINE DR	JOHNSON LN	E	AC	7	255	36	9,180	2/11/20	76	69	22	9	Surface Treatment - Slurry Seal	07-15-2021
1370	15822	NANTUCKET DR	WATERBURY LN	BUSHARD ST	E	AC	7	1,122	36	40,392	2/18/20	76	59	39	2	Surface Treatment - Slurry Seal	07-15-2021
546	14055	CUTTER DR	ESTUARY LN	ISTHMUS LN	E	AC	7	260	36	9,860	2/24/20	76	56	44	0	Surface Treatment - Slurry Seal	07-15-2021
391	15188	CARRANZA LN	VILLA NUEVA DR	COLON CIR	E	AAC	5	813	36	29,268	2/25/20	76	56	44	0	Overlay - AC Structural	10-01-2012
1596	15190	QUINTANA LN	VILLA NUEVA DR	CARRANZA LN	E	AAC	5	1,020	36	36,720	2/25/20	76	91	9	0	Overlay - AC Structural	10-01-2012
531	15807	CRESTMOOR LN	WINDCROFT DR	BRIGHTON DR	E	AC	5	661	36	23,796	3/12/20	76	52	41	7	New Construction	01-01-1980
592	13382	DENVALE CIR	SELKIRK DR	END	E	AC	5	126	36	6,036	3/12/20	76	26	74	0	New Construction	01-01-1980
623	13740	DRAKE LN	BOLSA AVE	ALEXANDRIA DR	E	AC	1	570	36	21,270	5/6/20	76	34	66	0	New Construction	01-01-1980
662	12954	EIGHTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	410	48	19,680	6/22/21	76	32	52	16	Surface Treatment - Slurry Seal	07-27-2022
1446	12926	OLIVE AVE	SECOND ST	THIRD ST	E	AC	6	265	26	6,890	6/30/21	76	19	80	1	Surface Treatment - Slurry Seal	07-27-2022
530	12992	CREST AVE	LAKE ST	MAIN ST	E	AC	6	665	45	30,095	7/8/21	76	62	37	1	Surface Treatment - Slurry Seal	07-27-2022
2288	17022	ADAMS AVE FRONTAGE	SUTTON LN	EAST END	E	AC	8	120	28	3,360	3/11/22	76	88	12	0	New Construction - Initial	01-01-1980
1998	13396	TORIN DR	PRESCOTT LN	FLINTSTONE LN	E	AC	5	260	36	9,360	3/14/22	76	35	65	0	New Construction - Initial	01-01-1980
615	13269	DORAINE CIR	GIARC LN	CDS	E	AC	3	222	32	8,904	3/16/22	76	61	38	1	New Construction	01-01-1980
945	13287	HOBART LN	DEFIANCE DR	BRIDGEWATER DR	E	AC	3	254	36	10,144	3/16/22	76	100	0	0	New Construction	01-01-1980
1428	15996	OAKMONT LN	EDGEMONT DR	HEIL AVE	E	AC	3	690	36	24,265	3/17/22	76	33	67	0	New Construction	01-01-1980
1833	13818	SKYLARK DR	ORIOLE LN	HUMMINGBIRD LN	E	AC	1	980	36	35,780	3/21/22	76	59	41	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1502	15812	PEARCE ST	ALGONQUIN ST	SIMS ST	E	AC	2	660	36	23,760	3/22/22	76	21	62	17	New Construction	01-01-1980
652	15081	EDGEWATER LN	WAVERLY LN	END	E	AC	2	1,061	36	38,196	3/24/22	76	33	6	61	New Construction	01-01-1980
549	15262	CYPRESS AVE	EMERALD LN	OAK LN	E	AC	4	317	36	11,412	3/31/22	76	41	58	1	New Construction	01-01-1980
1502	15119	PEARCE ST	BOLSA CHICA ST	ROOSEVELT LN	E	AC	2	663	36	23,868	4/5/22	76	23	65	12	New Construction	01-01-1980
1669	15023	ROOSEVELT LN	PEARCE ST	CDS	E	AC	2	487	36	18,782	4/5/22	76	54	44	2	New Construction	01-01-1980
1182	13530	LOIS CIR	LUCIA LN	CDS	E	AC	4	350	32	12,450	4/6/22	76	40	60	0	Surface Treatment - Slurry Seal	07-29-2020
191	13186	BARNSTABLE CIR	HUMBOLDT DR	CDS	E	AC	2	375	32	13,500	4/7/22	76	31	69	0	New Construction	01-01-1980
966	15050	HUMBOLDT DR	BARNSTABLE CIR	ARDSLEY CIR	E	AC	2	397	36	14,292	4/7/22	76	46	54	0	New Construction	01-01-1980
1261	13173	MARUFFA CIR	MISTRAL DR	CDS	E	AC	2	381	32	13,692	4/7/22	76	100	0	0	New Construction	01-01-1980
2094	13613	VISTA DR	GREEN ST	ISLAND CIR	E	AC	2	184	36	7,650	4/7/22	76	32	68	0	New Construction - Initial	01-01-1980
17	13620	ALADDIN DR	WEATHERLY LN	SCEPTRE LN	E	AC	2	720	36	25,920	4/9/22	76	33	67	0	New Construction	01-01-1980
16	14625	ALABAMA ST	ATLANTA AVE	ALLEY BALTIMORE AVE	E	AC	9	166	36	5,976	8/14/23	76	28	62	10	New Construction	01-01-1980
16	15663	ALABAMA ST	DETROIT AVE	PECAN AVE	E	AC	9	250	37	9,250	8/14/23	76	44	56	0	New Construction	01-01-1980
349	14665	CALIFORNIA ST	KNOXVILLE AVE	LINCOLN AVE	E	AAC	6	330	37	11,877	8/14/23	76	31	61	8	Overlay - AC Structural	03-01-2011
1765	14113	SEAPORT DR	SEA CIR	END	E	AAC	9	120	36	4,320	8/21/23	76	100	0	0	Overlay - AC Structural	03-01-2011
774	15668	FRANKFORT AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	38	18,430	8/24/23	76	61	0	39	New Construction	01-01-1980
774	15866	FRANKFORT AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	330	40	13,200	8/24/23	76	77	0	23	New Construction	01-01-1980
1722	15498	SANDPIPER LN	TERN CIR	KINGFISHER DR	E	AC	9	758	36	27,288	8/24/23	76	66	34	0	New Construction	01-01-1980
611	14311	DONCASTER DR	LOCHLEA LN	NEWLAND ST	E	AC	9	660	36	23,760	8/30/23	76	80	20	0	New Construction	01-01-1980
669	14296	EL TORO LN	KITE DR	ATLANTA AVE	E	AC	8	179	36	6,444	3/18/24	76	17	83	0	Surface Treatment - Slurry Seal	05-11-2018
1590	15520	QUEENS PARK LN	UPLAND DR	ATLANTA AVE	E	AC	8	747	36	26,892	3/19/24	76	29	60	11	Surface Treatment - Slurry Seal	05-11-2018
506	15947	CORNERBROOK DR	STRATHMOOR LN	AMBERWICK LN	E	AC	8	1,008	36	36,288	4/10/24	76	30	70	0	New Construction	01-01-1980
1539	14504	PLAYA DR	SURFRIDER LN	ISLANDER LN	E	AC	9	270	36	11,720	4/17/24	76	30	70	0	Surface Treatment - Slurry Seal	05-11-2019
751	14462	GRAHAM ST	RANCHO RD	HAROLD PL	E	AAC	1	394	18	9,092	5/8/24	76	37	36	27	Overlay - AC Structural	10-01-2016
217	14250	BEARSDEN CIR	COLBREGGAN DR	CDS	E	AAC	9	210	32	8,520	5/10/24	76	58	42	0	Overlay - AC Structural	05-11-2018
809	14784	GEORGETOWN LN	WOODWIND DR	WINDFIELD DR	E	AC	4	765	40	30,600	5/13/24	76	76	24	0	Surface Treatment - Slurry Seal	11-01-2019
1391	15014	NEWMAN AVE	BEACH BLVD	VAN BUREN ST	E	AC	4	955	40	36,920	5/13/24	77	27	72	1	Surface Treatment - Slurry Seal	11-28-2019
423	13670	CHATEAU LN	ANACAPA DR	BRIARCLIFF DR	E	AAC	1	785	36	29,760	5/7/24	77	97	0	3	Overlay - AC Structural	10-01-2016
1804	13677	SHINKLE CIR	GLENWOOD DR	END	E	AAC	1	350	32	12,950	5/7/24	77	100	0	0	Overlay - AC Fabric	10-01-2016
5460	61020	CANAL ST	BAYVIEW DR	END	E	AC	2	78	26	2,028	5/6/24	77	47	53	0	New Construction - AC	01-01-1980
1439	14262	OCEANWOOD DR	MAGNOLIA ST	SEA MIST LN	E	AC	9	379	36	14,394	5/6/24	77	89	10	1	Surface Treatment - Slurry Seal	05-11-2018
19	14253	ALBANY CIR	HOPETOWN LN	CDS	E	AAC	9	244	32	9,608	5/9/24	77	50	9	41	Overlay - AC Structural	05-11-2018
651	15295	EDGEVIEW LN	HARDWICK CIR	KELSEY CIR	E	AC	1	780	36	28,080	2/10/20	77	46	54	0	New Construction	01-01-1980
1338	14168	MOONCREST CIR	CLOUDHAVEN DR	CDS	E	AC	7	342	36	14,812	2/10/20	77	52	45	3	Surface Treatment - Slurry Seal	07-15-2021
1811	14150	SHOREWOOD CIR	ADAMS AVE	CDS	E	AC	7	630	36	24,480	2/11/20	77	83	9	8	Surface Treatment - Slurry Seal	07-15-2021
972	14447	HYANNIS PORT DR	WATERBURY LN	BUSHARD ST	E	AC	7	1,065	36	38,340	2/18/20	77	44	56	0	Surface Treatment - Slurry Seal	07-15-2021
1383	13457	NEWBURY DR	LAKEPOINT LN	HALLPORT LN	E	AAC	5	542	36	20,262	2/24/20	77	100	0	0	Overlay - AC Structural	10-01-2012
998	15200	IVORYCREST LN	JASONWOOD DR	NORBROOK DR	E	AAC	5	828	36	29,808	3/11/20	77	35	0	65	Overlay - AC Structural	10-01-2012
481	15312	COLUMBIA LN	ALEXANDRIA DR	HARVARD CIR	E	AC	1	520	36	18,720	5/6/20	77	32	68	0	New Construction	01-01-1980
662	12955	EIGHTH ST	PECAN AVE	ACACIA AVE	E	AC	6	410	48	19,680	6/22/21	77	45	25	30	Surface Treatment - Slurry Seal	07-27-2022
1972	13081	THIRTEENTH ST	PCH	WALNUT AVE	E	AC	6	365	50	18,570	6/22/21	77	38	41	21	Surface Treatment - Slurry Seal	07-27-2022
1505	13112	PECAN AVE	FOURTEENTH ST	SEVENTEENTH ST	E	AC	6	930	36	33,480	6/23/21	77	18	49	33	Surface Treatment - Slurry Seal	07-27-2022
1862	15849	SPRINGFIELD AVE	LAKE ST	PARK ST	E	AC	6	585	36	21,060	6/30/21	77	77	23	0	Surface Treatment - Slurry Seal	07-27-2022
1971	12945	THIRD ST	OLIVE AVE	ORANGE AVE	E	AC	6	375	36	13,500	6/30/21	77	32	58	10	Surface Treatment - Slurry Seal	07-27-2022
2033	13098	TWENTY-SECOND ST	ORANGE AVE	PECAN AVE	E	AC	6	395	46	18,170	6/30/21	77	14	40	46	Surface Treatment - Slurry Seal	07-27-2022
1447	14174	OLYMPIC DR	INTERIOR LN	CDS	E	AC	8	379	32	13,628	3/1/22	77	68	32	0	Surface Treatment - Slurry Seal	02-13-2023
1301	14090	MERRIMAC DR	BROOKHURST ST	CANBERRA LN	E	AC	8	1,156	36	41,616	3/3/22	77	60	40	0	Surface Treatment - Slurry Seal	02-08-2023
2051	15434	VALLEY FORGE DR	BROOKHURST ST	CANBERRA LN	E	AC	8	1,156	36	41,616	3/3/22	77	80	17	3	Surface Treatment - Slurry Seal	02-08-2023
2155	15999	WHITTIER LN	AUBURN DR	BRIDGEWATER DR	E	AC	3	780	36	30,080	3/16/22	77	100	0	0	New Construction - Initial	01-01-1980
117	13487	AMAZON DR	ALLEY GANGES LN	SHER LN	E	AC	4	818	36	29,948	3/18/22	77	29	71	0	Surface Treatment - Slurry Seal	07-29-2020
1662	15763	RODGERS DR	TWAIN LN	CDS	E	AC	5	798	36	29,978	3/22/22	77	20	80	0	New Construction	01-01-1980
1294	15030	MELODY LN	EDINGER AVE	RHAPSODY DR	E	AC	2	1,295	36	47,370	3/24/22	77	24	52	24	New Construction	01-01-1980
226	13436	BELLFIELD LN	MIDWAY DR	GRIMSBY DR	E	AC	5	203	36	7,308	3/28/22	77	70	30	0	New Construction	01-01-1980
1426	13565	OAK LN	ALLEY ASH ST	ALLEY OAK LN	E	AC	4	176	36	6,336	3/31/22	77	37	63	0	New Construction	01-01-1980
947	14817	HOLLAND DR	MARKEN LN	END	E	AC	4	96	36	3,456	4/6/22	77	100	0	0	New Construction	01-01-1980
1456	13533	ORINDA CIR	LUCIA LN	CDS	E	AC	4	350	32	12,450	4/6/22	77	38	49	13	Surface Treatment - Slurry Seal	07-29-2020
966	14958	HUMBOLDT DR	WAYFARER LN	SAYBROOK LN	E	AC	2	981	36	29,816	4/7/22	77	64	20	16	New Construction	01-01-1980
1322	15051	MISTRAL DR	WANDERER LN	LEONARD LN	E	AC	2	1,080	36	38,880	4/7/22	77	43	55	2	New Construction	01-01-1980
436	15926	CHINOOK DR	TROPICANA LN	SPRINGDALE ST	E	AC	1	900	36	32,400	4/8/22	77	44	56	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
969	14657	HUNTINGTON ST	MEMPHIS AVE	NASHVILLE AVE	E	AC	6	330	37	12,210	8/14/23	77	24	68	8	New Construction	01-01-1980
1088	14694	KNOXVILLE AVE	ALLEY ALABAMA ST	HUNTINGTON ST	E	AAC	6	162	37	5,994	8/15/23	77	100	0	0	Overlay - AC Structural	03-01-2011
1296	14681	MEMPHIS AVE	HUNTINGTON ST	DELAWARE ST	E	AC	6	659	37	24,087	8/15/23	77	23	70	7	New Construction	01-01-1980
473	14970	COLDWATER LN	YORKTOWN AVE	SCRIBE DR	E	AC	7	364	36	13,104	8/21/23	77	18	76	6	Surface Treatment - Slurry Seal	03-01-2011
1765	15449	SEAPORT DR	SEA CIR	DUBLIN LN	E	AAC	9	791	36	28,476	8/21/23	77	46	47	7	Overlay - AC Structural	03-01-2011
2057	14239	VARAS CIR	MATARO LN	END	E	AC	9	149	42	6,258	8/23/23	77	100	0	0	New Construction - Initial	01-01-1980
1034	14379	KAHULUI DR	KIOWA LN	KANEHOE LN	E	AC	9	930	36	33,480	3/27/24	77	16	71	13	Surface Treatment - Slurry Seal	05-11-2019
248	14355	BINGHAMPTON CIR	EFFINGHAM DR	CDS	E	AC	8	495	36	19,320	4/10/24	77	13	68	19	New Construction	01-01-1980
393	14260	CARROLLTOWN DR	HOPETOWN LN	CDS	E	AAC	9	245	32	9,340	5/6/24	77	51	30	19	Overlay - AC Structural	05-11-2018
5350	61000	16TH ST	BAYVIEW DR	END	E	AC	2	78	30	2,340	5/6/24	78	100	0	0	New Construction - AC	01-01-1980
118	14759	AMBERLEAF CIR	DELAWARE ST	CDS	E	AC	4	514	36	18,504	5/7/24	78	36	64	0	New Construction	01-01-1980
1679	15924	ROYAL OAK DR	CHALET LN	SUNNYCREST LN	E	AAC	1	1,041	36	38,976	5/7/24	78	66	34	0	Overlay - AC Structural	10-01-2016
225	15725	BELL CIR	TALBERT AVE	CDS	E	AC	4	562	36	21,732	5/13/24	78	18	82	0	Surface Treatment - Slurry Seal	11-28-2019
1580	14622	PROVIDENCE LN	CAPE COD DR	ADAMS AVE	E	AC	7	1,338	36	48,168	2/18/20	78	64	36	0	Surface Treatment - Slurry Seal	07-15-2021
2118	14068	WATERBURY LN	YORKTOWN AVE	GREENWICH DR	E	AC	7	172	36	6,192	2/18/20	78	6	94	0	Surface Treatment - Slurry Seal	07-15-2021
503	14416	CORDOBA LN	SLATER AVE	CRISTA PALMA DR	E	AC	5	173	36	5,940	2/25/20	78	34	66	0	Surface Treatment - Slurry Seal	10-01-2012
2047	13600	VALENTINE DR	WHITTIER LN	GOLDENWEST ST	E	AC	3	180	48	7,140	4/20/20	78	22	0	78	New Construction - Initial	01-01-1980
369	13804	CANTERBURY DR	YORKSHIRE LN	END	E	AC	1	440	36	17,340	5/6/20	78	26	74	0	New Construction	01-01-1980
1794	13739	SHELLY DR	BOLSA PARK LN	END	E	AC	1	294	36	12,384	5/6/20	78	27	73	0	New Construction	01-01-1980
1780	13069	SEVENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	375	46	17,250	6/22/21	78	56	0	44	Surface Treatment - Slurry Seal	07-27-2022
1965	13074	TENTH ST	PALM AVE	CREST AVE	E	AC	6	275	40	12,450	6/22/21	78	38	17	45	Surface Treatment - Slurry Seal	07-27-2022
1403	13011	NINETEENTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	415	46	19,090	6/23/21	78	15	85	0	Surface Treatment - Slurry Seal	07-27-2022
16	15674	ALABAMA ST	UTICA AVE.	WITCHITA AVE	E	AC	6	650	36	23,400	6/29/21	78	20	70	10	Surface Treatment - Slurry Seal	07-27-2022
1994	12939	WALNUT AVE	SIXTH ST	EIGHTH ST	E	AC	6	560	37	20,720	7/8/21	78	52	47	1	Surface Treatment - Slurry Seal	07-27-2022
1441	13359	OJAI LN	NAPA CIR	POINT LOMA DR	E	AC	5	262	36	10,572	3/15/22	78	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1106	15108	LAFAYETTE DR	WINDEMEIR LN	POMONA LN	E	AC	3	1,196	36	43,806	3/16/22	78	48	52	0	New Construction	01-01-1980
1843	15094	SOFTWIND DR	SPRINGDALE ST	WOODSTOCK LN	E	AC	3	1,194	36	42,984	3/17/22	78	44	53	3	New Construction	01-01-1980
588	13499	DELTON CIR	ALLEY MADDOX DR	CDS	E	AC	3	223	32	8,636	3/18/22	78	37	54	9	Surface Treatment - Slurry Seal	07-29-2020
2097	13486	VOLGA DR	ALLEY GANGES LN	SHER LN	E	AC	4	817	36	29,412	3/18/22	78	23	77	0	Surface Treatment - Slurry Seal	07-29-2020
1822	15811	SIMS ST	PEARCE ST	WARNER AVE	E	AC	2	1,320	36	47,520	3/22/22	78	25	75	0	New Construction	01-01-1980
1009	15127	JEAN DR	BUSBY LN	TRUDY LN	E	AC	3	520	36	18,552	3/23/22	78	35	65	0	New Construction	01-01-1980
180	15034	BALLAD LN	MINUET DR	PRELUDE DR	E	AC	2	520	36	19,020	3/24/22	78	40	60	0	New Construction	01-01-1980
953	13165	HONOLULU LN	KAUI LN	SCENARIO DR	E	AC	2	693	36	24,948	3/24/22	78	34	66	0	New Construction	01-01-1980
1909	14871	SUMMERDALE DR	TREEHAVEN LN	PINEHURST LN	E	AC	5	485	36	19,492	3/29/22	78	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1778	14929	SERENE DR	MISTY LN	MONTBURY CIR	E	AC	5	254	36	8,856	4/5/22	78	47	53	0	New Construction	01-01-1980
1987	13156	TISBURY CIR	MISTRAL DR	CDS	E	AC	2	428	32	15,196	4/7/22	78	53	47	0	New Construction - Initial	01-01-1980
758	15671	FLORIDA ST	GENEVA AVE	INDIANAPOLIS AVE	E	AC	9	292	36	10,512	8/15/23	78	33	35	32	New Construction	01-01-1980
1088	14693	KNOXVILLE AVE	ALABAMA ST	ALLEY ALABAMA ST	E	AAC	6	323	37	11,951	8/15/23	78	100	0	0	Overlay - AC Structural	03-01-2011
473	15403	COLDWATER LN	DRYBANK DR	ADAMS AVE	E	AC	7	1,074	36	38,664	8/21/23	78	27	64	9	Surface Treatment - Slurry Seal	03-01-2011
1763	14108	SEALROCK DR	SEASHELL CIR	LIGHTHOUSE LN	E	AC	9	246	36	8,856	8/21/23	78	100	0	0	New Construction	01-01-1980
1268	14240	MATARO LN	VARAS CIR	ALVARADO DR	E	AC	9	273	36	9,828	8/23/23	78	69	31	0	New Construction	01-01-1980
1722	14233	SANDPIPER LN	REILLY DR	TERN CIR	E	AC	9	261	36	9,396	8/24/23	78	54	32	14	New Construction	01-01-1980
185	15533	BANFF LN	CREW DR	CDS	E	AC	9	997	36	39,096	8/30/23	78	37	48	15	New Construction	01-01-1980
413	14294	CHANCE CIR	NATIONAL LN	CDS	E	AAC	8	491	36	20,716	3/18/24	78	60	40	0	Overlay - AC Structural	05-11-2018
442	16014	CHUBASCO LN	ORIENT DR	PANACEA DR	E	AC	8	1,016	36	37,326	4/1/24	78	100	0	0	New Construction	01-01-1980
1455	15951	ORIENT DR	CHUBASCO LN	COCOBANA LN	E	AC	8	1,025	36	38,400	4/1/24	78	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
560	13935	DANBURY CIR	NEWHAVEN LN	CDS	E	AC	7	408	36	18,648	4/2/24	78	37	49	14	Surface Treatment - Slurry Seal	11-28-2019
859	15365	GREGORY LN	GARFIELD AVE	CDS	E	AC	7	1,164	27	31,428	4/8/24	78	33	67	0	New Construction	01-01-1980
1986	15714	TIMBER CIR	DELAWARE ST	CDS	E	AC	4	319	17	6,673	4/9/24	78	51	49	0	Surface Treatment - Slurry Seal	11-28-2019
1695	15007	SADDLEBACK LN	ELLIS AVE	CDS	E	AC	5	1,434	36	51,624	5/6/24	79	39	56	5	Surface Treatment - Slurry Seal	11-28-2019
1303	14798	MICHAEL DR	JEFFERSON LN	CDS	E	AC	4	81	36	4,416	5/13/24	79	64	34	2	Surface Treatment - Slurry Seal	11-28-2019
896	13693	HARMONY CIR	SUNNYCREST LN	END	E	AAC	1	352	32	13,064	5/7/24	79	100	0	0	Overlay - AC Fabric	10-01-2016
532	15957	CRESTVIEW LN	FIRESIDE DR	CDS	E	AC	9	1,343	36	50,498	7/17/17	79	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1343	15834	MOONTIDE CIR	ADAMS AVE FRONTAGE	CDS	E	AC	7	635	36	24,360	2/10/20	79	59	41	0	Surface Treatment - Slurry Seal	07-15-2021
230	16022	BELLSHIRE DR	MAYPORT LN	SWANSEA LN	E	AC	7	758	36	27,288	2/11/20	79	94	0	6	Surface Treatment - Slurry Seal	07-15-2021
1241	15890	MANSARD LN	HENTON DR	BAINFORD DR	E	AC	7	941	36	34,376	2/11/20	79	35	65	0	Surface Treatment - Slurry Seal	07-15-2021
466	13625	COBRA LN	WRENFIELD DR	NORINO DR	E	AC	3	287	36	11,332	2/12/20	79	25	75	0	Surface Treatment - Slurry Seal	10-01-2012
1475	14125	PAGE CIR	CROWN REEF LN	CDS	E	AC	7	160	36	7,260	2/12/20	79	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1499	13974	PAULINE LN	GARFIELD AVE	LITCHFIELD DR	E	AC	8	630	36	22,680	2/18/20	79	31	69	0	Surface Treatment - Slurry Seal	07-15-2021

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1532	15585	PIONEER DR	MAGNOLIA ST	LOTUS LN	E	AC	7	1,117	36	40,662	2/18/20	79	39	58	3	Surface Treatment - Slurry Seal	07-15-2021
930	14429	HICKORY LN	BRABHAM DR	ANNIK DR	E	AC	8	260	36	10,110	2/19/20	79	69	31	0	Surface Treatment - Slurry Seal	07-15-2021
1701	13966	SAILWIND LN	SEASPRAY DR	BAYWOOD DR	E	AC	7	261	36	9,646	2/19/20	79	62	38	0	Surface Treatment - Slurry Seal	07-15-2021
791	14417	GALICIA LN	JARDINES DR	VILLA NUEVA DR	E	AC	5	205	36	7,380	2/25/20	79	22	78	0	Surface Treatment - Slurry Seal	10-01-2012
1386	13785	NEWCASTLE LN	OXFORD DR	HALIFAX DR	E	AC	1	1,040	36	37,152	2/26/20	79	28	51	21	New Construction	01-01-1980
1356	14923	MOSS DR	WRIGHTWOOD LN	SPRINGDALE ST	E	AC	5	180	36	6,204	3/9/20	79	39	61	0	New Construction	01-01-1980
1778	15799	SERENE DR	MONTBURY CIR	WOODFERN LN	E	AC	5	618	36	22,248	3/12/20	79	73	0	27	New Construction	01-01-1980
604	13365	DOHRN CIR	KRISTOPHER LN	END	E	AAC	3	368	36	15,248	5/5/20	79	100	0	0	Overlay - AC Structural	10-01-2012
481	13763	COLUMBIA LN	CITADEL DR	END	E	AC	1	410	36	16,560	5/6/20	79	45	53	2	New Construction	01-01-1980
5310	60480	12TH ST	PACIFIC S	END	E	AC	2	46	30	1,380	5/21/20	79	19	0	81	New Construction - Initial	01-01-1980
661	13006	EIGHTEENTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	410	46	18,860	6/22/21	79	16	0	84	Surface Treatment - Slurry Seal	07-27-2022
1780	13070	SEVENTH ST	ACACIA AVE	PALM AVE	E	AC	6	360	48	17,280	6/23/21	79	30	43	27	New Construction	01-01-1980
1528	13036	PINE ST	THIRTEENTH ST	ADAMS AVE	E	AC	6	645	37	23,865	6/29/21	79	39	31	30	Surface Treatment - Slurry Seal	07-27-2022
662	13072	EIGHTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	48	18,960	6/30/21	79	47	12	41	Surface Treatment - Slurry Seal	07-27-2022
672	13077	ELEVENTH ST	PALM AVE	MAIN ST	E	AC	6	702	43	30,186	7/8/21	79	59	34	7	Surface Treatment - Slurry Seal	07-27-2022
2043	14717	UTICA AVE	LAKE ST	PARK ST	E	AC	6	650	36	23,400	7/8/21	79	37	19	44	Surface Treatment - Slurry Seal	07-27-2022
2152	14192	WHITETREE CIR	BAY MEADOW DR	END	E	AC	8	426	34	16,284	2/23/22	79	15	53	32	Surface Treatment - Slurry Seal	02-13-2023
1353	14185	MORRISTOWN CIR	MAMMOTH DR	CDS	E	AC	8	579	32	20,028	3/1/22	79	54	43	3	Surface Treatment - Slurry Seal	02-13-2023
1957	15901	TARPON DR	WEAKFISH LN	SALMON LN	E	AC	8	1,020	36	36,720	3/7/22	79	23	77	0	Surface Treatment - Slurry Seal	02-08-2023
815	15104	GIARC LN	DORIANE CIR	LENNOX DR	E	AC	3	546	36	19,656	3/16/22	79	100	0	0	New Construction	01-01-1980
128	13252	ANGLER LN	PALISADE DR	ORLANDO DR	E	AC	3	620	36	22,320	3/17/22	79	100	0	0	New Construction	01-01-1980
808	13596	GENTRY LN	MYRTLE DR	SHAYNE DR	E	AC	3	1,016	36	37,076	3/17/22	79	50	46	4	New Construction	01-01-1980
670	13527	ELBE CIR	RHINE DR	CDS	E	AC	4	264	32	9,948	3/18/22	79	50	50	0	Surface Treatment - Slurry Seal	07-29-2020
784	14901	FRIML LN	ROGERS DR	KERN DR	E	AC	5	1,120	36	40,320	3/22/22	79	30	69	1	New Construction	01-01-1980
1452	13162	OPERA LN	OPERETTA DR	SCENARIO DR	E	AC	2	260	26	7,260	3/24/22	79	79	0	21	New Construction	01-01-1980
831	15793	GLENSTONE DR	GRAHAM ST	FRANS LN	E	AC	5	423	36	15,228	3/29/22	79	34	62	4	New Construction	01-01-1980
1545	14827	POLDER CIR	HAGUE LN	CDS	E	AC	4	554	36	21,194	3/31/22	79	44	56	0	Surface Treatment - Slurry Seal	07-29-2020
1242	13823	MANUFACTURE LN	PRODUCTION DR	SYSTEM DR	E	AC	1	339	40	13,810	4/1/22	79	53	44	3	New Construction	01-01-1980
1851	15286	SPA DR	HAROLD PL	DOLLAR DR	E	AC	1	776	36	27,936	4/8/22	79	100	0	0	New Construction	01-01-1980
16	14653	ALABAMA ST	ALLEY ADAMS AVE	ADAMS AVE	E	AC	6	190	36	6,840	8/15/23	79	27	73	0	Surface Treatment - Slurry Seal	03-01-2011
722	15495	FARNSWORTH LN	ALLEY INDIANAPOLIS AVE	KINGFISHER DR	E	AC	9	1,127	36	40,572	8/23/23	79	100	0	0	New Construction	01-01-1980
434	15869	CHICAGO AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	329	36	11,844	8/24/23	79	60	35	5	New Construction	01-01-1980
1300	14454	MERMAID CIR	BEACH BLVD	END	E	AC	9	270	32	8,640	8/24/23	79	67	33	0	New Construction	01-01-1980
1722	14228	SANDPIPER LN	INDIANAPOLIS AVE	ALLEY INDIANAPOLIS AVE	E	AC	9	152	36	5,472	8/24/23	79	59	41	0	New Construction	01-01-1980
1012	14973	JENNY DR	LOCHLEA LN	NEWLAND ST	E	AC	9	660	36	23,760	8/30/23	79	90	10	0	New Construction	01-01-1980
2017	14280	TROON LN	ZETLAND DR	DUMBRECK DR	E	AAC	8	236	36	9,876	3/18/24	79	58	0	42	Overlay - AC Structural	05-11-2018
2184	14286	WOODLEA LN	FRIARSCOURT DR	JURA DR	E	AC	8	783	36	28,188	3/19/24	79	37	62	1	New Construction - Initial	01-01-1980
847	15915	GRANT DR	WEYMOUTH LN	HARDING LN	E	AC	7	942	37	34,854	4/2/24	79	45	55	0	Surface Treatment - Slurry Seal	11-28-2019
1004	14785	JAMESTOWN LN	WOODWIND DR	WINDFIELD DR	E	AC	4	766	40	30,640	5/13/24	79	47	40	13	Surface Treatment - Slurry Seal	11-01-2019
712	14395	FAIRLANE CIR	RAMBLER DR	CDS	E	AC	9	390	36	15,540	5/6/24	79	40	60	0	New Construction	01-01-1980
1990	14251	TOBERMORY CIR	COLBREGGAN DR	CDS	E	AAC	9	205	32	8,060	5/10/24	79	46	51	3	Overlay - AC Structural	05-11-2018
1726	15289	SANDS LN	HAMMON LN	TROPICANA LN	E	AAC	1	520	36	18,720	5/8/24	79	53	47	0	Overlay - AC Fabric	10-01-2016
964	13857	HUGHES DR	CARRIE LN	EDWARDS ST	E	AC	1	531	36	19,116	5/8/24	80	43	57	0	New Construction	01-01-1980
337	14788	BURTON DR	GRIFFIN LN	SAMPSON LN	E	AC	4	126	40	5,040	5/8/24	80	46	44	10	Surface Treatment - Slurry Seal	11-01-2019
871	14975	HACIENDA DR	DUNES LN	SANDS DR	E	AAC	1	1,230	36	44,280	5/8/24	80	57	41	2	Overlay - AC Structural	10-01-2016
1858	15270	SPICKARD DR	KURT LN	WHETMORE LN	E	AAC	3	927	36	34,872	2/11/20	80	100	0	0	Overlay - AC Structural	10-01-2012
501	14050	CORAL CIR	WESTWINDS LN	CDS	E	AC	7	232	36	8,352	2/19/20	80	91	0	9	Surface Treatment - Slurry Seal	07-15-2021
2157	15346	WICKLOW LN	GLEN DR	LIMERICK DR	E	AC	3	1,039	36	37,404	2/19/20	80	76	21	3	New Construction - Initial	01-01-1980
828	13461	GLENFOX DR	HEATHPOINT LN	WELLBROOK CIR	E	AAC	5	269	36	10,434	2/24/20	80	80	20	0	Overlay - AC Structural	10-01-2012
1323	15168	MISTY LN	RAPHAEL DR	PADUA DR	E	AC	5	780	36	28,080	3/9/20	80	57	43	0	New Construction	01-01-1980
1059	13439	KENWICK CIR	NEWMOON LN	END	E	AAC	5	488	36	19,068	3/11/20	80	65	35	0	Overlay - AC Structural	10-01-2012
2034	15204	TWINFORD LN	NORBOOK DR	MANOFIELD DR	E	AAC	5	511	36	18,396	3/11/20	80	100	0	0	Overlay - AC Structural	10-01-2012
1780	12952	SEVENTH ST	PCH	WALNUT AVE	E	AC	6	390	48	18,720	6/22/21	80	47	24	29	Surface Treatment - Slurry Seal	07-27-2022
1825	13003	SIXTEENTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	390	46	17,940	6/22/21	80	18	0	82	Surface Treatment - Slurry Seal	07-27-2022
2030	13079	TWELFTH ST	PCH	WALNUT AVE	E	AC	6	340	50	17,142	6/22/21	80	59	0	41	Surface Treatment - Slurry Seal	07-27-2022
1780	16033	SEVENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	395	46	18,170	6/23/21	80	38	23	39	Surface Treatment - Slurry Seal	07-27-2022
1971	12946	THIRD ST	WALNUT AVE	OLIVE AVE	E	AC	6	355	36	12,780	6/30/21	80	35	65	0	Surface Treatment - Slurry Seal	07-27-2022
2030	13082	TWELFTH ST	CREST AVE	MAIN ST	E	AC	6	415	43	17,845	7/8/21	80	46	54	0	Surface Treatment - Slurry Seal	07-27-2022
1819	13408	SILVERHEEL CIR	COLLINS LN	CDS	E	AC	5	222	36	9,492	3/14/22	80	28	72	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1219	14604	MADERA LN	ATHENA DR	MUKAI CT	E	AC	5	386	36	15,036	3/15/22	80	83	17	0	Surface Treatment - Slurry Seal	10-01-2012
1963	13273	TELLIM LN	WALTON DR	LENNOX DR	E	AC	3	712	36	25,344	3/16/22	80	100	0	0	New Construction - Initial	01-01-1980
301	13261	BRENT CIR	SILVERWOOD DR	CDS	E	AC	3	140	32	5,730	3/17/22	80	73	27	0	New Construction	01-01-1980
1636	15243	RHINE DR	DON DR	LOIRE CIR	E	AC	4	520	36	18,720	3/18/22	80	37	63	0	Surface Treatment - Slurry Seal	07-29-2020
1453	13152	OPERETTA DR	FANTASIA LN	OPERA LN	E	AC	2	1,060	36	38,660	3/24/22	80	81	0	19	New Construction	01-01-1980
1398	15652	NICHOLS ST	WARNER AVE	CDS	E	AC	4	615	36	23,940	3/31/22	80	35	65	0	Surface Treatment - Slurry Seal	07-29-2020
891	14544	HARBOUR LN	MORNING STAR DR	END	E	AC	2	761	36	27,396	4/7/22	80	83	14	3	New Construction	01-01-1980
1019	13292	JIB CIR	RUDDER DR	CDS	E	AC	2	499	36	21,240	4/7/22	80	43	55	2	New Construction	01-01-1980
351	13665	CALNEVA LN	CHINOOK DR	SAN SOUCI CIR	E	AC	1	260	36	9,360	4/8/22	80	54	46	0	New Construction	01-01-1980
806	14633	GENEVA AVE	ALLEY DELAWARE ST	ALLEY HARTFORD AVE	E	AC	9	368	37	13,616	8/15/23	80	24	34	42	New Construction	01-01-1980
806	15878	GENEVA AVE	CALIFORNIA ST	DELAWARE ST	E	AC	9	330	39	12,870	8/15/23	80	100	0	0	New Construction	01-01-1980
1765	14114	SEAPORT DR	DUBLIN LN	LIGHTHOUSE LN	E	AAC	9	135	36	4,860	8/21/23	80	100	0	0	Overlay - AC Structural	03-01-2011
334	14999	BURLINGTON LN	CHESTERFIELD LN	ASHBURTON CIR	E	AC	9	572	36	20,336	8/24/23	80	52	48	0	New Construction	01-01-1980
434	15870	CHICAGO AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	36	17,460	8/24/23	80	40	12	48	New Construction	01-01-1980
1698	14453	SAIL CIR	BEACH BLVD	END	E	AC	9	270	32	8,640	8/24/23	80	65	35	0	New Construction	01-01-1980
1931	14493	SURFCREST DR	VACATION LN	HARBORBREEZE LN	E	AC	9	259	36	9,324	3/26/24	80	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
981	14344	INFERNO LN	ORIENT DR	VOLANTE DR	E	AC	8	512	36	18,932	4/1/24	80	30	42	28	Surface Treatment - Slurry Seal	05-11-2018
758	15005	FLORIDA ST	PROFESSIONAL CIR	SHAFFER CIR	E	AC	4	1,365	36	49,140	4/8/24	80	26	53	21	Surface Treatment - Slurry Seal	11-21-2019
2165	14956	WILLIAMS AVE	FLORIDA ST	BEACH BLVD	E	AC	7	660	36	23,760	4/9/24	80	39	45	16	Surface Treatment - Slurry Seal	11-28-2019
1551	15614	PORT CLYDE DR	CAPE MAY LN	ROCKPORT LN	E	AC	9	612	36	24,032	4/17/24	80	36	64	0	Surface Treatment - Slurry Seal	05-11-2019
1709	14476	SALUDA CIR	LANDFALL DR	CDS	E	AC	9	472	36	18,492	4/25/24	80	48	0	52	Surface Treatment - Slurry Seal	05-11-2019
832	13679	GLENWOOD DR	SHINKLE CIR	CHALET LN	E	AAC	1	258	36	10,788	5/7/24	80	100	0	0	Overlay - AC Fabric	10-01-2016
1248	14434	MARIANA CIR	WELLINGTON CIR	CDS	E	AAC	2	279	32	10,428	5/6/24	80	100	0	0	Overlay - AC Fabric	12-01-2017
979	13821	INDUSTRIAL DR	CHEMICAL LN	GRAHAM ST	E	AAC	1	1,170	40	46,800	5/3/24	81	55	43	2	Overlay - AC Fabric	10-01-2016
745	15954	FIVE HARBORS DR	CDS	CDS	E	AAC	9	1,056	32	36,792	5/6/24	81	62	38	0	Overlay - AC Structural	05-11-2018
412	13680	CHALET LN	GLENWOOD DR	ROYAL OAK DR	E	AAC	1	280	36	13,080	5/7/24	81	97	0	3	Overlay - AC Structural	10-01-2016
980	13820	INDUSTRY LN	MC FADDEN AVE	RESEARCH DR	E	AAC	1	1,116	40	44,640	5/3/24	81	54	42	4	Overlay - AC Fabric	10-01-2016
2052	15863	VAN BUREN LN	SLATER AVE	MICHAEL DR	E	AAC	4	541	36	18,888	5/13/24	81	66	33	1	New Construction - Initial	01-01-1980
1831	14531	SKYLAB RD	ABLE LN	SPRINGDALE ST	E	AC	1	1,325	60	79,500	2/10/20	81	32	68	0	New Construction	01-01-1980
460	50520	CLIFFWOOD DR	TIDELAND LN	CDS	E	AC	7	238	32	9,416	2/11/20	81	95	0	5	Surface Treatment - Slurry Seal	07-15-2021
888	14155	HARBOR ISLE LN	BROWNING DR	STRATHCONA CIR	E	AC	7	583	36	22,488	2/11/20	81	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
417	15462	CHARFORD DR	CAMFIELD LN	IVES LN	E	AC	7	409	36	14,724	2/12/20	81	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
952	14062	HONEYWOOD LN	YORKTOWN AVE	VERONICA DR	E	AC	7	170	36	6,120	2/18/20	81	58	0	42	Surface Treatment - Slurry Seal	07-15-2021
1183	13984	LOLA LN	ANNIK DR	YORKTOWN AVE	E	AC	8	171	36	6,156	2/18/20	81	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
224	13874	BELFAST LN	CARLOW DR	EDINGER AVE	E	AC	3	549	36	19,764	2/19/20	81	40	60	0	New Construction	01-01-1980
2141	14046	WESTWINDS LN	ALBATROSS DR	SHORE CIR	E	AC	7	260	36	10,110	2/19/20	81	39	61	0	Surface Treatment - Slurry Seal	07-15-2021
781	13465	FRESHWATER CIR	INLET DR	END	E	AC	5	478	36	18,708	2/24/20	81	53	42	5	Surface Treatment - Slurry Seal	10-01-2012
1993	15972	TOPEKA LN	SALT LAKE DR	DOLPHIN DR	E	AC	7	1,026	36	37,686	2/24/20	81	39	58	3	Surface Treatment - Slurry Seal	07-15-2021
1240	15199	MANORFIELD DR	OLDGATE LN	OXBORO LN	E	AAC	5	1,032	36	37,152	3/11/20	81	52	0	48	Overlay - AC Structural	10-01-2012
1444	15198	OLDGATE LN	LITTLEFIELD DR	END	E	AAC	5	337	36	12,132	3/11/20	81	41	0	59	Overlay - AC Structural	10-01-2012
481	13742	COLUMBIA LN	ALEXANDRIA DR	END	E	AC	1	410	36	16,560	5/6/20	81	48	52	0	New Construction	01-01-1980
5	12873	ACACIA AVE	ELEVENTH ST	FOURTEENTH ST	E	AC	6	865	36	31,140	6/23/21	81	16	40	44	Surface Treatment - Slurry Seal	05-03-2021
1385	12869	PALM AVE	MAIN ST	ELEVENTH ST	E	AC	6	1,320	40	52,800	6/23/21	81	14	59	27	Surface Treatment - Slurry Seal	05-03-2021
1780	12949	SEVENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	390	48	18,720	6/23/21	81	45	11	44	Surface Treatment - Slurry Seal	07-27-2022
969	14711	HUNTINGTON ST	SPRINGFIELD AVE	UTICA AVE	E	AC	6	640	36	22,490	6/29/21	81	27	42	31	Surface Treatment - Slurry Seal	07-27-2022
1130	13055	MAIN ST	ADAMS AVE	SEVENTEENTH ST	E	AAC	6	1,191	30	11,910	6/29/21	81	37	63	0	Surface Treatment - Slurry Seal	07-27-2022
1505	12958	PECAN AVE	ACACIA AVE	MAIN ST	E	AC	6	42	65	2,380	7/8/21	81	77	23	0	Surface Treatment - Slurry Seal	07-27-2022
1965	12989	TENTH ST	MAIN ST	LAKE ST	E	AC	6	648	37	23,976	7/8/21	81	73	25	2	Surface Treatment - Slurry Seal	07-27-2022
1600	14175	RAINIER CIR	INTERIOR LN	CDS	E	AC	8	379	32	13,628	2/23/22	81	74	26	0	Surface Treatment - Slurry Seal	02-13-2023
240	14430	BROOKHURST ST	KAMUELA DR.	YORKTOWN AVE	E	AC	8	1,121	26	29,146	2/25/22	81	41	0	59	Surface Treatment - Slurry Seal	02-08-2023
1609	14218	RAVENWOOD LN	JON DAY DR	WARWICK DR	E	AC	8	1,219	36	45,384	2/28/22	81	19	79	2	Surface Treatment - Slurry Seal	02-14-2023
1074	15482	KINGS CANYON DR	INTERIOR LN	RUNNING SPRINGS LN	E	AC	8	1,286	36	46,796	3/1/22	81	35	34	31	Surface Treatment - Slurry Seal	02-13-2023
155	14593	ASHWORTH CIR	CONSTITUTION DR	CDS	E	AC	8	238	36	10,368	3/7/22	81	88	0	12	Surface Treatment - Slurry Seal	02-08-2023
1516	13995	PERCH CIR	TARPON DR	CDS	E	AC	8	309	32	11,388	3/7/22	81	97	0	3	Surface Treatment - Slurry Seal	02-08-2023
1699	13992	SAILFISH DR	WEAKFISH LN	SALMON LN	E	AC	8	1,019	36	36,684	3/7/22	81	50	43	7	Surface Treatment - Slurry Seal	02-08-2023
1895	13987	STINGRAY LN	ALBACORE DR	VELARDO DR	E	AC	8	709	36	27,524	3/7/22	81	28	69	3	Surface Treatment - Slurry Seal	02-08-2023
1940	14006	SUVA LN	SAMOA DR	MAIKAI DR	E	AC	8	281	36	10,116	3/7/22	81	50	50	0	Surface Treatment - Slurry Seal	02-08-2023
1613	13278	REDGROVE CIR	OAKMONT LN	CDS	E	AC	3	420	36	16,920	3/17/22	81	100	0	0	New Construction	01-01-1980
509	13332	CORRINE CIR	COOPER LN	CDS	E	AC	3	423	36	18,528	3/18/22	81	39	61	0	Surface Treatment - Slurry Seal	07-29-2020

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1003	14868	JAMES CIR	LYNN ST	ALLEY JAMES CIR	E	AC	2	189	36	9,304	3/22/22	81	38	62	0	New Construction	01-01-1980
437	13592	CHIPPER LN	SNEAD DR	MEADOWLARK DR	E	AC	3	674	36	24,264	3/23/22	81	48	42	10	New Construction	01-01-1980
1374	13241	NASSAU LN	VENTURI DR	MARSHALL DR	E	AC	3	260	36	9,610	3/23/22	81	100	0	0	New Construction	01-01-1980
768	15194	FOSS LN	KENBROOK DR	MIDWAY DR	E	AC	5	552	36	19,872	3/28/22	81	100	0	0	New Construction	01-01-1980
1308	15192	MIDWAY DR	BELLFIELD LN	FOSS LN	E	AC	5	1,047	36	37,692	3/28/22	81	100	0	0	New Construction	01-01-1980
778	14886	FRASER LN	SUMMERDALE DR	JUNE DR	E	AAC	5	239	36	9,508	3/29/22	81	100	0	0	Overlay - AC Structural	10-01-2012
1682	13615	RUDDER DR	GREEN ST	JIB CIR	E	AC	2	446	36	16,056	4/7/22	81	66	34	0	New Construction	01-01-1980
1217	15231	MADDOX DR	ALLEY BARTLETT LN	TUNSTALL LN	E	AC	3	158	36	5,688	4/9/22	81	43	57	0	Surface Treatment - Slurry Seal	07-29-2020
1227	13188	MALDEN CIR	SOMERSET LN	CDS	E	AC	2	331	32	12,092	4/9/22	81	44	56	0	New Construction	01-01-1980
2126	15079	WEATHERLY LN	WARNER AVE	ALADDIN DR	E	AC	2	291	36	10,476	4/9/22	81	32	68	0	New Construction - Initial	01-01-1980
1373	15686	NASHVILLE AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	485	37	17,649	8/14/23	81	51	49	0	Overlay - AC Structural	03-01-2011
1462	14678	OSWEGO AVE	ALLEY ALABAMA ST	HUNTINGTON ST	E	AAC	6	162	36	5,544	8/14/23	81	45	55	0	Overlay - AC Structural	03-01-2011
1543	14028	POE DR	DITMAR LN	RUMFORD LN	E	AAC	7	261	36	9,396	8/17/23	81	42	56	2	Overlay - AC Structural	03-01-2011
1311	14620	MILLBRIDGE CIR	PORT GREENWICH LN	END	E	AC	9	453	34	15,402	8/21/23	81	22	78	0	Surface Treatment - Slurry Seal	03-01-2011
533	14433	CREW DR	BANFF LN	LOCHLEA LN	E	AC	9	256	32	8,192	8/30/23	81	100	0	0	New Construction	01-01-1980
1894	15551	STILWELL DR	KROLL LN	SHAW LN	E	AC	9	55	36	2,730	8/30/23	81	23	0	77	New Construction - Initial	01-01-1980
2195	14326	YARMOUTH LN	ST AUGUSTINE DR	HATTERAS DR	E	AC	9	833	36	29,412	8/30/23	81	67	33	0	New Construction - Initial	01-01-1980
1375	16013	NATIONAL LN	STAR DR	KITE DR	E	AC	8	1,014	36	36,504	3/18/24	81	33	55	12	Surface Treatment - Slurry Seal	05-11-2018
1222	14380	MAHALO DR	KIOWA LN	KANEOHE LN	E	AC	9	930	36	32,904	3/27/24	81	25	75	0	New Construction	01-01-1980
2293	14399	BANNING AVE FRONTAGE	STARFIRE LN	CDS	E	AC	9	370	27	11,790	4/17/24	81	25	71	4	New Construction - Initial	01-01-1980
573	14398	DAYTONA CIR	STARFIRE LN	CDS	E	AC	9	360	32	13,020	4/17/24	81	39	61	0	New Construction	01-01-1980
1292	14522	MELINDA CIR	JONESPORT LN	CDS	E	AC	9	409	32	15,588	4/17/24	81	38	48	14	Surface Treatment - Slurry Seal	05-11-2019
1131	13691	LARKSPUR CIR	SUNNYCREST LN	END	E	AAC	1	352	32	13,064	5/7/24	81	100	0	0	Overlay - AC Fabric	10-01-2016
705	13896	EVENING HILL DR	MANOR POINT CIR	SHADY HARBOR CIR	E	AC	5	355	36	12,780	5/6/24	81	79	21	0	Surface Treatment - Slurry Seal	11-28-2019
860	14789	GRIFFIN LN	SLATER AVE	BURTON DR	E	AC	4	448	40	17,920	5/8/24	81	59	41	0	Surface Treatment - Slurry Seal	11-01-2019
1711	15724	SAMPSON LN	BURTON DR	WOODWIND DR	E	AC	4	1,119	40	44,760	5/8/24	81	48	43	9	Surface Treatment - Slurry Seal	11-01-2019
1815	13210	SILLIMAN DR	PHELPS LN	SAYBROOK LN	E	AAC	2	871	36	31,356	5/10/24	81	100	0	0	Overlay - AC Fabric	12-01-2017
2200	14766	YUKON DR	HUNTINGTON ST	MANITOBA LN	E	AC	4	478	45	22,260	5/13/24	81	100	0	0	New Construction - Initial	01-01-1980
5000	60040	NORTH PACIFIC	BROADWAY	16TH ST	E	AC	2	727	25	18,175	5/6/24	81	18	74	8	New Construction - Initial	01-01-1980
1519	15069	PHELPS LN	DALE DR	CDS	E	AAC	2	560	36	21,460	5/10/24	81	30	70	0	Overlay - AC Fabric	12-01-2017
1002	14996	JALM DR	NEWLAND ST	CDS	E	AC	4	536	36	21,296	5/13/24	81	87	13	0	Surface Treatment - Slurry Seal	11-28-2019
231	13678	BELMAR CIR	ROYAL OAK DR	END	E	AAC	1	350	32	13,000	5/7/24	81	100	0	0	Overlay - AC Structural	10-01-2016
1010	14801	JEFFERSON LN	MICHAEL DR	DANY DR	E	AC	4	260	36	9,072	5/13/24	81	61	39	0	Surface Treatment - Slurry Seal	11-28-2019
1350	15056	MORNING STAR DR	SAYBROOK LN	EDGEWATER LN	E	AAC	2	794	36	28,584	5/10/24	81	58	42	0	Overlay - AC Structural	12-01-2017
763	15987	FORD DR	GOLDENWEST ST	END	E	AC	3	966	36	34,776	5/13/24	82	47	53	0	New Construction	01-01-1980
2170	15722	WINDFIELD DR	JAMESTOWN LN	GEORGETOWN LN	E	AC	4	283	40	11,320	5/13/24	82	51	44	5	Surface Treatment - Slurry Seal	11-01-2019
698	13174	ESCAPADE CIR	SUNDANCER LN	CDS	E	AAC	2	198	32	7,836	5/7/24	82	68	32	0	Overlay - AC Fabric	12-01-2017
1303	14796	MICHAEL DR	VAN BUREN ST	CDS	E	AC	4	190	32	7,880	5/13/24	82	67	33	0	Surface Treatment - Slurry Seal	11-28-2019
1302	14791	METZLER LN	BELVA DR	CDS	E	AC	4	310	40	14,200	5/9/24	82	80	17	3	Surface Treatment - Slurry Seal	11-01-2019
1124	13694	LARCHWOOD DR	SUNNYCREST LN	END	E	AC	1	352	36	14,472	2/10/20	82	76	0	24	New Construction	01-01-1980
1801	13698	SHERMAN DR	VANGUARD LN	SABRE LN	E	AC	1	267	36	10,612	2/10/20	82	50	50	0	New Construction	01-01-1980
1086	14130	KNIGHTS CIR	CROWN REEF LN	CDS	E	AC	7	160	36	7,260	2/12/20	82	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1867	14131	SQUIRES CIR	CROWN REEF LN	CDS	E	AC	7	160	36	7,260	2/12/20	82	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
858	14446	GREENWICH DR	WATERBURY LN	BUSHARD ST	E	AC	7	1,070	36	38,520	2/18/20	82	27	71	2	Surface Treatment - Slurry Seal	07-15-2021
1126	15124	LARK LN	TROPHY DR	WARNER AVE	E	AC	3	537	36	20,082	2/18/20	82	100	0	0	New Construction	01-01-1980
2018	13319	TROPHY DR	LARK LN	GREENVIEW LN	E	AC	3	540	36	20,440	2/18/20	82	88	12	0	New Construction - Initial	01-01-1980
728	13887	FEOLA CIR	BREELAND DR	END	E	AC	3	560	36	21,960	2/19/20	82	79	0	21	New Construction	01-01-1980
1700	15382	SAILPORT DR	CORALWOOD LN	HOPEBAY LN	E	AC	7	1,039	36	37,654	2/19/20	82	41	31	28	Surface Treatment - Slurry Seal	07-15-2021
1929	13125	SUNVIEW DR	SWEETBRIAR LN	DAWSON LN	E	AC	3	603	36	21,132	2/19/20	82	75	0	25	New Construction - Initial	01-01-1980
303	13460	BRENTWELL CIR	GLENFOX DR	END	E	AAC	5	472	36	18,492	2/24/20	82	100	0	0	Overlay - AC Structural	10-01-2012
307	15959	BRIARLY LN	DOREMERE DR	LOWMEAD DR	E	AC	7	1,007	36	37,002	2/24/20	82	25	73	2	Surface Treatment - Slurry Seal	07-15-2021
614	15420	DOREMERE DR	NEWLAND AV	GEMFALL LN	E	AC	7	981	36	35,316	2/24/20	82	35	65	0	Surface Treatment - Slurry Seal	07-15-2021
732	13450	FIELDBURY LN	TALBERT AVE	TALEGATE DR	E	AC	5	162	48	7,392	2/24/20	82	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1111	15826	LAKEVIEW DR	INLET DR	CLIFFVIEW LN	E	AC	5	700	30	21,750	2/24/20	82	45	55	0	Surface Treatment - Slurry Seal	10-01-2012
2131	13463	WELLBROOK CIR	GLENFOX DR	END	E	AAC	5	267	36	11,112	2/24/20	82	100	0	0	Overlay - AC Structural	10-01-2012
535	15181	CRISTA PALMA DR	SAN ROQUE LN	AVILLA LN	E	AC	5	1,108	36	40,638	2/25/20	82	59	41	0	Surface Treatment - Slurry Seal	10-01-2012
1644	15186	RIO VISTA DR	GOLDENWEST ST	END	E	AAC	5	539	36	21,404	2/25/20	82	77	23	0	Overlay - AC Structural	10-01-2012
1007	15196	JASONWOOD DR	IVORYCREST LN	END	E	AAC	5	836	36	31,896	3/11/20	82	56	40	4	Overlay - AC Structural	10-01-2012
1406	15203	NORBROOK DR	TWINFORD LN	FIELDBURY LN	E	AAC	5	664	36	23,904	3/11/20	82	70	0	30	Overlay - AC Structural	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
206	13741	BAYLOR CIR	ALEXANDRIA DR	END	E	AC	1	410	36	16,260	5/6/20	82	43	42	15	New Construction	01-01-1980
209	13766	BAYSIDE LN	SYDNEY DR	MEDFORD DR	E	AC	1	274	36	11,364	5/6/20	82	48	52	0	New Construction	01-01-1980
1169	14684	LINCOLN AVE	ALLEY ALABAMA ST	HUNTINGTON ST	E	AAC	6	162	37	5,994	5/21/20	82	32	68	0	Overlay - AC Structural	03-01-2011
1446	16034	OLIVE AVE	22ND ST	GOLDENWEST ST	E	AC	6	255	36	9,430	6/23/21	82	37	61	2	Surface Treatment - Slurry Seal	07-27-2022
2043	15698	UTICA AVE	PARK ST	MAIN ST	E	AC	6	365	36	13,140	7/8/21	82	36	13	51	Surface Treatment - Slurry Seal	07-27-2022
2064	15852	VENICE AVE	ALABAMA ST	HUNTINGTON ST	E	AC	6	450	36	16,100	7/8/21	82	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
246	15486	BIG SUR DR	WIND CAVE LN	RUNNING SPRINGS LN	E	AC	8	754	32	24,378	3/1/22	82	85	15	0	Surface Treatment - Slurry Seal	02-13-2023
707	16018	EVERGLADES LN	MAMMOTH DR	INDIANAPOLIS AVE	E	AC	8	1,469	36	52,884	3/1/22	82	52	32	16	Surface Treatment - Slurry Seal	02-13-2023
959	14197	HOT SPRINGS DR	EVERGLADES LN	RUNNING SPRINGS LN	E	AC	8	1,006	36	36,716	3/1/22	82	32	43	25	Surface Treatment - Slurry Seal	02-13-2023
2167	14187	WIND CAVE LN	MAMMOTH DR	BIG SUR DR	E	AC	8	833	36	30,488	3/1/22	82	57	31	12	Surface Treatment - Slurry Seal	02-13-2023
1223	15398	MAIKAI DR	TONGA LN	END	E	AC	8	864	36	32,904	3/7/22	82	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
586	14076	DELAFIELD CIR	ROCKLAND LN	CDS	E	AC	8	309	32	11,688	3/9/22	82	24	74	2	Surface Treatment - Slurry Seal	02-08-2023
583	15110	DEFIANCE DR	REDLANDS LN	HOBART LN	E	AC	3	1,086	36	40,096	3/16/22	82	100	0	0	New Construction	01-01-1980
699	13270	ESTA CIR	GIARC LN	CDS	E	AC	3	222	32	7,104	3/16/22	82	63	37	0	New Construction	01-01-1980
1549	13284	POMONA LN	LAFAYETTE DR	AUBURN DR	E	AC	3	259	36	9,324	3/16/22	82	100	0	0	New Construction	01-01-1980
1029	13282	JULIEN CIR	LAKEMONT LN	CDS	E	AC	3	143	36	6,648	3/17/22	82	100	0	0	New Construction	01-01-1980
1969	13525	THAMES LN	SEINE DR	RHINE DR	E	AC	4	406	36	14,616	3/18/22	82	42	58	0	Surface Treatment - Slurry Seal	07-29-2020
1185	14470	MC FADDEN AVE	INDUSTRY LN	GRAHAM ST	E	AC	1	256	44	11,264	3/21/22	82	31	42	27	New Construction	01-01-1980
545	14885	CURTIS CIR	GREEN ST	CDS	E	AC	2	407	36	14,652	3/22/22	82	45	21	34	New Construction	01-01-1980
1627	14876	RENOIR CIR	KERN DR	CDS	E	AC	5	50	36	1,800	3/22/22	82	100	0	0	New Construction	01-01-1980
1803	13321	SHIELDS DR	LOVELL LN	END	E	AC	3	400	36	15,650	3/23/22	82	100	0	0	New Construction	01-01-1980
164	15029	AUDREY DR	TOMAS LN	WARREN LN	E	AC	2	1,005	36	36,180	3/24/22	82	89	11	0	New Construction	01-01-1980
719	15937	FANTASIA LN	TENOR DR	SCENARIO DR	E	AC	2	940	36	34,140	3/24/22	82	35	65	0	New Construction	01-01-1980
1563	15936	PRELUDE DR	FANTASIA LN	BALLAD LN	E	AC	2	800	36	28,800	3/24/22	82	56	44	0	New Construction	01-01-1980
226	15191	BELLFIELD LN	GRIMSBY DR	CDS	E	AC	5	1,048	34	35,632	3/28/22	82	70	0	30	New Construction	01-01-1980
937	14907	HILLGATE LN	CDS	GLENSTONE DR	E	AC	2	103	36	5,058	3/29/22	82	100	0	0	New Construction	01-01-1980
1	14829	A ST	ROBIDOUX DR	WARNER AVE	E	AC	4	644	36	23,184	3/31/22	82	39	0	61	Surface Treatment - Slurry Seal	07-29-2020
1944	13566	SYCAMORE AVE	OAK LN	ASH ST	E	AC	4	447	36	16,092	3/31/22	82	100	0	0	New Construction - Initial	01-01-1980
197	13206	BARUNA LN	NALU CIR	SEA WITCH LN	E	AC	2	412	36	14,832	4/7/22	82	39	61	0	New Construction	01-01-1980
197	15071	BARUNA LN	DAVENPORT DR	KITTEN CIR	E	AC	2	607	36	21,852	4/7/22	82	28	72	0	New Construction	01-01-1980
1378	13293	NEELY CIR	GREEN ST	CDS	E	AC	2	269	36	10,934	4/7/22	82	47	50	3	New Construction	01-01-1980
2166	14953	WILLOW LN	CHINOOK AVE	END	E	AC	1	397	36	14,292	4/8/22	82	74	26	0	New Construction - Initial	01-01-1980
1834	13558	SKYLINE LN	SUNBREEZE DR	SLATER AVE	E	AC	3	314	36	11,304	4/9/22	82	65	35	0	New Construction	01-01-1980
1462	14679	OSWEGO AVE	HUNTINGTON ST	DELAWARE ST	E	AAC	6	660	36	23,184	8/14/23	82	59	41	0	Overlay - AC Structural	03-01-2011
691	14669	ENGLAND ST	LINCOLN AVE	MEMPHIS AVE	E	AAC	6	331	36	11,916	8/15/23	82	100	0	0	Overlay - AC Structural	03-01-2011
1023	14704	JOLIET AVE	GEORGIA ST	BEACH BLVD	E	AC	6	315	37	11,655	8/15/23	82	79	0	21	New Construction	01-01-1980
580	15404	DEEPCLIFF DR	DRYBROOK LN	END	E	AAC	7	528	36	19,008	8/17/23	82	100	0	0	Overlay - AC Structural	03-01-2011
602	15969	DITMAR LN	DEEPCLIFF DR	HURSTWELL DR	E	AC	7	986	36	35,496	8/17/23	82	77	0	23	New Construction	01-01-1980
1164	15448	LIGHTHOUSE LN	SEALROCK DR	END	E	AAC	9	151	40	6,040	8/21/23	82	73	27	0	Overlay - AC Structural	03-01-2011
1849	15447	SOUTHPORT DR	CAPE COTTAGE LN	END	E	AAC	9	372	36	13,392	8/21/23	82	31	69	0	Overlay - AC Structural	03-01-2011
1619	14369	REGATTA DR	POLYNESIAN LN	CDS	E	AAC	9	480	36	18,780	3/26/24	82	38	62	0	Overlay - AC Structural	05-11-2018
1902	15558	STRATHMOOR LN	ATLANTA AVE	BLUEFIELD DR	E	AC	8	681	36	24,228	4/1/24	82	31	0	69	Surface Treatment - Slurry Seal	05-11-2018
758	15711	FLORIDA ST	WILLIAMS AVE	CLAY AVE	E	AC	7	660	36	23,760	4/9/24	82	56	44	0	Surface Treatment - Slurry Seal	11-28-2019
2185	14521	WOODS HOLE DR	ROCKPORT LN	JONESPORT LN	E	AC	9	254	36	8,856	4/17/24	82	89	11	0	Surface Treatment - Slurry Seal	05-11-2019
974	15572	IMPALA LN	NEOLANI DR	MOKIHANA DR	E	AC	9	1,013	36	37,218	4/24/24	82	52	48	0	Surface Treatment - Slurry Seal	05-11-2018
628	15595	DRUMBEAT DR	BUSHARD ST	CDS	E	AC	9	365	32	13,480	4/25/24	82	47	0	53	Surface Treatment - Slurry Seal	05-11-2019
2163	13848	WILLETT LN	ROYALIST DR	END	E	AC	1	530	36	20,330	5/8/24	82	62	35	3	New Construction - Initial	01-01-1980
1631	15064	SAYBROOK LN	TALISMAN LN	SILLMAN DR	E	AAC	2	392	36	14,112	5/10/24	82	37	63	0	Overlay - AC Structural	12-01-2017
1325	14394	MOKIHANA DR	ALLEY BUSHARD ST	BUSHARD ST	E	AAC	9	120	36	4,320	5/6/24	82	40	60	0	Overlay - AC Structural	05-11-2018
1398	15838	NICHOLS ST	BELSITO DR	WARNER AVE	E	AC	0	670	44	29,480	5/8/24	82	100	0	0	New Construction	01-01-1980
885	14987	HAPPY DR	JOLLY LN	JOYFUL LN	E	AC	4	509	36	18,324	5/13/24	83	85	15	0	Surface Treatment - Slurry Seal	11-28-2019
751	223	GRAHAM ST	SLATER AVE	END	E	AC	0	1,638	30	49,140	5/3/24	83	43	57	0	New Construction - Initial	01-01-1980
350	14249	CALLIEBURN CIR	COLBREGGAN DR	CDS	E	AAC	9	206	32	9,392	5/10/24	83	100	0	0	Overlay - AC Structural	07-01-2018
1588	14774	QUEBEC DR	HUNTINGTON DR	CDS	E	AC	4	150	34	6,600	5/13/24	83	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1039	14388	KANAKOA LN	NEOLANI DR	MALAHINE DR	E	AC	9	752	36	27,072	7/12/17	83	66	0	34	Surface Treatment - Slurry Seal	05-11-2018
519	14159	COVE CIR	ADAMS AVE FRONTAGE	END	E	AC	7	558	36	21,588	2/10/20	83	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
1956	14466	TANGIERS DR	SPA DR	NEVEDA DR	E	AC	1	621	36	22,356	2/10/20	83	50	0	50	New Construction - Initial	01-01-1980
1097	13628	KURT LN	MANHATTEN DR	SPICKARD DR	E	AAC	3	261	36	9,896	2/11/20	83	100	0	0	Overlay - AC Structural	10-01-2012
2023	13378	TUCANA DR	TAURUS LN	GOLDENWEST ST	E	AC	3	317	36	10,824	2/11/20	83	100	0	0	Surface Treatment - Slurry Seal	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1267	15889	MASTERS DR	NORCROFT LN	NEWBY LN	E	AC	7	1,033	36	37,938	2/12/20	83	97	0	3	Surface Treatment - Slurry Seal	07-15-2021
1570	14129	PRINCESS CIR	CROWN REEF LN	CDS	E	AC	7	160	36	7,260	2/12/20	83	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
857	13318	GREENVIEW LN	GILDRED CIR	TROPHY DR	E	AC	3	418	36	15,048	2/18/20	83	74	15	11	New Construction	01-01-1980
864	14872	GROVE CIR	SUMMERDALE DR	END	E	AAC	5	246	36	10,584	2/18/20	83	72	28	0	Overlay - AC Structural	10-01-2012
1022	15391	JOICE LN	RONNEY DR	KAREN CIR	E	AC	8	510	36	19,110	2/18/20	83	59	39	2	Surface Treatment - Slurry Seal	07-15-2021
432	13880	CHESTNUT DR	SUNFLOWER LN	SUNBURST LN	E	AC	3	254	36	10,144	2/19/20	83	69	28	3	New Construction	01-01-1980
502	13964	CORALWOOD LN	CRESCENT DR	SEAHURST DR	E	AC	7	350	36	12,850	2/19/20	83	74	0	26	Surface Treatment - Slurry Seal	07-15-2021
724	15960	FELCLIFF LN	DOREMERE DR	ADAMS AVE	E	AC	7	1,108	36	40,638	2/24/20	83	51	49	0	Surface Treatment - Slurry Seal	07-15-2021
1109	15207	LAKEPOINT LN	NEWBURY DR	INLET DR	E	AAC	5	519	36	19,434	2/24/20	83	100	0	0	Overlay - AC Structural	10-01-2012
1714	13431	SAN LEANDRO LN	VILLA NUEVA DR	CALPE CIR	E	AAC	5	1,084	36	38,736	2/25/20	83	79	12	9	Overlay - AC Structural	10-01-2012
2074	15185	VIA ANGELINA DR	AVILLA LN	EL NOPAL LN	E	AAC	5	1,141	36	42,076	2/25/20	83	100	0	0	Overlay - AC Structural	10-01-2012
574	14930	DE LONG CIR	PRICE DR	END	E	AC	5	385	36	15,360	3/9/20	83	100	0	0	New Construction	01-01-1980
861	14931	GRIFFITH CIR	PRICE DR	END	E	AC	5	385	36	15,660	3/9/20	83	41	59	0	New Construction	01-01-1980
1197	14936	LOURDES DR	MISTY LN	WRIGHTWOOD LN	E	AC	5	1,013	36	36,192	3/9/20	83	33	59	8	New Construction	01-01-1980
1323	15800	MISTY LN	PRICE DR	RAPHAEL DR	E	AC	5	905	36	32,580	3/9/20	83	33	44	23	New Construction	01-01-1980
1142	13448	LEAF CIR	PACEMONT DR	END	E	AAC	5	380	36	17,680	3/11/20	83	48	52	0	Overlay - AC Structural	10-01-2012
725	13381	FELSON CIR	SELKIRK DR	END	E	AC	5	114	36	5,904	3/12/20	83	33	0	67	New Construction	01-01-1980
2182	15796	WOODFERN LN	SLATER AVE	SERENE DR	E	AC	5	455	36	16,380	3/12/20	83	25	73	2	New Construction - Initial	01-01-1980
5390	60600	20TH ST	PCH	PACIFIC N	E	AC	2	87	23	2,001	5/6/20	83	75	0	25	New Construction - Initial	01-01-1980
5220	60370	4TH ST	PACIFIC N	PCH	E	AC	2	182	23	4,186	5/6/20	83	49	51	0	New Construction - Initial	01-01-1980
505	13731	CORNELL DR	BOLSA PARK LN	END	E	AC	1	294	36	12,084	5/6/20	83	38	53	9	New Construction	01-01-1980
5010	60110	SOUTH PACIFIC	22ND ST	19TH ST	E	AC	2	706	25	17,650	5/21/20	83	26	59	15	New Construction - Initial	01-01-1980
661	13008	EIGHTEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/22/21	83	31	0	69	Surface Treatment - Slurry Seal	07-27-2022
2032	13023	TWENTY-FIRST ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/30/21	83	16	79	5	Surface Treatment - Slurry Seal	07-27-2022
1685	15487	RUNNING SPRINGS LN	MAMMOTH DR	HOT SPRINGS DR	E	AC	8	1,341	36	49,026	3/1/22	83	38	25	37	Surface Treatment - Slurry Seal	02-13-2023
390	13988	CARP CIR	VERLARDO DR	CDS	E	AC	8	449	36	18,164	3/7/22	83	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1982	13977	TIGERFISH CIR	VELARDO DR	CDS	E	AC	8	450	36	18,200	3/7/22	83	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
983	15900	INNSBRUCK DR	BUSHARD ST FRONTAGE	TIBBETT LN	E	AC	8	1,167	36	42,512	3/9/22	83	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1731	15148	SANTA YNEZ DR	LIDO LN	MIRA LOMA CIR	E	AC	5	509	36	19,464	3/15/22	83	30	70	0	New Construction	01-01-1980
1106	13283	LAFAYETTE DR	POMONA LN	CDS	E	AC	3	168	32	7,176	3/16/22	83	80	0	20	New Construction	01-01-1980
311	15111	BRIDGEWATER DR	REDLANDS LN	WHITTIER LN	E	AC	3	1,348	36	49,278	3/17/22	83	88	0	12	New Construction	01-01-1980
126	15304	ANDAMAN LN	TASMAN DR	CASPIAN CIR	E	AC	1	548	36	19,728	3/21/22	83	24	53	23	New Construction	01-01-1980
1194	15941	LOS PATOS AVE	WARNER AVE	SIMS ST	E	AC	2	1,174	36	43,764	3/22/22	83	24	45	31	New Construction	01-01-1980
1313	13609	MILO ST	SIMS ST	BLANTON ST	E	AC	2	330	36	12,860	3/22/22	83	25	68	7	New Construction	01-01-1980
1502	13294	PEARCE ST	GREEN ST	BOLSA CHICA ST	E	AC	2	660	36	23,760	3/22/22	83	33	61	6	New Construction	01-01-1980
1662	15762	RODGERS DR	BERLIN LN	TWAIN LN	E	AC	5	508	36	18,538	3/22/22	83	84	16	0	New Construction	01-01-1980
1055	13322	KENDRICK CIR	LOVELL LN	CDS	E	AC	3	351	36	13,986	3/23/22	83	62	38	0	New Construction	01-01-1980
942	13137	HILO CIR	WAIKIKI LN	CDS	E	AC	2	535	36	19,260	3/24/22	83	100	0	0	New Construction	01-01-1980
1519	13204	PHELPS LN	BRANFORD DR	CALHOUN DR	E	AC	2	264	36	9,504	3/24/22	83	44	56	0	New Construction	01-01-1980
2103	15031	WAIKIKI LN	TRAVELWAY	KONA DR	E	AC	2	587	36	21,132	3/24/22	83	46	54	0	New Construction - Initial	01-01-1980
1751	15619	SPRINGDALE ST	TALBERT AVE	LITTLEFIELD DR	E	AC	5	1,152	80	92,160	3/28/22	83	100	0	0	New Construction	01-01-1980
1672	13351	ROSEMONT DR	AUTUMN CIR	PINEHURST LN	E	AAC	5	260	36	9,360	3/29/22	83	100	0	0	Overlay - AC Structural	10-01-2012
1672	15141	ROSEMONT DR	SPRINGDALE ST	AUTUMN CIR	E	AAC	5	440	36	15,840	3/29/22	83	88	0	12	Overlay - AC Structural	10-01-2012
1489	13543	PARKER CIR	ROSS LN	CDS	E	AC	4	244	32	9,058	3/31/22	83	35	65	0	Surface Treatment - Slurry Seal	07-29-2020
2084	14994	VIEWPOINT LN	CHRYSLER CIR	TERRY DR	E	AC	4	689	36	24,804	4/6/22	83	36	64	0	Surface Treatment - Slurry Seal	07-29-2020
1084	13221	KITTEN CIR	BARUNA LN	CDS	E	AC	2	170	36	6,120	4/7/22	83	45	50	5	New Construction	01-01-1980
1147	13219	LEGEND CIR	BARUNA LN	CDS	E	AC	2	170	36	7,620	4/7/22	83	26	74	0	New Construction - Initial	01-01-1980
640	13663	DUNES LN	HACIENDA DR	CHINOOK DR	E	AC	1	260	36	9,360	4/8/22	83	33	46	21	New Construction	01-01-1980
204	15620	BAY VIEW DR	BROADWAY	END	E	AC	2	420	27	11,340	4/9/22	83	15	78	7	New Construction	01-01-1980
1880	15590	STARDUST DR	NEVADA DR	HAMMON LN	E	AC	1	790	36	28,440	4/9/22	83	57	43	0	New Construction	01-01-1980
903	14634	HARTFORD AVE	HUNTINGTON ST	CALIFORNIA ST	E	AC	9	330	37	12,210	8/14/23	83	51	26	23	New Construction	01-01-1980
1373	14680	NASHVILLE AVE	HUNTINGTON ST	DELAWARE ST	E	AAC	6	660	37	23,828	8/14/23	83	81	19	0	Overlay - AC Structural	03-01-2011
630	15970	DRYBROOK LN	DEEPCLIFF DR	HURSTWELL DR	E	AC	7	991	36	35,676	8/17/23	83	38	56	6	Surface Treatment - Slurry Seal	03-01-2011
1321	14238	MISSION LN	ALVARADO DR	END	E	AC	9	481	36	17,316	8/23/23	83	89	0	11	New Construction	01-01-1980
1841	15497	SNOWBIRD DR	SCHOONER LN	BASTIA LN	E	AC	9	624	36	22,464	8/23/23	83	34	66	0	New Construction	01-01-1980
349	14640	CALIFORNIA ST	GENEVA AVE	HARTFORD AVE	E	AC	9	331	37	12,247	8/24/23	83	100	0	0	New Construction	01-01-1980
1621	15883	REILLY DR	FARNSWORTH LN	SANDPIPER LN	E	AC	9	796	36	28,656	8/24/23	83	33	53	14	New Construction	01-01-1980
1179	15535	LOCHLEA LN	JENNY DR	HILLHEAD CIR	E	AC	9	660	36	23,760	8/30/23	83	61	33	6	New Construction	01-01-1980
695	15651	ERNEST AVE	GOLDENWEST ST	GOTHARD ST	E	AC	4	1,321	40	52,840	3/5/24	83	55	45	0	Surface Treatment - Slurry Seal	11-28-2019

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1477	16016	PAISLEY LN	CAITHNESS DR	NETHERWAY DR	E	AC	8	758	36	29,640	3/18/24	83	42	37	21	Surface Treatment - Slurry Seal	05-11-2018
1878	15523	STAR DR	REEF LN	SKIMMER LN	E	AC	8	1,008	36	35,744	3/18/24	83	63	25	12	Surface Treatment - Slurry Seal	05-11-2018
1523	15555	PIER DR	NORTHSHORE LN	CDS	E	AC	9	547	36	21,492	3/20/24	83	69	31	0	Surface Treatment - Slurry Seal	05-11-2018
467	14347	COCOBANA LN	ORIENT DR	BLUEFIELD DR	E	AC	8	507	36	19,002	4/1/24	83	58	0	42	Surface Treatment - Slurry Seal	05-11-2018
1612	14345	RED JACKET CIR	ORIENT DR	CDS	E	AC	8	451	36	16,236	4/1/24	83	86	14	0	New Construction	01-01-1980
819	13936	GILFORD CIR	NEWHAVEN LN	CDS	E	AC	7	408	36	17,768	4/2/24	83	29	71	0	Surface Treatment - Slurry Seal	11-28-2019
452	15712	CLAY AVE	FLORIDA ST	BEACH BLVD	E	AC	7	661	36	23,796	4/9/24	83	65	0	35	Surface Treatment - Slurry Seal	04-01-2017
758	15710	FLORIDA ST	GARFIELD AVE	CLAY AVE	E	AC	7	1,320	40	52,800	4/9/24	83	41	59	0	Surface Treatment - Slurry Seal	11-28-2019
974	14396	IMPALA LN	MOKIHANA DR	HUDSON DR	E	AC	9	260	36	10,110	4/24/24	83	25	75	0	New Construction	01-01-1980
1463	14600	OVERLOOK DR	EDWARDS ST	WILDFLOWER LN	E	AC	5	403	36	14,508	5/7/24	83	41	37	22	New Construction	01-01-1980
5000	60000	NORTH PACIFIC	WARNER AVE	5TH ST	E	AC	2	1,347	20	26,940	5/6/24	83	27	73	0	New Construction - Initial	01-01-1980
1827	14267	SKI HARBOR CIR	BEACHWOOD LN	CDS	E	AC	9	303	32	11,196	5/6/24	83	49	33	18	Surface Treatment - Slurry Seal	05-11-2018
677	14255	ELLSWORTH DR	MAGNOLIA ST	KELVIN LN	E	AC	9	176	32	5,632	5/9/24	83	60	37	3	Surface Treatment - Slurry Seal	05-11-2018
5000	60060	NORTH PACIFIC	19TH ST	22ND ST	E	AC	2	706	25	17,650	5/6/24	83	21	38	41	New Construction - Initial	01-01-1980
956	15503	HOPETOWN LN	ELLSWORTH DR	SPENCER CIR	E	AC	9	602	36	21,672	5/9/24	83	62	37	1	Surface Treatment - Slurry Seal	05-11-2018
1857	14254	SPENCER CIR	HOPETOWN LN	CDS	E	AAC	9	245	32	7,840	5/6/24	83	73	24	3	Overlay - AC Structural	05-11-2018
1238	14767	MANITOBA LN	ALBERTA DR	YUKON DR	E	AC	4	246	36	9,856	5/13/24	83	94	0	6	Surface Treatment - Slurry Seal	11-28-2019
1754	14263	SEA MIST LN	FIVE HARBORS DR	OCEANWOOD DR	E	AC	9	249	36	9,714	5/6/24	84	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1284	13149	MEADOWLARK DR	EAGLE LN	BIRDIE LN	E	AAC	3	265	36	9,540	5/9/24	84	100	0	0	Overlay - AC Structural	10-01-2016
1586	15008	QUARTERHORSE LN	ELLIS AVE	CHURCHILL DR	E	AC	5	1,480	36	53,280	5/7/24	84	35	58	7	Surface Treatment - Slurry Seal	11-28-2019
233	14792	BELVA DR	GOTHARD ST	METZLER LN	E	AC	4	437	40	17,480	5/9/24	84	60	21	19	Surface Treatment - Slurry Seal	11-01-2019
2132	14435	WELLINGTON CIR	MARIANA CIR	CDS	E	AAC	2	500	32	11,836	5/6/24	84	100	0	0	Overlay - AC Fabric	12-01-2017
471	15953	COLBREGGAN DR	CALLIEBURN CIR	MINERVA LN	E	AAC	9	950	36	35,200	5/10/24	84	100	0	0	Overlay - AC Structural	07-01-2018
1602	14471	RAMBLER DR	ALLEY BUSHARD ST	BUSHARD ST	E	AC	9	150	36	5,400	7/12/17	84	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1602	15594	RAMBLER DR	STARFIRE LN	ALLEY BUSHARD ST	E	AC	9	403	36	14,508	7/12/17	84	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
872	14352	HAGERSTOWN CIR	CORNERBROOK DR	CDS	E	AC	8	340	36	13,740	7/13/17	84	77	0	23	Surface Treatment - Slurry Seal	05-11-2018
539	15291	CROUPIER CIR	CALNEVA LN	SPRINGDALE ST	E	AC	1	640	36	24,290	2/10/20	84	33	67	0	New Construction	01-01-1980
1251	14157	MARINA LN	ADAMS AVE FRONTAGE	NAUTILUS DR	E	AC	7	805	36	29,730	2/10/20	84	93	0	7	Surface Treatment - Slurry Seal	07-15-2021
2199	13689	YUCCA CIR	ROYAL OAK DR	END	E	AC	1	334	32	12,488	2/10/20	84	41	59	0	New Construction - Initial	01-01-1980
591	15468	DENSMORE LN	BEDEL DR	BAINFORD DR	E	AC	7	668	36	24,048	2/11/20	84	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
975	14127	IMPERIAL COVE LN	VISCOUNT DR	MASTER DR	E	AC	7	904	36	33,294	2/12/20	84	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
2288	17018	ADAMS AVE FRONTAGE	LOTUS LN	WEST END	E	AC	7	398	32	14,236	2/18/20	84	51	49	0	Surface Treatment - Slurry Seal	07-15-2021
828	15208	GLENFOX DR	WELLBROOK CIR	LAKEPOINT LN	E	AAC	5	755	36	26,892	2/24/20	84	76	0	24	Overlay - AC Structural	10-01-2012
1383	15206	NEWBURY DR	HALLPORT LN	END	E	AAC	5	785	36	30,060	2/24/20	84	100	0	0	Overlay - AC Structural	10-01-2012
668	15986	EL NOPAL LN	VIA ANGELINA DR	RIO VISTA DR	E	AAC	5	751	36	28,036	2/25/20	84	100	0	0	Overlay - AC Structural	10-01-2012
1690	13419	SABBICAS CIR	SAN ROQUE LN	END	E	AAC	5	285	36	12,260	2/25/20	84	85	15	0	Overlay - AC Structural	10-01-2012
877	13773	HALIFAX DR	EDWARDS ST	HANOVER LN	E	AC	1	535	36	18,972	2/26/20	84	40	37	23	New Construction	01-01-1980
2192	14922	WRIGHTWOOD LN	PRICE DR	MOSS DR	E	AC	5	225	36	9,100	3/9/20	84	69	17	14	New Construction - Initial	01-01-1980
1027	13440	JUDWICK CIR	NEWMOON LN	END	E	AAC	5	479	36	18,744	3/11/20	84	100	0	0	Overlay - AC Structural	10-01-2012
1392	15197	NEWMOON LN	IRONGATE CIR	LITTLEFIELD DR	E	AAC	5	814	36	29,304	3/11/20	84	100	0	0	Overlay - AC Structural	10-01-2012
1465	15205	OXBORO LN	NORBROOK DR	MANOFIELD DR	E	AAC	5	547	36	19,692	3/11/20	84	100	0	0	Overlay - AC Structural	10-01-2012
1358	14917	MOSSVALE CIR	WOODFERN LN	END	E	AC	5	548	35	20,980	3/12/20	84	59	27	14	New Construction	01-01-1980
1192	15379	LORRAINE DR	SAUSALITO LN	BAYWATER LN	E	AC	7	916	36	32,976	4/15/20	84	61	28	11	Surface Treatment - Slurry Seal	07-15-2021
5010	60100	SOUTH PACIFIC	25TH ST	22ND ST	E	AC	2	709	25	17,725	5/6/20	84	75	0	25	New Construction - Initial	01-01-1980
1528	13034	PINE ST	SPRINGFIELD AVE	UTICA AVE	E	AC	6	642	37	23,754	6/29/21	84	46	41	13	Surface Treatment - Slurry Seal	07-27-2022
662	16032	EIGHTH ST	ORANGE AVE	PECAN AVE	E	AC	6	396	48	19,008	6/30/21	84	87	0	13	Surface Treatment - Slurry Seal	07-27-2022
770	13090	FOURTEENTH ST	PALM AVE	CREST AVE	E	AC	6	556	45	25,020	6/30/21	84	44	48	8	Surface Treatment - Slurry Seal	07-27-2022
2032	13097	TWENTY-FIRST ST	ORANGE AVE	PECAN AVE	E	AC	6	395	46	18,170	6/30/21	84	21	68	11	Surface Treatment - Slurry Seal	07-27-2022
1972	12984	THIRTEENTH ST	PALM AVE	CREST AVE	E	AC	6	610	42	25,620	7/8/21	84	32	20	48	Surface Treatment - Slurry Seal	07-27-2022
527	14177	CRATER CIR	ROCKY MOUNTAIN DR	CDS	E	AC	8	399	36	16,164	2/23/22	84	41	0	59	Surface Treatment - Slurry Seal	02-13-2023
1571	14205	PRINCETON CIR	MEREDITH DR	CDS	E	AC	8	108	31	5,348	2/28/22	84	36	43	21	Surface Treatment - Slurry Seal	02-14-2023
2288	50300	ADAMS AVE FRONTAGE	CARMANIA LN	END	E	AC	8	123	25	3,075	3/3/22	84	81	0	19	Surface Treatment - Slurry Seal	02-08-2023
657	14081	EDUCATION LN	YORKTOWN AVE	FREDERICK CIR	E	AC	8	410	36	14,760	3/7/22	84	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1581	14009	PUA DR	MOOREA LN	END	E	AC	8	431	36	17,316	3/7/22	84	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
279	14084	BOND CIR	EDUCATION LN	CDS	E	AC	8	472	36	18,792	3/9/22	84	41	53	6	Surface Treatment - Slurry Seal	02-08-2023
1479	16007	PALISADE ST	ANGLER LN	WOODSTOCK LN	E	AC	3	1,012	36	36,432	3/17/22	84	100	0	0	New Construction	01-01-1980
1537	13274	PITMAN LN	WALTON DR	LAURELHURST DR	E	AC	3	1,010	36	35,784	3/17/22	84	34	66	0	New Construction	01-01-1980
129	15223	ANITA LN	SHER LN	NANCY DR	E	AC	4	1,054	36	37,944	3/18/22	84	42	58	0	Surface Treatment - Slurry Seal	07-29-2020
827	13496	GLENCOE AVE	SILVER LN	BEACH BLVD	E	AC	4	1,320	36	47,520	3/18/22	84	18	82	0	Surface Treatment - Slurry Seal	07-29-2020

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1507	13333	PEGGY CIR	COOPER LN	CDS	E	AC	3	423	36	18,528	3/18/22	84	51	49	0	Surface Treatment - Slurry Seal	07-29-2020
967	13817	HUMMINGBIRD LN	DOVEWOOD DR	ROBINWOOD DR	E	AC	1	1,040	36	37,440	3/21/22	84	95	0	5	New Construction	01-01-1980
967	15327	HUMMINGBIRD LN	ROBINWOOD DR	SKYLARK DR	E	AC	1	520	36	18,970	3/21/22	84	100	0	0	New Construction	01-01-1980
257	13610	BLANTON ST	PEARCE ST	MILO ST	E	AC	2	660	36	23,120	3/22/22	84	20	61	19	New Construction	01-01-1980
1194	15785	LOS PATOS AVE	SIMS ST	GREEN ST	E	AC	2	1,320	36	47,520	3/22/22	84	50	0	50	New Construction	01-01-1980
2127	13329	WEBER CIR	MYTINGER LN	CDS	E	AC	3	419	36	16,434	3/23/22	84	55	31	14	New Construction - Initial	01-01-1980
912	13166	HAWAII LN	KAUI LN	SCENARIO DR	E	AC	2	695	36	25,520	3/24/22	84	21	69	10	New Construction	01-01-1980
606	13288	DOLORES ST	PRAIRIE DR	PEARCE ST	E	AC	2	663	36	26,508	3/29/22	84	41	40	19	New Construction	01-01-1980
814	15789	GHENT DR	BREDA LN	WILD ROSE LN	E	AC	5	513	36	18,718	3/29/22	84	43	57	0	New Construction	01-01-1980
635	13764	DUKE CIR	CITADEL DR	END	E	AC	1	410	36	16,560	3/30/22	84	40	60	0	New Construction	01-01-1980
332	15237	BURKE LN	HEIL AVE	EARL CIR	E	AC	3	1,303	40	52,120	3/31/22	84	37	61	2	Surface Treatment - Slurry Seal	07-29-2020
1119	15253	LANDAU LN	HEIL AVE	ROYAL DR	E	AC	4	1,349	36	48,564	3/31/22	84	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1502	13303	PEARCE ST	ROOSEVELT LN	CDS	E	AC	2	332	36	13,202	4/5/22	84	32	68	0	New Construction	01-01-1980
1755	15070	SEA WITCH LN	BARUNA LN	FINISTERRE DR	E	AC	2	1,312	36	47,232	4/5/22	84	70	30	0	New Construction	01-01-1980
304	15248	BRESSEL LN	MERLE CIR	WARNER AVE	E	AC	4	486	36	17,746	4/6/22	84	26	74	0	Surface Treatment - Slurry Seal	07-29-2020
895	13216	HARKNESS CIR	TRUMBULL DR	CDS	E	AC	2	529	36	20,544	4/7/22	84	55	43	2	New Construction	01-01-1980
993	13614	ISLAND CIR	VISTA DR	CDS	E	AC	2	243	36	13,270	4/7/22	84	45	55	0	New Construction	01-01-1980
1105	13185	LADONA CIR	MISTRAL DR	CDS	E	AC	2	358	32	12,956	4/7/22	84	100	0	0	New Construction	01-01-1980
1368	13199	NALU CIR	BARUNA LN	CDS	E	AC	2	229	36	9,744	4/7/22	84	84	0	16	New Construction	01-01-1980
1823	13227	SIRIUS DR	BOLERO LN	BARUNA LN	E	AC	2	430	36	16,980	4/7/22	84	19	61	20	New Construction	01-01-1980
1880	14465	STARDUST DR	SPA DR	NEVEDA DR	E	AC	1	808	36	29,088	4/8/22	84	100	0	0	New Construction	01-01-1980
351	15290	CALNEVA LN	SAN SOUCI CIR	SPA DR	E	AC	1	792	36	28,512	4/9/22	84	51	49	0	New Construction	01-01-1980
758	14673	FLORIDA ST	INDIANAPOLIS AVE	JOILET AVE	E	AAC	6	330	37	12,210	8/15/23	84	64	0	36	Overlay - AC Structural	03-01-2011
1110	14705	LAKESIDE LN	MEMPHIS AVE	OCEANHILL DR	E	AAC	6	986	34	33,524	8/15/23	84	54	44	2	Overlay - AC Structural	03-01-2011
1169	14683	LINCOLN AVE	ALABAMA ST	ALLEY ALABAMA ST	E	AAC	6	323	37	11,951	8/15/23	84	79	14	7	Overlay - AC Structural	03-01-2011
1361	14118	MUNSTER DR	LONDONDERRY LN	DUBLIN LN	E	AC	9	1,040	36	37,440	8/23/23	84	59	19	22	Surface Treatment - Slurry Seal	03-01-2011
2201	14103	YVONNE DR	MALLOY DR	ALLEY MALLOY DR	E	AAC	9	139	36	5,004	8/23/23	84	100	0	0	Overlay - AC Structural	03-01-2011
1926	14455	SUNSET CIR	BEACH BLVD	END	E	AC	9	270	32	8,640	8/24/23	84	51	17	32	New Construction - Initial	01-01-1980
132	15547	ANTIGUA LN	ST AUGUSTINE DR	SANDY HOOK DR	E	AC	9	1,013	36	37,218	8/30/23	84	49	47	4	New Construction	01-01-1980
1727	14330	SANDY HOOK DR	ANTIGUA LN	SEAFORTH LN	E	AC	9	446	36	16,806	8/30/23	84	79	21	0	New Construction	01-01-1980
1670	14739	SEVENTEENTH ST	FLORIDA ST	CLAY AVE	E	AC	7	660	36	23,760	3/13/24	84	67	0	33	Surface Treatment - Slurry Seal	11-28-2019
179	14288	BALGAIR CIR	SCOTSTOUN DR	CDS	E	AC	8	452	32	16,132	3/19/24	84	97	0	3	Surface Treatment - Slurry Seal	05-11-2018
238	15564	BERMUDA DR	MAGNOLIA ST	KANEHOE LN	E	AC	9	1,110	36	39,672	3/27/24	84	50	50	0	Surface Treatment - Slurry Seal	05-11-2018
264	14348	BLUEFIELD DR	COCOBANA LN	STRATHMOOR LN	E	AAC	8	250	36	9,000	4/1/24	84	31	24	45	Overlay - AC Structural	05-11-2018
1135	13915	LAURA CIR	GREGORY LN	CDS	E	AC	7	160	27	5,570	4/8/24	84	69	31	0	New Construction - Initial	01-01-1980
2290	17025	JOLLY LN	HAPPY DR	TALBERT AVE	E	AC	4	466	36	18,176	5/13/24	84	71	25	4	Surface Treatment - Slurry Seal	11-28-2019
1633	14787	REYNOLDS CIR	SAMPSON LN	CDS	E	AC	4	304	40	13,660	5/8/24	84	72	22	6	New Construction	01-01-1980
1398	15839	NICHOLS ST	WAGON DR	BELSITO DR	E	AC	0	1,645	44	72,380	5/8/24	84	63	35	2	New Construction	01-01-1980
2197	13798	YORKSHIRE LN	CANTERBURY DR	CUMBERLAND DR	E	AC	1	276	36	9,936	4/27/24	84	49	48	3	New Construction - Initial	01-01-1980
1448	13202	ONDINE CIR	EDGEWATER LN	CDS	E	AAC	2	350	36	14,100	5/10/24	85	59	41	0	Overlay - AC Fabric	12-01-2017
567	15729	DARSY DR	FOREST LN	CDS	E	AC	4	398	34	15,832	5/13/24	85	63	32	5	Surface Treatment - Slurry Seal	11-28-2019
1391	15727	NEWMAN AVE	VAN BUREN ST	CDS	E	AC	4	1,049	40	43,460	5/13/24	85	57	21	22	Surface Treatment - Slurry Seal	11-28-2019
1303	14797	MICHAEL DR	VAN BUREN ST	JEFFERSON LN	E	AC	4	561	34	19,074	5/13/24	85	83	17	0	Surface Treatment - Slurry Seal	11-28-2019
1782	14353	SHACKLEFORD CIR	CORNERBROOK DR	CDS	E	AC	8	340	36	13,740	7/13/17	85	79	0	21	New Construction	01-01-1980
997	13683	IVORY CIR	EDGEVIEW LN	END	E	AC	1	530	36	20,830	2/10/20	85	39	61	0	New Construction	01-01-1980
1430	13699	OAKTREE CIR	MAR VISTA DR	END	E	AC	1	480	36	19,080	2/10/20	85	100	0	0	New Construction	01-01-1980
1693	15299	SABRE LN	BOLSA AVE	END	E	AC	1	613	36	24,068	2/10/20	85	68	32	0	New Construction	01-01-1980
1061	14167	KENYON LN	HAZELBROOK DR	CLIFFWOOD DR	E	AC	7	241	36	8,164	2/11/20	85	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
730	15093	FERNHILL CIR	GRAHAM ST	END	E	AC	3	552	36	21,672	2/18/20	85	100	0	0	New Construction	01-01-1980
20	14043	ALBATROSS DR	WINDWARD LN	WESTWINDS LN	E	AC	7	1,012	36	36,432	2/19/20	85	52	48	0	Surface Treatment - Slurry Seal	07-15-2021
1700	13959	SAILPORT DR	HOPEBAY LN	CDS	E	AC	7	340	32	12,130	2/19/20	85	76	0	24	Surface Treatment - Slurry Seal	07-15-2021
1916	13960	SUNCORAL DR	BAYWATER LN	PISMO LN	E	AC	7	251	36	9,036	2/19/20	85	28	72	0	New Construction - Initial	01-01-1980
982	15582	INLET DR	CLEARWATER CIR	LAKEVIEW DR	E	AC	5	583	36	20,988	2/24/20	85	59	41	0	Surface Treatment - Slurry Seal	10-01-2012
115	15187	ALTAMIRANO LN	VILLA NUEVA DR	CADIZ CIR	E	AC	5	1,101	36	41,136	2/25/20	85	21	79	0	Surface Treatment - Slurry Seal	10-01-2012
343	13425	CADIZ CIR	ALTAMIRANO LN	END	E	AAC	5	100	50	5,750	2/25/20	85	80	0	20	Overlay - AC Structural	10-01-2012
1335	13418	MONTOYA CIR	SAN ROQUE LN	END	E	AAC	5	285	36	11,760	2/25/20	85	100	0	0	Overlay - AC Structural	10-01-2012
2080	13805	VICTORIA LN	HALIFAX DR	MELBOURNE DR	E	AC	1	260	36	9,072	2/26/20	85	68	32	0	New Construction - Initial	01-01-1980
732	13462	FIELDBURY LN	GLENFOX DR	TALBERT AVE	E	AAC	5	499	36	17,964	3/11/20	85	67	33	0	Overlay - AC Structural	10-01-2012
1177	15195	LITTLEFIELD DR	SPRINGDALE ST	NEWMOON LN	E	AAC	5	629	36	22,644	3/11/20	85	100	0	0	Overlay - AC Structural	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1950	13456	TALEGATE DR	FIELDBURY LN	END	E	AAC	5	265	36	9,252	3/11/20	85	100	0	0	Overlay - AC Structural	10-01-2012
5370	60570	18TH ST	PCH	PACIFIC N	E	AC	2	106	29	3,074	5/6/20	85	100	0	0	New Construction - Initial	01-01-1980
5250	60415	6TH ST	PACIFIC S	END	E	AC	2	34	37	1,258	5/6/20	85	100	0	0	New Construction - Initial	01-01-1980
505	13745	CORNELL DR	STANFORD LN	COLUMBIA N	E	AC	1	260	36	9,360	5/6/20	85	55	45	0	New Construction	01-01-1980
733	13749	FIELDSTON LN	TYNDALL DR	SHELLY DR	E	AC	1	274	36	11,364	5/6/20	85	83	0	17	New Construction	01-01-1980
5360	60560	17TH ST	PACIFIC S	END	E	AC	2	90	30	2,700	5/21/20	85	29	0	71	New Construction - Initial	01-01-1980
1825	13093	SIXTEENTH ST	PCH	WALNUT AVE	E	AC	6	370	46	16,825	6/22/21	85	25	0	75	Surface Treatment - Slurry Seal	07-27-2022
1446	12905	OLIVE AVE	ELEVENTH ST	FOURTEENTH ST	E	AC	6	930	38	35,340	6/23/21	85	62	0	38	Surface Treatment - Slurry Seal	07-27-2022
157	13040	ASPENWOOD LN	ADAMS AVE	SHIPLEY ST	E	PCC	6	190	20	4,780	7/8/21	85	0	100	0	Surface Treatment - Slurry Seal	07-27-2022
2206	14189	ZION CIR	CARLSBAD LN	END	E	AC	8	363	36	14,568	2/23/22	85	33	0	67	Surface Treatment - Slurry Seal	02-13-2023
1298	16020	MEREDITH DR	BROOKHURST ST	CRAIMER LN	E	AC	8	1,358	36	48,888	2/28/22	85	42	53	5	Surface Treatment - Slurry Seal	02-14-2023
657	14085	EDUCATION LN	CONSTITUTION DR	GARRETT CIR	E	AC	8	261	36	9,396	3/7/22	85	45	55	0	New Construction	01-01-1980
2105	13997	WALLEYE LN	BASS DR	VELARDO DR	E	AC	8	450	36	16,950	3/7/22	85	33	60	7	Surface Treatment - Slurry Seal	02-08-2023
478	15984	COLLINS LN	MOTION CIR	COLLINS CIR	E	AC	5	774	36	28,614	3/14/22	85	48	52	0	New Construction	01-01-1980
961	13275	HOWLAND LN	LENNOX DR	EDGEMONT DR	E	AC	3	1,058	36	38,088	3/17/22	85	100	0	0	New Construction	01-01-1980
1638	13489	RHONE LN	SHER LN	KIM LN	E	AC	4	851	36	30,636	3/18/22	85	40	60	0	Surface Treatment - Slurry Seal	07-29-2020
1155	14865	LESLIE LN	WARNER AVE	DUNBAR AVE	E	AC	2	440	36	15,840	3/22/22	85	95	0	5	New Construction - Initial	01-01-1980
2029	14891	TWAIN LN	ROGERS DR	KERN DR	E	AC	5	989	36	35,604	3/22/22	85	69	31	0	New Construction - Initial	01-01-1980
130	13324	ANNETTE CIR	LOVELL LN	CDS	E	AC	3	351	36	13,986	3/23/22	85	100	0	0	New Construction	01-01-1980
463	13595	CLUBHOUSE LN	ALLEY HEIL AVE	HEIL AVE	E	AC	3	152	45	6,840	3/23/22	85	100	0	0	New Construction	01-01-1980
1305	13243	MIDDLECOFF DR	CLUBHOUSE LN	FAIRWAY LN	E	AC	3	855	36	31,030	3/23/22	85	52	48	0	New Construction	01-01-1980
2020	15816	TRUDY LN	HEIL AVE	JEAN DR	E	AC	3	438	36	15,768	3/23/22	85	45	55	0	New Construction - Initial	01-01-1980
1563	13134	PRELUDE DR	BALLAD LN	MELODY LN	E	AC	2	260	36	9,360	3/24/22	85	100	0	0	New Construction	01-01-1980
299	14914	BREDA LN	GHENT DR	NORDINA DR	E	AC	5	1,120	36	40,570	3/29/22	85	48	52	0	New Construction	01-01-1980
375	15307	CAPETOWN LN	BOLSA AVE	KIMBERLY DR	E	AC	1	819	36	29,196	3/30/22	85	25	0	75	New Construction	01-01-1980
549	13567	CYPRESS AVE	OAK LN	ASH ST	E	AC	4	447	36	16,092	3/31/22	85	88	0	12	New Construction	01-01-1980
1212	15245	LYNDON ST	WARNER AVE	CDS	E	AC	4	466	36	18,576	3/31/22	85	49	47	4	Surface Treatment - Slurry Seal	07-29-2020
2116	13529	WASHINGTON AVE	LYNDON ST	NICHOLS ST	E	ACT	4	530	36	19,080	3/31/22	85	47	53	0	Surface Treatment - Slurry Seal	07-29-2020
327	14851	BRUSH DR	ALLEY NEWLAND ST	NEWLAND ST	E	AC	4	152	36	5,472	4/6/22	85	32	68	0	Surface Treatment - Slurry Seal	07-29-2020
925	14843	HERITAGE LN	TERYY DR	LANCASTER DR	E	AC	4	465	36	16,990	4/6/22	85	45	50	5	Surface Treatment - Slurry Seal	07-29-2020
947	15016	HOLLAND DR	BEACH BLVD	CDS	E	AC	4	625	36	23,750	4/6/22	85	57	43	0	Surface Treatment - Slurry Seal	07-29-2020
414	15060	CHANNEL LN	DEVON CIR	GILBERT DR	E	AC	2	1,236	36	44,296	4/9/22	85	54	46	0	New Construction	01-01-1980
2207	13557	SLATER AVE FRONTAGE RD	LUCERO L N	CDS	E	AC	3	232	27	7,464	4/9/22	85	31	69	0	New Construction	01-01-1980
806	15872	GENEVA AVE	ALABAMA ST	HUNTINGTON ST	E	AC	9	485	37	17,945	8/15/23	85	75	25	0	New Construction	01-01-1980
473	14971	COLDWATER LN	SCRIBE DR	DRYBANK DR	E	AC	7	1,479	36	53,244	8/21/23	85	79	0	21	Surface Treatment - Slurry Seal	03-01-2011
212	17000	BEACH BLVD FRONTAGE	DRIFTWOOD DR	TRAVELWAY	E	AC	9	1,352	28	37,856	8/24/23	85	98	0	2	New Construction	01-01-1980
928	14235	HERON CIR	SANDPIPER LN	END	E	AC	9	360	36	12,960	8/24/23	85	46	51	3	New Construction	01-01-1980
1761	14992	SEAGATE DR	PROMENADE PKWY	CDS	E	AC	4	592	42	26,114	3/5/24	85	45	0	55	Surface Treatment - Slurry Seal	11-28-2019
1526	15515	PIERVIEW LN	INDIANAPOLIS AVE	SALINE DR	E	AC	8	416	36	14,720	3/6/24	85	83	17	0	Surface Treatment - Slurry Seal	05-11-2018
345	15511	CAITHNESS DR	PAISLET LN	QUEENS PARK LN	E	AAC	8	1,026	36	39,288	3/18/24	85	48	48	4	Overlay - AC Structural	05-11-2018
1853	15524	SPARKMAN LN	KITE DR	CDS	E	AC	8	751	36	28,732	3/18/24	85	70	0	30	Surface Treatment - Slurry Seal	05-11-2018
1619	14375	REGATTA DR	POLYNESIAN LN	KANEOHE LN	E	AAC	9	478	36	17,708	3/26/24	85	59	41	0	Overlay - AC Structural	05-11-2018
1040	15567	KANEOHE LN	HAITI DR	BERMUDA DR	E	AC	9	1,008	36	36,288	3/27/24	85	45	55	0	New Construction	01-01-1980
1040	15568	KANEOHE LN	BERMUDA DR	KAPAA DR	E	AC	9	768	36	27,648	3/27/24	85	47	53	0	New Construction	01-01-1980
1079	15569	KIOWA LN	KAHULUI DR	ALOHA DR	E	AC	9	768	36	27,648	3/27/24	85	39	61	0	New Construction	01-01-1980
978	14346	INDIGO CIR	ORIENT DR	CDS	E	AC	8	451	36	17,736	4/1/24	85	100	0	0	New Construction	01-01-1980
880	15371	HAMDEN LN	GARFIELD AVE	NEWHAVEN LN	E	AC	7	1,434	36	51,624	4/2/24	85	87	0	13	Surface Treatment - Slurry Seal	11-28-2019
1910	15372	SUMMERFIELD LN	GARFIELD AVE	DEAUVILLE DR	E	AC	7	515	36	19,518	4/2/24	85	26	68	6	Surface Treatment - Slurry Seal	11-28-2019
400	15618	CASTINE DR	WOOD ISLAND LN	CDS	E	AC	9	325	32	12,900	4/17/24	85	50	40	10	Surface Treatment - Slurry Seal	05-11-2019
1085	14526	KITTERY CIR	CASTINE DR	CDS	E	AC	9	169	32	6,908	4/17/24	85	55	45	0	Surface Treatment - Slurry Seal	05-11-2019
1025	14524	JONESPORT LN	ALLISON CIR	CAPE MAY LN	E	AC	9	647	36	23,004	4/24/24	85	46	39	15	Surface Treatment - Slurry Seal	05-11-2019
2117	14525	WATCH HARBOR DR	BUSHARD ST	WOOD ISLAND LN	E	AC	9	167	36	5,724	4/24/24	85	65	35	0	Surface Treatment - Slurry Seal	05-11-2019
1812	13899	SICILY CIR	EVENING HILL DR	CDS	E	AC	5	361	36	16,196	5/6/24	85	100	0	0	New Construction	01-01-1980
483	13716	COMMERCIAL DR	CHEMICAL LN	GRAHAM ST	E	AAC	1	1,170	40	46,800	5/3/24	85	50	43	7	Overlay - AC Fabric	10-01-2016
1886	15861	STEEP LN	FOX CIR	ELLIS AVE	E	AC	4	321	36	11,268	5/13/24	85	84	16	0	New Construction	01-01-1980
1284	13148	MEADOWLARK DR	GRAHAM ST	EAGLE LN	E	AAC	3	176	34	5,984	5/9/24	86	100	0	0	Overlay - AC Structural	10-01-2016
1026	14545	JOYFUL LN	TALBERT AVE	HAPPY DR	E	AC	4	508	36	18,288	5/13/24	86	54	19	27	Surface Treatment - Slurry Seal	11-28-2019
751	665	GRAHAM ST	SLATER AVE	END	E	AC	0	1,638	30	49,140	5/3/24	86	39	61	0	New Construction - Initial	01-01-1980
2163	15339	WILLETT LN	PRISCILLA DR	ROYALIST DR	E	AC	1	1,040	36	37,440	5/8/24	86	61	39	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
401	13233	CASTLE DR	EAGLE LN	CLUBHOUSE LN	E	AAC	3	1,039	36	37,404	5/9/24	86	94	0	6	Overlay - AC Structural	10-01-2016
1494	13807	PARTRIDGE CIR	PELICAN LN	END	E	AAC	1	380	36	14,930	5/9/24	86	100	0	0	Overlay - AC Fabric	10-01-2016
221	14354	BECKWOURTH CIR	CORNERBROOK DR	CDS	E	AC	8	341	36	13,776	7/13/17	86	59	0	41	New Construction	01-01-1980
1151	15561	LEMONTREE LN	PEPPERTREE DR	CHEVY CHASE DR	E	AC	8	838	36	30,918	7/13/17	86	100	0	0	New Construction - Initial	01-01-1980
680	13673	ELMHURST CIR	BRIARCLIFF DR	END	E	AC	1	505	36	19,930	2/10/20	86	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1376	15824	NAUTILUS DR	MARINA LN	BUSHARD ST	E	AC	7	1,106	36	40,566	2/10/20	86	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
421	13309	CHARLEYVILLE CIR	MEADOWBROOK DR	END	E	AC	3	219	32	8,808	2/18/20	86	100	0	0	New Construction	01-01-1980
825	14539	HEIL AVE	TRUDY LN	TORJIAN LN	E	AC	3	1,140	36	41,040	2/18/20	86	42	0	58	New Construction - Initial	01-01-1980
6	13946	ACAPULCO CIR	SAUSALITO LN	CDS	E	AC	7	654	34	23,486	2/19/20	86	18	45	37	Surface Treatment - Slurry Seal	07-15-2021
502	15383	CORALWOOD LN	SEAHURST DR	SAILPORT DR	E	AC	7	678	36	24,658	2/19/20	86	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
2026	16008	TULLOW LN	GLEN DR	LIMERICK DR	E	AC	3	1,030	36	36,792	2/19/20	86	100	0	0	New Construction - Initial	01-01-1980
1109	13459	LAKEPOINT LN	INLET DR	END	E	AC	5	268	36	11,448	2/24/20	86	22	14	64	Surface Treatment - Slurry Seal	10-01-2012
1146	14061	LEECREST LN	LARKPORT DR	LOWMEAD DR	E	AC	7	266	36	10,326	2/24/20	86	59	32	9	Surface Treatment - Slurry Seal	07-15-2021
391	13430	CARRANZA LN	COLON CIR	SALAMANCA LN	E	AAC	5	207	36	7,452	2/25/20	86	71	0	29	Overlay - AC Structural	10-01-2012
1205	15189	LUCIENTO DR	CADIZ CIR	SALAMANCA LN	E	AAC	5	429	36	15,444	2/25/20	86	100	0	0	Overlay - AC Structural	10-01-2012
1773	13417	SEGOVIA CIR	SAN ROQUE LN	END	E	AAC	5	285	36	11,760	2/25/20	86	100	0	0	Overlay - AC Structural	10-01-2012
2080	13788	VICTORIA LN	CUMBERLAND DR	HALIFAX DR	E	AC	1	520	36	18,720	2/26/20	86	56	14	30	New Construction - Initial	01-01-1980
1474	13383	PADUA DR	WRIGHTWOOD LN	SPRINGDALE ST	E	AC	5	180	36	6,480	3/9/20	86	57	43	0	New Construction	01-01-1980
1339	13451	MOONFIELD DR	IVORYCREST LN	FIELDBURY LN	E	AAC	5	917	36	33,012	3/11/20	86	100	0	0	Overlay - AC Structural	10-01-2012
25	15310	ALEXANDRIA DR	DRAKE LN	COLUMBIA LN	E	AC	1	520	36	19,220	5/6/20	86	47	53	0	New Construction	01-01-1980
505	15309	CORNELL DR	BOLSA PARK LN	STANFORD LN	E	AC	1	1,298	36	46,152	5/6/20	86	100	0	0	New Construction	01-01-1980
662	12956	EIGHTH ST	ACACIA AVE	PALM AVE	E	AC	6	390	47	18,330	6/22/21	86	80	0	20	Surface Treatment - Slurry Seal	07-27-2022
1184	50480	LOMA AVE	PARK ST	MAIN ST	E	AC	6	349	36	12,564	6/28/21	86	59	41	0	Surface Treatment - Slurry Seal	07-27-2022
1488	14733	PARK ST	UTICA AVE	LAKE ST	E	AC	6	1,145	36	41,220	6/29/21	86	4	51	45	Surface Treatment - Slurry Seal	07-27-2022
1528	14735	PINE ST	UTICA AVE	PARK ST	E	AC	6	660	36	23,760	6/29/21	86	0	0	100	Surface Treatment - Slurry Seal	07-27-2022
9	13061	ADAMS AVE	MAIN ST	SEVENTEENTH ST	E	AC	6	745	46	36,075	6/30/21	86	54	0	46	Surface Treatment - Slurry Seal	07-27-2022
2031	13014	TWENTIETH ST	ACACIA AVE	PALM AVE	E	AC	6	386	46	17,756	6/30/21	86	33	61	6	Surface Treatment - Slurry Seal	02-13-2024
530	13085	CREST AVE	CREST AVE	THIRTEENTH ST	E	AC	6	192	45	8,940	7/8/21	86	74	26	0	Surface Treatment - Slurry Seal	07-27-2022
1839	14188	SMOKEY CIR	CARLSBAD LN	END	E	AC	8	363	36	14,568	2/23/22	86	45	43	12	Surface Treatment - Slurry Seal	02-13-2023
2011	14087	TRENTON LN	FORRESTAL DR	VALLEY FORGE DR	E	AC	8	260	36	10,360	2/25/22	86	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
707	14183	EVERGLADES LN	KINGS CANTON DR	MAMMOTH DR	E	AC	8	253	36	9,108	3/1/22	86	54	46	0	Surface Treatment - Slurry Seal	02-13-2023
321	14075	BROOKLINE CIR	INNSBRUCK DR	CDS	E	AC	8	365	32	13,180	3/9/22	86	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
425	13281	CHELE CIR	LAKEMONT LN	CDS	E	AC	3	143	36	6,948	3/17/22	86	100	0	0	New Construction	01-01-1980
633	13254	DUCHESS LN	PALISADE DR	CHRISTY DR	E	AC	3	1,160	36	41,760	3/17/22	86	100	0	0	New Construction	01-01-1980
1636	15240	RHINE DR	RHONE LN	CHARLES LN	E	AC	4	520	36	18,720	3/18/22	86	37	63	0	Surface Treatment - Slurry Seal	07-29-2020
2027	13618	TUNSTALL LN	MADDOX DR	NORMA DR	E	AC	3	792	36	28,512	3/18/22	86	91	0	9	New Construction - Initial	01-01-1980
262	13813	BLUEBIRD LN	DOVEWOOD DR	QUAIL CIR	E	AC	1	260	36	9,360	3/21/22	86	50	50	0	New Construction	01-01-1980
450	15085	CLARK DR	BIRDIE LN	NASSAU LN	E	AC	3	1,223	36	44,028	3/23/22	86	65	23	12	New Construction	01-01-1980
324	13761	BROWN CIR	COLUMBIA LN	END	E	AC	1	543	36	21,048	3/30/22	86	26	56	18	New Construction	01-01-1980
1069	15308	KIMBERLY DR	CAPETOWN LN	END	E	AC	1	794	36	30,384	3/30/22	86	26	74	0	New Construction	01-01-1980
357	13545	CAMEL CIR	ROSS LN	END	E	AC	4	199	32	7,618	3/31/22	86	33	63	4	Surface Treatment - Slurry Seal	07-29-2020
1622	15743	REMBRANDT DR	HAGUE LN	NEWLAND ST	E	AC	4	653	36	23,508	3/31/22	86	56	44	0	Surface Treatment - Slurry Seal	07-29-2020
1774	13523	SEINE DR	TIBER LN	THAMES LN	E	AC	4	809	36	29,874	3/31/22	86	61	39	0	Surface Treatment - Slurry Seal	07-29-2020
1944	13577	SYCAMORE AVE	ASH ST	ELM ST	E	AC	4	436	36	15,696	3/31/22	86	92	0	8	New Construction - Initial	01-01-1980
610	13531	DONALD CIR	LUCIA LN	CDS	E	AC	4	350	32	12,450	4/6/22	86	61	39	0	Surface Treatment - Slurry Seal	07-29-2020
1112	13535	LAMAR DR	NEWLAND ST	LUCIA LN	E	AC	4	493	36	17,748	4/6/22	86	37	63	0	Surface Treatment - Slurry Seal	07-29-2020
389	13200	CAROUSEL LN	WANDERER LN	WANDERER LN	E	AC	2	1,011	36	39,396	4/7/22	86	19	38	43	New Construction	01-01-1980
1036	13212	KAMALII DR	BARUNA LN	SEA WITCH LN	E	AC	2	445	36	16,020	4/7/22	86	79	21	0	New Construction	01-01-1980
2065	13184	VENTURE DR	WALRUS LN	SUNDANCER LN	E	AC	2	1,520	36	54,720	4/7/22	86	78	16	6	New Construction - Initial	01-01-1980
2111	13201	WANDERER LN	HUMBOLDT DR	CAROUSEL LN	E	AC	2	631	36	23,716	4/7/22	86	50	47	3	New Construction - Initial	01-01-1980
11	14959	ADMIRRALTY DR	PCH	CHANNEL LN	E	AC	2	796	60	40,240	4/9/22	86	66	31	3	New Construction	01-01-1980
414	13194	CHANNEL LN	ADMIRALTY DR	DEVON CIR	E	AC	2	401	36	14,436	4/9/22	86	53	47	0	New Construction	01-01-1980
1741	15827	SCEPTRE LN	ALADDIN DR	WARNER AVE	E	AC	2	367	36	13,212	4/9/22	86	56	44	0	New Construction	01-01-1980
349	14664	CALIFORNIA ST	LINCOLN AVE	MEMPHIS AVE	E	AAC	6	330	37	11,803	8/14/23	86	100	0	0	Overlay - AC Structural	03-01-2011
969	14656	HUNTINGTON ST	NASHVILLE AVE	OSWEGO AVE	E	AC	6	330	36	11,592	8/14/23	86	37	25	38	New Construction	01-01-1980
969	14658	HUNTINGTON ST	KNOXVILLE AVE	LINCOLN AVE	E	AC	6	330	40	13,200	8/14/23	86	56	39	5	New Construction	01-01-1980
969	15682	HUNTINGTON ST	OSWEGO AVE	ADAMS AVE	E	AAC	6	660	36	23,760	8/14/23	86	68	32	0	Overlay - AC Structural	03-01-2011
1436	14706	OCEANHILL DR	DELAWARE ST	CDS	E	AAC	6	1,218	34	42,912	8/15/23	86	62	21	17	Overlay - AC Structural	03-01-2011
287	14027	BOWMAN LN	HURSTWELL DR	DRYBANK DR	E	AAC	7	536	36	19,296	8/17/23	86	91	0	9	Overlay - AC Structural	03-01-2011

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
342	14024	CADE CIR	DRYBROOK LN	END	E	AAC	7	294	32	9,408	8/17/23	86	59	24	17	Overlay - AC Structural	03-01-2011
475	14242	COLIMA LN	CASTILIAN CIR	SNOWBIRD DR	E	AC	9	253	36	9,108	8/23/23	86	27	73	0	New Construction	01-01-1980
1188	14115	LONDONDERRY LN	MALLOY DR	MUNSTER DR	E	AAC	9	260	36	9,360	8/23/23	86	100	0	0	Overlay - AC Structural	03-01-2011
2289	17024	EDISON AVE	NEWLAND AVE	SOUTH END	E	AC	9	816	25	20,400	8/30/23	86	60	0	40	New Construction - Initial	01-01-1980
1179	15536	LOCHLEA LN	ALLEY DONCASTER DR	ALLEY LOMOND DR	E	AC	9	326	36	11,736	8/30/23	86	100	0	0	New Construction	01-01-1980
1320	14317	MIRAMAR LN	DORSETT DR	SABLE DR	E	AC	9	512	36	18,144	8/30/23	86	52	41	7	New Construction	01-01-1980
1936	14432	SURVEYOR CIR	HAMILTON AVE	END	E	AC	9	496	41	22,336	8/30/23	86	15	63	22	New Construction - Initial	01-01-1980
1098	14283	LA CRESTA CIR	PIERVIEW LN	CDS	E	AC	8	510	36	19,560	3/6/24	86	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1818	15946	SILVER STRAND DR	REEF LN	CDS	E	AC	8	1,010	36	37,560	3/6/24	86	88	0	12	Surface Treatment - Slurry Seal	05-11-2018
1860	15945	SPINNAKER DR	HORIZON LN	BROOKHURST ST	E	AC	8	695	36	24,500	3/6/24	86	58	0	42	New Construction	01-01-1980
452	14747	CLAY AVE	MAIN ST	HOLLY ST	E	AC	7	368	30	11,040	3/12/24	86	58	0	42	Surface Treatment - Slurry Seal	11-28-2019
2205	14279	ZETLAND DR	PAISLEY LN	TROON LN	E	AC	8	783	36	28,188	3/18/24	86	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
782	15519	FRIARSCOURT DR	GLENCAIRN LN	HUNTER LN	E	AC	8	506	36	18,216	3/19/24	86	66	15	19	Surface Treatment - Slurry Seal	05-11-2018
1747	15943	SCOTSTOUN DR	GLENCAIRN LN	QUEENS PARK LN	E	AC	8	1,027	36	36,972	3/19/24	86	65	35	0	Surface Treatment - Slurry Seal	05-11-2018
175	14378	BAHAMA LN	HAITI DR	RHODESIA DR	E	AAC	9	752	36	28,072	3/26/24	86	52	16	32	Overlay - AC Structural	05-11-2018
272	14370	BOBBIE CIR	POLYNESIAN LN	CDS	E	AAC	9	480	36	18,780	3/26/24	86	68	32	0	Overlay - AC Structural	05-11-2018
298	14340	BREAKWATER CIR	BOWSPIRIT LN	CDS	E	AAC	9	350	32	12,700	4/1/24	86	100	0	0	Overlay - AC Structural	05-11-2018
438	14501	CHRISTINE DR	HULA CIR	SUSAN LN	E	AC	9	249	36	9,964	4/17/24	86	69	19	12	Surface Treatment - Slurry Seal	05-11-2019
1659	15616	ROCKPORT LN	PORT CLYDE DR	CDS	E	AC	9	382	36	16,252	4/17/24	86	67	0	33	Surface Treatment - Slurry Seal	05-11-2019
372	15622	CAPE MAY LN	PORT CLYDE DR	STONINGTON CIR	E	AC	9	373	36	14,678	4/24/24	86	49	0	51	Surface Treatment - Slurry Seal	05-11-2019
374	14527	CAPE SPLIT CIR	CAPE MAY LN	CDS	E	AC	9	131	32	5,992	4/24/24	86	50	14	36	Surface Treatment - Slurry Seal	05-11-2019
552	14472	DAKAR LN	DRUMBEAT DR	BORBA CIR	E	AC	9	202	32	6,964	4/25/24	86	50	0	50	Surface Treatment - Slurry Seal	05-11-2019
1120	15596	LANDFALL DR	HILARIA CIR	DIRIGO CIR	E	AC	9	764	36	27,504	4/25/24	86	72	0	28	Surface Treatment - Slurry Seal	05-11-2019
1254	15106	MARJAN LN	EDINGER AVE	LAURELHURST DR	E	AC	3	1,190	36	42,264	5/9/24	86	95	0	5	New Construction	01-01-1980
1070	14277	KIMBERWICK LN	FIRESIDE DR	HAVEN LN	E	AC	9	177	36	6,372	5/7/24	86	53	47	0	Surface Treatment - Slurry Seal	05-11-2018
2177	14272	WINTERWOOD CIR	CHARWOOD LN	CDS	E	AC	9	440	34	16,460	5/7/24	86	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1951	14546	TALISMAN LN	SAYBROOK LN	PICKWICK CIR	E	AAC	2	348	36	12,528	5/10/24	86	49	51	0	Overlay - AC Fabric	12-01-2017
1495	14548	PASEO CIR	NEWLAND ST	CDS	E	AC	4	362	36	15,032	5/13/24	86	100	0	0	New Construction	01-01-1980
736	13208	FIGARO CIR	EDGEWATER LN	CDS	E	AAC	2	350	36	14,100	5/10/24	86	45	55	0	Overlay - AC Fabric	12-01-2017
1932	15356	SURFDALE LN	LAWN HAVEN DR	GARDEN CIR	E	AC	5	522	36	18,792	5/6/24	87	19	81	0	Surface Treatment - Slurry Seal	11-28-2019
797	15359	GARDEN CIR	SURFDALE CIR	CDS	E	AC	5	343	36	14,348	5/6/24	87	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
5000	60080	NORTH PACIFIC	25TH ST	ANDERSON ST	E	AC	2	485	25	12,125	5/6/24	87	23	42	35	New Construction - Initial	01-01-1980
444	14760	CHURCHILL DR	ROCKINGHORSE LN	QUARTERHORSE LN	E	AC	5	393	36	14,148	5/7/24	87	52	0	48	Surface Treatment - Slurry Seal	11-28-2019
2089	14779	VINCENT CIR	GOTHARD ST	END	E	AC	4	422	40	18,680	5/9/24	87	52	48	0	New Construction - Initial	01-01-1980
2291	17027	ASTRONAUTICS LN	DELTA LN	RANCHO RD	E	AC	1	1,592	36	61,512	2/10/20	87	25	0	75	New Construction - Initial	01-01-2000
306	13675	BRIARCLIFF DR	FAIRVIEW LN	END	E	AC	1	551	32	19,382	2/10/20	87	78	22	0	New Construction	01-01-1980
2292	17028	DELTA LN	SKYLAB LN	ASTRONAUTICS LN	E	AC	1	1,338	36	48,168	2/10/20	87	31	0	69	New Construction - Initial	01-01-2000
1851	13661	SPA DR	HAMMON LN	CALNEVA LN	E	AC	1	780	36	28,080	2/10/20	87	52	48	0	New Construction	01-01-1980
1237	15988	MANHATTAN DR	MAYOR LN	WHETMORE LN	E	AAC	3	1,181	36	42,516	2/11/20	87	100	0	0	Overlay - AC Structural	10-01-2012
160	15151	ATHENA DR	LIDO LN	MADERA LN	E	AAC	5	1,020	36	36,720	2/18/20	87	96	0	4	Overlay - AC Structural	10-01-2012
258	15627	BUSHARD ST	GREENWICH DR	NANTUCKET DR	E	AC	7	528	28	14,784	2/18/20	87	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
2062	15587	VELARDO DR	WOODWARD LN	BUSHARD ST	E	AC	8	1,153	36	42,258	2/18/20	87	45	55	0	Surface Treatment - Slurry Seal	07-15-2021
300	13127	BREELAND DR	SHERBECK LN	GOLDENWEST ST	E	AC	3	1,196	36	42,768	2/19/20	87	98	0	2	New Construction	01-01-1980
529	13963	CRESCENT DR	PISMO LN	CORALWOOD LN	E	AC	7	1,116	36	40,676	2/19/20	87	94	0	6	Surface Treatment - Slurry Seal	07-15-2021
454	13464	CLEARWATER CIR	INLET DR	END	E	AC	5	481	36	18,816	2/24/20	87	97	0	3	Surface Treatment - Slurry Seal	10-01-2012
1006	13424	JARDINES DR	AVILLA LN	END	E	AAC	5	528	36	21,008	2/25/20	87	88	0	12	Overlay - AC Structural	10-01-2012
2075	13423	VIA CARONA DR	AVILLA LN	EL NOPAL LN	E	AAC	5	1,142	36	41,112	2/25/20	87	100	0	0	Overlay - AC Structural	10-01-2012
1967	13391	TERRIER DR	MISTY LN	WRIGHTWOOD LN	E	AC	5	1,013	36	35,892	3/9/20	87	81	16	3	New Construction - Initial	01-01-1980
1177	13443	LITTLEFIELD DR	NEWMOON LN	TWINFORD LN	E	AAC	5	328	36	11,808	3/11/20	87	100	0	0	Overlay - AC Structural	10-01-2012
1392	13442	NEWMOON LN	JASONWOOD DR	IRONGATE CIR	E	AAC	5	255	36	9,180	3/11/20	87	100	0	0	Overlay - AC Structural	10-01-2012
1117	15167	LANCEFIELD DR	OLDGLEN LN	SHAMLEY CIR	E	AC	5	509	36	19,324	3/12/20	87	100	0	0	New Construction	01-01-1980
1556	13389	PORTSIDE CIR	LANCEFIELD DR	END	E	AC	5	102	36	5,472	3/12/20	87	32	68	0	New Construction	01-01-1980
1584	14924	PUTNEY CIR	BARWOOD DR	END	E	AC	5	313	36	13,268	3/12/20	87	31	0	69	New Construction	01-01-1980
1639	13743	RICE CIR	ALEXANDRIA DR	END	E	AC	1	410	36	16,560	5/6/20	87	100	0	0	New Construction	01-01-1980
2037	13746	TYNDALL DR	FIELDSTONE LN	BOLSA PARK LN	E	AC	1	769	36	28,184	5/6/20	87	100	0	0	New Construction - Initial	01-01-1980
1403	13012	NINETEENTH ST	PCH	WALNUT AVE	E	AC	6	370	50	18,500	6/23/21	87	34	0	66	Surface Treatment - Slurry Seal	07-27-2022
1446	12917	OLIVE AVE	SIXTH ST	EIGHTH ST	E	AC	6	600	40	24,000	6/23/21	87	50	0	50	Surface Treatment - Slurry Seal	05-03-2021
1130	13051	MAIN ST	ACACIA AVE	PALM AVE	E	AAC	6	578	45	26,185	6/29/21	87	28	0	72	Surface Treatment - Slurry Seal	07-27-2022
1488	13029	PARK ST	SPRINGFIELD AVE	UTICA AVE	E	AC	6	645	37	23,865	6/29/21	87	45	0	55	Surface Treatment - Slurry Seal	07-27-2022

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
849	15485	GRAYSTONE LN	VERDANT DR	END	E	AC	8	554	34	20,636	2/23/22	87	44	17	39	Surface Treatment - Slurry Seal	02-13-2023
767	14086	FORRESTAL DR	BROOKHURST ST	TRENTON LN	E	AC	8	884	36	32,824	2/25/22	87	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1564	15979	PRESCOTT LN	FENLEY DR	KELLEY CIR	E	AC	5	516	36	18,576	3/14/22	87	34	66	0	New Construction	01-01-1980
1544	15143	POINT LOMA DR	AVALON LN	OJAI LN	E	AC	5	515	36	19,680	3/15/22	87	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
2025	13286	TUFTS LN	LOYOLA DR	DEFIANCE DR	E	AC	3	257	36	10,252	3/16/22	87	100	0	0	New Construction - Initial	01-01-1980
2035	13277	TYEE LN	NYANZA DR	LAURELHURST DR	E	AC	3	260	36	10,110	3/16/22	87	100	0	0	New Construction - Initial	01-01-1980
28	15226	ALHAMBRA AVE	RHONE LN	SILVER LN	E	AC	4	1,154	36	41,544	3/18/22	87	33	67	0	Surface Treatment - Slurry Seal	07-29-2020
251	13331	BISHOP DR	EDWARDS ST	COOPER LN	E	AC	3	531	36	19,116	3/18/22	87	37	63	0	Surface Treatment - Slurry Seal	07-29-2020
1030	15224	JULIETTE LOW DR	ANITA LN	SILVER LN	E	AC	4	890	36	32,040	3/18/22	87	39	58	3	Surface Treatment - Slurry Seal	07-29-2020
637	15766	DUNBAR AVE	BOLSA CHICA ST	HARBOR BLUFFS CIR	E	AC	2	1,182	36	42,552	3/22/22	87	97	0	3	New Construction	01-01-1980
1394	15775	NEWQUIST LN	EL DORADO DR	GLENROY DR	E	AC	2	733	36	27,528	3/22/22	87	95	0	5	New Construction	01-01-1980
1981	14884	TIFFANY CIR	KERN DR	CDS	E	AC	5	542	36	20,762	3/22/22	87	48	52	0	New Construction - Initial	01-01-1980
2020	15128	TRUDY LN	JEAN DR	SHIELDS DR	E	AC	3	1,282	36	46,152	3/23/22	87	100	0	0	New Construction - Initial	01-01-1980
768	13438	FOSS LN	MIDWAY DR	CDS	E	AC	5	127	36	4,572	3/28/22	87	100	0	0	New Construction	01-01-1980
1364	13398	MUTHER LN	KISER DR	HAMSHIRE DR	E	AC	5	257	36	9,252	3/28/22	87	45	55	0	New Construction	01-01-1980
777	15792	FRANS LN	APEL LN	GLENSTONE DR	E	AC	5	383	36	14,038	3/29/22	87	100	0	0	New Construction	01-01-1980
420	13522	CHARLES LN	DON DR	RHINE DR	E	AC	4	503	36	18,858	3/31/22	87	69	0	31	Surface Treatment - Slurry Seal	07-29-2020
515	13514	COUNT CIR	BURKE LN	END	E	AC	3	130	32	5,660	3/31/22	87	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
873	15742	HAGUE LN	EDAM CIR	VALENCIA DR	E	AC	4	765	36	27,540	3/31/22	87	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1651	15749	ROBIDOUX DR	BEACH BLVD	B ST	E	AC	4	599	28	15,572	3/31/22	87	36	58	6	Surface Treatment - Slurry Seal	07-29-2020
947	14816	HOLLAND DR	WAAL CIR	JEFFERSON LN	E	AC	4	260	36	9,360	4/6/22	87	61	39	0	Surface Treatment - Slurry Seal	07-29-2020
1000	14807	JACQUELYN LN	ALLEY BARTON DR	ALLEY SLATER AVE	E	AC	4	500	36	19,000	4/6/22	87	89	0	11	New Construction	01-01-1980
1342	14451	MOONSHADOW CIR	VIEWPOINT LN	CDS	E	AC	4	273	32	10,236	4/6/22	87	61	39	0	Surface Treatment - Slurry Seal	07-29-2020
197	15068	BARUNA LN	SEA WITCH LN	DAVENPORT DR	E	AC	2	886	36	31,896	4/7/22	87	56	44	0	New Construction	01-01-1980
817	15063	GILBERT DR	CHANNEL LN	SOMERSET LN	E	AC	2	1,332	36	48,452	4/9/22	87	38	52	10	New Construction	01-01-1980
679	14972	ELMCREST LN	DRYBROOK LN	DRYBANK DR	E	AAC	7	1,283	36	46,188	8/17/23	87	76	0	24	Overlay - AC Structural	03-01-2011
1321	15500	MISSION LN	SNOWBIRD DR	ALVARADO DR	E	AC	9	505	36	18,180	8/23/23	87	100	0	0	New Construction	01-01-1980
339	14611	BUSHWICK DR	ASHBURTON CIR	ATTLEBORO CIR	E	AC	9	235	36	8,460	8/24/23	87	100	0	0	New Construction	01-01-1980
349	14643	CALIFORNIA ST	DETROIT AVE	ELMIRA AVE	E	AC	9	330	38	12,540	8/24/23	87	80	0	20	New Construction	01-01-1980
935	14639	HILL ST	FRANKFORT AVE	ALLEY GENEVA AVE	E	AC	9	160	33	5,280	8/24/23	87	100	0	0	New Construction	01-01-1980
1179	14309	LOCHLEA LN	HILLHEAD CIR	ALLEY DONCASTER DR	E	AC	9	165	36	5,940	8/30/23	87	100	0	0	New Construction	01-01-1980
1744	14307	SCONE DR	CUPAR LN	BANFF LN	E	AC	9	266	36	9,576	8/30/23	87	100	0	0	New Construction	01-01-1980
688	14297	ENDEVER DR	SKIMMER LN	BROOKHURST ST	E	AC	8	187	36	6,732	3/19/24	87	52	48	0	Surface Treatment - Slurry Seal	05-11-2018
1850	14337	SOUTHSHORE DR	FLEET LN	COMPASS LN	E	AC	9	618	36	22,748	4/1/24	87	63	37	0	Surface Treatment - Slurry Seal	05-11-2018
1960	15273	TAYLOR DR	CAMABY LN	DELAWARE ST	E	AC	4	1,371	36	49,068	4/9/24	87	51	39	10	New Construction - Initial	01-01-1980
1449	14528	ONSET CIR	CAPE MAY LN	CDS	E	AC	9	206	32	8,092	4/24/24	87	83	17	0	Surface Treatment - Slurry Seal	05-11-2019
2179	15617	WOOD ISLAND LN	CAPE MAY LN	CASTINE DR	E	AC	9	956	36	35,416	4/24/24	87	73	0	27	Surface Treatment - Slurry Seal	05-11-2019
664	14608	EL ARROYO DR	BRITTANY LN	NEWLAND ST	E	AC	4	496	36	17,856	5/13/24	87	82	18	0	Surface Treatment - Slurry Seal	04-01-2017
1381	14468	NEVADA DR	STARDUST DR	TANGIERS DR	E	AAC	1	260	36	9,360	5/8/24	87	100	0	0	Overlay - AC Structural	10-01-2016
521	15734	CRABB LN	SPEER DR	CDS	E	AC	4	456	36	16,416	5/13/24	87	96	4	0	Surface Treatment - Slurry Seal	11-01-2019
677	15952	ELLSWORTH DR	KELVIN LN	MINERVA LN	E	AAC	9	944	36	34,734	5/9/24	87	98	0	2	Overlay - AC Structural	05-11-2018
452	14745	CLAY AVE	STEWARD ST	CDS	E	AC	7	830	28	24,740	5/6/24	88	66	0	34	New Construction	01-01-1980
599	13211	DIABLO CIR	EDGEWATER LN	CDS	E	AAC	2	350	36	14,100	5/10/24	88	100	0	0	Overlay - AC Fabric	12-01-2017
5000	60050	NORTH PACIFIC	16TH ST	19TH ST	E	AC	2	705	25	17,625	5/6/24	88	48	52	0	New Construction - Initial	01-01-1980
1838	14461	TALBERT AVE	GOTHARD ST	END	E	AC	4	747	40	31,380	5/9/24	88	43	57	0	New Construction - Initial	01-01-1980
1091	15012	KOVACS LN	TALBERT AVE	REDONDO CIR	E	AC	4	911	40	36,440	5/13/24	88	81	19	0	Surface Treatment - Slurry Seal	11-28-2019
652	15066	EDGEWATER LN	FIGARO CIR	DAVENPORT DR	E	AAC	2	807	36	29,052	5/10/24	88	100	0	0	Overlay - AC Structural	12-01-2017
1151	14364	LEMONTREE LN	CHEVY CHASE DR	CDS	E	AC	8	127	36	4,572	7/13/17	88	78	0	22	New Construction - Initial	01-01-1980
651	13676	EDGEVIEW LN	GLENWOOD DR	HARDWICK CIR	E	AC	1	260	36	9,360	2/10/20	88	100	0	0	New Construction	01-01-1980
881	15287	HAMMON LN	HAROLD PL	SANDS DR	E	AC	1	690	36	24,840	2/10/20	88	53	22	25	New Construction	01-01-1980
1124	15298	LARCHWOOD DR	SPRINGDALE ST	NORTHRIDGE LN	E	AC	1	915	36	32,652	2/10/20	88	79	0	21	New Construction	01-01-1980
656	13314	EDMONDS CIR	GREENVIEW LN	END	E	AC	3	410	36	16,560	2/18/20	88	100	0	0	New Construction	01-01-1980
780	15784	FREEBORN DR	ERWIN LN	EDWARDS ST	E	AAC	5	785	36	28,590	2/18/20	88	81	0	19	Overlay - AC Structural	10-01-2012
1846	15145	SONOMA DR	LA MESA LN	ELSINORE CIR	E	AAC	5	499	36	17,964	2/18/20	88	100	0	0	Overlay - AC Structural	10-01-2012
2118	15425	WATERBURY LN	GREENWICH DR	HYANNIS PORT DR	E	AC	7	792	36	28,512	2/18/20	88	73	27	0	Surface Treatment - Slurry Seal	07-15-2021
572	15919	DAWSON LN	SKYVIEW DR	SHANNON DR	E	AC	3	764	36	27,216	2/19/20	88	100	0	0	New Construction	01-01-1980
352	13432	CALPE CIR	SAN LEANDRO LN	END	E	AAC	5	100	50	6,000	2/25/20	88	100	0	0	Overlay - AC Structural	01-23-2014
479	13428	COLON CIR	CARRANZA LN	END	E	AAC	5	92	42	5,364	2/25/20	88	82	18	0	Overlay - AC Structural	01-23-2014
1006	15183	JARDINES DR	SAN ROGUE LN	AVILLA LN	E	AAC	5	1,108	36	40,388	2/25/20	88	85	0	15	Overlay - AC Structural	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1193	13421	LOS AMIGOS CIR	VIA ESPANA LN	END	E	AAC	5	916	36	34,476	2/25/20	88	82	18	0	Overlay - AC Structural	10-01-2012
1205	13435	LUCIENTO DR	SALAMANCA LN	SAN LEANDRO LN	E	AAC	5	438	36	15,768	2/25/20	88	100	0	0	Overlay - AC Structural	10-01-2012
2076	13629	VIA ESPANA LN	SPICKARD DR	SLATER AVE	E	AC	3	166	36	5,400	2/25/20	88	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1606	14940	RAPHAEL DR	MISTY LN	WRIGHTWOOD LN	E	AC	5	1,013	36	35,892	3/9/20	88	31	55	14	New Construction	01-01-1980
991	13441	IRONGATE CIR	NEWMOON LN	END	E	AAC	5	476	36	18,636	3/11/20	88	100	0	0	Overlay - AC Structural	10-01-2012
2073	13446	VESTRY CIR	PACEMONT DR	END	E	AAC	5	362	36	14,532	3/11/20	88	100	0	0	Overlay - AC Structural	10-01-2012
1264	15160	MARYPORT DR	CRESTMOOR LN	SHOREHAM LN	E	AC	5	524	36	18,864	3/12/20	88	49	51	0	New Construction	01-01-1980
1377	15801	NEARGATE DR	RAINGLEN LN	GRAHAM ST	E	AC	5	587	36	20,844	3/12/20	88	65	35	0	New Construction	01-01-1980
1641	15802	RIDGEBURY DR	GRAHAM ST	CRESTMOOR LN	E	AC	5	716	36	25,776	3/12/20	88	56	16	28	New Construction	01-01-1980
1216	15923	MACHINE DR	PIPELINE LN	SPRINGDALE ST	E	AC	1	1,254	40	50,160	5/5/20	88	71	0	29	New Construction	01-01-1980
734	12996	FIFTEENTH ST	ACACIA AVE	PALM AVE	E	AC	6	370	46	17,020	6/22/21	88	94	0	6	Surface Treatment - Slurry Seal	07-27-2022
735	13068	FIFTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	375	54	19,015	6/22/21	88	100	0	0	New Construction	01-01-1980
2030	50100	TWELFTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	375	46	17,250	6/22/21	88	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1900	14212	STONYBROOK DR	BROOKJURST ST	CRAIMER LN	E	AC	8	1,255	36	45,180	2/28/22	88	67	0	33	Surface Treatment - Slurry Seal	02-14-2023
657	15431	EDUCATION LN	FREDERICK CIR	CONSTITUTION DR	E	AC	8	759	36	27,324	3/7/22	88	70	0	30	New Construction	01-01-1980
128	15095	ANGLER LN	SOFTWIND DR	PALISADE DR	E	AC	3	534	36	19,224	3/17/22	88	100	0	0	New Construction	01-01-1980
498	15992	COOPER LN	ABBOTT DR	MARILYN DR	E	AC	3	1,555	36	55,732	3/18/22	88	96	0	4	Surface Treatment - Slurry Seal	07-29-2020
261	13812	BLUE JAY CIR	BLUEBIRD LN	END	E	AC	1	530	36	20,330	3/21/22	88	50	46	4	New Construction	01-01-1980
358	14881	CAMELOT CIR	GLENROY DR	CDS	E	AC	2	472	36	18,342	3/22/22	88	100	0	0	New Construction	01-01-1980
852	15116	GREEN ST	BARRACUDA LN	WARNER AVE	E	AC	2	884	36	31,824	3/22/22	88	50	37	13	New Construction	01-01-1980
856	14875	GREENTREE LN	WARNER AVE	VINELAND DR	E	AC	2	672	36	24,192	3/22/22	88	100	0	0	New Construction	01-01-1980
643	13244	EAGLE LN	MEADOWLARK DR	MIDDLECOFF DR	E	AC	3	871	36	32,106	3/23/22	88	96	0	4	New Construction	01-01-1980
1803	15130	SHIELDS DR	TRUDY LN	EDWARDS ST	E	AC	3	1,323	36	47,628	3/23/22	88	100	0	0	New Construction	01-01-1980
1908	15131	SUMMERCLOUD LN	CAMILLE DR	SHIELDS DR	E	AC	3	573	36	20,628	3/23/22	88	71	0	29	New Construction - Initial	01-01-1980
229	14916	BELLPORT CIR	GLENSTONE DR	CDS	E	AC	2	229	36	9,594	3/29/22	88	100	0	0	New Construction	01-01-1980
1871	15017	ST GEORGE LN	WARNER AVE	ST PAUL CIR	E	AC	5	335	36	13,200	3/29/22	88	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
259	15747	BLAYLOCK DR	A ST	BARCELONA LN	E	AC	4	887	36	32,182	3/31/22	88	59	41	0	Surface Treatment - Slurry Seal	07-29-2020
609	14965	DON DR	CHARLES LN	RHINE DR	E	AC	4	649	36	24,864	3/31/22	88	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
740	15261	FIR DR	EMERALD LN	OAK LN	E	AC	4	318	36	11,448	3/31/22	88	100	0	0	New Construction	01-01-1980
274	13228	BOLERO LN	FINISTERRE DR	SIRIUS DR	E	AC	2	800	36	29,550	4/7/22	88	48	52	0	New Construction - Initial	01-01-1980
966	15054	HUMBOLDT DR	WANDERER LN	BARNSTABLE CIR	E	AC	2	1,115	36	40,140	4/7/22	88	91	0	9	New Construction	01-01-1980
1257	13506	MARS DR	GEMINI LN	GOTHARD ST	E	AC	3	361	40	15,190	4/7/22	88	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
2065	13187	VENTURE DR	SUNDANCER LN	CDS	E	AC	2	189	32	7,848	4/7/22	88	50	0	50	New Construction - Initial	01-01-1980
435	14954	CHINOOK AVE	CADCADE ST	WILLOW LN	E	AC	1	833	32	26,656	4/8/22	88	33	0	67	New Construction	01-01-1980
1776	15112	SELL CIR	HEIL AVE	CDS	E	AC	2	492	36	21,672	4/9/22	88	57	28	15	New Construction	01-01-1980
1844	13192	SOMERSET LN	MALDEN CIR	GILBERT DR	E	AC	2	1,041	36	37,976	4/9/22	88	36	34	30	New Construction	01-01-1980
1462	14732	OSWEGO AVE	ALABAMA ST	ALLEY ALABAMA ST	E	AAC	6	322	36	11,304	8/14/23	88	52	48	0	Overlay - AC Structural	03-01-2011
843	14025	GRACE CIR	DITMAR LN	END	E	AAC	7	345	32	11,040	8/17/23	88	80	20	0	Overlay - AC Structural	03-01-2011
971	15405	HURSTWELL DR	BOWMAN LN	DITMAR LN	E	AAC	7	566	36	20,376	8/17/23	88	80	0	20	Overlay - AC Structural	03-01-2011
408	14035	CATO CIR	FLAXMAN DR	END	E	AAC	7	347	32	11,104	8/21/23	88	66	34	0	Overlay - AC Structural	03-01-2011
1164	14109	LIGHTHOUSE LN	SEAPORT DR	SEALROCK DR	E	AAC	9	246	36	8,856	8/21/23	88	80	20	0	Overlay - AC Structural	03-01-2011
1416	14618	NORTHPORT DR	PORT GREENWICH LN	END	E	AC	9	453	36	16,308	8/21/23	88	35	65	0	Surface Treatment - Slurry Seal	03-01-2011
1083	15944	KITE DR	SPARKMAN LN	SKIMMER LN	E	AC	8	1,007	36	36,252	3/18/24	88	55	45	0	Surface Treatment - Slurry Seal	05-11-2018
1033	14287	JURA DR	WOODLEA LN	HUNTER LN	E	AC	8	267	36	9,612	3/19/24	88	51	49	0	Surface Treatment - Slurry Seal	05-11-2018
2041	14460	UPLAND DR	QUEENS PARK LN	SPARKMAN LN	E	AAC	8	253	36	9,108	3/19/24	88	57	43	0	Overlay - AC Structural	05-11-2018
1040	14376	KANEOHE LN	REGATTA DR	HAITI DR	E	AC	9	273	36	10,578	3/26/24	88	100	0	0	New Construction	01-01-1980
1399	14371	NIGUEL CIR	POLYNESIAN LN	CDS	E	AAC	9	480	36	19,080	3/26/24	88	93	0	7	Overlay - AC Structural	05-11-2018
1637	14374	RHODESIA DR	BAHAMA LN	KANEOHE LN	E	AAC	9	260	36	9,072	3/27/24	88	100	0	0	Overlay - AC Structural	05-11-2018
880	13928	HAMDEN LN	HARDING LN	NEWHAVEN LN	E	AC	7	256	36	8,928	4/2/24	88	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1324	14982	MODALE DR	FLAGSTAFF LN	NEWLAND ST	E	AC	7	595	36	21,420	4/8/24	88	66	34	0	Surface Treatment - Slurry Seal	11-28-2019
120	15559	AMBERWICK LN	EFFINGHAM DR	CDS	E	AC	8	1,021	36	38,256	4/10/24	88	32	64	4	New Construction	01-01-1980
1594	13889	QUIETSANDS CIR	LAWN HAVEN DR	CDS	E	AC	5	193	36	8,948	4/15/24	88	100	0	0	New Construction	01-01-1980
965	14500	HULA CIR	CHRISTINE DR	CDS	E	AC	9	220	36	10,420	4/17/24	88	64	36	0	New Construction	01-01-1980
1881	15825	STARFIRE LN	DAYTONA CIR	BANNING AVE	E	AC	9	294	36	10,584	4/17/24	88	55	45	0	Surface Treatment - Slurry Seal	05-11-2019
1548	14368	POLYNESIAN LN	HAMILTON AVE	REGATTA DR	E	AAC	9	168	36	6,048	5/6/24	88	75	21	4	Overlay - AC Structural	05-11-2018
1381	15589	NEVADA DR	TANGIERS DR	HAMMON LN	E	AAC	1	1,203	36	43,308	5/8/24	88	100	0	0	Overlay - AC Structural	10-01-2016
296	13242	BRASSIE CIR	SPRINGDALE ST	END	E	AAC	3	270	32	9,890	5/9/24	88	45	0	55	Overlay - AC Fabric	10-01-2016
900	14780	HARRIMAN ST	GOTHARD ST	CDS	E	AC	4	331	36	11,916	5/9/24	89	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
897	14463	HAROLD PL	SPA DR	GRAHAM ST	E	AAC	1	563	36	20,268	5/8/24	89	100	0	0	Overlay - AC Fabric	10-01-2016

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1912	14458	SUMMIT DR	BEACON HILL LN	GOLDENWEST ST	E	AC	5	709	44	31,196	5/6/24	89	57	0	43	New Construction - Initial	01-01-1980
1610	13171	REBEL CIR	SUNDANCER LN	CDS	E	AAC	2	485	34	17,990	5/7/24	89	100	0	0	Overlay - AC Fabric	12-01-2017
30	14392	ALII CIR	ZAMORA LN	CDS	E	AC	9	235	32	9,020	7/12/17	89	95	0	5	New Construction	01-01-1980
1062	14391	KEOKI CIR	ZAMORA LN	CDS	E	AC	9	235	32	9,020	7/12/17	89	100	0	0	New Construction	01-01-1980
1226	15573	MALAHINE DR	IMPALA LN	HANAKAI LN	E	AC	9	516	36	19,326	7/12/17	89	100	0	0	New Construction	01-01-1980
2019	13664	TROPICANA LN	CHINOOK DR	SANDS DR	E	AC	1	275	36	13,900	2/10/20	89	100	0	0	New Construction - Initial	01-01-1980
1247	14407	MARGARITA LN	FENWICK DR	BAKER DR	E	AAC	3	300	36	11,550	2/11/20	89	90	0	10	Overlay - AC Structural	10-01-2012
1013	13370	JEPSEN CIR	CORY DR	END	E	AAC	3	449	36	18,164	2/12/20	89	100	0	0	Overlay - AC Structural	10-01-2012
1625	13367	RENNRICK CIR	KRISTOPHER LN	END	E	AAC	3	368	36	15,248	2/12/20	89	80	20	0	Overlay - AC Structural	10-01-2012
612	13316	DONLYN DR	GREENVIEW LN	SPRINGDALE ST	E	AC	3	520	36	18,432	2/18/20	89	100	0	0	New Construction	01-01-1980
780	14894	FREEBORN DR	LIDO LN	ERWIN LN	E	AAC	5	405	36	15,720	2/18/20	89	81	0	19	Overlay - AC Structural	10-01-2012
818	13315	GILDRED CIR	GREENVIEW LN	END	E	AC	3	410	36	16,560	2/18/20	89	100	0	0	New Construction	01-01-1980
1022	13983	JOICE LN	KAREN CIR	GRAND DR	E	AC	8	254	36	9,894	2/18/20	89	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
459	14419	CLIFFVIEW LN	CENTRAL PARK DR	LAKEVIEW DR	E	AC	5	273	30	8,190	2/24/20	89	56	0	44	Surface Treatment - Slurry Seal	10-01-2012
614	14057	DOREMERE DR	GEMFALL LN	FELCLIFF LN	E	AC	7	215	36	8,490	2/24/20	89	89	0	11	Surface Treatment - Slurry Seal	07-15-2021
171	15985	AVILLA LN	CRISTA PALMA DR	JARDINES DR	E	AAC	5	971	36	34,668	2/25/20	89	100	0	0	Overlay - AC Structural	10-01-2012
922	15466	HENTON DR	BRENTSTONE LN	CDS	E	AC	7	547	32	17,504	2/25/20	89	30	70	0	Surface Treatment - Slurry Seal	07-15-2021
1713	13427	SAN DOVAL LN	VILLA NUEVA DR	ARACENA DR	E	AAC	5	596	36	22,206	2/25/20	89	96	0	4	Overlay - AC Structural	10-01-2012
1717	15182	SAN ROQUE LN	SEGOVIA CIR	JARDINES DR	E	AAC	5	730	36	27,030	2/25/20	89	64	0	36	Overlay - AC Structural	10-01-2012
1848	13429	SORIA CIR	QUINTANA LN	END	E	AAC	5	92	42	5,364	2/25/20	89	100	0	0	Overlay - AC Structural	10-01-2012
1569	13516	PRINCE DR	GOTHARD ST	BURKE LN	E	AC	3	436	40	17,440	3/9/20	89	69	18	13	Surface Treatment - Slurry Seal	07-29-2020
1598	13453	RAIN CIR	NORBROOK DR	END	E	AAC	5	280	36	11,880	3/11/20	89	100	0	0	Overlay - AC Structural	10-01-2012
1645	13447	RIVERSIDE CIR	PACEMONT DR	END	E	AAC	5	360	36	14,460	3/11/20	89	70	0	30	Overlay - AC Structural	10-01-2012
108	15977	ALLSTONE DR	RAINGLEN LN	END	E	AC	5	587	36	21,132	3/12/20	89	53	0	47	New Construction	01-01-1980
1244	14410	MARBER LN	WOODBORO DR	TALBERT AVE	E	AC	5	182	36	6,552	3/12/20	89	64	0	36	New Construction	01-01-1980
2153	15975	WHITFORD LN	BRIGHTON DR	BERSHIRE DR	E	AC	5	1,100	36	40,350	3/12/20	89	43	54	3	New Construction - Initial	01-01-1980
2076	15184	VIA ESPANA LN	SLATER AVE	VIA ANGELINA DR	E	AAC	5	418	36	15,048	5/4/20	89	100	0	0	Overlay - AC Structural	10-01-2012
5280	60445	9TH ST	PACIFIC N	PCH	E	AC	2	211	21	4,431	5/6/20	89	100	0	0	New Construction - Initial	01-01-1980
5010	60160	SOUTH PACIFIC	7TH ST	5TH ST	E	AC	2	470	25	11,750	5/6/20	89	96	0	4	New Construction - Initial	01-01-1980
5010	60170	SOUTH PACIFIC	5TH ST	END	E	AC	2	956	25	23,900	5/6/20	89	86	0	14	New Construction - Initial	01-01-1980
5300	60455	11TH ST	PACIFIC N	PCH	E	AC	2	167	20	3,340	5/21/20	89	50	30	20	New Construction - Initial	01-01-1980
734	12999	FIFTEENTH ST	PCH	WALNUT AVE	E	AC	6	355	50	18,630	6/22/21	89	37	0	63	Surface Treatment - Slurry Seal	07-27-2022
735	12947	FIFTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	370	56	18,815	6/22/21	89	65	18	17	New Construction	01-01-1980
1825	13001	SIXTEENTH ST	ACACIA AVE	PALM AVE	E	AC	6	390	46	17,940	6/22/21	89	91	0	9	Surface Treatment - Slurry Seal	07-27-2022
1446	12927	OLIVE AVE	FIRST ST	SECOND ST	E	AC	6	265	36	9,540	6/30/21	89	36	0	64	Surface Treatment - Slurry Seal	07-27-2022
1385	15841	PALM AVE	MAIN ST	LAKE ST	E	AC	6	265	46	12,190	7/8/21	89	77	0	23	Surface Treatment - Slurry Seal	07-27-2022
244	14450	BICKLEY DR	BUSHARD ST FRONTAGE	BROMLEY LN	E	AC	8	1,128	36	41,358	3/9/22	89	53	44	3	Surface Treatment - Slurry Seal	02-08-2023
493	14459	CONSTITUTION LN	EDUCATION LN	BROOKHURST ST	E	AC	8	661	36	23,796	3/9/22	89	75	25	0	Surface Treatment - Slurry Seal	02-08-2023
1349	13406	MORION CIR	COLLINS LN	CDS	E	AC	5	222	36	7,992	3/14/22	89	100	0	0	New Construction	01-01-1980
815	13271	GIARC LN	WALTON DR	DORIANE CIR	E	AC	3	168	36	6,798	3/16/22	89	82	0	18	New Construction	01-01-1980
1201	13285	LOYOLA DR	TUFTS LN	WHITTIER LN	E	AC	3	1,094	36	40,384	3/16/22	89	100	0	0	New Construction	01-01-1980
1424	13276	NYANZA DR	MARJAN LN	TYEE LN	E	AC	3	840	36	30,240	3/16/22	89	100	0	0	New Construction	01-01-1980
1427	13279	OAKGROVE CIR	OAKMONT LN	CDS	E	AC	3	420	36	16,920	3/17/22	89	59	0	41	New Construction	01-01-1980
1820	16000	SILVERWOOD DR	WOODSTOCK LN	BRIMHALL LN	E	AC	3	1,272	36	45,792	3/17/22	89	100	0	0	New Construction	01-01-1980
1868	14892	ST ANDREWS LN	GLENROY DR	KENILWORTH DR	E	AC	2	260	36	9,360	3/22/22	89	100	0	0	New Construction	01-01-1980
721	13328	FARINELLA DR	TRUDY LN	SUMMERCLOUD LN	E	AC	3	1,148	36	41,328	3/23/22	89	100	0	0	New Construction	01-01-1980
1803	15126	SHIELDS DR	LOVELL LN	TRUDY LN	E	AC	3	803	36	30,258	3/23/22	89	100	0	0	New Construction	01-01-1980
569	14614	EDWARDS ST	GARFIELD AVE	PENINSULA LN	E	AC	5	669	44	29,436	3/28/22	89	100	0	0	New Construction - Initial	01-01-1980
674	13839	ELIOT CIR	WINSLOW DR	END	E	AC	1	339	36	13,454	3/30/22	89	100	0	0	New Construction	01-01-1980
172	15748	B ST	WARNER AVE	BLAYLOCK DR	E	AC	4	670	35	23,450	3/31/22	89	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1493	13299	PARLAY CIR	STALLION CIR	CDS	E	AC	2	282	36	11,402	4/5/22	89	100	0	0	New Construction	01-01-1980
259	15746	BLAYLOCK DR	BEACH BLVD	A ST	E	AC	4	300	35	10,500	4/6/22	89	57	0	43	Surface Treatment - Slurry Seal	07-29-2020
2099	14819	WAAL CIR	HOLLAND DR	CDS	E	AC	4	560	36	21,410	4/6/22	89	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
274	13217	BOLERO LN	NALU CIR	FINISTERRE DR	E	AC	2	1,864	36	67,104	4/7/22	89	53	0	47	New Construction - Initial	01-01-1980
739	15072	FINISTERRE DR	BOLERO LN	BARUNA LN	E	AC	2	470	36	16,920	4/7/22	89	100	0	0	New Construction	01-01-1980
805	13508	GEMINI LN	MARS DR	SATURN DR	E	AC	3	575	40	24,500	4/7/22	89	63	0	37	Surface Treatment - Slurry Seal	07-29-2020
1154	13172	LEONARD LN	MISTRAL DR	HUMBOLDT DR	E	AC	2	260	36	9,072	4/7/22	89	100	0	0	New Construction - Initial	01-01-1980
1322	15048	MISTRAL DR	LEONARD LN	TISBURY CIR	E	AC	2	527	36	18,972	4/7/22	89	67	0	33	New Construction	01-01-1980
2124	15040	WAYFARER LN	HUMBOLDT DR	CDS	E	AC	2	980	36	36,780	4/7/22	89	79	0	21	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1997	14535	WARNER AVE	WEATHERLY LN	SCEPTRE LN	E	AC	2	720	63	45,360	4/9/22	89	59	41	0	New Construction - Initial	01-01-1980
485	14026	COMPTON DR	DITMAR LN	NEWLAND AVE	E	AC	7	442	36	15,912	8/17/23	89	84	0	16	New Construction	01-01-1980
1188	14116	LONDONDERRY LN	MUNSTER DR	END	E	AC	9	130	36	4,680	8/23/23	89	100	0	0	New Construction	01-01-1980
1179	14310	LOCHLEA LN	ALLEY LOMOND DR	LOMOND DR	E	AC	9	170	28	5,786	8/30/23	89	100	0	0	New Construction	01-01-1980
1579	14603	PROMENADE PKWY DR	MAIN ST	SEAGATE DR	E	AC	4	849	42	35,658	3/5/24	89	54	0	46	Surface Treatment - Slurry Seal	11-28-2019
957	15522	HORIZON LN	SPINNAKER DR	SILVER STRAND DR	E	AAC	8	500	36	18,000	3/6/24	89	57	0	43	Overlay - AC Structural	05-11-2018
1380	15513	NETHERWAY DR	PAISLEY LN	QUEENS PARK LN	E	AC	8	1,039	36	38,580	3/18/24	89	66	0	34	Surface Treatment - Slurry Seal	05-11-2018
31	14278	ALISA LN	INDIANAPOLIS AVE	CAITHNESS DR	E	AC	8	166	36	5,976	3/19/24	89	63	0	37	Surface Treatment - Slurry Seal	05-11-2018
288	15554	BOWSPRIT LN	WATERFRONT DR	PIER DR	E	AAC	9	460	36	17,310	3/20/24	89	100	0	0	Overlay - AC Structural	05-11-2018
2119	15553	WATERFRONT DR	BOWSPRIT LN	BUSHARD ST	E	AC	9	517	36	19,362	3/20/24	89	100	0	0	New Construction - Initial	01-01-1980
1911	15604	SUMMERWIND LN	OCEANCREST DR	OCEANBREEZE LN	E	AC	9	817	36	29,412	3/26/24	89	40	48	12	Surface Treatment - Slurry Seal	05-11-2019
335	15369	BURNHAM CIR	WORCHESTER LN	CDS	E	AC	7	556	36	23,166	4/2/24	89	61	23	16	Surface Treatment - Slurry Seal	11-28-2019
1389	13931	NEWHAVEN LN	ALLEY GIILFORD CIR	YORKTOWN AVE	E	AC	7	150	36	5,400	4/2/24	89	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1324	15814	MODALE DR	CHAPEL LN	FLAGSTAFF LN	E	AC	7	727	36	26,652	4/8/24	89	59	41	0	Surface Treatment - Slurry Seal	11-28-2019
1025	15615	JONESPORT LN	MELINDA CIR	ALLISON CIR	E	AC	9	248	36	9,428	4/17/24	89	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1202	14514	LUAU LN	LANAI CIR	LEILANI DR	E	AC	9	258	36	8,700	4/17/24	89	77	23	0	Surface Treatment - Slurry Seal	05-11-2019
453	14482	CLEARBROOK DR	ARCHER CIR	ST JOHN LN	E	AC	9	250	36	9,750	4/25/24	89	71	0	29	Surface Treatment - Slurry Seal	05-11-2019
2154	13469	WHITNEY DR	RUSHMOOR LN	END	E	AC	4	535	36	22,860	5/13/24	89	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
463	13590	CLUBHOUSE LN	ALLEY EDINGER AVE	CASTLE DR	E	AAC	3	140	36	5,040	5/9/24	89	100	0	0	Overlay - AC Structural	10-01-2016
427	15305	CHEMICAL LN	BUSINESS DR	MC FADDEN AVE	E	AAC	1	796	40	31,840	5/3/24	89	84	0	16	Overlay - AC Structural	10-01-2016
5000	60070	NORTH PACIFIC	22ND ST	25TH ST	E	AC	2	705	25	17,625	5/6/24	89	34	66	0	New Construction - Initial	01-01-1980
443	13900	CHURCH CIR	SURFDALE LN	CDS	E	AC	5	311	36	13,196	5/6/24	89	53	47	0	Surface Treatment - Slurry Seal	11-28-2019
710	15011	FAIRCREST DR	EDWARDS ST	ROCKINGHORSE LN	E	AC	5	466	36	16,776	5/7/24	90	74	26	0	New Construction	01-01-1980
2175	16010	WINSLOW DR	ALDEN LN	AULNAY LN	E	AC	1	1,041	36	37,476	5/7/24	90	32	68	0	New Construction - Initial	01-01-1980
1522	14547	PICKWICK CIR	TALISMAN LN	PICKWICK CIR	E	AAC	2	559	36	21,724	5/10/24	90	79	21	0	Overlay - AC Fabric	12-01-2017
1398	14964	NICHOLS ST	WAGON DR	SLATER AVE	E	AC	0	327	44	14,388	5/8/24	90	74	26	0	New Construction	01-01-1980
1912	14984	SUMMIT DR	PENINSULA LN	BEACON HILL LN	E	AC	5	2,155	44	94,820	5/6/24	90	55	0	45	New Construction - Initial	01-01-1980
1891	14752	STEWART ST	GARFIELD AVE	CLAY AVE	E	AC	7	1,320	30	39,600	5/6/24	90	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1355	13214	MORSE CIR	TRUMBULL DR	CDS	E	AAC	2	306	36	11,016	5/10/24	90	100	0	0	Overlay - AC Fabric	12-01-2017
1631	15058	SAYBROOK LN	ALLEY SEABROOK LN	BRANFORD DR	E	AAC	2	420	36	15,120	5/10/24	90	100	0	0	Overlay - AC Structural	12-01-2017
1214	14782	LYONS CIR	TALBERT AVE	CDS	E	AC	4	275	40	12,500	5/13/24	90	92	0	8	Surface Treatment - Slurry Seal	11-01-2019
605	14467	DOLLAR DR	SPA DR	NEVADA DR	E	AC	1	434	36	15,624	2/10/20	90	50	0	50	New Construction	01-01-1980
2055	13697	VANGUARD LN	CORTEZ DR	SHEMAN DR	E	AC	1	272	36	12,292	2/10/20	90	100	0	0	New Construction - Initial	01-01-1980
1648	15157	ROB ROY CIR	MANHATTAN DR	END	E	AAC	3	446	36	16,556	2/11/20	90	100	0	0	Overlay - AC Structural	10-01-2012
1066	13366	KILDA CIR	KRISTOPHER LN	END	E	AAC	3	368	36	15,248	2/12/20	90	78	22	0	Overlay - AC Structural	10-01-2012
1195	13308	LOS VERDES LN	HEIL AVE	MEADOWBROOK DR	E	AC	3	321	36	10,968	2/18/20	90	59	41	0	New Construction	01-01-1980
1573	13248	PRO CIR	FERNHILL CIR	END	E	AC	3	183	34	8,022	2/18/20	90	35	0	65	New Construction	01-01-1980
879	14414	HALLPORT LN	VARSITY DR	NEWBURY DR	E	AAC	5	155	36	5,292	2/24/20	90	100	0	0	Overlay - AC Structural	10-01-2012
535	13416	CRISTA PALMA DR	AVILLA LN.	END	E	AAC	5	416	36	16,976	2/25/20	90	100	0	0	Overlay - AC Structural	10-01-2012
1717	13420	SAN ROQUE LN	CRISTA PALMA DR	SEGOVIA CIR	E	AAC	5	246	36	9,606	2/25/20	90	100	0	0	Overlay - AC Structural	10-01-2012
2093	13422	VISTA DEL SOL DR	AVILLA LN	EL NOPAL LN	E	AAC	5	1,142	36	41,112	2/25/20	90	100	0	0	Overlay - AC Structural	10-01-2012
1781	13780	SEVILLA CIR	ALEXANDRIA DR	END	E	AC	1	410	36	16,260	2/26/20	90	73	22	5	New Construction	01-01-1980
998	13444	IVORYCREST LN	VARSITY DR	JASONWOOD DR	E	AAC	5	166	36	5,976	3/11/20	90	100	0	0	Overlay - AC Structural	10-01-2012
1465	13455	OXBORO LN	MANOFIELD DR	END	E	AAC	5	115	36	4,140	3/11/20	90	100	0	0	Overlay - AC Structural	10-01-2012
158	13720	ASSEMBLY LN	MACHINE DR	MC FADDEN AVE	E	AC	1	818	40	32,720	5/5/20	90	91	0	9	New Construction	01-01-1980
690	15922	ENGINEER DR	PIPELINE LN	SPRINGDALE ST	E	AC	1	1,206	40	47,760	5/5/20	90	39	0	61	New Construction	01-01-1980
1794	13748	SHELLY DR	FIELDSTON LN	BOLSA PARK LN	E	AC	1	769	36	28,184	5/6/20	90	100	0	0	New Construction	01-01-1980
2080	13791	VICTORIA LN	MELBOURNE DR	END	E	AC	1	410	36	16,560	5/6/20	90	100	0	0	New Construction - Initial	01-01-1980
2030	12978	TWELFTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	375	48	19,680	6/22/21	90	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1446	13065	OLIVE AVE	THIRD ST	MAIN ST	E	AC	6	267	36	9,612	6/30/21	90	51	0	49	Surface Treatment - Slurry Seal	05-03-2021
1862	13116	SPRINGFIELD AVE	PARK ST	MAIN ST	E	AC	6	348	36	12,528	6/30/21	90	62	0	38	Surface Treatment - Slurry Seal	07-27-2022
2033	13028	TWENTY-SECOND ST	PCH	WALNUT AVE	E	AC	6	355	46	16,960	6/30/21	90	41	0	59	Surface Treatment - Slurry Seal	07-27-2022
1298	14207	MEREDITH DR	CRAIMER LN	MIDLAND LN	E	AC	8	377	36	14,322	2/28/22	90	100	0	0	Surface Treatment - Slurry Seal	02-14-2023
2294	14596	BUSHARD ST FRONTAGE	VELARDO DR	BASS DR	E	AC	8	449	28	12,572	3/7/22	90	37	0	63	New Construction - Initial	01-01-1980
1544	13353	POINT LOMA DR	OJAI LN	CORONADO LN	E	AC	5	474	36	17,064	3/15/22	90	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
650	15997	EDGEMONT DR	EDWARDS ST	REDLANDS LN	E	AC	3	1,119	36	39,996	3/17/22	90	96	0	4	New Construction	01-01-1980
1108	15107	LAKEMONT LN	EDGEMONT DR	CHELE CIR	E	AC	3	520	36	19,470	3/17/22	90	100	0	0	New Construction	01-01-1980
1414	13257	NORMANDY LN	MYRTLE DR	RINGO CIR	E	AC	3	255	36	9,180	3/17/22	90	100	0	0	New Construction	01-01-1980
2	15132	ABBOTT DR	CDS	END	E	AC	3	475	36	18,452	3/18/22	90	44	56	0	Surface Treatment - Slurry Seal	07-29-2020

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
554	15135	DALE VISTA LN	MASON DR	MARILYN DR	E	AC	3	1,290	36	46,440	3/18/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
769	15134	FOUNTAIN LN	HEIL AVE	DALE VISTA LN	E	AC	3	1,117	36	40,212	3/18/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
796	15221	GANGES LN	ALLEY GANGES LN	ALLEY GANGES LN	E	AC	4	348	36	13,528	3/18/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1068	13488	KIM LN	RHONE LN	CDS	E	AC	4	294	36	11,084	3/18/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1341	13479	MOONLIGHT CIR	WISHINGWELL LN	CDS	E	AC	3	486	36	19,296	3/18/22	90	55	45	0	Surface Treatment - Slurry Seal	07-29-2020
1369	15225	NANCY DR	RHONE LN	MARK LN	E	AC	4	890	36	32,790	3/18/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1636	15241	RHINE DR	CHARLES LN	DON DR	E	AC	4	670	36	24,120	3/18/22	90	51	49	0	Surface Treatment - Slurry Seal	07-29-2020
886	15830	HARBOR BLUFFS CIR	CDS	CDS	E	AC	2	514	36	20,794	3/22/22	90	100	0	0	New Construction	01-01-1980
1540	14882	PLEASANT CIR	GLENROY DR	CDS	E	AC	2	476	36	18,486	3/22/22	90	100	0	0	New Construction	01-01-1980
1198	15125	LOVELL LN	ANNETTE CIR	SHIELDS DR	E	AC	3	781	36	28,116	3/23/22	90	100	0	0	New Construction	01-01-1980
772	15983	FOXSHIELD DR	BLUEGATE LN	HALLCROFT LN	E	AC	5	759	36	27,324	3/28/22	90	81	0	19	New Construction	01-01-1980
257	13290	BLANTON ST	PRAIRE DR	PEARCE ST	E	AC	2	660	36	23,760	3/29/22	90	42	0	58	New Construction	01-01-1980
831	15794	GLENSTONE DR	HILLGATE LN	CDS	E	AC	2	786	36	29,646	3/29/22	90	100	0	0	New Construction	01-01-1980
937	14910	HILLGATE LN	GLENSTONE DR	CDS	E	AC	2	197	36	8,442	3/29/22	90	100	0	0	New Construction	01-01-1980
505	13759	CORNELL DR	COLUMBIA LN	EDWARDS ST	E	AC	1	645	36	22,644	3/30/22	90	31	69	0	New Construction	01-01-1980
1486	13770	PARIS CIR	HANOVER LN	END	E	AC	1	433	36	17,388	3/30/22	90	38	62	0	New Construction	01-01-1980
1664	13888	ROLLINS LN	RETHERFORD DR	BREELAND DR	E	AC	3	281	36	10,866	3/30/22	90	100	0	0	New Construction	01-01-1980
1877	13750	STANFORD LN	CORNELL DR	CITADEL DR	E	AC	1	780	36	27,792	3/30/22	90	38	62	0	New Construction	01-01-1980
2002	16011	TOWAY LN	DOWN DR	END	E	AC	1	1,100	36	40,850	3/30/22	90	39	0	61	New Construction - Initial	01-01-1980
1	14830	A ST	WARNER AVE	BLAYLOCK DR	E	AC	4	660	34	22,440	3/31/22	90	54	46	0	Surface Treatment - Slurry Seal	07-29-2020
189	15744	BARCELONA LN	BLAYLOCK DR	VALENCIA DR	E	AC	4	520	36	18,970	3/31/22	90	68	12	20	Surface Treatment - Slurry Seal	07-29-2020
1258	14828	MARSEILLE DR	GRANADA LN	BARCELONA LN	E	AC	4	757	36	27,252	3/31/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1638	15238	RHONE LN	HEIL AVE	RHINE DR	E	AC	4	1,190	36	42,840	3/31/22	90	37	59	4	Surface Treatment - Slurry Seal	07-29-2020
1281	13307	MEADOW CIR	GRAHAM ST	CDS	E	AC	2	451	36	18,036	4/5/22	90	100	0	0	New Construction	01-01-1980
1897	13306	STONEHAVEN CIR	GRAHAM ST	CDS	E	AC	2	403	36	15,758	4/5/22	90	100	0	0	New Construction - Initial	01-01-1980
947	15737	HOLLAND DR	MARKEN LN	WAAL CIR	E	AC	4	520	36	18,720	4/6/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1289	14818	MEER CIR	HOLLAND DR	CDS	E	AC	4	560	36	21,410	4/6/22	90	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
966	13170	HUMBOLDT DR	ARDSLEY CIR	WAYFARER LN	E	AC	2	445	36	16,020	4/7/22	90	100	0	0	New Construction	01-01-1980
2111	15055	WANDERER LN	CAROUSEL LN	HUMBOLDT DR	E	AC	2	578	36	20,520	4/7/22	90	38	0	62	New Construction - Initial	01-01-1980
204	14536	BAY VIEW DR	ALLEY BAY VIEW 1	BROADWAY	E	AC	2	122	27	3,294	4/9/22	90	22	0	78	New Construction	01-01-1980
285	14439	BOUNTY CIR	CHANNEL LN	CDS	E	AC	2	288	32	10,716	4/9/22	90	51	0	49	New Construction - Initial	01-01-1980
691	14670	ENGLAND ST	KNOXVILLE AVE	LINCOLN AVE	E	AC	6	330	37	12,062	8/15/23	90	100	0	0	New Construction	01-01-1980
758	14674	FLORIDA ST	JOILET AVE	KNOXVILLE AVE	E	AAC	6	330	37	11,988	8/15/23	90	69	0	31	Overlay - AC Structural	03-01-2011
1023	15875	JOLIET AVE	CALIFORNIA ST	DELAWARE ST	E	AC	6	329	37	12,173	8/15/23	90	100	0	0	New Construction	01-01-1980
1088	14698	KNOXVILLE AVE	ALLEY CALIFORNIA ST	DELAWARE ST	E	AC	6	169	37	6,253	8/15/23	90	100	0	0	New Construction	01-01-1980
1749	14023	SCRIBE DR	COLDWATER LN	DRYBROOK LN	E	AAC	7	210	36	7,560	8/17/23	90	76	0	24	Overlay - AC Structural	03-01-2011
752	15963	FLAXMAN DR	WEEMS LN	EDGEWOOD LN	E	AAC	7	771	36	27,756	8/21/23	90	92	0	8	Overlay - AC Structural	03-01-2011
1416	15656	NORTHPORT DR	NEW BRITAIN LN	PORT GREENWICH LN	E	AC	9	534	36	19,224	8/21/23	90	55	45	0	Surface Treatment - Slurry Seal	03-01-2011
1790	15544	SHAW LN	STILLWELL DR	END	E	AC	9	1,153	36	43,008	8/30/23	90	51	49	0	New Construction	01-01-1980
1504	15517	PEBBLE LN	SPINNAKER DR	CDS	E	AAC	8	529	36	20,244	3/6/24	90	91	0	9	Overlay - AC Structural	05-11-2018
1670	14740	SEVENTEENTH ST	DELAWARE ST	CLAY AVE	E	AC	7	383	36	13,788	3/13/24	90	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1156	14282	LEVEE DR	QUEENS PARK LN	REEF LN	E	AC	8	246	36	8,856	3/18/24	90	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
331	14339	BULKHEAD CIR	WATERFRONT DR	CDS	E	AAC	9	395	36	15,720	3/20/24	90	95	0	5	Overlay - AC Structural	05-11-2018
1438	15598	OCEANVIEW LN	ROCK POINT DR	HIGHTIDE DR	E	AC	9	1,026	36	38,936	3/26/24	90	100	0	0	New Construction	01-01-1980
2100	13917	WADEBRIDGE CIR	COLCHESTER LN	CDS	E	AC	7	332	32	10,624	4/2/24	90	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
969	15002	HUNTINGTON ST	MONTE CRISTO LN	GARFIELD AVE	E	AC	4	472	36	16,992	4/9/24	90	76	24	0	Surface Treatment - Slurry Seal	11-28-2019
404	14510	CATALINA CIR	MOLOKAI DR	CDS	E	AC	9	313	32	11,516	4/17/24	90	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
2013	14976	TRINIDAD LN	EDINGER AVE	AQUARIUS DR	E	AAC	2	1,508	46	56,810	5/7/24	90	56	29	15	Overlay - AC Fabric	12-01-2017
1000	14809	JACQUELYN LN	SPEER AVE	LIBERTY AVE	E	AC	4	330	36	11,880	5/13/24	90	38	1	61	Surface Treatment - Slurry Seal	11-01-2019
1586	15009	QUARTERHORSE LN	CHURCHILL DR	END	E	AC	5	566	36	20,376	5/7/24	90	93	0	7	New Construction	01-01-1980
1721	14966	SANDPEBBLE CIR	GARDEN CIR	CDS	E	AC	5	338	36	15,668	5/6/24	90	100	0	0	New Construction	01-01-1980
1178	14960	LITTLER DR	BIRDIE LN	CLARK DR	E	AAC	3	1,153	36	41,758	5/9/24	90	61	31	8	Overlay - AC Fabric	10-01-2016
1695	15010	SADDLEBACK LN	GARFIELD AVE	CDS	E	AC	5	643	37	23,791	5/7/24	90	50	13	37	Surface Treatment - Slurry Seal	11-28-2019
166	15335	AULNAY LN	WINSLOW DR	PRISCILLA DR	E	AC	1	520	36	18,720	5/7/24	91	100	0	0	New Construction	01-01-1980
1686	13175	RUNNING TIDE CIR	SUNDANCER LN	CDS	E	AAC	2	576	34	21,084	5/7/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
1696	15036	SAGAMORE DR	TYPHOON LN	CDS	E	AAC	2	1,093	36	41,148	5/7/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
1766	15037	SEASCAPE DR	CDS	CDS	E	AAC	2	945	36	37,620	5/7/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
2038	13150	TYPHOON LN	SAGAMORE DR	VENTURE DR	E	AAC	2	762	36	28,182	5/7/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
401	13234	CASTLE DR	CLUBHOUSE LN	END	E	AAC	3	285	36	10,260	5/9/24	91	100	0	0	Overlay - AC Structural	10-01-2016

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1822	15770	SIMS ST	WARNER AVE	STELLRECHT CIR	E	AAC	2	764	36	27,504	5/13/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
1138	15354	LAWN HAVEN DR	EVENING HILL DR	CDS (E)	E	AC	5	1,090	36	41,240	5/6/24	91	73	22	5	Surface Treatment - Slurry Seal	11-28-2019
1469	13449	PACEMONT DR	IVORYCREST LN	VESTRY CIR	E	AC	5	213	36	7,668	2/10/20	91	69	0	31	New Construction	01-01-1980
144	13377	ARGO CIR	CAPSTONE DR	END	E	AAC	3	320	36	13,020	2/11/20	91	100	0	0	Overlay - AC Structural	10-01-2012
764	14409	FORD LN	WHETMORE LN	GOLDENWEST ST	E	AC	3	177	36	5,784	2/11/20	91	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
816	13376	GIBSON CIR	MANHATTAN DR	END	E	AAC	3	438	36	17,268	2/11/20	91	100	0	0	Overlay - AC Structural	10-01-2012
1890	13980	STEVEN LN	KNEEP DR	RONNEY DR	E	AC	8	255	36	9,530	2/18/20	91	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
411	15581	CENTRAL PARK DR	EDWARDS ST	CLIFFVIEW LN	E	AC	5	1,310	80	104,800	2/24/20	91	100	0	0	New Construction	01-01-1980
139	13426	ARACENA DR	CARRANZA LN	SAN DOVAL LN	E	AAC	5	256	36	9,966	2/25/20	91	100	0	0	Overlay - AC Structural	10-01-2012
1406	13445	NORBROOK DR	IVORYCREST LN	TWINFORD LN	E	AAC	5	136	36	5,646	3/11/20	91	94	0	6	Overlay - AC Structural	10-01-2012
1406	13452	NORBROOK DR	FIELDBURY LN	END	E	AAC	5	104	36	3,744	3/11/20	91	100	0	0	Overlay - AC Structural	10-01-2012
540	14928	CROWN CIR	BARWOOD DR	END	E	AC	5	431	36	17,516	3/12/20	91	100	0	0	New Construction	01-01-1980
720	14933	FANWOOD DR	GAINSFORD LN	RAINGLEN LN	E	AC	5	389	36	14,754	3/12/20	91	44	0	56	New Construction	01-01-1980
902	13385	HARTFIELD CIR	BERSHIRE DR	END	E	AC	5	155	36	7,080	3/12/20	91	71	0	29	New Construction	01-01-1980
2130	13631	WELLBANK LN	LANCEFIELD DR	WOODBORO DR	E	AC	5	353	36	14,208	3/12/20	91	63	0	37	New Construction - Initial	01-01-1980
2180	13384	WOODBORO DR	WHITFORD LN	BOLTON CIR	E	AC	5	340	36	11,952	3/12/20	91	100	0	0	New Construction - Initial	01-01-1980
1047	15265	KEELSON LN	ALLEY SLATER AVE	KRISTIN CIR	E	AAC	4	1,012	36	36,432	5/5/20	91	46	0	54	Overlay - AC Structural	10-01-2012
5420	60640	23RD ST	PCH	PACIFIC N	E	AC	2	207	30	6,210	5/6/20	91	48	42	10	New Construction - Initial	01-01-1980
5450	60690	26TH ST	PCH	PACIFIC N	E	AC	2	207	30	6,210	5/6/20	91	100	0	0	New Construction - Initial	01-01-1980
446	13752	CITADEL DR	LA SALLE LN	STANFORD LN	E	AC	1	260	36	9,072	5/6/20	91	41	59	0	New Construction	01-01-1980
639	13735	DUNDEE DR	BOLSA PARK LN	SOUTH END	E	AC	1	485	36	18,960	5/6/20	91	76	0	24	New Construction	01-01-1980
5010	60090	SOUTH PACIFIC	ANDERSON ST	25TH ST	E	AC	2	481	25	12,025	5/6/20	91	49	0	51	New Construction - Initial	01-01-1980
5010	60120	SOUTH PACIFIC	19TH ST	16TH ST	E	AC	2	705	25	17,625	5/6/20	91	30	0	70	New Construction - Initial	01-01-1980
770	16026	FOURTEENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	395	46	18,170	6/22/21	91	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1825	13092	SIXTEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	380	46	17,480	6/22/21	91	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1130	13056	MAIN ST	PALM AVE	CREST AVE	E	AAC	6	858	45	39,610	6/29/21	91	44	0	56	Surface Treatment - Slurry Seal	07-27-2022
992	13048	ISLAND BAY LN	PALM AVE	MORNING TIDE DR	E	AC	5	285	36	9,400	6/30/21	91	62	0	38	Surface Treatment - Slurry Seal	07-27-2022
2031	13015	TWENTIETH ST	PECAN AVE	ACACIA AVE	E	AC	6	415	46	19,090	6/30/21	91	61	0	39	Surface Treatment - Slurry Seal	07-27-2022
2031	13016	TWENTIETH ST	WALNUT AVE	OLIVE AVE	E	AC	6	405	46	18,630	6/30/21	91	43	0	57	Surface Treatment - Slurry Seal	07-27-2022
2031	13017	TWENTIETH ST	PCH	WALNUT AVE	E	AC	6	370	46	17,020	6/30/21	91	94	0	6	Surface Treatment - Slurry Seal	07-27-2022
2033	13024	TWENTY-SECOND ST	ACACIA AVE	PALM AVE	E	AC	6	395	46	18,170	6/30/21	91	48	0	52	Surface Treatment - Slurry Seal	07-27-2022
5	15843	ACACIA AVE	MAIN ST	LAKE ST	E	AC	6	270	36	9,720	7/8/21	91	76	0	24	Surface Treatment - Slurry Seal	07-27-2022
1158	13901	LEXIE CIR	PALM AVE	END	E	AC	5	173	36	9,015	7/8/21	91	70	0	30	Surface Treatment - Slurry Seal	07-27-2022
384	16017	CARLSBAD LN	YELLOWSTONE DR	BAY MEADOW DR	E	AC	8	765	36	26,952	2/23/22	91	48	0	52	Surface Treatment - Slurry Seal	02-13-2023
245	15481	BIG BEND LN	OLYMPIC DR	LASSEN CIR	E	AC	8	915	36	33,690	3/1/22	91	83	0	17	Surface Treatment - Slurry Seal	02-13-2023
1506	14198	PECK DR	RUNNING SPRINGS LN	BROOKHURST ST	E	AC	8	187	45	7,585	3/1/22	91	59	0	41	New Construction	01-01-1980
875	14012	HALAWA DR	MAUNA LN	PITSCAIM LN	E	AC	8	1,080	36	38,880	3/2/22	91	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
2299	60760	LAMB LN	YORKTOWN AVE	PATCH DR	E	AC	8	630	36	22,680	3/2/22	91	44	0	56	New Construction - AC	01-01-2015
1328	15440	MONITOR DR	CANBERRA LN	INDEPENDENCE LN	E	AC	8	1,142	36	40,896	3/2/22	91	74	0	26	Surface Treatment - Slurry Seal	02-08-2023
406	13994	CATFISH CIR	TARPON DR	CDS	E	AC	8	310	32	11,420	3/7/22	91	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
2062	15906	VELARDO DR	BUSHARD ST	STINGRAY LN	E	AC	8	1,075	36	39,700	3/7/22	91	42	50	8	Surface Treatment - Slurry Seal	02-08-2023
911	14078	HAVENHURST LN	WOODLAWN DR	WARBURTON DR	E	AC	8	293	36	10,548	3/9/22	91	80	0	20	Surface Treatment - Slurry Seal	02-08-2023
1658	15429	ROCKLAND LN	YORKTOWN AVE	INNSBRUCK DR	E	AC	8	450	36	16,200	3/9/22	91	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1962	14949	TELHAN DR	BUSHARD ST FRONTAGE	ELMSFORD LN	E	AC	8	1,132	36	41,502	3/9/22	91	72	0	28	Surface Treatment - Slurry Seal	02-08-2023
28	13492	ALHAMBRA AVE	SILVER LN	BEACH BLVD	E	AC	4	1,320	36	47,520	3/18/22	91	43	0	57	Surface Treatment - Slurry Seal	07-29-2020
721	13335	FARINELLA DR	EDWARDS ST	COOPER LN	E	AC	3	537	36	19,032	3/18/22	91	100	0	0	New Construction	01-01-1980
3500	35000	KELLOG CIR	MADDOX DR	CDS	E	AC	3	223	36	11,328	3/18/22	91	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1266	13337	MASON DR	DALE VISTA LN	FOUNTAIN LN	E	AC	3	398	36	14,328	3/18/22	91	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1413	15268	NORMA DR	GOLDENWEST ST	TUNSTALL LN	E	AC	3	653	36	23,508	3/18/22	91	100	0	0	New Construction	01-01-1980
1636	15244	RHINE DR	LOIRE CIR	HEIL AVE	E	AC	4	693	36	24,948	3/18/22	91	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
852	14962	GREEN ST	PEARCE ST	BARRACUDA LN	E	AC	2	437	36	15,732	3/22/22	91	95	0	5	New Construction	01-01-1980
1213	15115	LYNN ST	PEARCE ST	WARNER AVE	E	AC	2	1,321	36	47,556	3/22/22	91	100	0	0	New Construction	01-01-1980
1502	13607	PEARCE ST	BLANTON ST	LYNN ST	E	AC	2	330	36	11,880	3/22/22	91	41	59	0	New Construction	01-01-1980
1888	14877	STELLRECHT CIR	SIMS ST	CDS	E	AC	2	397	36	15,792	3/22/22	91	86	0	14	New Construction	01-01-1980
463	13594	CLUBHOUSE LN	MIDDLECOFF DR	ALLEY HEIL AVE	E	AC	3	140	36	5,040	3/23/22	91	100	0	0	New Construction	01-01-1980
1236	13235	MANGRUM DR	EAGLE LN	BIRDIE LN	E	AC	3	260	36	9,360	3/23/22	91	77	23	0	New Construction	01-01-1980
1649	13326	ROBERT LN	JEAN DR	SHIELDS DR	E	AC	3	1,281	36	46,116	3/23/22	91	50	29	21	New Construction	01-01-1980
1999	14442	TORJIAN LN	HEIL AVE	GLORIA DR	E	AC	3	248	36	8,928	3/23/22	91	41	59	0	New Construction - Initial	01-01-1980
146	13131	ARIA CIR	PRELUDE DR	CDS	E	AC	2	412	36	16,332	3/24/22	91	58	0	42	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
180	13133	BALLAD LN	PRELUDE DR	CDS	E	AC	2	412	36	16,132	3/24/22	91	76	24	0	New Construction	01-01-1980
1032	14887	JUNE DR	FRASER LN	ERWIN LN	E	AC	5	251	36	9,338	3/29/22	91	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1163	14890	LIEGE DR	CHAPPARAL LN	WILD ROSE LN	E	AC	5	629	36	22,644	3/29/22	91	76	24	0	New Construction	01-01-1980
2134	14905	WENDY CIR	FRANS LN	CDS	E	AC	5	263	36	10,718	3/29/22	91	53	47	0	New Construction - Initial	01-01-1980
172	14831	B ST	ROBIDOUX DR	WARNER AVE	E	AC	4	651	34	22,134	3/31/22	91	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1977	13521	TIBER LN	SEINE DR	RHINE DR	E	AC	4	758	36	28,038	3/31/22	91	55	45	0	Surface Treatment - Slurry Seal	07-29-2020
950	13493	HOLT AVE	PARKSIDE LN	BEACH BLVD	E	AC	4	660	36	23,760	4/1/22	91	67	0	33	Surface Treatment - Slurry Seal	07-29-2020
1215	13495	MAC DONALD AVE	BEACH BLVD	END	E	AC	4	660	35	23,100	4/1/22	91	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1490	14985	PARKSIDE LN	STARK ST	HOLT AVE	E	AC	4	475	36	17,100	4/1/22	91	84	0	16	Surface Treatment - Slurry Seal	07-29-2020
1490	15625	PARKSIDE LN	EDINGER AVE	STARK ST	E	AC	4	905	36	32,580	4/1/22	91	83	0	17	Surface Treatment - Slurry Seal	07-29-2020
1835	13878	SKYVIEW DR	SWEETBRIAR LN	DAWSON LN	E	AC	3	594	36	21,096	4/1/22	91	46	0	54	New Construction	01-01-1980
1736	13507	SATURN DR	GEMINI LN	GOTHARD ST	E	AC	3	395	40	16,550	4/7/22	91	70	0	30	Surface Treatment - Slurry Seal	07-29-2020
2065	13160	VENTURE DR	TYPHOON LN	WALRUS LN	E	AC	2	254	36	9,894	4/7/22	91	100	0	0	New Construction - Initial	01-01-1980
11	13190	ADMIRRALTY DR	CHANNEL LN	CDS	E	AC	2	299	32	11,068	4/9/22	91	65	0	35	New Construction	01-01-1980
597	13193	DEVON CIR	CHANNEL LN	CDS	E	AC	2	335	32	12,220	4/9/22	91	62	27	11	New Construction	01-01-1980
1501	15057	PEALE LN	MALDEN CIR	GILBERT DR	E	AC	2	1,178	36	42,408	4/9/22	91	73	27	0	New Construction	01-01-1980
349	14667	CALIFORNIA ST	INDIANAPOLIS AVE	JOILET AVE	E	AC	6	330	37	11,988	8/14/23	91	100	0	0	Surface Treatment - Slurry Seal	03-01-2011
903	15877	HARTFORD AVE	DELAWARE ST	GENEVA AVE	E	AC	9	626	37	23,162	8/15/23	91	69	0	31	New Construction	01-01-1980
1410	14621	NORFOLK DR	PORT GREENWICH LN	KELSO DR	E	AAC	9	549	36	19,764	8/21/23	91	42	58	0	Overlay - AC Structural	03-01-2011
431	15000	CHESTERFIELD LN	BURLINGTON LN	ATTLEBORO CIR	E	AC	9	542	36	19,512	8/24/23	91	100	0	0	New Construction	01-01-1980
1621	14229	REILLY DR	SANDPIPER LN	END	E	AC	9	364	36	13,104	8/24/23	91	100	0	0	New Construction	01-01-1980
1095	15550	KROLL LN	ARCEL CIR	STILWELL DR	E	AC	9	406	32	14,492	8/30/23	91	100	0	0	New Construction	01-01-1980
1707	14284	SALT AIR CIR	SPINNAKER DR	CDS	E	AAC	8	528	36	20,208	3/6/24	91	100	0	0	Overlay - AC Structural	05-11-2018
2098	14290	VOYAGER CIR	HORIZON LN	CDS	E	AC	8	510	36	18,360	3/6/24	91	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1123	14292	LAPWORTH CIR	NATIONAL LN	CDS	E	AAC	8	491	36	20,716	3/18/24	91	61	25	14	Overlay - AC Structural	05-11-2018
1590	14281	QUEENS PARK LN	CAITHNESS DR	LEVEE DR	E	AC	8	456	36	16,416	3/18/24	91	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1590	15514	QUEENS PARK LN	CAITHNESS DR	NETHERWAY DR	E	AC	8	684	36	25,800	3/18/24	91	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
988	14285	IONA LN	NETHERWAY DR	ERSKINE DR	E	AC	8	237	36	8,532	3/19/24	91	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1548	15566	POLYNESIAN LN	BOBBIE CIR	RHODESIA DR	E	AAC	9	768	36	27,648	3/26/24	91	100	0	0	Overlay - AC Structural	05-11-2018
110	15570	ALOHA DR	KIOWA LN	KANEHOE LN	E	AC	9	930	36	34,980	3/27/24	91	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
2036	13922	TYLER CIR	HARDING LN	CDS	E	AC	7	520	37	22,860	4/2/24	91	72	28	0	Surface Treatment - Slurry Seal	11-28-2019
823	13650	GLEADA ST	STERLING AVE	KINER AVE	E	AC	4	397	33	13,601	4/8/24	91	55	45	0	Surface Treatment - Slurry Seal	11-28-2019
500	15715	DELAWARE ST	ONTARIO DR	ELLIS AVE	E	AC	4	1,083	36	38,988	4/9/24	91	70	0	30	Surface Treatment - Slurry Seal	11-28-2019
1597	13151	RAGTIME CIR	SUNDANCER LN	CDS	E	AAC	2	196	32	8,072	5/7/24	91	76	0	24	Overlay - AC Fabric	12-01-2017
168	14952	AUTOPARK DR	REPAIR LN	GOTHARD ST	E	AC	4	353	40	13,800	5/9/24	91	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
652	15062	EDGEWATER LN	BRANFORD DR	FIGARO CIR	E	AAC	2	525	36	18,900	5/10/24	91	100	0	0	Overlay - AC Structural	12-01-2017
744	15624	FISHER DR	SAYBROOK LN	DAVIS CUP	E	AAC	2	322	36	11,592	5/10/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
1657	14761	ROCKINGHORSE LN	CHURCHILL DR	FAIRCREST DR	E	AC	5	467	36	16,812	5/7/24	91	15	0	85	New Construction	01-01-1980
137	13158	AQUARIUS DR	RASCAL LN	SUNDANCER LN	E	AAC	2	245	36	8,820	5/7/24	91	100	0	0	Overlay - AC Fabric	12-01-2017
652	13197	EDGEWATER LN	MORNING STAR DR	BRANFORD DR	E	AAC	2	260	36	9,360	5/10/24	91	100	0	0	Overlay - AC Structural	12-01-2017
195	60850	BOLSA CHICA ST	LOS PATOS AVE	BRIGHTWATER DR	E	AC	2	860	49	34,940	5/13/24	91	100	0	0	New Construction - AC	01-01-1980
1284	13239	MEADOWLARK DR	NASSAU LN	FAIRWAY LN	E	AAC	3	260	36	9,360	5/9/24	91	100	0	0	Overlay - AC Fabric	10-01-2016
5460	61010	CANAL ST	PCH	END N	E	PCC	2	56	24	1,344	5/13/24	91	34	0	66	New Construction - PCC	01-01-1980
318	15942	BROADWAY	INTREPID LN	PCH	E	AAC	2	351	28	6,328	5/13/24	92	100	0	0	Overlay - AC Fabric	12-01-2017
5000	60020	NORTH PACIFIC	7TH ST	10TH ST	E	AC	2	705	25	17,625	5/6/24	92	100	0	0	New Construction - Initial	01-01-1980
1918	15045	SUNDANCER LN	RAGTIME CIR	NIMBLE CIR	E	AAC	2	399	36	14,364	5/7/24	92	100	0	0	Overlay - AC Fabric	12-01-2017
1350	13195	MORNING STAR DR	EDGEWATER LN	CDS	E	AAC	2	357	36	14,352	5/10/24	92	88	0	12	Overlay - AC Fabric	12-01-2017
987	14393	IOLANI CIR	ZAMORA LN	CDS	E	AC	9	235	32	9,020	7/12/17	92	100	0	0	New Construction	01-01-1980
2291	17026	ASTRONAUTICS LN	SKYLAB RD	DELTA LN	E	AC	1	2,052	36	77,872	2/10/20	92	48	0	52	New Construction - Initial	01-01-2000
511	13696	CORTEZ DR	SPRINGDALE ST	VANGUARD LN	E	AC	1	370	36	14,070	2/10/20	92	100	0	0	New Construction	01-01-1980
897	14464	HAROLD PL	GRAHAM ST	HAMMON LN	E	AC	1	1,322	36	47,592	2/10/20	92	100	0	0	New Construction	01-01-1980
1679	15296	ROYAL OAK DR	SUNNYCREST LN	EDWARDS ST	E	AC	1	452	36	15,984	2/10/20	92	100	0	0	New Construction	01-01-1980
1851	13659	SPA DR	DOLLAR DR	HAMMON LN	E	AC	1	1,391	36	50,076	2/10/20	92	100	0	0	New Construction	01-01-1980
1923	15297	SUNNYCREST LN	LARKSPUR CIR	LARCHWOOD DR	E	AC	1	770	36	27,720	2/10/20	92	94	0	6	New Construction - Initial	01-01-1980
760	15818	FLOWER LN	SUNBREEZE DR	SLATER AVE	E	AAC	3	314	36	12,054	2/11/20	92	100	0	0	Overlay - AC Structural	10-01-2012
1265	13555	MASHIE CIR	NIMROD DR	END	E	AAC	3	216	32	8,412	2/11/20	92	55	0	45	Overlay - AC Structural	10-01-2012
512	15989	CORY DR	MAYOR LN	END	E	AC	3	1,127	36	42,572	2/12/20	92	91	0	9	Surface Treatment - Slurry Seal	10-01-2012
1275	13372	MAYOR LN	SLATER AVE	CORY DR	E	AAC	3	168	36	6,048	2/12/20	92	52	0	48	Overlay - AC Structural	10-01-2012
1796	15153	SHENLYN DR	EDWARDS ST	IRELAND LN	E	AAC	3	531	36	19,866	2/12/20	92	100	0	0	Overlay - AC Structural	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
160	13364	ATHENA DR	MADERA LN	EDWARDS ST	E	AAC	5	170	36	6,120	2/18/20	92	100	0	0	Overlay - AC Structural	10-01-2012
776	13313	FRANMAR CIR	GREENVIEW LN	END	E	AC	3	410	36	16,260	2/18/20	92	100	0	0	New Construction	01-01-1980
1306	13312	MIDIRON CIR	GREENVIEW LN	END	E	AC	3	412	32	14,684	2/18/20	92	100	0	0	New Construction	01-01-1980
2296	60730	SHERIDAN DR	SLAYBACK LN	CDS	E	AC	7	438	36	16,810	2/18/20	92	27	0	73	New Construction - AC	01-01-2014
982	14422	INLET DR	LAKEPOINT LN	EDWARDS ST	E	AAC	5	175	36	6,012	2/24/20	92	100	0	0	Overlay - AC Structural	10-01-2012
1702	13433	SALAMANCA LN	CARRANZA LN	LUCIENTO DR	E	AAC	5	254	36	8,856	2/25/20	92	100	0	0	Overlay - AC Structural	10-01-2012
2044	14492	VACATION LN	SURFCREST DR	HIGHTIDE DR	E	AC	9	560	36	20,910	2/25/20	92	100	0	0	New Construction - Initial	01-01-1980
807	13779	GENOA CIR	ALEXANDRIA DR	END	E	AC	1	410	36	16,260	2/26/20	92	53	0	47	New Construction	01-01-1980
884	15317	HANOVER LN	PARIS CIR	HALIFAX DR	E	AC	1	780	36	27,792	2/26/20	92	94	0	6	New Construction	01-01-1980
1420	13792	NORWICH CIR	MELBOURNE DR	END	E	AC	1	410	36	16,560	2/26/20	92	56	0	44	New Construction	01-01-1980
1323	14918	MISTY LN	SLATER AVE	PRICE DR	E	AC	5	170	36	6,120	3/9/20	92	100	0	0	New Construction	01-01-1980
201	14921	BATES CIR	ALLSTONE DR	END	E	AC	5	217	36	9,612	3/12/20	92	69	0	31	New Construction	01-01-1980
788	15804	GAINSFORD LN	FANWOOD DR	BECK CIR	E	AC	5	794	36	29,334	3/12/20	92	56	0	44	New Construction	01-01-1980
1117	13388	LANCEFIELD DR	SHAMLEY CIR	WELLBANK LN	E	AC	5	255	36	10,180	3/12/20	92	100	0	0	New Construction	01-01-1980
1128	15808	LARKMONT DR	CRESTMOOR LN	HELENBROOK LN	E	AC	5	517	36	19,362	3/12/20	92	66	0	34	New Construction	01-01-1980
1599	15831	RAINGLEN LN	NEARGATE DR	END	E	AC	5	897	36	34,292	3/12/20	92	100	0	0	New Construction	01-01-1980
1775	15161	SELKIRK DR	FALKIRK LN	DENVALE CIR	E	AC	5	765	36	27,264	3/12/20	92	59	41	0	New Construction	01-01-1980
1778	14925	SERENE DR	WOODFERN LN	END	E	AC	5	499	36	19,964	3/12/20	92	100	0	0	New Construction	01-01-1980
2168	14935	WINDCROFT DR	CRESTMOOR LN	HELENBROOK LN	E	AC	5	494	36	18,534	3/12/20	92	94	0	6	New Construction - Initial	01-01-1980
1511	13700	PENFIELD CIR	MAR VISTA DR	END	E	AC	1	480	36	19,080	5/5/20	92	84	0	16	New Construction	01-01-1980
1568	15797	PRICE DR	DE LONG CIR	WRIGHTWOOD LN	E	AC	5	759	36	28,074	5/5/20	92	100	0	0	New Construction	01-01-1980
2180	15165	WOODBORO DR	BOLTON CIR	WELLBANK LN	E	AC	5	1,214	36	44,704	5/5/20	92	100	0	0	New Construction - Initial	01-01-1980
318	60490	BROADWAY	PCH	PACIFIC S	E	AC	2	304	44	13,376	5/6/20	92	53	0	47	New Construction - Initial	01-01-1980
770	12993	FOURTEENTH ST	ACACIA AVE	PALM AVE	E	AC	6	390	46	17,940	6/22/21	92	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1404	15840	NINTH ST	PCH	WALNUT AVE	E	AC	6	370	46	17,020	6/22/21	92	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
5	13102	ACACIA AVE	TWENTIETH ST	GOLDENWEST ST	E	AC	6	781	36	28,116	6/23/21	92	51	0	49	Surface Treatment - Slurry Seal	07-27-2022
5	13111	ACACIA AVE	FOURTEENTH ST	SEVENTEENTH ST	E	AC	6	880	36	31,680	6/23/21	92	71	0	29	Surface Treatment - Slurry Seal	07-27-2022
1446	13113	OLIVE AVE	FOURTEENTH ST	SEVENTEENTH ST	E	AC	6	930	36	33,480	6/23/21	92	63	0	37	Surface Treatment - Slurry Seal	07-27-2022
1505	12895	PECAN AVE	EIGHTH ST	ELEVENTH ST	E	AC	6	912	36	32,832	6/23/21	92	83	0	17	Surface Treatment - Slurry Seal	06-08-2021
1505	12957	PECAN AVE	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/23/21	92	84	0	16	Surface Treatment - Slurry Seal	07-27-2022
2031	13096	TWENTIETH ST	ORANGE AVE	PECAN AVE	E	AC	6	390	46	17,940	6/30/21	92	85	0	15	Surface Treatment - Slurry Seal	07-27-2022
2033	13025	TWENTY-SECOND ST	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/30/21	92	69	0	31	Surface Treatment - Slurry Seal	07-27-2022
584	12862	DEGUELLE CIR	FINDLEY CIR	CDS	E	AC	5	286	34	12,785	7/8/21	92	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
2030	13080	TWELFTH ST	PALM AVE	CREST AVE	E	AC	6	298	46	13,708	7/8/21	92	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
455	14193	CLEARWOOD CIR	BAY MEADOW DR	CDS	E	AC	8	426	34	16,284	2/23/22	92	41	59	0	Surface Treatment - Slurry Seal	02-13-2023
385	15444	CARMANIA LN	SHALOM DR	ORONSAY CR	E	AC	8	517	36	18,612	2/28/22	92	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1024	14211	JON DAY DR	BROOKHURST ST	CRAIMER LN	E	AC	8	1,280	36	46,080	2/28/22	92	51	0	49	Surface Treatment - Slurry Seal	02-14-2023
265	13986	BLUEFIN LN	GARFIELD AVE	ALBACORE DR	E	AC	8	180	47	7,810	3/7/22	92	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
267	13993	BLUEGILL CIR	TARPON DR	CDS	E	AC	8	310	32	11,420	3/7/22	92	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
493	15647	CONSTITUTION LN	CLANCY LN	EDUCATION LN	E	AC	8	530	36	19,080	3/7/22	92	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1917	13407	SUNDANCE CIR	COLLINS LN	CDS	E	AC	5	222	36	9,492	3/14/22	92	100	0	0	New Construction - Initial	01-01-1980
1614	16006	REDLANDS LN	LAFAYETTE DR	HEIL AVE	E	AC	3	1,228	36	44,208	3/16/22	92	88	0	12	New Construction	01-01-1980
2108	16004	WALTON DR	GIARC LN	MARJAN LN	E	AC	3	1,291	36	47,226	3/16/22	92	100	0	0	New Construction - Initial	01-01-1980
1414	15100	NORMANDY LN	RINGO CIR	SHAYNE DR	E	AC	3	765	36	27,540	3/17/22	92	100	0	0	New Construction	01-01-1980
1255	13490	MARK LN	NANCY DR	ALHAMBRA AVE	E	AC	4	260	36	10,110	3/18/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1922	13481	SUNLIGHT DR	WISHINGWELL LN	CDS	E	AC	3	486	36	17,496	3/18/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1922	15217	SUNLIGHT DR	MAGELLAN LN	WISHINGWELL LN	E	AC	3	520	36	18,720	3/18/22	92	73	27	0	Surface Treatment - Slurry Seal	07-29-2020
830	14880	GLENROY DR	GREENLEAF LN	NEWQUIST LN	E	AC	2	321	36	12,696	3/22/22	92	89	0	11	New Construction	01-01-1980
830	15778	GLENROY DR	NEWQUIST LN	ST ANDREWS LN	E	AC	2	778	36	28,008	3/22/22	92	82	0	18	New Construction	01-01-1980
855	15781	GREENLEAF LN	GLENROY DR	END	E	AC	2	452	36	17,184	3/22/22	92	100	0	0	New Construction	01-01-1980
1056	15783	KENILWORTH DR	GREENLEAF LN	GRAHAM ST	E	AC	2	1,400	36	50,400	3/22/22	92	92	0	8	New Construction	01-01-1980
1502	15114	PEARCE ST	LYNN ST	GREEN ST	E	AC	2	660	36	23,760	3/22/22	92	45	0	55	New Construction	01-01-1980
1510	14867	PENDLETON DR	ST ANDREWS LN	GRAHAM ST	E	AC	2	170	32	5,440	3/22/22	92	100	0	0	New Construction	01-01-1980
1868	15768	ST ANDREWS LN	EL DORADO DR	GLENROY DR	E	AC	2	741	36	27,816	3/22/22	92	88	0	12	New Construction	01-01-1980
2090	15774	VINELAND DR	NEWQUIST LN	END	E	AC	2	304	36	10,944	3/22/22	92	100	0	0	New Construction - Initial	01-01-1980
2146	14866	WHISTLER CIR	HERBERT LN	CDS	E	AC	5	193	36	8,198	3/22/22	92	100	0	0	New Construction - Initial	01-01-1980
362	13327	CAMILLE DR	MYTINGER LN	SUMMERCLOUD LN	E	AC	3	358	36	12,888	3/23/22	92	100	0	0	New Construction	01-01-1980
463	13593	CLUBHOUSE LN	MARSHALL DR	MIDDLECOFF DR	E	AC	3	260	36	9,360	3/23/22	92	72	0	28	New Construction	01-01-1980
2109	13132	WALTZ CIR	PRELUDE DR	CDS	E	AC	2	412	36	16,332	3/24/22	92	100	0	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
448	13869	CLARE DR	EDWARDS ST	TULLOW LN	E	AC	3	406	36	14,328	3/30/22	92	60	40	0	New Construction	01-01-1980
332	13517	BURKE LN	EARL CIR	PRINCE DR	E	AC	3	361	40	14,440	3/31/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
564	13524	DANUBE DR	RHONE LN	THAMES LN	E	AC	4	1,043	36	37,548	3/31/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
644	13515	EARL CIR	BURKE LN	CDS	E	AC	3	130	32	5,660	3/31/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
181	13264	BALLANTINE LN	EDINGER AVE	BELLINGER DR	E	AC	3	179	36	6,444	4/1/22	92	100	0	0	New Construction	01-01-1980
271	14988	BOARDWALK DR	SAYBROOK LN	ALGONQUIN ST	E	AC	2	834	36	30,024	4/5/22	92	72	28	0	New Construction - Initial	01-01-1980
829	14837	GLENHAVEN LN	TERRY DR	ARNETT DR	E	AC	4	465	36	16,990	4/6/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1316	14833	MINORU LN	ALLEY WARNER AVE	WARNER AVE	E	AC	4	180	36	6,480	4/6/22	92	56	44	0	Surface Treatment - Slurry Seal	07-29-2020
468	13348	COD CIR	SUN DR	END	E	AC	3	225	36	10,100	4/7/22	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
516	14991	COUNTESS DR	EDINGER AVE	PORTOFINO CIR	E	AC	2	1,605	44	71,870	4/7/22	92	88	0	12	New Construction	01-01-1980
1322	13155	MISTRAL DR	TISBURY CIR	WAYFARER LN	E	AC	2	481	36	17,316	4/7/22	92	96	0	4	New Construction	01-01-1980
1382	14623	NEW BRITAIN LN	HAMMON LN	END	E	AAC	9	639	36	23,004	8/21/23	92	100	0	0	Overlay - AC Structural	03-01-2011
1552	14617	PORT GREENWICH LN	NORTHPORT DR	BOOTHBAY CIR	E	AC	9	255	36	9,180	8/21/23	92	100	0	0	New Construction	01-01-1980
1552	15655	PORT GREENWICH LN	BOOTHBAY CIR	CAPE NEWBURY DR	E	AC	9	768	36	27,648	8/21/23	92	100	0	0	New Construction	01-01-1980
1763	14107	SEALROCK DR	LIGHTHOUSE LN	NEWLAND ST	E	AAC	9	162	36	5,832	8/21/23	92	100	0	0	Overlay - AC Structural	03-01-2011
1841	14226	SNOWBIRD DR	CATAMARAN LN	SCHOONER LN	E	AC	9	415	36	14,940	8/23/23	92	86	0	14	New Construction	01-01-1980
1841	14244	SNOWBIRD DR	BASTIA LN	MISSION LN	E	AC	9	706	36	25,416	8/23/23	92	78	15	7	New Construction	01-01-1980
704	14224	EVELYNE CIR	FARNSWORTH LN	END	E	AC	9	321	32	10,272	8/24/23	92	69	0	31	New Construction	01-01-1980
969	14997	HUNTINGTON ST	PACIFIC VIEW	ATLANTA AVE	E	AAC	9	1,249	37	46,213	8/24/23	92	57	0	43	Overlay - AC Structural	07-01-2010
212	17002	BEACH BLVD FRONTAGE	TRAVELWAY	WEST END	E	AC	9	1,032	36	37,152	8/30/23	92	41	0	59	New Construction	01-01-1980
631	14308	DRYMEN DR	BANFF LN	ALLEY DONCASTER DR	E	AC	9	264	36	9,540	8/30/23	92	100	0	0	New Construction	01-01-1980
1320	15538	MIRAMAR LN	GREENFIELD LN	DORSETT DR	E	AC	9	686	36	24,696	8/30/23	92	71	29	0	New Construction	01-01-1980
703	15377	GARFIELD AVE	PLUM TREE LN	END	E	AC	7	678	26	17,628	3/5/24	92	100	0	0	Surface Treatment - Slurry Seal	07-14-2021
1579	14602	PROMENADE PKWY DR	SEAGATE DR	GOTHARD AVE	E	AC	4	1,017	42	42,714	3/5/24	92	70	0	30	Surface Treatment - Slurry Seal	11-28-2019
948	15713	HOLLY ST	GARFIELD AVE	MAIN ST	E	AC	7	580	36	20,880	3/12/24	92	85	0	15	Surface Treatment - Slurry Seal	11-28-2019
696	15518	ERSKINE DR	BUSHARD ST	IONA LN	E	AC	8	898	36	32,076	3/19/24	92	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
968	15958	HUNTER LN	ERSKINE DR	SCOTSTOUN DR	E	AC	8	1,288	36	46,368	3/19/24	92	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1434	15603	OCEANBREEZE LN	OCEANCREST DR	SUMMERWIND LN	E	AC	9	796	36	29,406	3/26/24	92	89	0	11	Surface Treatment - Slurry Seal	05-11-2019
1548	14373	POLYNESIAN LN	REGATTA DR	BOBBIE CIR	E	AAC	9	256	36	9,216	3/26/24	92	100	0	0	Overlay - AC Structural	05-11-2018
1040	14383	KANEOHE LN	KAPAA DR	ALOHA DR	E	AC	9	256	36	9,966	3/27/24	92	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
484	14338	COMPASS LN	SOUTHSHORE DR	WATERFRONT DR	E	AC	9	389	36	14,504	4/1/24	92	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
838	13656	GOODWIN LN	FORELLE DR	ELLIS AVE	E	AC	4	660	36	23,184	4/8/24	92	68	27	5	Surface Treatment - Slurry Seal	11-28-2019
500	14758	DELAWARE ST	TAYLOR DR	ONTARIO DR	E	AC	4	260	36	9,360	4/9/24	92	76	0	24	Surface Treatment - Slurry Seal	11-28-2019
372	14541	CAPE MAY LN	JONESPORT LN	CDS	E	AC	9	171	36	7,956	4/24/24	92	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1379	15571	NEOLANI DR	KANAKOA LN	ZAMORA LN	E	AC	9	517	36	18,612	4/24/24	92	100	0	0	New Construction	01-01-1980
1840	15087	SNEAD DR	NASSAU LN	CHIPPER LN	E	AAC	3	576	36	20,986	5/9/24	92	100	0	0	Overlay - AC Fabric	10-01-2016
2154	15210	WHITNEY DR	CASCADE LN	RUSHMOOR LN	E	AC	4	550	36	19,800	5/13/24	92	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1912	14981	SUMMIT DR	SEAPOINT AVE	PENINSULA LN	E	AC	5	1,617	44	71,148	5/6/24	92	70	0	30	New Construction - Initial	01-01-1980
643	15082	EAGLE LN	CASTLE DR	MEADOWLARK DR	E	AAC	3	1,185	36	43,410	5/9/24	92	100	0	0	Overlay - AC Fabric	10-01-2016
1628	14950	REPAIR LN	AUTOPARK DR	ELLIS AVE	E	AC	4	183	40	7,000	5/9/24	93	86	14	0	Surface Treatment - Slurry Seal	11-28-2019
166	15334	AULNAY LN	MC FADDEN AVE	WINSLOW DR	E	AC	1	441	36	15,876	5/7/24	93	100	0	0	New Construction	01-01-1980
2305	60820	MARIGAYLE CIR	EDWARDS ST	CDS	E	AC	5	185	36	8,550	5/7/24	93	100	0	0	New Construction - AC	01-01-1980
1607	13147	RASCAL LN	SEASCAPE DR	AQUARIUS DR	E	AAC	2	385	36	13,860	5/7/24	93	70	0	30	Overlay - AC Fabric	12-01-2017
711	13220	FAIRFIELD CIR	WESTPORT DR	CDS	E	AAC	2	400	36	15,900	5/10/24	93	100	0	0	Overlay - AC Fabric	12-01-2017
1534	13164	PIRATE CIR	SUNDANCER LN	CDS	E	AAC	2	404	32	14,428	5/7/24	93	86	0	14	Overlay - AC Fabric	12-01-2017
1284	15088	MEADOWLARK DR	FAIRWAY LN	SPRINGDALE ST	E	AAC	3	614	45	26,630	5/9/24	93	100	0	0	Overlay - AC Fabric	10-01-2016
570	15073	DAVENPORT DR	SAYBROOK LN	ALGONQUIN ST	E	AAC	2	802	60	48,120	5/10/24	93	100	0	0	Overlay - AC Structural	12-01-2017
1631	15061	SAYBROOK LN	BRANFORD DR	TALISMAN LN	E	AAC	2	365	36	13,140	5/10/24	93	100	0	0	Overlay - AC Structural	12-01-2017
1892	13213	STILES CIR	TRUMBELL DR	CDS	E	AAC	2	223	36	9,528	5/10/24	93	100	0	0	Overlay - AC Fabric	12-01-2017
166	15920	AULNAY LN	PRISCILLA DR	ROYALIST DR	E	AC	1	1,040	36	37,440	5/7/24	93	100	0	0	New Construction	01-01-1980
1631	15067	SAYBROOK LN	SILLMAN DR	DAVENPORT DR	E	AAC	2	1,137	36	40,932	5/10/24	93	100	0	0	Overlay - AC Structural	12-01-2017
156	13686	ASPEN CIR	ROYAL OAK DR	END	E	AC	1	350	32	13,000	2/10/20	93	100	0	0	New Construction	01-01-1980
562	13672	DANES CIR	BRIARCLIFF DR	END	E	AC	1	504	36	19,394	2/10/20	93	100	0	0	New Construction	01-01-1980
1124	13695	LARCHWOOD DR	NORTHRIDGE LN	SUNNYCREST LN	E	AC	1	1,280	36	45,792	2/10/20	93	100	0	0	New Construction	01-01-1980
1422	13669	NUGGET CIR	SAHARA LN	END	E	AC	1	270	36	11,220	2/10/20	93	100	0	0	New Construction	01-01-1980
1697	13668	SAHARA LN	CROUPIER CIR	NUGGET CIR	E	AC	1	260	36	10,860	2/10/20	93	100	0	0	New Construction	01-01-1980
1923	13703	SUNNYCREST LN	LARCHWOOD DR	MAR VISTA DR	E	AC	1	259	36	9,324	2/10/20	93	55	0	45	New Construction - Initial	01-01-1980
1923	13704	SUNNYCREST LN	MAR VISTA DR	END	E	AC	1	481	36	19,316	2/10/20	93	100	0	0	New Construction - Initial	01-01-1980
1402	15255	NIMROD DR	MASHIE CIR	LUCERO LN	E	AAC	3	658	36	25,188	2/11/20	93	57	0	43	Overlay - AC Structural	10-01-2012

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
397	13371	CASPERS CIR	CORY DR	END	E	AAC	3	369	36	15,084	2/12/20	93	100	0	0	Overlay - AC Structural	10-01-2012
990	13369	IRELAND LN	SHENLYN DR.	CORY DR	E	AAC	3	259	36	10,074	2/12/20	93	100	0	0	Overlay - AC Structural	10-01-2012
1081	13368	KIRKLUND CIR	KRISTOPHER LN	END	E	AAC	3	368	36	15,248	2/12/20	93	100	0	0	Overlay - AC Structural	10-01-2012
1094	15991	KRISTOPHER LN	WRENFIELD DR	SHENLYN DR	E	AAC	3	1,264	36	44,928	2/12/20	93	100	0	0	Overlay - AC Structural	10-01-2012
1275	15154	MAYOR LN	CORY DR	END	E	AAC	3	368	36	15,748	2/12/20	93	100	0	0	Overlay - AC Structural	10-01-2012
708	14873	EVERGREEN CIR	SUMMERDALE DR	END	E	AAC	5	246	36	10,584	2/18/20	93	100	0	0	Overlay - AC Structural	10-01-2012
857	15123	GREENVIEW LN	DONLYN DR	GILDRED CIR	E	AC	3	780	36	28,080	2/18/20	93	100	0	0	New Construction	01-01-1980
1282	15120	MEADOWBROOK DR	CHARLEYVILLE CIR	GREENVIEW LN	E	AC	3	513	36	18,968	2/18/20	93	100	0	0	New Construction	01-01-1980
1846	13357	SONOMA DR	ELSINORE CIR	CORONADO LN	E	AAC	5	253	36	9,108	2/18/20	93	100	0	0	Overlay - AC Structural	10-01-2012
666	14415	EL CORTIJO DR	EDWARDS ST	ALTAMIRANO LN	E	AAC	5	167	36	5,724	2/25/20	93	100	0	0	Overlay - AC Structural	10-01-2012
1318	13434	MIRA EL RIO LN	LUCIENTO DR	CENTRAL PARK DR	E	AAC	5	177	36	6,084	2/25/20	93	100	0	0	Overlay - AC Structural	10-01-2012
2086	15580	VILLA NUEVA DR	QUINTANA LN	END	E	AC	5	381	36	13,428	2/25/20	93	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
369	13795	CANTERBURY DR	VICTORIA LN	YORKSHIRE LN	E	AC	1	782	36	27,864	2/26/20	93	100	0	0	New Construction	01-01-1980
877	15323	HALIFAX DR	VICTORIA LN	FLINTRIDGE LN	E	AC	1	505	36	18,930	2/26/20	93	100	0	0	New Construction	01-01-1980
884	13784	HANOVER LN	MELBOURNE DR	MC FADDEN AVE	E	AC	1	512	36	18,144	2/26/20	93	100	0	0	New Construction	01-01-1980
1087	13794	KNOLLWOOD CIR	HALIFAX DR	END	E	AC	1	326	36	13,236	2/26/20	93	100	0	0	New Construction	01-01-1980
1568	14919	PRICE DR	MISTY LN	DE LONG CIR	E	AC	5	254	36	8,868	3/9/20	93	100	0	0	New Construction	01-01-1980
219	14941	BECK CIR	GAINSFORD LN	END	E	AC	5	154	36	5,544	3/12/20	93	100	0	0	New Construction	01-01-1980
220	15798	BECKWALL LN	NEARGATE DR	END	E	AC	5	542	36	21,512	3/12/20	93	59	0	41	New Construction	01-01-1980
862	15166	GRIMSBY DR	WHITFORD LN	TALBERT AVE	E	AC	5	850	36	30,312	3/12/20	93	100	0	0	New Construction	01-01-1980
919	14944	HELENBROOK LN	WINDCROFT DR	LARKMONT DR	E	AC	5	464	36	16,704	3/12/20	93	55	0	45	New Construction	01-01-1980
1786	13390	SHAMLEY CIR	LANCEFIELD DR	END	E	AC	5	102	36	5,472	3/12/20	93	100	0	0	New Construction	01-01-1980
1884	13630	STARMONT LN	GRIMSBY DR	BERSHIRE DR	E	AC	5	440	36	15,552	3/12/20	93	100	0	0	New Construction	01-01-1980
2028	14920	TUSCAN CIR	ALLSTONE DR	END	E	AC	5	144	36	6,984	3/12/20	93	62	0	38	New Construction - Initial	01-01-1980
177	14408	BAKER DR	MARGARITA LN	ROB ROY CIR	E	AAC	3	249	36	9,714	5/5/20	93	100	0	0	Overlay - AC Structural	10-01-2012
551	15258	DAIRYVIEW CIR	END	END	E	AAC	4	511	36	21,396	5/5/20	93	51	0	49	Overlay - AC Structural	10-01-2012
1089	15263	KOLEDO LN	MANDRELL DR	BARTON DR	E	AAC	4	330	36	11,880	5/5/20	93	72	0	28	Overlay - AC Structural	10-01-2012
5430	60660	24TH ST	PCH	PACIFIC N	E	AC	2	228	29	6,612	5/6/20	93	100	0	0	New Construction - Initial	01-01-1980
5010	60150	SOUTH PACIFIC	10TH ST	7TH ST	E	AC	2	705	25	17,625	5/6/20	93	59	0	41	New Construction - Initial	01-01-1980
1945	13755	SYDNEY DR	BOLSA PARK LN	END	E	AAC	1	294	36	12,084	5/6/20	93	66	0	34	New Construction - Initial	01-01-1980
1945	13765	SYDNEY DR	BOLSA PARK LN	BAYSIDE LN	E	AC	1	769	36	28,184	5/6/20	93	66	0	34	New Construction - Initial	01-01-1980
5430	60670	24TH ST	PACIFIC S	END	E	AC	2	58	27	1,566	5/21/20	93	79	0	21	New Construction - Initial	01-01-1980
734	13091	FIFTEENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	375	46	17,250	6/22/21	93	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
770	13089	FOURTEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/22/21	93	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
770	13115	FOURTEENTH ST	PCH	OLIVE AVE	E	AC	6	775	46	36,095	6/22/21	93	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1825	16025	SIXTEENTH ST	ORANGE AVE	PECAN AVE	E	AC	6	380	46	17,480	6/22/21	93	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
5	13103	ACACIA AVE	SEVENTEENTH ST	TWENTIETH ST	E	AC	6	828	36	29,808	6/23/21	93	81	0	19	Surface Treatment - Slurry Seal	07-27-2022
1446	12922	OLIVE AVE	FIFTH ST	SIXTH ST	E	AC	6	270	36	9,720	6/23/21	93	100	0	0	Surface Treatment - Slurry Seal	05-03-2021
1385	12863	PALM AVE	ELEVENTH ST	FOURTEENTH ST	E	AC	6	975	40	39,000	6/23/21	93	100	0	0	Surface Treatment - Slurry Seal	05-03-2021
992	13078	ISLAND BAY LN	MORNING TIDE DR	CDS	E	AC	5	943	32	38,740	6/30/21	93	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1906	15360	SUMMER BREEZE LN	LITTLE HARBOR DR	CDS	E	AC	5	807	36	31,845	6/30/21	93	66	0	34	Surface Treatment - Slurry Seal	07-27-2022
492	14095	CONSTELLATION LN	MONITOR DR	LURLINE DR	E	AC	8	1,040	36	37,440	3/2/22	93	83	0	17	Surface Treatment - Slurry Seal	02-08-2023
18	15393	ALBACORE DR	CDS	STINGRAY LN	E	AC	8	784	36	29,474	3/7/22	93	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
199	15820	BASS DR	BUSHARD ST	WALLEYE LN	E	AC	8	322	36	12,592	3/7/22	93	72	0	28	New Construction	01-01-1980
905	14073	HARTSDALE CIR	INNSBRUCK DR	END	E	AC	8	295	32	10,940	3/9/22	93	71	0	29	Surface Treatment - Slurry Seal	02-08-2023
281	13342	BONNIE DR	PATRICIA LN	KETTLER LN	E	AC	3	521	36	18,756	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1065	50450	KETTLER LN	BONNIE DR	SYLVIA DR	E	AC	3	1,018	36	40,348	3/18/22	93	92	0	8	Surface Treatment - Slurry Seal	07-29-2020
1210	13347	LYDIA DR	MARIE LN	GOLDENWEST ST	E	AC	3	409	36	14,724	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1217	13504	MADDOX DR	ALLEY GOLDENWEST ST	BARTLETT LN	E	AC	3	157	36	5,652	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1217	13505	MADDOX DR	ALLEY SABOT LN	ALLEY MADDOX DR	E	AC	3	160	36	5,760	3/18/22	93	100	0	0	New Construction	01-01-1980
1217	15230	MADDOX DR	BARTLETT LN	ALLEY BARTLETT LN	E	AC	3	157	36	5,652	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1217	15232	MADDOX DR	TUNSTALL LN	ALLEY SABOT LN	E	AC	3	359	36	12,924	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1220	13605	MAGELLAN LN	BOUQUET DR	SUNLIGHT DR	E	AC	3	1,041	36	37,476	3/18/22	93	91	0	9	Surface Treatment - Slurry Seal	07-29-2020
1689	13338	RUTH DR	PATRICIA LN	SIMMONE LN	E	AC	3	265	36	10,340	3/18/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
109	14915	ALMELO LN	GHENT DR	NORDINA DR	E	AC	5	1,125	36	40,500	3/29/22	93	100	0	0	New Construction	01-01-1980
831	14908	GLENSTONE DR	HILLGATE LN	GRAHAM ST	E	AC	2	166	36	5,976	3/29/22	93	100	0	0	New Construction	01-01-1980
1291	13774	MELBOURNE DR	HANOVER LN	END	E	AC	1	433	36	17,388	3/30/22	93	67	0	33	New Construction	01-01-1980
2053	14825	VAN DYKE LN	AMSTERDAM DR	REMBRANDT DR	E	AC	4	491	36	17,676	3/31/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
327	15760	BRUSH DR	MONROE LN	TRIPP CIR	E	AC	4	550	36	19,800	4/6/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1000	14808	JACQUELYN LN	ALLEY SLATER AVE	SLATER AVE	E	AC	4	150	36	5,400	4/6/22	93	100	0	0	New Construction	01-01-1980
1316	15750	MINORU LN	ALLEY SARU CIR	ALLEY WARNER AVE	E	AC	4	466	36	16,776	4/6/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1968	14839	TERRY DR	LEAFWOOD CIR	HERITAGE LN	E	AC	4	256	36	9,216	4/6/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1968	15757	TERRY DR	MONTCLAIR LN	IRBY LN	E	AC	4	750	36	27,000	4/6/22	93	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
881	15288	HAMMON LN	SANDS DR	SPA DR	E	AC	1	772	36	27,792	4/8/22	93	91	0	9	New Construction	01-01-1980
1851	13658	SPA DR	RANCHO RD	HAROLD PL	E	AC	1	173	36	6,228	4/8/22	93	100	0	0	New Construction	01-01-1980
127	60710	ANDERSON ST	PCH	END	E	AC	2	358	32	11,456	4/9/22	93	61	39	0	New Construction - Initial	01-01-1980
716	13205	FALKLAND CIR	CHANNEL LN	CDS	E	AC	2	200	32	7,900	4/9/22	93	91	0	9	New Construction	01-01-1980
806	14631	GENEVA AVE	DELAWARE ST	ALLEY DELAWARE ST	E	AC	9	170	37	6,290	8/15/23	93	100	0	0	New Construction	01-01-1980
373	15446	CAPE NEWBURY DR	CAPE COTTAGE LN	END	E	AC	9	733	36	26,388	8/21/23	93	60	0	40	Surface Treatment - Slurry Seal	03-01-2011
935	14638	HILL ST	ALLEY GENEVA AVE	GENEVA AVE	E	AC	9	160	33	5,280	8/24/23	93	100	0	0	New Construction	01-01-1980
1045	14322	KAUSCH CIR	SATTERFIELD DR	END	E	AC	9	240	32	9,180	8/30/23	93	87	0	13	New Construction	01-01-1980
1617	14291	REEF LN	LEVEE DR	STAR DR	E	AC	8	127	36	6,572	3/6/24	93	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
948	14754	HOLLY ST	CLAY AVE	CDS	E	AC	7	450	34	15,300	3/12/24	93	77	0	23	New Construction	01-01-1980
636	15512	DUMBRECK DR	PAISLEY LN	QUEENS PARK LN	E	AC	8	1,039	36	37,148	3/18/24	93	80	0	20	New Construction	01-01-1980
874	14377	HAITI DR	BAHAMA LN	KANEHOE LN	E	AAC	9	259	36	10,074	3/26/24	93	100	0	0	Overlay - AC Structural	05-11-2018
1911	14497	SUMMERWIND LN	OCEANBREEZE LN	HARBORBREEZE LN	E	AC	9	504	36	18,894	3/26/24	93	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1637	15565	RHODESIA DR	BAHAMA LN	CDS	E	AAC	9	740	36	28,440	3/27/24	93	100	0	0	Overlay - AC Structural	05-11-2018
689	13932	ENFIELD CIR	HAMDEN LN	CDS	E	AC	7	198	36	10,989	4/2/24	93	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1148	14385	LEHUA LN	HAMILTON AVE	NEOLANI DR	E	AC	9	178	36	6,120	4/24/24	93	100	0	0	Surface Treatment - Slurry Seal	05-11-2018
1379	14386	NEOLANI DR	IMPALA LN	KANAKOA LN	E	AC	9	278	36	11,008	4/24/24	93	100	0	0	New Construction	01-01-1980
1855	15044	SPARTAN CIR	AQUARIUS DR	CDS	E	AAC	2	554	36	21,744	5/7/24	93	86	0	14	Overlay - AC Fabric	12-01-2017
1918	13146	SUNDANCER LN	SEASCAPE DR	RAGTIME CIR	E	AAC	2	378	36	13,608	5/7/24	93	100	0	0	Overlay - AC Fabric	12-01-2017
1918	15046	SUNDANCER LN	NIMBLE CIR	REBEL CIR	E	AAC	2	309	36	11,124	5/7/24	93	100	0	0	Overlay - AC Fabric	12-01-2017
197	13225	BARUNA LN	KITTEN CIR	SIRUS DR	E	AC	2	268	36	10,398	5/10/24	93	100	0	0	New Construction	01-01-1980
553	13582	DALE DR	EDGEWATER LN	PHELPS LN	E	AAC	2	260	36	9,360	5/10/24	93	100	0	0	Overlay - AC Structural	12-01-2017
985	13209	INTREPID LN	REMORA DR	BROADWAY	E	AAC	2	957	32	30,624	5/13/24	94	75	0	25	Overlay - AC Fabric	12-01-2017
2161	13161	WILDFIRE CIR	AQUARIUS DR	CDS	E	AAC	2	411	36	16,596	5/7/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
137	15043	AQUARIUS DR	VIM LN	RASCAL LN	E	AAC	2	731	36	26,316	5/7/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
1295	14436	MELVILLE CIR	MARIANA CIR	CDS	E	AAC	2	367	32	13,244	5/6/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
5000	60010	NORTH PACIFIC	5TH ST	7TH ST	E	AC	2	470	25	11,750	5/6/24	94	86	0	14	New Construction - Initial	01-01-1980
1401	13168	NIMBLE CIR	SUNDANCER LN	CDS	E	AAC	2	194	32	7,708	5/7/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
1001	13684	JADE CIR	EDGEVIEW LN	END	E	AC	1	530	36	20,830	2/10/20	94	91	0	9	New Construction	01-01-1980
1795	14161	SHELTER LN	NAUTILUS DR	CANDLEWOOD DR	E	AC	7	258	36	9,288	2/10/20	94	94	0	6	Surface Treatment - Slurry Seal	07-15-2021
1831	14532	SKYLAB RD	DELTA LN	ABLE LN	E	AC	1	1,631	60	97,860	2/10/20	94	100	0	0	New Construction	01-01-1980
1923	13690	SUNNYCREST LN	ROYAL OAK DR	LARKSPUR CIR	E	AC	1	258	36	9,288	2/10/20	94	100	0	0	New Construction - Initial	01-01-1980
2203	13687	ZANE CIR	ROYAL OAK DR	END	E	AC	1	350	32	13,200	2/10/20	94	100	0	0	New Construction - Initial	01-01-1980
848	13559	GRASS CIR	SUNBREEZE DR	END	E	AAC	3	223	36	10,278	2/11/20	94	90	0	10	Overlay - AC Structural	10-01-2012
1145	13553	LEE CIR	FORD DR	END	E	AAC	3	350	32	12,700	2/11/20	94	89	0	11	Overlay - AC Structural	10-01-2012
1310	13552	MILL CIR	FORD DR	END	E	AAC	3	350	32	12,700	2/11/20	94	90	0	10	Overlay - AC Structural	10-01-2012
1914	15256	SUNBREEZE DR	FLOWER LN	GRASS CIR	E	AAC	3	665	36	25,440	2/11/20	94	100	0	0	Overlay - AC Structural	10-01-2012
857	15121	GREENVIEW LN	LANGPORT CIR	TREETOP CIR	E	AC	3	259	36	10,074	2/18/20	94	100	0	0	New Construction	01-01-1980
857	15122	GREENVIEW LN	TREETOP CIR	DONLYN DR	E	AC	3	525	36	18,900	2/18/20	94	83	0	17	New Construction	01-01-1980
941	13247	HILLVIEW CIR	FERNHILL CIR	END	E	AC	3	179	34	7,886	2/18/20	94	72	0	28	New Construction	01-01-1980
2010	13311	TREETOP CIR	GREENVIEW LN	END	E	AC	3	360	32	13,320	2/18/20	94	100	0	0	New Construction - Initial	01-01-1980
2083	13317	VIEW CIR	LARK LN	END	E	AC	3	252	36	10,572	2/18/20	94	100	0	0	New Construction - Initial	01-01-1980
2295	60720	WARDLOW LN	PIONEER DR	SHERIDAN DR	E	AC	7	480	36	17,280	2/18/20	94	38	0	62	New Construction - AC	01-01-2014
1230	13886	MALM CIR	BREELAND DR	END	E	AC	3	560	36	21,960	2/19/20	94	73	0	27	New Construction	01-01-1980
1630	13126	RETHERFORD DR	SHERBECK LN	ROLLINS LN	E	AC	3	1,010	36	37,110	2/19/20	94	100	0	0	New Construction	01-01-1980
1788	13884	SHANNON DR	DUNDALK LN	SHERBECK LN	E	AC	3	260	36	10,110	2/19/20	94	78	0	22	New Construction	01-01-1980
1788	15351	SHANNON DR	SHERBECK LN	END	E	AC	3	770	36	29,520	2/19/20	94	77	0	23	New Construction	01-01-1980
2072	13861	VESPER CIR	WHITEOAK LN	END	E	AC	3	213	32	8,316	2/19/20	94	90	0	10	New Construction - Initial	01-01-1980
917	13458	HEATHPOINT LN	NEWBURY DR	GLENFOX DR	E	AC	5	256	36	9,966	2/24/20	94	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
2086	15579	VILLA NUEVA DR	CARRANZA NL	QUINTANA LN	E	AC	5	512	36	18,432	2/25/20	94	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
119	15806	AMBERTON LN	HELMSIDE DR	MARYPORT DR	E	AC	5	551	36	20,836	3/12/20	94	83	0	17	New Construction	01-01-1980
198	15976	BARWOOD DR	RAINGLEN LN	BECKWALL LN	E	AC	5	652	36	23,184	3/12/20	94	100	0	0	New Construction	01-01-1980
920	14938	HELMSIDE DR	AMBERTON LN	CRESTMOOR LN	E	AC	5	292	36	11,512	3/12/20	94	100	0	0	New Construction	01-01-1980
1599	14939	RAINGLEN LN	BANKTON DR	NEARGATE DR	E	AC	5	357	36	12,852	3/12/20	94	91	0	9	New Construction	01-01-1980
1876	14943	STANFIELD CIR	LARKMONT DR	END	E	AC	5	202	36	8,772	3/12/20	94	69	0	31	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1089	13571	KOLEDO LN	BARTON DR	ALLEY BARTON DR	E	AAC	4	165	36	5,940	5/5/20	94	100	0	0	Overlay - AC Structural	10-01-2012
1589	13569	QUEENS LN	ALLEY BARTON DR	ALLEY SLATER AVE	E	AAC	4	501	36	18,036	5/5/20	94	100	0	0	Overlay - AC Structural	10-01-2012
5310	60470	12TH ST	PCH	PACIFIC N	E	AC	2	207	25	5,175	5/6/20	94	100	0	0	New Construction - Initial	01-01-1980
5400	60620	21ST ST	PCH	PACIFIC N	E	AC	2	106	25	2,650	5/6/20	94	100	0	0	New Construction - Initial	01-01-1980
5410	60630	22ND ST	PCH	END	E	AC	2	363	30	10,890	5/6/20	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
276	13754	BOLSA PARK LN	SHELLY DR	SYDNEY DR	E	AC	1	274	36	9,576	5/6/20	94	100	0	0	New Construction - Initial	01-01-1980
639	13730	DUNDEE DR	NORTH END	BOLSA PARK LN	E	AC	1	294	36	12,084	5/6/20	94	77	0	23	New Construction	01-01-1980
1104	15313	LA SALLE LN	CORNELL DR	MC FADDEN AVE	E	AC	1	1,292	36	46,512	5/6/20	94	100	0	0	New Construction	01-01-1980
5010	60140	SOUTH PACIFIC	BROADWAY	10TH ST	E	AC	2	728	25	18,200	5/6/20	94	88	0	12	New Construction - Initial	01-01-1980
734	13000	FIFTEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	380	46	17,480	6/22/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
770	12994	FOURTEENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/22/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1825	13002	SIXTEENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	395	46	18,170	6/22/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
2030	16027	TWELFTH ST	ORANGE AVE	PECAN AVE	E	AC	6	365	46	16,790	6/22/21	94	100	0	0	New Construction - Initial	01-01-1980
5	12879	ACACIA AVE	EIGHTH ST	ELEVENTH ST	E	AC	6	930	36	33,480	6/23/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1505	13105	PECAN AVE	SEVENTEENTH ST	TWENTIETH ST	E	AC	6	820	36	29,520	6/23/21	94	97	0	3	Surface Treatment - Slurry Seal	07-27-2022
1715	13039	SAN NICOLAS CIR	LOMA AVE	CDS	E	AC	6	258	54	17,890	6/30/21	94	100	0	0	Surface Treatment - Slurry Seal	05-09-2021
738	13060	FINDLEY CIR	GOLDENWEST ST	CDS	E	AC	5	410	36	16,965	7/8/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1488	13030	PARK ST	ADAMS AVE	SPRINGFIELD AVE	E	AC	6	645	37	23,865	7/8/21	94	70	0	30	Surface Treatment - Slurry Seal	07-27-2022
2061	13041	VEERING CIR	SEVENTEENTH ST	CDS	E	AC	6	286	36	12,435	7/8/21	94	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
245	14181	BIG BEND LN	LASSEN CIR	YELLOWSTONE DR	E	AC	8	252	36	9,072	3/1/22	94	100	0	0	Surface Treatment - Slurry Seal	02-13-2023
447	15646	CLANCY LN	GARRETT CIR	CDS	E	AC	8	402	36	16,822	3/7/22	94	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
2024	14074	TUCKAHOE CIR	INNSBRUCK DR	CDS	E	AC	8	365	32	13,180	3/9/22	94	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
2112	15430	WARBURTON DR	BUSHARD ST FRONTAGE	ELMSFORD LN	E	AC	8	1,124	36	40,464	3/9/22	94	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
181	15102	BALLANTINE LN	BELLINGER DR	SILVERWOOD DR	E	AC	3	1,010	36	36,360	3/17/22	94	100	0	0	New Construction	01-01-1980
2040	13255	UNDERHILL LN	MYRTLE DR	SHAYNE DR	E	AC	3	1,020	36	36,720	3/17/22	94	90	0	10	New Construction - Initial	01-01-1980
1217	15022	MADDOX DR	GOLDENWEST ST	ALLEY GOLDENWEST ST	E	AC	3	181	36	6,516	3/18/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1249	15994	MARIE LN	HEIL AVE	PAULA CIR	E	AC	3	933	36	33,588	3/18/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1946	15137	SYLVIA DR	DIANE LN	KETTLER LN	E	AC	3	521	36	18,756	3/18/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
667	14861	EL DORADO DR	NEWQUIST LN	ST ANDREWS LN	E	AC	2	744	36	29,064	3/22/22	94	100	0	0	New Construction	01-01-1980
949	14404	HOLLYWOOD LN	MEADOWLARK DR	CALIENTE DR	E	AC	2	863	36	31,818	3/23/22	94	100	0	0	New Construction	01-01-1980
1739	13163	SCENARIO DR	FANTASIA LN	OPERA LN	E	AC	2	1,060	36	38,660	3/24/22	94	89	0	11	New Construction	01-01-1980
266	15176	BLUEGATE LN	HAMSHIRE DR	CDS	E	AC	5	453	36	18,108	3/28/22	94	100	0	0	New Construction	01-01-1980
224	15347	BELFAST LN	GLEN DR	CARLOW DR	E	AC	3	900	36	32,400	3/30/22	94	100	0	0	New Construction	01-01-1980
481	15314	COLUMBIA LN	CORNELL DR	BROWN CIR	E	AC	1	520	36	18,720	3/30/22	94	83	0	17	New Construction	01-01-1980
1527	13849	PILGRIM CIR	ROYALIST DR	END	E	AC	1	530	36	20,330	3/30/22	94	100	0	0	New Construction	01-01-1980
1688	13760	RUTGERS CIR	COLUMBIA LN	END	E	AC	1	543	36	21,048	3/30/22	94	87	0	13	New Construction	01-01-1980
1638	13518	RHONE LN	RHINE DR	VANTAGE DR	E	AC	4	500	36	19,000	3/31/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
570	13215	DAVENPORT DR	BARUNA LN	EDGEWATER LN	E	AC	2	679	60	37,140	4/5/22	94	100	0	0	New Construction	01-01-1980
327	14849	BRUSH DR	HART CIR	MONROE LN	E	AC	4	262	36	9,432	4/6/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
327	14850	BRUSH DR	IRBY LN	ALLEY NEWLAND ST	E	AC	4	140	36	5,040	4/6/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
327	15761	BRUSH DR	TRIPP CIR	IRBY LN	E	AC	4	550	36	19,800	4/6/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1968	15756	TERRY DR	HERITAGE LN	MONTCLAIR LN	E	AC	4	788	36	28,368	4/6/22	94	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
435	14955	CHINOOK AVE	SPRINGDALE ST	CADCADE ST	E	AC	1	827	32	26,464	4/8/22	94	100	0	0	New Construction	01-01-1980
204	15621	BAY VIEW DR	REMORA DR	ALLEY BAY VIEW 2	E	AC	2	602	27	16,254	4/9/22	94	71	0	29	New Construction	01-01-1980
1487	14540	PARK AVE	PCH	END	E	AC	2	255	36	9,180	4/9/22	94	100	0	0	New Construction	01-01-1980
7	14456	ACCESSWAY	BEACH BLVD	BEACH BLVD	E	AC	9	102	28	2,856	8/24/23	94	100	0	0	New Construction	01-01-1980
787	14333	FRY CIR	KNOLL LN	END	E	AC	9	168	32	6,876	8/30/23	94	100	0	0	New Construction	01-01-1980
1925	14457	SUNRISE DR	BEACH BLVD	BEACH BLVD	E	AC	9	131	46	6,026	8/30/23	94	100	0	0	New Construction - Initial	01-01-1980
802	14517	GATESHEAD DR	HARWICH LN	CDS	E	AC	9	130	36	6,480	4/17/24	94	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
867	14397	GULSTRAND CIR	STARFIRE LN	CDS	E	AAC	9	355	32	13,160	4/17/24	94	90	0	10	Overlay - AC Structural	05-11-2018
495	13157	CONTENT CIR	AQUARIUS DR	CDS	E	AAC	2	204	32	6,528	5/7/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
2107	13159	WALRUS LN	AQUARIUS DR	VENTURE DR	E	AAC	2	677	36	25,122	5/7/24	94	100	0	0	Overlay - AC Fabric	12-01-2017
899	50500	HARRIET WIEDER REG	GARFIELD AVE	OVERLOOK DR	E	AC	5	2,193	24	52,632	5/7/24	95	100	0	0	Surface Treatment - Slurry Seal	04-01-2017
1723	14863	SANDRA LEE LN	WARNER AVE	SANDRA LEE LN	E	AAC	2	201	36	7,236	5/13/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
23	13840	ALDEN LN	END	WINSLOW DR	E	AC	1	339	36	13,454	5/7/24	95	100	0	0	New Construction	01-01-1980
23	13842	ALDEN LN	WINSLOW DR	ALBION DR	E	AC	1	260	36	9,860	5/7/24	95	100	0	0	New Construction	01-01-1980
137	13144	AQUARIUS DR	WALRUS LN	SPARTAN CIR	E	AAC	2	248	36	9,678	5/7/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
137	15042	AQUARIUS DR	SPARTAN CIR	VIM LN	E	AAC	2	407	36	14,652	5/7/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
1591	13154	QUICKSTEP CIR	SPARTAN CIR	CDS	E	AAC	2	182	32	7,624	5/7/24	95	100	0	0	Overlay - AC Fabric	12-01-2017

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1918	15049	SUNDANCER LN	REBEL CIR	VENTURE DR	E	AAC	2	506	36	18,216	5/7/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
2088	14403	VIM LN	SAGAMORE DR	AQUARIUS DR	E	AAC	2	257	36	9,252	5/7/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
2175	13841	WINSLOW DR	ALDEN LN	MAYFLOWER LN	E	AC	1	260	36	9,360	5/7/24	95	100	0	0	New Construction - Initial	01-01-1980
2129	13835	WELDE CIR	AULNAY LN	END	E	AC	1	397	36	15,542	5/8/24	95	100	0	0	New Construction - Initial	01-01-1980
463	13589	CLUBHOUSE LN	EDINGER AVE	ALLEY EDINGER AVE	E	AAC	3	161	36	5,796	5/9/24	95	100	0	0	Overlay - AC Structural	10-01-2016
570	13218	DAVENPORT DR	BEDFORD LN	SAYBROOK LN	E	AAC	2	537	60	32,220	5/10/24	95	100	0	0	Overlay - AC Structural	12-01-2017
570	15939	DAVENPORT DR	EDGEWATER LN	BEDFORD LN	E	AAC	2	871	60	52,260	5/10/24	95	100	0	0	Overlay - AC Structural	12-01-2017
1458	14870	ORION AVE	MARINA VIEW PL	SANDRA LEE LN	E	AAC	2	256	36	9,216	5/13/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
1624	13196	REMORA DR	BAY VIEW DR	INTREPID LN	E	AAC	2	103	28	2,884	5/13/24	95	100	0	0	Overlay - AC Fabric	12-01-2017
2306	60860	PLAZA LN	WARNER AVE	ACORN DR	E	AC	2	750	36	34,320	8/1/18	95	84	0	16	New Construction - AC	01-01-1980
329	14401	BUCKINGHAM DR	GRAHAM ST	DAN LN	E	AC	1	1,239	40	49,240	2/10/20	95	100	0	0	New Construction	01-01-1980
1923	13688	SUNNYCREST LN	ROYAL OAK DR	END	E	AC	1	334	36	14,024	2/10/20	95	100	0	0	New Construction - Initial	01-01-1980
368	13554	CANNA CIR	FORD DR	END	E	AAC	3	350	32	12,700	2/11/20	95	100	0	0	Overlay - AC Structural	10-01-2012
634	13556	DUELLO LN	NIMROD DR	SLATER AVE	E	AAC	3	314	36	11,304	2/11/20	95	100	0	0	Overlay - AC Structural	10-01-2012
1203	15817	LUCERO LN	NIMROD DR	SLATER AVE	E	AAC	3	314	32	10,048	2/11/20	95	100	0	0	Overlay - AC Structural	10-01-2012
2207	13560	SLATER AVE FRONTAGE RD	FLOWER LN	END	E	AAC	3	251	27	7,977	2/11/20	95	100	0	0	Overlay - AC Structural	10-01-2012
2145	15158	WHETMORE LN	CAPSTONE DR	SPICKARD DR	E	AC	3	950	36	36,700	2/11/20	95	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
1121	13310	LANGPORT CIR	GREENVIEW LN	END	E	AC	3	333	32	13,156	2/18/20	95	100	0	0	New Construction	01-01-1980
1667	15390	RONNEY DR	JOICE LN	BUSHARD ST	E	AC	8	344	36	13,134	2/18/20	95	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
572	15918	DAWSON LN	MC FADDEN AVE	SKYVIEW DR	E	AC	3	696	36	25,056	2/19/20	95	100	0	0	New Construction	01-01-1980
663	13868	EIRE CIR	TULLOW LN	END	E	AC	3	294	32	11,208	2/19/20	95	100	0	0	New Construction	01-01-1980
1286	13867	MEATH CIR	TULLOW LN	END	E	AC	3	294	32	11,208	2/19/20	95	100	0	0	New Construction	01-01-1980
2026	15021	TULLOW LN	STARSHINE DR	GLEN DR	E	AC	3	254	36	9,144	2/19/20	95	100	0	0	New Construction - Initial	01-01-1980
2086	14418	VILLA NUEVA DR	ALTAMIRANO LN	CARRANZA LN	E	AC	5	256	36	9,966	2/25/20	95	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
25	13775	ALEXANDRIA DR	EDWARDS ST	HANOVER LN	E	AC	1	536	36	19,008	2/26/20	95	100	0	0	New Construction	01-01-1980
25	15320	ALEXANDRIA DR	VICTORIA LN.	SUSSEX CIR	E	AC	1	536	36	19,796	2/26/20	95	100	0	0	New Construction	01-01-1980
25	15931	ALEXANDRIA DR	HANOVER LN	VICTORIA LN	E	AC	1	781	36	28,116	2/26/20	95	100	0	0	New Construction	01-01-1980
755	13799	FLINTRIDGE LN	CUMBERLAND DR	HALIFAX DR	E	AC	1	521	36	19,256	2/26/20	95	100	0	0	New Construction	01-01-1980
884	13777	HANOVER LN	ALEXANDRIA DR	END	E	AC	1	410	36	16,260	2/26/20	95	100	0	0	New Construction	01-01-1980
884	13781	HANOVER LN	ALEXANDRIA DR	OXFORD DR	E	AC	1	260	36	9,360	2/26/20	95	100	0	0	New Construction	01-01-1980
884	13782	HANOVER LN	OXFORD DR	PARIS CIR	E	AC	1	260	36	9,360	2/26/20	95	100	0	0	New Construction	01-01-1980
884	13783	HANOVER LN	HALIFAX DR	MELBOURNE DR	E	AC	1	260	36	9,072	2/26/20	95	100	0	0	New Construction	01-01-1980
1291	15928	MELBOURNE DR	HANOVER LN	VICTORIA LN	E	AC	1	780	36	28,080	2/26/20	95	100	0	0	New Construction	01-01-1980
1953	14932	TAMIKO CIR	PRICE DR	END	E	AC	5	385	36	15,360	3/9/20	95	100	0	0	New Construction - Initial	01-01-1980
1469	15201	PACEMONT DR	VESTRY CIR	FIELDBURY LN	E	AC	5	873	36	31,428	3/11/20	95	100	0	0	New Construction	01-01-1980
26	14948	ALFAWN CIR	SELKIRK DR	END	E	AC	5	102	36	5,172	3/12/20	95	100	0	0	New Construction	01-01-1980
186	14946	BANKTON DR	END	GAINSFORD LN	E	AC	5	146	36	5,256	3/12/20	95	100	0	0	New Construction	01-01-1980
186	15805	BANKTON DR	GAINSFORD LN	END	E	AC	5	424	36	17,264	3/12/20	95	100	0	0	New Construction	01-01-1980
236	14926	BERLARK CIR	SERENE DR	END	E	AC	5	424	36	17,064	3/12/20	95	100	0	0	New Construction	01-01-1980
277	13386	BOLTON CIR	WOODBORO DR	END	E	AC	5	136	36	6,396	3/12/20	95	100	0	0	New Construction - Initial	01-01-1980
364	14937	CANDLE CIR	GAINSFORD LN	END	E	AC	5	94	36	3,384	3/12/20	95	100	0	0	New Construction	01-01-1980
531	14934	CRESTMOOR LN	SERENE DR	WINDCROFT DR	E	AC	5	246	36	8,568	3/12/20	95	100	0	0	New Construction	01-01-1980
788	14945	GAINSFORD LN	BECK CIR	BANKTON DR	E	AC	5	305	36	10,692	3/12/20	95	100	0	0	New Construction	01-01-1980
1445	13387	OLDGLEN LN	LANCEFIELD DR	WOODBORO DR	E	AC	5	315	36	12,340	3/12/20	95	100	0	0	New Construction	01-01-1980
1775	13380	SELKIRK DR	DENVALE CIR	SHOREHAM LN	E	AC	5	258	36	9,012	3/12/20	95	100	0	0	New Construction	01-01-1980
196	14425	BARTON DR	KOLEDO LN	QUEENS LN	E	AAC	4	298	36	10,728	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
1047	13573	KEELSON LN	ALLEY SLATER AVE	SLATER AVE	E	AAC	4	150	36	5,400	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
1047	13574	KEELSON LN	KRISTIN CIR	END	E	AAC	4	107	38	5,266	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
1093	13575	KRISTIN CIR	KEELSON LN	END	E	AAC	4	197	34	6,698	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
1589	13572	QUEENS LN	ALLEY SLATER AVE	SLATER AVE	E	AAC	4	150	36	5,400	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
1589	14426	QUEENS LN	BARTON DR	ALLEY BARTON DR	E	AAC	4	158	36	5,688	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
2006	13725	TRANSISTOR LN	ENGINEER DR	MACHINE DR	E	AC	1	1,141	40	45,640	5/5/20	95	100	0	0	New Construction - Initial	01-01-1980
2102	13568	WAGON DR	NICHOLS ST	DAIRYVIEW CIR	E	AAC	4	181	36	6,516	5/5/20	95	100	0	0	Overlay - AC Structural	10-01-2012
5290	60440	10TH ST	PCH	END	E	AC	2	403	25	10,075	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5330	60500	14TH ST	PCH	PACIFIC N	E	AC	2	156	28	4,368	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5340	60520	15TH ST	PCH	PACIFIC N	E	AC	2	160	29	4,640	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5360	60550	17TH ST	PCH	PACIFIC N	E	AC	2	156	28	4,368	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5380	60590	19TH ST	PCH	END	E	AC	2	330	26	8,580	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5210	60360	3RD ST	PACIFIC S	END	E	AC	2	24	15	360	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
5260	60410	7TH ST	PCH	END	E	AC	2	264	23	6,072	5/6/20	95	95	0	5	New Construction - Initial	01-01-1980
5270	60430	8TH ST	PACIFIC S	END	E	AC	2	23	27	621	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5280	60450	9TH ST	PACIFIC S	END	E	AC	2	66	30	1,980	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
135	13727	APOLLO LN	ATLAS DR	THOR DR	E	AC	1	267	36	10,362	5/6/20	95	90	0	10	New Construction	01-01-1980
446	13753	CITADEL DR	STANFORD LN	COLUMBIA LN	E	AC	1	260	36	8,784	5/6/20	95	100	0	0	New Construction	01-01-1980
5010	60130	SOUTH PACIFIC	16TH ST	BROADWAY	E	AC	2	727	25	18,175	5/6/20	95	100	0	0	New Construction - Initial	01-01-1980
5300	60460	11TH ST	PACIFIC S	END	E	AC	2	64	31	1,984	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5330	60510	14TH ST	PACIFIC S	END	E	AC	2	90	30	2,700	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5340	60530	15TH ST	PACIFIC S	END	E	AC	2	80	22	1,760	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5350	60545	16TH ST	PACIFIC AVE N	END	E	AC	2	188	24	4,950	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5370	60580	18TH ST	PACIFIC S	END	E	AC	2	54	26	1,404	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5390	60610	20TH ST	PACIFIC S	END	E	AC	2	81	26	2,106	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
5440	60685	25TH ST	PACIFIC AVE N	END	E	AC	2	215	22	4,730	5/21/20	95	100	0	0	New Construction - Initial	01-01-1980
734	12997	FIFTEENTH ST	PECAN AVE	ACACIA AVE	E	AC	6	365	46	16,790	6/22/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
734	12998	FIFTEENTH ST	WALNUT AVE	OLIVE AVE	E	AC	6	365	46	16,790	6/22/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1387	13042	NEWFOUNDLAND CIR	PALM AVE	CDS	E	AC	6	195	36	9,045	6/22/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1403	13013	NINETEENTH ST	OLIVE AVE	ORANGE AVE	E	AC	6	395	46	18,170	6/23/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1446	12924	OLIVE AVE	MAIN ST	FIFTH ST	E	AC	6	310	36	10,195	6/23/21	95	100	0	0	Surface Treatment - Slurry Seal	05-03-2021
1130	12860	MAIN ST	SIXTH ST	ACACIA AVE	E	AAC	6	320	45	12,850	6/29/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1130	13046	MAIN ST	LOMA AVE	ADAMS AVE	E	AAC	6	349	30	3,468	6/29/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1130	13052	MAIN ST	ORANGE AVE	SIXTH ST	E	AAC	6	695	43	37,605	6/29/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1130	13053	MAIN ST	OLIVE AVE	ORANGE AVE	E	AAC	6	415	38	15,655	6/29/21	95	100	0	0	Overlay - AC Structural	06-01-2016
1130	13054	MAIN ST	PCH	OLIVE AVE	E	AAC	6	790	33	29,160	6/29/21	95	100	0	0	Overlay - AC Structural	06-01-2016
1130	13057	MAIN ST	CREST AVE	TWELTH ST	E	AAC	6	1,015	45	45,675	6/29/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1130	13059	MAIN ST	TWELTH ST	LOMA AVE	E	AAC	6	845	45	44,486	6/29/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
1130	17004	MAIN ST	ADAMS AVE	LOMA AVE	E	AAC	6	349	33	11,517	6/30/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
2032	13020	TWENTY-FIRST ST	PECAN AVE	ACACIA AVE	E	AC	6	410	46	18,860	6/30/21	95	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
240	14088	BROOKHURST ST	CUTTY SARK DR	FORRESTAL DR	E	AC	8	1,444	28	40,432	2/25/22	95	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
240	14616	BROOKHURST ST	CUTTY SARK DR	END	E	AC	8	116	26	3,016	2/25/22	95	100	0	0	New Construction	01-01-1980
2301	60780	HANSEN LN	PATCH DR	THOMPSON DR	E	AC	8	531	36	19,116	3/2/22	95	100	0	0	New Construction - AC	01-01-2015
2300	60770	PATCH DR	HANSEN LN	CDS	E	AC	8	550	36	20,842	3/2/22	95	100	0	0	New Construction - AC	01-01-2015
2303	60800	SNOWDON LN	PATCH DR	THOMPSON DR	E	AC	8	480	36	17,280	3/2/22	95	100	0	0	New Construction - AC	01-01-2015
2302	60790	THOMPSON DR	HANSEN LN	LAMB LN	E	AC	8	400	36	14,400	3/2/22	95	100	0	0	New Construction - AC	01-01-2015
2288	50320	ADAMS AVE FRONTAGE	RANGER LN	PICCADILLY LN	E	AC	8	479	25	11,975	3/3/22	95	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
493	14089	CONSTITUTION LN	BROOKHURST ST	BROOKHURST ST	E	AC	8	76	58	4,408	3/9/22	95	100	0	0	New Construction	01-01-1980
2183	15823	WOODLAWN DR	BUSHARD ST	TIBBETT LN	E	AC	8	1,199	36	42,943	3/9/22	95	100	0	0	Surface Treatment - Slurry Seal	02-08-2023
1360	14993	MUKAI CT	MADERA LN	CDS	E	AC	5	271	36	12,036	3/15/22	95	100	0	0	Surface Treatment - Slurry Seal	10-01-2012
522	13272	CRAIG LN	WALTON DR	LENNOX DR	E	AC	3	712	36	25,344	3/16/22	95	100	0	0	New Construction	01-01-1980
542	13262	CULPEPPER CIR	SILVERWOOD DR	CDS	E	AC	3	140	32	5,730	3/17/22	95	100	0	0	New Construction	01-01-1980
1016	13260	JERSEY CIR	NORMANDY LN	CDS	E	AC	3	238	32	8,866	3/17/22	95	100	0	0	New Construction	01-01-1980
1496	15136	PATRICIA LN	HEIL AVE	RUTH DR	E	AC	3	610	36	22,660	3/18/22	95	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1692	15819	SABOT LN	SUNLIGHT DR	HEIL AVE	E	AC	3	312	36	11,232	3/18/22	95	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1817	13491	SILVER LN	ALHAMBRA AVE	HEIL AVE	E	AC	4	165	36	5,940	3/18/22	95	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
940	14899	HILLSIDE CIR	LOS PATOS AVE	CDS	E	AC	2	80	25	2,000	3/22/22	95	100	0	0	New Construction	01-01-1980
1733	13177	SARATOGA LN	MEADOWLARK DR	CALIENTE DR	E	AC	2	860	36	32,460	3/23/22	95	76	0	24	New Construction	01-01-1980
1739	13167	SCENARIO DR	WAIKIKI LN	CDS	E	AC	2	535	36	20,760	3/24/22	95	100	0	0	New Construction	01-01-1980
647	14421	EASY LN	MIDWAY DR	CDS	E	AC	5	127	36	4,572	3/28/22	95	100	0	0	New Construction	01-01-1980
703	14601	GARFIELD AVE	SEAPOINT AVE	END	E	AC	5	788	26	20,488	3/28/22	95	100	0	0	New Construction - Initial	01-01-1980
1893	13632	STILL HARBOR LN	WINTERGREEN DR	KISER DR	E	AC	5	260	36	10,110	3/28/22	95	100	0	0	New Construction - Initial	01-01-1980
1407	14904	NORCON CIR	TILBURG DR	CDS	E	AC	5	128	36	5,858	3/29/22	95	100	0	0	New Construction	01-01-1980
25	15311	ALEXANDRIA DR	COLUMBIA LN	EDWARDS ST	E	AC	1	645	36	22,644	3/30/22	95	100	0	0	New Construction	01-01-1980
276	13729	BOLSA PARK LN	KIMBERLY DR	DUNDEE DR	E	AC	1	276	36	9,936	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
276	13736	BOLSA PARK LN	DUNDEE DR	CORNELL DR	E	AC	1	274	36	9,864	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
276	13737	BOLSA PARK LN	CORNELL DR.	TYNDALL DR	E	AC	1	274	36	9,864	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
276	13747	BOLSA PARK LN	TYNDALL DR	SHELLY DR	E	AC	1	274	36	9,576	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
276	13756	BOLSA PARK LN	SYDNEY DR	MEDFORD DR	E	AC	1	274	36	9,576	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
353	13833	CALVIN CIR	AULNAY LN	END	E	AC	1	396	36	15,506	3/30/22	95	100	0	0	New Construction	01-01-1980
378	13789	CAPRI CIR	MELBOURNE DR	END	E	AC	1	410	36	16,560	3/30/22	95	100	0	0	New Construction	01-01-1980
383	13875	CARLOW DR	BELFAST LN	DUNDALK LN	E	AC	3	264	36	9,216	3/30/22	95	100	0	0	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
481	13744	COLUMBIA LN	HARVARD CIR	CORNELL DR	E	AC	1	260	36	9,360	3/30/22	95	100	0	0	New Construction	01-01-1980
481	13751	COLUMBIA LN	BROWN CIR	CITADEL DR	E	AC	1	260	36	9,360	3/30/22	95	100	0	0	New Construction	01-01-1980
504	13873	CORK DR	WICKLOW LN	BELFAST LN	E	AC	3	260	36	9,072	3/30/22	95	100	0	0	New Construction	01-01-1980
618	13732	DOVER DR	CAPETOWN LN	KINGSTON LN	E	AC	1	270	36	10,220	3/30/22	95	100	0	0	New Construction	01-01-1980
638	15348	DUNDALK LN	SHANNON DR	END	E	AC	3	1,070	36	41,020	3/30/22	95	100	0	0	New Construction	01-01-1980
702	13778	ETON CIR	ALEXANDRIA DR	END	E	AC	1	410	36	16,260	3/30/22	95	100	0	0	New Construction	01-01-1980
757	13790	FLORENCE CIR	MELBOURNE DR	END	E	AC	1	410	36	16,560	3/30/22	95	100	0	0	New Construction	01-01-1980
824	13870	GLEN DR	WICKLOW LN	TULLOW LN	E	AC	3	258	36	9,000	3/30/22	95	100	0	0	New Construction	01-01-1980
824	15344	GLEN DR	DAWSON LN	WICKLOW LN	E	AC	3	1,287	36	46,044	3/30/22	95	100	0	0	New Construction	01-01-1980
877	15929	HALIFAX DR	HANOVER LN	VICTORIA LN	E	AC	1	780	36	27,792	3/30/22	95	100	0	0	New Construction	01-01-1980
946	13768	HOLIDAY LN	MEDFORD DR	MC FADDEN AVE	E	AC	1	179	36	6,444	3/30/22	95	100	0	0	New Construction	01-01-1980
1069	13734	KIMBERLY DR	CAPETOWN LN	KINGSTON LN	E	AC	1	270	36	10,470	3/30/22	95	100	0	0	New Construction	01-01-1980
1077	13733	KINGSTON LN	DOVER DR	KIMBERLY DR	E	AC	1	578	36	22,308	3/30/22	95	100	0	0	New Construction	01-01-1980
1168	15343	LIMERICK DR	WICKLOW LN	END	E	AC	3	557	36	21,552	3/30/22	95	100	0	0	New Construction	01-01-1980
1287	13767	MEDFORD DR	BAYSIDE LN	HOLIDAY LN	E	AC	1	523	36	19,578	3/30/22	95	100	0	0	New Construction	01-01-1980
1287	15315	MEDFORD DR	HOLIDAY LN	END	E	AC	1	540	36	20,940	3/30/22	95	100	0	0	New Construction	01-01-1980
1314	13834	MILTON CIR	AULNAY LN	END	E	AC	1	330	36	13,130	3/30/22	95	100	0	0	New Construction	01-01-1980
1421	13786	NOTTINGHAM LN	OXFORD DR	HALIFAX DR	E	AC	1	1,040	36	37,152	3/30/22	95	100	0	0	New Construction	01-01-1980
1466	13769	OXFORD DR	HANOVER LN	END	E	AC	1	433	36	15,588	3/30/22	95	100	0	0	New Construction	01-01-1980
1466	15930	OXFORD DR	HANOVER LN	VICTORIA LN	E	AC	1	781	36	28,116	3/30/22	95	100	0	0	New Construction	01-01-1980
1611	13860	RED COACH DR	WHITEOAK LN	WILD CHERRY CIR	E	AC	3	399	36	15,364	3/30/22	95	100	0	0	New Construction	01-01-1980
1611	15341	RED COACH DR	WILD CHERRY CIR	OAKSHIRE LN	E	AC	3	746	36	26,856	3/30/22	95	100	0	0	New Construction	01-01-1980
1665	13771	ROME CIR	HANOVER LN	END	E	AC	1	433	36	17,388	3/30/22	95	100	0	0	New Construction	01-01-1980
1705	13793	SALISBURY LN	MELBOURNE DR	MC FADDEN AVE	E	AC	1	512	36	18,144	3/30/22	95	100	0	0	New Construction	01-01-1980
1799	13885	SHERBECK LN	BREELAND DR	EDINGER AVE	E	AC	3	670	36	23,842	3/30/22	95	100	0	0	New Construction	01-01-1980
1799	15352	SHERBECK LN	SHANNON DR	BREELAND DR	E	AC	3	521	36	18,478	3/30/22	95	100	0	0	New Construction	01-01-1980
1847	13772	SORENTO CIR	HANOVER LN	END	E	AC	1	433	36	17,388	3/30/22	95	100	0	0	New Construction	01-01-1980
1885	15342	STARSHINE DR	EDWARDS ST	TULLOW LN	E	AC	3	412	36	14,544	3/30/22	95	100	0	0	New Construction	01-01-1980
1896	13831	STONE CIR	AULNAY LN	END	E	AC	1	397	36	15,542	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
2080	13776	VICTORIA LN	BOLSA AVE	ALEXANDRIA DR	E	AC	1	569	36	20,484	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
2149	16012	WHITEOAK LN	RED COACH DR	STARSHINE DR	E	AC	3	776	36	28,686	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
2197	13800	YORKSHIRE LN	BRUNSWICK DR	MELBOURNE DR	E	AC	1	228	36	8,208	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
2197	15321	YORKSHIRE LN	CUMBERLAND DR	BRUNSWICK DR	E	AC	1	552	36	19,872	3/30/22	95	100	0	0	New Construction - Initial	01-01-1980
649	14826	EDAM CIR	HAGUE LN	CDS	E	AC	4	89	40	4,810	3/31/22	95	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
1400	13520	NILE CIR	RHINE DR	CDS	E	AC	4	166	32	6,812	3/31/22	95	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
263	13883	BLUEBONNET DR	SUNBURST LN	GOLDENWEST ST	E	AC	3	182	36	6,552	4/1/22	95	100	0	0	New Construction	01-01-1980
308	13879	BRIARWOOD DR	DAWSON LN	SUNFLOWER LN	E	AC	3	257	36	8,676	4/1/22	95	100	0	0	New Construction	01-01-1980
409	13859	CAVAN CIR	CARRIE LN	END	E	AC	1	419	36	16,334	4/1/22	95	100	0	0	New Construction	01-01-1980
799	13877	GAS LIGHT DR	OAKSHIRE LN	DAWSON LN	E	AC	3	640	36	23,790	4/1/22	95	100	0	0	New Construction	01-01-1980
1189	13858	LONGFORD CIR	CARRIE LN	END	E	AC	1	419	36	16,334	4/1/22	95	100	0	0	New Construction	01-01-1980
1337	13882	MOONBEAM DR	SUNFLOWER LN	SUNBURST LN	E	AC	3	254	36	11,144	4/1/22	95	100	0	0	New Construction	01-01-1980
1429	13876	OAKSHIRE LN	RED COACH DR	GAS LIGHT DR	E	AC	3	253	36	10,108	4/1/22	95	100	0	0	New Construction	01-01-1980
1538	13865	PLACID CIR	RED COACH DR	END	E	AC	3	227	32	8,764	4/1/22	95	100	0	0	New Construction	01-01-1980
1611	13871	RED COACH DR	OAKSHIRE LN	DAWSON LN	E	AC	3	584	36	21,024	4/1/22	95	100	0	0	New Construction	01-01-1980
1915	13881	SUNBURST LN	MOONBEAM DR	BLUEBONNET DR	E	AC	3	365	36	14,140	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
1915	15349	SUNBURST LN	BLUEBONNET DR	END	E	AC	3	647	36	25,092	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
1920	15350	SUNFLOWER LN	CHESTNUT DR	MOONBEAM DR	E	AC	3	539	36	21,404	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
1943	15345	SWEETBRIAR LN	SKYVIEW DR	GLEN DR	E	AC	3	492	36	17,424	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
2158	13863	WILD CHERRY CIR	RED COACH DR	END	E	AC	3	227	32	8,764	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
2159	13864	WILD PLUM CIR	RED COACH DR	END	E	AC	3	227	32	9,064	4/1/22	95	100	0	0	New Construction - Initial	01-01-1980
292	15179	BRAEMAR DR	ORKNEY CIR	SKYE LN	E	AC	5	580	36	22,130	4/4/22	95	100	0	0	New Construction	01-01-1980
7	14072	ACCESSWAY	BUSHARD ST	BUSHARD ST FRONTAGE	E	AC	7	54	55	2,970	4/6/22	95	100	0	0	New Construction	01-01-1980
7	14445	ACCESSWAY	SHOREWOOD CIR	ADAMS AVE	E	AC	7	77	45	3,465	4/6/22	95	100	0	0	New Construction	01-01-1980
190	13619	BARDON LN	LA MANCHA CIR	CORSICAN DR	E	AC	3	269	36	10,434	4/7/22	95	100	0	0	New Construction	01-01-1980
161	13726	ATLAS DR	APOLLO LN	SABRE LN	E	AC	1	150	36	7,400	4/8/22	95	100	0	0	New Construction	01-01-1980
1693	13728	SABRE LN	ATLAS DR	BOLSA AVE	E	AC	1	224	36	8,814	4/8/22	95	100	0	0	New Construction	01-01-1980
1974	15306	THOR DR	SPRINGDALE ST	END	E	AC	1	624	36	24,264	4/8/22	95	100	0	0	New Construction - Initial	01-01-1980
204	14537	BAY VIEW DR	ALLEY BAY VIEW 2	ALLEY BAY VIEW 1	E	AC	2	233	27	6,291	4/9/22	95	50	0	50	New Construction	01-01-1980
414	14438	CHANNEL LN	BOUNTY CIR	ADMIRALTY DR	E	AC	2	376	32	11,832	4/9/22	95	82	0	18	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
645	13198	EASTER CIR	CHANNEL LN	CDS	E	AC	2	246	32	9,372	4/9/22	95	100	0	0	New Construction	01-01-1980
810	14676	GEORGIA ST	JOILET AVE	KNOXVILLE AVE	E	AC	6	330	37	11,988	8/15/23	95	100	0	0	New Construction	01-01-1980
969	14609	HUNTINGTON ST	PCH	PACIFIC VIEW	E	AAC	9	450	50	21,445	8/24/23	95	100	0	0	Overlay - AC Structural	07-01-2010
85	14246	ATLANTA AVE	END	BASTIA LN	E	AC	9	350	26	9,100	8/30/23	95	100	0	0	New Construction	01-01-1980
426	14324	CHELSEA LN	SABLE DR	ST AUGUSTINE DR	E	AC	9	253	36	9,108	8/30/23	95	100	0	0	New Construction	01-01-1980
853	14315	GREENBORO LN	MARTINIQUE DR	SABLE DR	E	AC	9	1,022	36	36,792	8/30/23	95	100	0	0	New Construction	01-01-1980
1260	14313	MARTINIQUE DR	WHITE HORSE LN	MIRAMAR LN	E	AC	9	253	36	9,108	8/30/23	95	100	0	0	New Construction	01-01-1980
1260	15537	MARTINIQUE DR	SHEPHERD LN	WHITE HORSE LN	E	AC	9	504	36	18,894	8/30/23	95	100	0	0	New Construction	01-01-1980
1691	14318	SABLE DR	SHEPHERD LN	CHELSEA LN	E	AC	9	117	36	4,962	8/30/23	95	100	0	0	New Construction	01-01-1980
1691	15539	SABLE DR	CHELSEA LN	MIRAMAR LN	E	AC	9	640	36	23,040	8/30/23	95	100	0	0	New Construction	01-01-1980
1760	14331	SEAFORTH LN	SANDY HOOK DR	HAMILTON AVE	E	AC	9	175	36	6,300	8/30/23	95	100	0	0	New Construction	01-01-1980
1760	15548	SEAFORTH LN	ST AUGUSTINE DR	SANDY HOOK DR	E	AC	9	1,025	36	36,900	8/30/23	95	100	0	0	New Construction	01-01-1980
1797	14314	SHEPHERD LN	MARTINIQUE DR	SABLE DR	E	AC	9	1,022	36	38,292	8/30/23	95	100	0	0	New Construction	01-01-1980
1925	14613	SUNRISE DR	SEABREEZE DR	BEACH BLVD	E	AC	9	380	22	11,181	8/30/23	95	100	0	0	New Construction - Initial	01-01-1980
2148	14316	WHITE HORSE LN	MARTINIQUE DR	SABLE DR	E	AC	9	1,022	36	36,792	8/30/23	95	90	0	10	New Construction - Initial	01-01-1980
703	13950	GARFIELD AVE	LINDSAY LN	END	E	AAC	7	423	26	10,998	3/5/24	95	100	0	0	Overlay - AC Structural	07-15-2021
1670	50260	SEVENTEENTH ST	MAIN ST	UTICA AVE	E	AC	0	170	25	4,250	3/13/24	95	100	0	0	New Construction - Initial	01-01-1980
1602	14485	RAMBLER DR	BUSHARD ST	OCEANVIEW LN	E	AC	9	167	36	5,724	3/26/24	95	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1961	14384	TEAKWOOD LN	ALOHA DR	BANNING AVE	E	AC	9	168	36	6,048	3/27/24	95	100	0	0	New Construction - Initial	01-01-1980
9	13117	ADAMS AVE	PARK ST	MAIN ST	E	AAC	0	365	37	13,505	4/3/24	95	100	0	0	Overlay - AC Structural	07-27-2022
9	13118	ADAMS AVE	LAKE ST	PARK ST	E	AAC	0	650	37	24,050	4/3/24	95	100	0	0	Overlay - AC Structural	07-27-2022
452	14748	CLAY AVE	HUNTINGTON ST	DELAWARE ST	E	AAC	7	660	36	23,760	4/9/24	95	100	0	0	Overlay - AC Structural	04-01-2017
452	14749	CLAY AVE	DELAWARE ST	SEVENTEENTH ST	E	AAC	7	242	36	8,712	4/9/24	95	100	0	0	Overlay - AC Structural	04-01-2017
452	14750	CLAY AVE	SEVENTEENTH ST	FLORIDA ST	E	AAC	7	418	36	15,048	4/9/24	95	100	0	0	Overlay - AC Structural	04-01-2017
1245	14520	MARBLEHEAD LN	BANNING AVE	PORT CLYDE DR	E	AC	9	167	36	6,012	4/17/24	95	100	0	0	Surface Treatment - Slurry Seal	05-11-2019
1379	14387	NEOLANI DR	ZAMORA LN	CDS	E	AC	9	235	32	9,320	4/24/24	95	100	0	0	New Construction	01-01-1980
1291	15927	MELBOURNE DR	VICTORIA LN	YORKSHIRE LN	E	AC	1	780	36	29,080	4/27/24	96	100	0	0	New Construction	01-01-1980
2306	60880	PLAZA LN	DOVERTON DR	HEIL AVE	E	AC	2	1,078	28	33,200	8/1/18	96	82	0	18	New Construction - AC	01-01-1980
1196	15897	LOTUS LN	PIONEER DR	ADAMS AVE	E	AC	7	803	36	29,808	2/18/20	96	67	0	33	Surface Treatment - Slurry Seal	07-15-2021
1737	15376	SAUSALITO LN	NAPLES DR	LORRAINE DR	E	AC	7	501	36	18,036	2/19/20	96	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
5420	60650	23RD ST	PACIFIC S	END	E	AC	2	27	22	594	5/21/20	96	100	0	0	New Construction - Initial	01-01-1980
1440	12852	OFELIA LN	MORNING TIDE DR	PALM AVE	E	AC	5	202	36	6,555	6/30/21	96	19	0	81	Surface Treatment - Slurry Seal	07-27-2022
653	12859	FIRST ST	PCH	END	E	AC	6	100	65	7,145	7/8/21	96	100	0	0	New Construction	01-01-1980
1505	15846	PECAN AVE	MAIN ST	LAKE ST	E	AC	6	265	36	9,540	7/8/21	96	100	0	0	Surface Treatment - Slurry Seal	05-03-2021
1305	15092	MIDDLECOFF DR	EAGLE LN	CLUBHOUSE LN	E	AC	3	1,087	36	39,132	3/23/22	96	90	0	10	New Construction	01-01-1980
513	13473	COTTONWOOD CIR	ETNA CIR	END	E	AC	4	570	36	25,020	5/13/24	96	100	0	0	New Construction	01-01-1980
2080	13787	VICTORIA LN	ALEXANDRIA DR	OXFORD DR	E	AC	1	260	36	9,072	4/27/24	97	60	0	40	New Construction - Initial	01-01-1980
2306	60870	PLAZA LN	ACORN DR	DOVERTON DR	E	AC	2	828	28	23,184	8/1/18	97	100	0	0	New Construction - AC	01-01-1980
258	14550	BUSHARD ST	NANTUCKET DR	HYANNIS PORT DR	E	AC	7	264	28	7,392	2/18/20	97	100	0	0	Surface Treatment - Slurry Seal	07-15-2021
2298	60750	LANDERS DR	SLAYBACK LN	WARDLOW LN	E	AC	7	262	36	9,432	2/18/20	97	80	0	20	New Construction - AC	01-01-2014
2297	60740	SLAYBACK LN	SHERIDAN DR	LANDERS DR	E	AC	7	277	36	9,972	2/18/20	97	70	0	30	New Construction - AC	01-01-2014
1184	13119	LOMA AVE	SAN NICHOLAS CIR	MAIN ST	E	AC	6	255	36	9,535	6/30/21	97	46	0	54	Surface Treatment - Slurry Seal	05-03-2021
2043	14720	UTICA AVE	MAIN ST	END	E	AC	6	185	36	6,660	7/8/21	97	100	0	0	Surface Treatment - Slurry Seal	06-01-2021
1249	15139	MARIE LN	PAULA CIR	MARILYN DR	E	AC	3	827	36	29,772	3/18/22	97	100	0	0	Surface Treatment - Slurry Seal	07-29-2020
212	17029	BEACH BLVD FRONTAGE	STERLING	TAYLOR	E	AAC	4	665	28	18,620	5/9/24	98	100	0	0	Overlay - AC Structural	04-01-2017
1932	17100	SURFDALE LN	GARDEN CIR	SILVERBEACH CIR	E	AC	5	700	36	25,200	5/6/24	98	100	0	0	Surface Treatment - Slurry Seal	11-28-2019
1130	17005	MAIN ST	SEVENTEENTH ST	ADAMS AVE	E	AAC	6	1,191	28	33,348	6/30/21	99	2	0	98	Surface Treatment - Slurry Seal	05-01-2021
2133	14437	WELLINGTON DR	MARIANA CIR	PEALE LN	E	AC	2	198	32	6,336	4/9/22	99	100	0	0	New Construction - Initial	01-01-1980
148	13182	ARLINGTON LN	MEADOWLARD DR	CALIENTE DR	E	AAC	2	863	36	31,068	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
208	13183	BAYSHORE LN	MEADOWLARK DR	CALIENTE DR	E	AAC	2	863	36	31,068	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
250	13236	BIRDIE LN	MANGUM DR	LITTLER DR	E	AAC	3	260	36	9,360	10/1/16	100	0	0	0	Overlay - AC Structural	10-01-2016
250	13245	BIRDIE LN	VENTURI DR	MIDDLECOFF DR	E	AAC	3	520	36	18,720	10/1/16	100	0	0	0	Overlay - AC Structural	10-01-2016
250	15084	BIRDIE LN	LITTLER DR	VENTURI DR	E	AAC	3	1,014	36	36,504	10/1/16	100	0	0	0	Overlay - AC Structural	10-01-2016
348	13181	CALIENTE DR	SANTA ANITA LN	DEL MAR LN	E	AAC	2	260	36	9,360	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
348	13588	CALIENTE DR	BAYSHORE LN	HOLLYWOOD LN	E	AAC	2	265	36	10,040	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
348	15052	CALIENTE DR	SARATOGA LN	SANTA ANITA LN	E	AAC	2	520	36	19,220	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
348	15053	CALIENTE DR	DEL MAR LN	BAYSHORE LN	E	AAC	2	532	36	19,152	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
429	13585	CHERYL DR	TOMAS LN	SANDRA LN	E	AAC	2	740	36	27,390	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
571	13143	DAVIS LN	HENDRICKSEN DR	SISSON DR	E	AAC	2	849	36	32,064	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
836	13178	GOLDEN GATE LN	MEADOWLARK DR	CALIENTE DR	E	AAC	2	863	36	31,068	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
921	15028	HENDRICKSEN DR	SCHYER LN	DAVIS LN	E	AAC	2	1,025	36	38,400	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1166	13129	LILES LN	EDINGER AVE	ALLEY EDINGER AVE	E	AAC	2	158	36	5,688	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1166	13130	LILES LN	ALLEY EDINGER AVE	HENDRICKSEN DR	E	AAC	2	144	36	5,184	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1170	13135	LINDA CIR	TOMAS LN	END	E	AAC	2	470	36	18,720	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1284	15934	MEADOWLARK DR	SARATOGA LN	DEL MAR LN	E	AAC	2	783	36	28,688	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1284	15935	MEADOWLARK DR	DEL MAR LN	GRAHAM ST	E	AAC	2	1,024	36	36,864	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1725	13584	SANDRA LN	AUDREY DR	CHERYL DR	E	AAC	2	569	36	21,234	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1743	13142	SCHRYER LN	HENDRICKSEN DR	SISSON DR	E	AAC	2	849	36	30,564	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1824	15038	SISSON DR	BOLSA CHICA ST	WARREN LN	E	AAC	2	1,195	36	43,020	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1824	15039	SISSON DR	WARREN LN	DAVIS LN	E	AAC	2	1,286	36	47,046	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1991	13140	TOMAS LN	CHERYL DR	SISSON DR	E	AAC	2	268	36	9,648	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
1991	15032	TOMAS LN	AUDREY DR	CHERYL DR	E	AAC	2	533	36	19,938	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
2114	15027	WARREN LN	EDINGER AVE	AUDREY DR	E	AAC	2	300	36	10,800	10/1/16	100	0	0	0	Overlay - AC Fabric	10-01-2016
419	13296	CHARLENE CIR	GREEN ST	CDS	E	AAC	2	273	36	11,078	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
852	14983	GREEN ST	HEIL AVE	RUDDER DR	E	AAC	2	589	36	21,204	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
852	15019	GREEN ST	WARNER AVE	KING CIR	E	AAC	2	505	36	18,180	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
852	15780	GREEN ST	KING CIR	LOS PATOS AVE	E	AAC	2	821	36	29,556	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
852	15815	GREEN ST	RUDDER DR	PEARCE ST	E	AAC	2	747	36	26,892	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
926	14878	HERMANSON CIR	LYNN ST	CDS	E	AAC	2	407	36	16,152	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
958	13295	HOSKINS ST	PEARCE ST	MILO ST	E	AAC	2	660	36	23,760	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
958	14860	HOSKINS ST	MILO ST	WARNER AVE	E	AAC	2	660	36	23,760	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
1072	14869	KING CIR	ALLEY GREEN ST	GREEN ST	E	AAC	2	187	36	9,232	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1141	14961	LE GRAND LN	HEIL AVE	PRAIRE DR	E	AAC	2	664	36	25,570	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
1213	13606	LYNN ST	PRAIRIE DR	PEARCE ST	E	AAC	2	660	36	24,750	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1213	15018	LYNN ST	WARNER AVE	JAMES CIR	E	AAC	2	505	36	18,180	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1213	15786	LYNN ST	JAMES CIR	LOS PATOS AVE	E	AAC	2	821	36	27,056	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1252	15020	MARINA VIEW PL	ORION AVE	LOS PATOS AVE	E	AAC	2	686	36	24,696	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1313	13612	MILO ST	HOSKINS ST	GREEN ST	E	AAC	2	330	36	11,664	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
1425	13153	OAHU DR	WAIKIKI LN	BOLSA CHICA ST	E	AAC	2	670	36	24,120	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
1458	15769	ORION AVE	SANDRA LEE LN	SIMS ST	E	AAC	2	330	36	11,592	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1561	15113	PRAIRIE DR	ALLEY LE GRAND LN	LYNN ST	E	AAC	2	786	36	29,276	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1723	14897	SANDRA LEE LN	ORION AVE	LOS PATOS AVE	E	AAC	2	662	36	23,832	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1723	15764	SANDRA LEE LN	ORION AVE	CDS	E	AAC	2	441	36	17,376	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
1764	14888	SEAPINE CIR	GREEN ST	CDS	E	AAC	2	347	36	13,992	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
1822	14898	SIMS ST	STELLRECHT CIR	LOS PATOS AVE	E	AAC	2	561	36	20,196	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
2103	15035	WAIKIKI LN	KONA DR	HILO CIR	E	AAC	2	272	36	9,792	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
2103	15041	WAIKIKI LN	HILO CIR	SCENARIO DR	E	AAC	2	816	36	29,376	12/1/17	100	0	0	0	Overlay - AC Structural	12-01-2017
2120	14543	WATERWAY CIR	HEIL AVE	CDS	E	AAC	2	446	34	16,414	12/1/17	100	0	0	0	Overlay - AC Fabric	12-01-2017
165	14362	AUGUSTA CIR	PEPPERTREE DR	CDS	E	AAC	8	334	32	12,188	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
675	14258	ELIZABETH LN	ELLSWORTH DR	CARROLTOWN DR	E	AAC	9	902	36	32,472	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
883	14389	HANAKAI LN	NEOLANI DR	MALAHINE DR	E	AAC	9	752	36	27,822	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
892	14271	HARCOURT CIR	BROOKSIDE LN	CDS	E	AAC	9	252	32	9,864	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
1325	15574	MOKIHANA DR	IMPALA LN	ALLEY BUSHARD ST	E	AAC	9	990	36	35,640	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
1515	14359	PEPPERTREE DR	PINETREE LN	AUGUSTA CIR	E	AAC	8	250	36	9,750	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
1515	15562	PEPPERTREE DR	LEMONTREE LN	SPYGLASS LN	E	AAC	8	496	36	18,606	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
1530	15560	PINETREE LN	CHEVY CHASE DR	PEPPERTREE DR	E	AAC	8	836	36	31,596	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
2119	14360	WATERFRONT DR	BUSHARD ST	PINETREE LN	E	AAC	8	169	36	5,796	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
2202	14390	ZAMORA LN	NEOLANI DR	KEOKI CIR	E	AAC	9	251	36	9,036	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
2202	15575	ZAMORA LN	KEOKI CIR	MOKIHANA DR	E	AAC	9	761	36	27,396	5/11/18	100	0	0	0	Overlay - AC Structural	05-11-2018
142	14480	ARCHER CIR	CLEARBROOK DR	CDS	E	AAC	9	415	36	16,440	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
178	14511	BALBOA CIR	MOLOKAI DR	CDS	E	AAC	9	313	32	11,516	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
205	14498	BAYBREEZE DR	SUMMERWIND LN	BROOKHURST ST	E	AAC	9	237	44	9,628	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
213	14487	BEACHSIDE DR	SEACREST LN	SEASIDE LN	E	AAC	9	257	36	10,252	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
295	14478	BRANTA CIR	LANDFALL DR	CDS	E	AAC	9	472	36	19,492	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
372	15623	CAPE MAY LN	STONINGTON CIR	JONESPORT LN	E	AAC	9	546	36	19,656	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
438	15606	CHRISTINE DR	SUSAN LN	ISLANDER LN	E	AAC	9	532	36	19,152	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
438	15607	CHRISTINE DR	ISLANDER LN	CDS	E	AAC	9	760	36	28,860	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
453	15597	CLEARBROOK DR	ARCHER CIR	CDS	E	AAC	9	593	36	23,148	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
601	14477	DIRIGO CIR	LANDFALL DR	CDS	E	AAC	9	472	36	18,492	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
761	14519	FOLKSTONE CIR	HARWICH LN	CDS	E	AAC	9	139	32	4,448	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
802	15612	GATESHEAD DR	HARWICH LN	BUSHARD ST	E	AAC	9	721	36	25,956	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
890	15605	HARBORBREEZE LN	SHOEBREEZE DR	SUMMERWIND LN	E	AAC	9	770	36	29,720	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
907	15613	HARWICH LN	GATESHEAD DR	WALLINGFORD LN	E	AAC	9	816	36	30,126	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
933	14489	HIGHTIDE DR	OCEANVIEW LN	SEACREST LN	E	AAC	9	258	36	10,288	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
933	14491	HIGHTIDE DR	SUMMER CIR	VACATION LN	E	AAC	9	254	36	10,144	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
933	15600	HIGHTIDE DR	SEACREST LN	SUMMER CIR	E	AAC	9	511	36	18,396	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
934	14475	HILARIA CIR	LANDFALL DR.	CDS	E	AAC	9	472	36	18,492	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
994	14505	ISLANDER LN	PLAYA DR	CHRISTINE DR	E	AAC	9	695	36	26,020	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1099	14508	LA JOLLA CIR	MALIBU LN	CDS	E	AAC	9	331	32	12,092	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1107	14502	LAGUNA CIR	CHRISTINE DR	CDS	E	AAC	9	243	36	10,248	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1114	14516	LANAI CIR	LUAU LN	CDS	E	AAC	9	345	32	12,540	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1228	14530	MALIBU LN	TAHITI CIR	LEILANI DR	E	AAC	9	275	36	10,650	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1228	15608	MALIBU LN	BANNING AVE	TAHITI CIR	E	AAC	9	944	36	33,984	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1326	14507	MOLOKAI DR	MALIBU LN	CATALINA CIR	E	AAC	9	252	36	9,072	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1326	14513	MOLOKAI DR	NEWPORT CIR	BUSHARD ST	E	AAC	9	322	36	11,592	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1326	15609	MOLOKAI DR	CATALINA CIR	NEWPORT CIR	E	AAC	9	520	36	18,720	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1393	14512	NEWPORT CIR	MOLOKAI DR	CDS	E	AAC	9	313	32	11,516	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1435	14494	OCEANCREST DR	SUMMERWIND LN	CDS	E	AAC	9	130	34	5,920	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1435	15602	OCEANCREST DR	SUMMERWIND LN	CDS	E	AAC	9	775	34	28,150	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1654	14484	ROCK POINT DR	OCEANVIEW LN	SEASIDE LN	E	AAC	9	515	36	19,290	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1759	14488	SEACREST LN	BEACHSIDE DR	HIGHTIDE DR	E	AAC	9	773	36	28,578	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1768	14483	SEASIDE LN	LANDFALL DR	ROCK POINT DR	E	AAC	9	656	36	23,328	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1768	15599	SEASIDE LN	ROCK POINT DR	HIGHTIDE DR	E	AAC	9	1,026	36	36,936	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1808	14496	SHOREBREEZE DR	HARBORBREEZE LN	OCEANBREEZE LN	E	AAC	9	262	36	10,182	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1872	14481	ST JOHN LN	HAMILTON AVE	CLEARBROOK DR	E	AAC	9	525	36	19,650	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1899	14542	STONINGTON CIR	CAPE MAY LN	CDS	E	AAC	9	118	32	5,276	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1907	14490	SUMMER CIR	HIGHTIDE DR	CDS	E	AAC	9	307	32	11,324	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1949	14509	TAHITI CIR	MALIBU LN	CDS	E	AAC	9	266	32	10,012	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1978	14495	TIDE LN	HIGHTIDE DR	BANNING AVE	E	AAC	9	167	36	6,012	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1983	14515	TIKI CIR	LUAU LN	CDS	E	AAC	9	345	32	12,540	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
2106	14518	WALLINGFORD LN	GATESHEAD DR	HARWICH LN	E	AAC	9	696	36	25,806	5/11/19	100	0	0	0	Overlay - AC Structural	05-11-2019
1043	13911	KATHERINE DR	CAROLYN LN	LISTER LN	E	AAC	7	236	36	9,436	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1160	14805	LIBERTY AVE	JACQUELYN LN	ALLEY LIBERTY AVE	E	AAC	4	155	36	5,580	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1160	14806	LIBERTY AVE	ALLEY LIBERTY AVE	BEACH BLVD	E	AAC	4	1,331	36	47,916	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1160	15732	LIBERTY AVE	CRABB LN	JACQUELYN LN	E	AAC	4	325	36	11,700	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1302	14790	METZLER LN	SLATER AVE	BELVA DR	E	AAC	4	1,319	40	52,760	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1348	14810	MORGAN LN	SLATER AVE	SPEER AVE	E	AAC	4	661	36	23,796	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1856	15015	SPEER AVE	MORGAN LN	BEACH BLVD	E	AAC	4	1,320	26	33,940	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
1856	15733	SPEER AVE	CRABB LN	MORGAN LN	E	AAC	4	479	36	17,244	11/1/19	100	0	0	0	Overlay - AC Structural	11-01-2019
388	13910	CAROLYN LN	KATHERINE DR	CDS	E	AAC	7	382	36	14,732	11/21/19	100	0	0	0	Overlay - AC Structural	11-21-2019
1173	13654	LISA LN	TAYLOR DR	FORELLE DR	E	AAC	4	533	33	17,325	11/21/19	100	0	0	0	Overlay - AC Structural	11-21-2019
1233	13940	MANDEVILLE DR	DALEHURST CIR	SUMMERFIELD LN	E	AAC	7	401	36	15,414	11/21/19	100	0	0	0	Overlay - AC Structural	11-21-2019
21	14765	ALBERTA DR	HUNTINGTON ST	MANITOBA LN	E	AAC	4	574	36	20,076	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
136	15720	APPLEBY DR	CARNABY LN	HUNTINGTON ST	E	AAC	4	519	36	19,684	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
192	14793	BARON CIR	TALBERT AVE	CDS	E	AAC	4	603	36	23,208	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
215	13890	BEACON HILL LN	SUMMIT DR	LAWN HAVEN DR	E	AAC	5	219	36	6,684	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
241	13934	BETHEL CIR	BRIDGEPORT DR	CDS	E	AAC	7	315	32	13,728	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
310	15968	BRIDGEPORT DR	NEWHAVEN LN	NEWLAND ST	E	AAC	7	517	36	18,612	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
316	14607	BRITTANY LN	BENJAMIN DR	EL ARROYO DR	E	AAC	4	251	36	9,036	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
317	13925	BRIXHAM CIR	WEYMOUTH LN	CDS	E	AAC	7	142	32	7,956	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
360	14794	CAMERON ST	SLATER AVE	NEWMAN AVE	E	AAC	4	1,322	36	43,592	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
377	13919	CAPITOL CIR	GRANT DR	CDS	E	AAC	7	107	31	6,467	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
387	14770	CARNABY LN	DANTON CIR	APPLEBY DR	E	AAC	4	722	36	26,992	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
387	15721	CARNABY LN	TAYLOR DR	DANTON CIR	E	AAC	4	529	36	19,044	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
415	14968	CHAPEL LN	ELLIS AVE	MODALE DR	E	AAC	7	1,288	36	46,848	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
452	15024	CLAY AVE	HOLLY ST	RANCH LN	E	AAC	7	1,321	36	47,556	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
456	14738	CLEVELAND DR	HUNTINGTON ST	CDS	E	AAC	7	330	32	10,560	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
469	14744	COENSON CIR	CLAY AVE	CDS	E	AAC	7	394	34	15,396	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
472	15917	COLCHESTER LN	GARFIELD AVE	DARTMOOR DR	E	AAC	7	1,033	36	37,188	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
489	13920	CONGRESS CIR	GRANT DR	CDS	E	AAC	7	107	31	6,467	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
491	14967	CONSTANTINE DR	HOYT CIR	LISTER LN	E	AAC	7	826	36	29,736	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
491	15363	CONSTANTINE DR	BEACH BLVD	HOYT CIR	E	AAC	7	660	36	23,760	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
517	13893	COUNTRY CIR	EVENING HILL DR	CDS	E	AAC	5	203	36	9,308	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
534	14969	CRIMSON CIR	FLAGSTAFF LN	CDS	E	AAC	7	692	36	30,112	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
555	13939	DALEHURST CIR	MANDEVILLE DR	CDS	E	AAC	7	145	36	10,326	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
563	14775	DANTON CIR	CARNABY LN	CDS	E	AAC	4	122	32	5,404	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
565	13933	DAREN CIR	HAMDEN LN	CDS	E	AAC	7	198	32	10,197	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
568	15366	DARTMOOR DR	SHERBORNE LN	CDS	E	AAC	7	540	36	23,749	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
576	13938	DEAUVILLE DR	COLCHESTER LN	SUMMERFIELD LN	E	AAC	7	898	36	33,488	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
590	15914	DEMION LN	ELLIS AVE	CDS	E	AAC	7	1,216	36	47,121	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
694	14778	ENTERPRISE LN	PRODAN DR	MOUNTJOY DR	E	AAC	4	1,030	40	42,700	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
705	13891	EVENING HILL DR	LAWN HAVEN DR	HARBOR KEY CIR	E	AAC	5	272	36	9,792	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
705	15355	EVENING HILL DR	HARBOR KEY CIR	MANOR POINT CIR	E	AAC	5	500	36	18,000	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
718	15367	FALMOUTH DR	WORCHESTER LN	SHERBORNE LN	E	AAC	7	530	36	21,398	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
747	15913	FLAGSTAFF LN	MODALE DR	CDS	E	AAC	7	1,269	36	48,717	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
765	15283	FORELLE DR	GOODWIN LN	SPRINGTIME LN	E	AAC	4	570	37	20,490	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
765	15284	FORELLE DR	PATTERSON LN	GOODWIN LN	E	AAC	4	612	37	22,348	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
771	14773	FOX CIR	STEEP LN	CDS	E	AAC	4	126	18	2,518	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
775	14772	FRANKLIN DR	DELAWARE ST	CDS	E	AAC	4	507	36	18,502	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
800	14771	GASPE CIR	APPLEBY DR	CDS	E	AAC	4	458	36	17,988	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
801	13894	GATE HILL CIR	EVENING HILL DR	CDS	E	AAC	5	313	36	14,518	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
811	14802	GERALDINE LN	SLATER AVE	ROSANNA DR	E	AAC	4	511	36	19,146	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
821	13643	GLADYS AVE	WHARTON ST	HARTLUND ST	E	AAC	4	387	33	13,371	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
851	13907	GRAZIADIO DR	BEACH BLVD	LIBRA CIR	E	AAC	7	512	36	17,412	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
889	13892	HARBOR KEY CIR	EVENING HILL DR	CDS	E	AAC	5	195	32	8,240	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
893	13929	HARDING LN	HAMDEN LN	GRANT DR	E	AAC	7	314	37	11,618	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
893	15967	HARDING LN	GRANT DR	YORKTOWN AVE	E	AAC	7	1,076	37	39,812	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
904	13637	HARTLUND ST	TALBERT AVE	ALLEY TALBERT AVE	E	AAC	4	175	34	5,814	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
904	15274	HARTLUND ST	ALLEY TALBERT AVE	MAGIC CIR	E	AAC	4	437	34	14,858	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
904	15276	HARTLUND ST	MAGIC CIR	LE CONTE DR	E	AAC	4	832	34	28,288	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
914	13921	HAYES CIR	HARDING LN	CDS	E	AAC	7	520	37	22,860	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
962	14990	HOYT CIR	LINDENWOOD DR	CONSTANTINE DR	E	AAC	7	330	36	11,880	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	14736	HUNTINGTON ST	GARFIELD AVE	CLAY AVE	E	AAC	7	1,320	36	47,520	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	14737	HUNTINGTON ST	YORKTOWN AVE	SEVENTEENTH ST	E	AAC	7	317	36	11,412	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	14768	HUNTINGTON ST	TAYLOR DR	ONTARIO DR	E	AAC	4	260	36	9,360	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	14769	HUNTINGTON ST	ONTARIO DR	QUEBEC CIR	E	AAC	4	267	36	9,612	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	15006	HUNTINGTON ST	MAIN ST	CDS	E	AAC	4	593	42	26,156	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	15709	HUNTINGTON ST	SEVENTEENTH ST	CLAY AVE	E	AAC	7	1,105	36	39,780	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	15718	HUNTINGTON ST	QUEBEC CIR	ALBERTA DR	E	AAC	4	258	36	9,288	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
969	15719	HUNTINGTON ST	ALBERTA DR	ELLIS AVE	E	AAC	4	537	36	19,332	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1005	14751	JANA CIR	FLORIDA ST	CDS	E	AAC	7	190	33	6,270	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1010	14800	JEFFERSON LN	SLATER AVE	MICHAEL DR	E	AAC	4	530	36	18,080	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1071	13644	KINER AVE	WHARTON ST	HARTLUND ST	E	AAC	4	387	33	13,371	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1071	13651	KINER AVE	GLEADA LN	LISA LN	E	AAC	4	854	33	28,682	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1071	17030	KINER AVE	HARTLUND ST	CDS	E	AAC	4	126	33	3,894	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1076	13914	KINGSPORT DR	FLAGSTAFF LN	NEWLAND ST	E	AAC	7	176	33	4,848	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1102	13657	LA PALMA DR	PATTERSON LN	CDS	E	AAC	4	281	32	10,492	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1138	15353	LAWN HAVEN DR	EVENING HILL DR	CDS	E	AAC	5	226	32	9,032	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1140	15281	LE CONTE DR	HARTLUND ST	CDS	E	AAC	4	460	36	18,060	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1161	15362	LIBRA CIR	CDS	CDS	E	AAC	7	529	34	20,870	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1173	13649	LISA LN	STERLING DR	CDS	E	AAC	4	124	33	3,828	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1173	15278	LISA LN	STERLING AVE	TAYLOR DR	E	AAC	4	659	33	21,483	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1174	15364	LISTER LN	MODALE DR	GARFIELD AVE	E	AAC	7	1,440	36	51,840	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1238	15717	MANITOBA LN	ONTARIO DR	ALBERTA DR	E	AAC	4	561	36	20,196	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1239	13895	MANOR POINT CIR	EVENING HILL DR	CDS	E	AAC	5	354	36	14,744	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1309	13937	MILFORD CIR	NEWLAND ST	CDS	E	AAC	7	311	32	13,912	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1359	14777	MOUNTJOY DR	GOTHARD ST	ENTERPRISE LN	E	AAC	4	439	40	18,310	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1389	13930	NEWHAVEN LN	HAMDEN LN	BRIDGEPORT DR	E	AAC	7	370	36	13,320	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1391	15013	NEWMAN AVE	BEACH BLVD	CDS	E	AAC	4	1,330	36	47,880	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1450	14763	ONTARIO DR	CARNABY LN	HUNTINGTON ST	E	AAC	4	483	36	17,100	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1450	15716	ONTARIO DR	HUNTINGTON ST	DELAWARE ST	E	AAC	4	888	36	31,680	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1464	14743	OWEN AVE	FLORIDA ST	BEACH BLVD	E	AAC	7	660	36	23,760	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1482	14762	PAMMY LN	TAYLOR DR	FRANKLIN DR	E	AAC	4	1,000	36	35,712	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1497	15285	PATTERSON LN	FORELLE DR	CDS	E	AAC	4	252	32	9,564	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1497	15862	PATTERSON LN	FORELLE DR	ELLIS AVE	E	AAC	4	665	32	21,024	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1509	13646	PEMBERCO CIR	STERLING AVE	CDS	E	AAC	4	130	32	5,660	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1546	13923	POLK CIR	HARDING LN	CDS	E	AAC	7	524	37	23,008	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1567	13916	PRESTWICK CIR	COLSHESTER LN	CDS	E	AAC	7	250	32	11,850	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1588	14764	QUEBEC DR	HUNTINGTON ST	MANITOBA LN	E	AAC	4	617	36	21,924	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1615	14781	REDONDO CIR	TALBERT AVE	KOVACS LN	E	AAC	4	718	40	28,720	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1650	13653	ROBERTA CIR	TAYLOR DR	CDS	E	AAC	4	232	32	8,924	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1677	15731	ROXANNE LN	ROSANNA DR	CDS	E	AAC	4	333	32	12,456	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1732	13641	SANTANA CIR	GULF LN	CDS	E	AAC	4	233	32	8,956	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1783	13897	SHADY HARBOR CIR	EVENING HILL DR	CDS	E	AAC	5	416	36	16,976	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1784	14755	SHAFFER CIR	FLORIDA ST	CDS	E	AAC	4	184	34	6,256	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1800	13918	SHERBORNE LN	DARTMOOR DR	FALMOUTH DR	E	AAC	7	254	36	11,462	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1816	15358	SILVER BEACH CIR	SUMMER BREEZE LN	CDS	E	AAC	5	564	36	22,104	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1837	13908	SMOKEWOOD CIR	CONSTANTINE DR	CDS	E	AAC	7	273	34	9,282	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1861	13912	SPRING CIR	FLAGSTAFF LN	CDS	E	AAC	7	401	32	17,088	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1891	14753	STEWART ST	ERNEST AVE	GARFIELD AVE	E	AAC	4	1,055	40	42,200	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1921	13913	SUNKIST CIR	FLAGSTAFF LN	CDS	E	AAC	7	231	32	11,192	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1960	15280	TAYLOR DR	BEACH BLVD	LISA LN	E	AAC	4	1,115	32	35,424	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
1960	15813	TAYLOR DR	DELAWARE ST	BEACH BLVD	E	AAC	4	1,188	36	42,180	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2004	13640	TRADEWIND CIR	GULF LN	CDS	E	AAC	4	233	32	8,956	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2050	13909	VALLEY CIR	GARFIELD AVE	CDS	E	AAC	7	549	34	19,916	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2135	13926	WENLOCK CIR	WORCHESTER LN	CDS	E	AAC	7	116	31	7,008	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2142	15916	WEYMOUTH LN	FALMOUTH DR	BURNHAM CIR	E	AAC	7	926	36	33,336	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2143	15277	WHARTON ST	GLADYS AVE	KINER AVE	E	AAC	4	864	33	29,512	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2147	13924	WHITBURN CIR	WEYMOUTH LN	CDS	E	AAC	7	150	32	8,212	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2190	13927	WORCHESTER LN	WENLOCK CIR	YORKTOWN AVE	E	AAC	7	174	36	6,264	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
2190	15368	WORCHESTER LN	FALMOUTH DR	WENLOCK CIR	E	AAC	7	1,180	36	43,639	11/28/19	100	0	0	0	Overlay - AC Structural	11-28-2019
234	14606	BENJAMIN DR	BRITTANY LN	NEWLAND ST	E	AAC	4	483	36	17,388	12/5/19	100	0	0	0	Overlay - AC Structural	12-05-2019
1451	14804	OPAL CIR	VAN BUREN ST	CDS	E	AAC	4	190	32	7,580	12/5/19	100	0	0	0	Overlay - AC Structural	12-05-2019
1671	14803	ROSANNA DR	GERALDINE LN	ROXANNE LN	E	AAC	4	288	36	11,118	12/6/19	100	0	0	0	Overlay - AC Structural	12-06-2019
24	13494	ALDRICH ST	PARKSIDE LN	BEACH BLVD	E	AAC	4	665	36	23,940	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
122	14822	AMSTERDAM DR	HAGUE LN	VAN DYKE LN	E	AAC	4	358	36	13,388	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
122	15741	AMSTERDAM DR	ROTTERDAM LN	HAGUE LN	E	AAC	4	353	36	12,708	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
150	14835	ARNETT DR	ALLEY NEWLAND ST	NEWLAND ST	E	AAC	4	160	36	5,760	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
150	14836	ARNETT DR	NEWLAND ST	LUCIA LN	E	AAC	4	522	36	19,292	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
150	15752	ARNETT DR	GLENHAVEN LN	ALLEY NEWLAND ST	E	AAC	4	621	36	22,606	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
193	13502	BARTLETT LN	MADDOX DR	ALLEY NORMA DR	E	AAC	3	682	36	24,552	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
193	13503	BARTLETT LN	ALLEY NORMA DR	NORMA DR	E	AAC	3	105	36	3,780	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
268	13602	BLUESAILS DR	BRIDGE LN	MOONGLOW LN	E	AAC	3	995	36	37,320	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
286	13604	BOUQUET DR	SERENADE LN	MAGELLAN LN	E	AAC	3	260	36	10,110	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
290	13334	BRAD DR	EDWARDS ST	COOPER LN	E	AAC	3	530	36	19,080	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
309	13601	BRIDGE LN	BLUESAILS DR	STONEWOOD DR	E	AAC	3	260	36	10,110	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
328	14847	BRYANT DR	MONROE LN	CDS	E	AAC	4	380	32	13,410	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
328	14848	BRYANT DR	IRBY LN	MONROE LN	E	AAC	4	1,115	36	40,140	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
365	13477	CANDLELIGHT CIR	WISHINGWELL LN	CDS	E	AAC	3	486	36	19,296	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
382	13346	CARLA CIR	MARIE LN	CDS	E	AAC	3	229	36	11,544	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
395	15209	CASCADE LN	SHASTA LN	END	E	AAC	4	1,373	36	49,284	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
441	14605	CHRYSLER CIR	VIEWPORT LN	BEACH BLVD	E	AAC	4	530	60	31,800	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
510	13511	CORSICAN DR	GOTHARD ST	ALLEY BARDON LN	E	AAC	3	258	36	9,288	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
510	15233	CORSICAN DR	ALLEY BARDON LN	CDS	E	AAC	3	330	36	13,380	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
557	14957	DAMASK DR	VIEWPOINT LN	BEACH BLVD	E	AAC	4	537	36	19,832	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
577	13339	DEBRA CIR	MARILYN DR	CDS	E	AAC	3	316	36	12,926	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
600	13341	DIANE LN	SYLVIA DR	MARILYN DR	E	AAC	3	547	36	20,392	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
676	13512	ELK CIR	LILAC LN	CDS	E	AAC	3	237	32	9,834	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
701	13472	ETNA CIR	RUSHMOOR LN	COTTONWOOD CIR	E	AAC	4	156	32	5,892	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
706	13471	EVEREST CIR	RUSHMOOR LN	END	E	AAC	4	368	32	15,376	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
729	13544	FERGUSON CIR	ROSS LN	CDS	E	AAC	4	244	32	9,058	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
783	14812	FRIESLAND DR	ROTTERDAM LN	ZEIDER LN	E	AAC	4	898	36	32,328	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
783	14813	FRIESLAND DR	MARKEN LN	ROTTERDAM LN	E	AAC	4	660	36	24,010	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
783	15735	FRIESLAND DR	ZEIDER LN	NEWLAND ST	E	AAC	4	291	36	10,476	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
822	13539	GLASGOW CIR	BRESSEL LN	CDS	E	AAC	4	420	32	14,690	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
845	15745	GRANADA LN	BLAYLOCK DR	VALENCIA DR	E	AAC	4	530	36	19,330	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
4030	50200	HART CIR	BRUSH DR	CDS	E	AAC	4	425	35	16,120	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
908	13540	HASTINGS CIR	ROSS LN	CDS	E	AAC	4	244	32	9,058	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
825	13482	HEIL AVE	CDS	SABOT LN	E	AAC	3	654	26	17,004	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
825	13483	HEIL AVE	SABOT LN	CDS	E	AAC	3	355	26	9,126	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
927	13519	HERMIT CIR	VANTAGE DR	CDS	E	AAC	4	131	32	5,692	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
931	14858	HIGGINS CIR	BRUSH DR	CDS	E	AAC	4	424	32	14,818	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
960	13534	HOWARD CIR	LUCIA LN	CDS	E	AAC	4	420	32	14,690	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
989	15753	IRBY LN	LAMBERT DR	ARNETT DR	E	AAC	4	727	36	26,172	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
989	15754	IRBY LN	HEIL AVE	BRUSH DR	E	AAC	4	526	36	18,936	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
989	15755	IRBY LN	BRUSH DR	LAMBERT DR	E	AAC	4	524	36	18,864	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1010	15730	JEFFERSON LN	GUILDER DR	SLATER AVE	E	AAC	4	920	36	33,370	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1011	14838	JEFFREY CIR	TERRY DR	CDS	E	AAC	4	197	32	7,554	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1058	13547	KENT CIR	ROSS LN	CDS	E	AAC	4	199	32	7,618	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1100	13509	LA MANCHA CIR	ALLEY BARDON LN	CDS	E	AAC	3	258	36	11,538	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1100	13510	LA MANCHA CIR	BARDON LN	ALLEY BARDON LN	E	AAC	3	136	36	4,896	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1103	15229	LA PAZ DR	MALAGA LN	ALLEY VILLA YORBA	E	AAC	4	219	36	9,368	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1113	14845	LAMBERT DR	MONROE LN	CDS	E	AAC	4	380	32	13,410	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1113	14846	LAMBERT DR	MONROE LN	IRBY LN	E	AAC	4	1,116	36	40,176	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1116	15758	LANCASTER DR	HERITAGE LN	MONTCLAIR LN	E	AAC	4	788	36	28,718	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1143	14844	LEAFWOOD CIR	TERRY DR	CDS	E	AAC	4	520	36	19,975	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1152	13343	LENIS CIR	MARIE LN	CDS	E	AAC	3	229	36	9,844	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1165	15235	LILAC LN	TOULOUSE DR	ELK CIR	E	AAC	3	280	36	10,830	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1167	13349	LIMELIGHT CIR	SUN DR	CDS	E	AAC	3	220	36	9,920	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1181	13526	LOIRE CIR	RHINE DR	CDS	E	AAC	4	465	36	18,240	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1191	13484	LORGE CIR	GOTHARD ST	END	E	AAC	3	404	36	16,044	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1204	13536	LUCIA LN	HEIL AVE	LOIS CIR	E	AAC	4	161	36	5,796	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1204	13537	LUCIA LN	HOWARD CIR	ARNETT DR	E	AAC	4	298	36	10,728	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1204	15246	LUCIA LN	LOIS CIR	JUDY CIR	E	AAC	4	512	36	18,432	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1204	15247	LUCIA LN	JUDY CIR	HOWARD CIR	E	AAC	4	797	36	28,692	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1225	15228	MALAGA LN	SAN ANGELO DR	LA PAZ DR	E	AAC	4	819	36	31,234	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1250	13336	MARILYN DR	COOPER LN	CDS	E	AAC	3	428	36	17,008	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1250	15133	MARILYN DR	DIANE LN	COOPER LN	E	AAC	3	919	36	33,084	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1250	15995	MARILYN DR	DIANE LN	CDS	E	AAC	3	1,071	36	40,056	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1256	14815	MARKEN LN	HOLLAND DR	SLATER AVE	E	AAC	4	660	36	23,760	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1256	15736	MARKEN LN	FRIESLAND DR	HOLLAND DR	E	AAC	4	520	36	18,970	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1299	13538	MERLE CIR	BRESSEL LN	CDS	E	AAC	4	420	36	16,620	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1329	14852	MONROE LN	HEIL AVE	BRUSH DR	E	AAC	4	526	36	18,936	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1329	15864	MONROE LN	BRUSH DR	TERRY DR	E	AAC	4	786	36	28,296	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1332	14840	MONTCLAIR LN	TERRY DR	LANCASTER DR	E	AAC	4	465	36	16,990	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1340	13603	MOONGLOW LN	BLUESAILS DR	STONEWOOD DR	E	AAC	3	260	36	10,860	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1363	14859	MURDY CIR	GOTHARD ST	CDS	E	AAC	3	435	36	17,460	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1498	13345	PAULA CIR	MARIE LN	CDS	E	AAC	3	229	36	9,844	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1560	14854	POTTER CIR	BRUSH DR	CDS	E	AAC	4	424	32	14,818	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1635	13528	RHINE CIR	RHINE DR	CDS	E	AAC	4	129	32	5,628	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1638	15222	RHONE LN	KIM LN	HEIL AVE	E	AAC	4	1,062	36	38,232	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1673	13549	ROSS LN	HEIL AVE	HASTINGS CIR	E	AAC	4	159	36	5,724	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1673	15249	ROSS LN	HASTINGS CIR	ROYER CIR	E	AAC	4	516	36	18,576	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1673	15250	ROSS LN	ROYER CIR	ROYAL DR	E	AAC	4	615	36	22,140	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1673	15251	ROSS LN	ROYAL DR	SALEM CIR	E	AAC	4	414	36	14,904	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1673	15252	ROSS LN	SALEM CIR	WARNER AVE	E	AAC	4	936	36	33,696	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1675	14820	ROTTERDAM DR	VALENCIA DR	FRIESLAND DR	E	AAC	4	261	36	9,396	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1675	15738	ROTTERDAM DR	WARNER AVE	VALENCIA DR	E	AAC	4	1,200	36	43,200	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1692	13500	SABOT LN	HEIL AVE	ALLEY HEIL AVE	E	AAC	3	165	36	5,940	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1692	13501	SABOT LN	ALLEY HEIL AVE	MADDOX DR	E	AAC	3	365	36	13,140	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1703	13546	SALEM CIR	ROSS LN	CDS	E	AAC	4	199	32	7,618	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1712	15227	SAN ANGELO DR	MALAGA LN	ALLEY SAN ANGELO DR	E	AAC	4	227	36	9,922	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1734	14834	SARU CIR	MINORU LN	ALLEY SARU CIR	E	AAC	4	223	22	5,406	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1738	13550	SAVOY CIR	LANDAU LN	CDS	E	AAC	4	270	36	10,970	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1746	14841	SCOTSDALE CIR	LANCASTER DR	CDS	E	AAC	4	213	32	8,066	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1750	13617	SCULPIN DR	SUN DR	WARNER AVE	E	AAC	3	199	36	7,164	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1777	15216	SERENADE LN	STONEWOOD DR	SUNLIGHT DR	E	AAC	3	1,300	36	46,800	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1798	13485	SHER LN	EDINGER AVE	ALLEY VOLGA DR	E	AAC	4	670	36	24,120	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1798	15218	SHER LN	ALLEY VOLGA DR	ALLEY AMAZON DR	E	AAC	4	308	36	11,088	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1798	15219	SHER LN	ALLEY AMAZON DR	ALLEY RHONE LN	E	AAC	4	308	36	11,088	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1798	15220	SHER LN	ALLEY RHONE LN	JULIETTE LOW DR	E	AAC	4	660	36	23,560	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1817	15272	SILVER LN	JULIETTE LOW DR	ALHAMBRA AVE	E	AAC	4	530	36	19,080	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1821	15138	SIMMONE LN	SYLVIA DR	CDS	E	AAC	3	758	36	28,658	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1870	14842	ST CLOUD CIR	LANCASTER DR	CDS	E	AAC	4	213	32	8,066	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1882	14963	STARK ST	PARKSIDE LN	BEACH BLVD	E	AAC	4	660	36	23,760	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1882	9002	STARK ST	BEACH BLVD	MALAGA LN	E	AAC	4	738	78	56,064	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1883	13478	STARLIGHT CIR	WISHINGWELL LN	CDS	E	AAC	3	486	36	19,296	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1898	13474	STONEWOOD DR	GOLDENWEST ST	BRIDGE LN	E	AAC	3	180	36	6,480	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1898	15214	STONEWOOD DR	BRIDGE LN	MOONGLOW LN	E	AAC	3	995	36	36,570	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1904	15213	SUGAR AVE	SHASTA LN	MC FADDEN AVE	E	AAC	4	678	32	21,696	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1913	15140	SUN DR	COD CIR	LIMELIGHT CIR	E	AAC	3	350	36	12,600	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1952	15751	TAMARU DR	MINORU LN	NEWLAND ST	E	AAC	4	505	36	18,180	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
1968	14995	TERRY DR	BEACH BLVD	LEAFWOOD CIR	E	AAC	4	445	36	16,020	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
1968	9001	TERRY DR	VIEWPOINT LN	BEACH BLVD	E	AAC	4	530	40	21,200	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2001	15234	TOULOUSE DR	ALLEY GOTHARD ST	CDS	E	AAC	3	378	36	16,908	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2001	15236	TOULOUSE DR	GOTHARD ST	ALLEY GOTHARD ST	E	AAC	3	151	36	5,436	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2014	14857	TRIPP CIR	BRUSH DR	CDS	E	AAC	4	424	32	14,818	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2046	14821	VALENCIA DR	HAGUE LN	CDS	E	AAC	4	553	36	21,158	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2046	15739	VALENCIA DR	GRANADA LN	ROTTERDAM LN	E	AAC	4	1,020	36	36,970	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2046	15740	VALENCIA DR	ROTTERDAM LN	HAGUE LN	E	AAC	4	535	36	19,260	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2047	13480	VALENTINE DR	GOLDENWEST ST	WISHINGWELL LN	E	AAC	3	671	36	24,156	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2056	15239	VANTAGE DR	RHONE LN	CDS	E	AAC	4	682	36	27,052	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2069	13344	VERLENE CIR	MARIE LN	CDS	E	AAC	3	229	36	9,934	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2078	13548	VICEROY CIR	ROSS LN	CDS	E	AAC	4	205	32	7,810	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2101	13541	WAGERS CIR	ROSS LN	CDS	E	AAC	4	244	32	9,058	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2104	14853	WAITE LN	HEIL AVE	BRUSH DR	E	AAC	4	526	36	19,436	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2110	13340	WANDA CIR	MARILYN DR	END	E	AAC	3	320	36	13,070	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2144	14856	WHEELER CIR	BRUSH DR	CDS	E	AAC	4	424	32	14,818	7/29/20	100	0	0	0	Overlay - AC Fabric	07-29-2020
2178	13475	WISHINGWELL LN	STONEWOOD DR	CANDLELIGHT CIR	E	AAC	3	260	36	9,360	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2178	13476	WISHINGWELL LN	VALENTINE DR	SUNLIGHT DR	E	AAC	3	260	36	9,360	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
2178	15215	WISHINGWELL LN	CANDLELIGHT CIR	VALENTINE DR	E	AAC	3	780	36	28,080	7/29/20	100	0	0	0	Overlay - AC Structural	07-29-2020
735	16028	FIFTH ST	PCH	WALNUT AVE	E	PCC	6	365	34	9,835	6/22/21	100	100	0	0	New Construction - Initial	01-01-1980
355	13905	CAMBRIA COVE CIR	GOLDENWEST ST	CDS	E	AC	5	205	36	8,973	6/30/21	100	100	0	0	Surface Treatment - Slurry Seal	07-27-2022
2121	13941	WAVE CIR	PLUM TREE LN	CDS	E	AAC	7	434	32	15,138	7/14/21	100	0	0	0	Overlay - AC Structural	07-14-2021
2288	17019	ADAMS AVE FRONTAGE	MARINA LN	BUSHARD ST FRONTAGE	E	AAC	7	1,050	28	29,400	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2288	17023	ADAMS AVE FRONTAGE	SHOREWOOD CIR	HAPPY ISLE LN	E	AAC	7	260	28	7,280	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2288	50340	ADAMS AVE FRONTAGE	BUSHARD ST FRONTAGE	GLOUCESTER LN	E	AAC	7	506	30	15,180	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2288	50350	ADAMS AVE FRONTAGE	GLOUCESTER LN	CHESAPEAKE LN	E	AAC	7	530	30	15,900	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2288	50360	ADAMS AVE FRONTAGE	ISTHMUS LN	FELCLIFF LN	E	AAC	7	674	30	20,220	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
13	14120	AFTON CIR	CDS	VINTAGE LN	E	AAC	7	435	32	15,720	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
107	15887	ALLPORT LN	MARVALE DR	CDS	E	AAC	7	798	36	30,978	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
121	14147	AMBY DR	BRENTSTONE LN	MANSARD LN	E	AAC	7	254	36	9,144	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
159	14141	ASTOR LN	MIDBURY DR	GALLANT DR	E	AAC	7	252	36	9,822	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
176	15469	BAINFORD DR	MANSARD LN	CDS	E	AAC	7	446	32	16,272	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
207	13955	BAYONNE DR	CDS	LOMBARDY LN	E	AAC	7	586	34	21,174	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
207	13957	BAYONNE DR	LOMBARDY LN	CDS	E	AAC	7	220	32	8,540	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
211	15384	BAYWOOD DR	PISMO LN	CORALWOOD LN	E	AAC	7	1,130	36	40,930	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
256	13981	BLANE CIR	JOICE LN	CDS	E	AAC	8	245	32	9,640	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
270	14172	BLUFFWATER CIR	COASTLAND DR	CDS	E	AAC	7	226	32	8,732	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
273	14040	BOISE DR	SACRAMENTO LN	PHOENIX LN	E	AAC	7	253	36	9,608	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
284	14049	BOSUN CIR	WESTWINDS LN	CDS	E	AAC	7	232	36	9,602	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
297	14047	BREAKERS DR	TRIDENT LN	WESTWINDS LN	E	AAC	7	492	36	17,712	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
258	15428	BUSHARD ST	CAPE COD DR	ADAMS AVE	E	AAC	7	1,334	28	37,352	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2294	14158	BUSHARD ST FRONTAGE	ADAM AVE FRONTAGE	NAUTILUS DR	E	AAC	7	809	28	22,652	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
361	15888	CAMFIELD LN	LARTHORN DR	CHARFORD DR	E	AAC	7	867	36	31,212	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
366	15476	CANDLEWOOD DR	RAMONA LN	DEERVALE LN	E	AAC	7	960	36	34,560	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
370	15965	CAPE COD DR	WATERBURY LN	BUSHARD ST	E	AAC	7	1,066	36	39,126	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
417	14146	CHARFORD DR	IVES LN	BRENTSTONE LN	E	AAC	7	391	36	14,826	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
458	15381	CLIFFSIDE DR	BAYWATER LN	NORTHSTAR LN	E	AAC	7	1,126	36	41,036	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
461	14056	CLIPPER DR	WESTWINDS LN	MAGNOLIA ST	E	AAC	7	180	36	6,480	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
461	15419	CLIPPER DR	ISTHMUS LN	WESTWINDS LN	E	AAC	7	752	36	27,072	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
465	15479	COASTLAND DR	TIDELAND LN	BUSHARD ST	E	AAC	7	403	36	14,508	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
528	14067	CRAWFORD CIR	LOTUS LN	CDS	E	AAC	7	382	36	15,252	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
536	14143	CROFT LN	GALLANT DR	BURLCREST DR	E	AAC	7	254	36	9,144	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
541	15458	CROWN REFF LN	PRINCESS CIR	MASTERS DR	E	AAC	7	763	36	27,468	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
541	16023	CROWN REFF LN	FELCLIFF LN	PRINCESS CIR	E	AAC	7	584	36	21,024	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
607	14053	DOLPHIN DR	ESTUARY LN	TRIDENT LN	E	AAC	7	520	36	19,470	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
607	15417	DOLPHIN DR	TOPEKA LN	ESTUARY LN	E	AAC	7	781	36	28,116	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
625	14136	DREW CIR	TRUXTON DR	CDS	E	AAC	7	413	32	14,716	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
646	14166	EASTWOOD CIR	HAZELBROOK DR	CDS	E	AAC	7	496	36	19,356	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
673	13953	ELGIN CIR	LINDSAY LN	CDS	E	AAC	7	419	36	16,334	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
684	14066	ELVA CIR	RUMSEY LN	CDS	E	AAC	7	161	36	8,346	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
723	14148	FAUST CIR	DENSMORE LN	CDS	E	AAC	7	91	42	4,822	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
750	14128	FLAX CIR	MASTERS DR	CDS	E	AAC	7	105	26	2,730	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
773	13949	FRANCISCAN CIR	HOMESTEAD LN	CDS	E	AAC	7	279	36	11,294	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
793	14142	GALLANT DR	ASTOR LN	SWANSEA LN	E	AAC	7	255	36	9,180	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
793	15465	GALLANT DR	TRANQUIL LN	ASTOR LN	E	AAC	7	741	36	27,426	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
804	14054	GEMFALL LN	DOLPHIN DR	DOREMERE DR	E	AAC	7	258	36	9,288	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
834	15833	GLOUCESTER LN	CAPE COD DR	END	E	AAC	7	1,414	36	50,904	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
841	14139	GOTHIC CIR	BELLSHIRE DR	CDS	E	AAC	7	456	32	16,092	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
863	14070	GROTON DR	CHESAPEAKE LN	POTOMAC LN	E	AAC	7	270	36	10,720	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
870	15471	GUSS DR	HARBOR ISLE LN	CDS	E	AAC	7	550	32	19,950	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
913	14121	HAXTON CIR	VINTAGE LN	CDS	E	AAC	7	435	32	15,420	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
916	13970	HEATHERTON CIR	RANDI LN	CDS	E	AAC	8	400	32	14,600	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
918	14042	HELENA CIR	ANCHORAGE DR	END	E	AAC	7	341	36	13,526	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
951	15910	HOMESTEAD LN	LUSS DR	END	E	AAC	7	732	32	24,674	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
955	13958	HOPEBAY LN	CLIFFSIDE DR	SAILPORT DR	E	AAC	7	250	36	9,000	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
973	15385	HYDE PARK DR	MAGNOLIA ST	HICKORY LN	E	AAC	8	1,162	36	42,832	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
995	15418	ISTHMUS LN	CUTTER DR	ADAMS AVE	E	AAC	7	1,113	36	40,568	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
996	14149	IVES LN	CHARFORD DR	INDIANAPOLIS AVE	E	AAC	7	170	36	6,120	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1042	13982	KAREN CIR	JOICE LN	CDS	E	AAC	8	246	32	9,672	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1046	13944	KEEL DR	YACHT LN	LOOKOUT LN	E	AAC	7	461	36	16,596	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
3100	20100	KELSO DR	NEWLAND ST	VINTAGE DR	E	AAC	7	490	36	18,390	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1053	14252	KELVINGROVE LN	INDIANAPOLIS AVE	COLBREGGAN DR	E	AAC	9	371	32	11,872	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1115	13951	LANARK CIR	LINDSAY LN	CDS	E	AAC	7	419	36	16,334	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1129	15421	LARKPORT DR	BRIARLY LN	FELCLIFF LN	E	AAC	7	1,027	36	36,972	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1132	16024	LARTHORN DR	NORCROFT LN	MEANDER LN	E	AAC	7	1,236	36	45,246	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1134	13952	LAUDER CIR	LINDSAY LN	CDS	E	AAC	7	419	36	16,334	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1172	15909	LINDSAY LN	GARFIELD AVE	LUSS DR	E	AAC	7	998	36	36,178	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1209	15378	LUSS DR	LINDSAY LN	CDS	E	AAC	7	949	36	35,414	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2287	17016	MAGNOLIA ST FRONTAGE	PIONEER DR	GETTYSBURG DR	E	AAC	7	260	26	6,760	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2287	17017	MAGNOLIA ST FRONTAGE	SUNSHINE DR	VILLAGE DR	E	AAC	7	655	26	17,030	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1262	14133	MARVALE DR	ALLPORT LN	CAMFIELD LN	E	AAC	7	737	36	27,282	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1269	13976	MATTHEW CIR	LITCHFIELD DR	CDS	E	AAC	8	510	36	20,160	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1276	15460	MAYPORT LN	ADAMS AVE	MIDBURY DR	E	AAC	7	746	36	26,856	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1280	15386	MC LAREN LN	BRABHAM DR	CDS	E	AAC	8	759	36	29,124	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1304	15461	MIDBURY DR	TRANQUIL LN	ASTOR LN	E	AAC	7	732	36	27,102	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1346	13972	MOORPARK DR	SEAHURST DR	MC LAREN LN	E	AAC	8	180	36	6,480	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1357	14060	MOSSFORD DR	BRIARLY LN	FELCLIFF LN	E	AAC	7	1,027	36	36,972	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1362	14140	MURAL CIR	BELLSHIRE DR	CDS	E	AAC	7	449	32	15,868	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1372	15375	NAPLES DR	NEWLAND ST	LOOKOUT LN	E	AAC	7	641	36	23,326	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1384	14132	NEWBY LN	MASTERS DR	LARTHORN DR	E	AAC	7	238	36	9,318	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1408	15456	NORCROFT LN	KELSO DR	LARTHORN DR	E	AAC	7	534	36	19,974	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1419	13962	NORTHSTAR LN	CLIFFSIDE DR	SAILPORT DR	E	AAC	7	253	36	9,358	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1467	14122	OXLEY CIR	VINTAGE LN	CDS	E	AAC	7	435	32	15,420	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1478	13954	PALERMO DR	CDS	LOMBARDY LN	E	AAC	7	585	32	19,970	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1478	13956	PALERMO DR	LOMBARDY LN	CDS	E	AAC	7	221	32	8,322	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1520	15412	PHOENIX LN	PIERRE DR	BOISE DR	E	AAC	7	757	36	27,752	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1524	14039	PIERRE DR	SACRAMENTO LN	PHOENIX LN	E	AAC	7	253	36	9,358	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1535	15966	PISMO LN	CRESCENT DR	BAYWOOD DR	E	AAC	7	498	36	17,928	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1550	14160	PORT CIR	ADAMS AVE FRONTAGE	CDS	E	AAC	7	559	36	21,624	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1557	14448	PORTSMOUTH DR	WATERBURY LN	BUSHARD ST	E	AAC	7	1,068	36	38,448	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1559	15426	POTOMAC LN	CAPE COD DR	ADAMS AVE	E	AAC	7	1,336	36	48,096	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1603	14163	RAMONA LN	CANDLEWOOD DR	HAZELBROOK DR	E	AAC	7	743	36	26,748	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1604	15908	RANDI LN	GARFIELD AVE	HYDE PARK DR	E	AAC	8	995	34	33,830	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1608	14137	RATH CIR	MEANDER LN	CDS	E	AAC	7	76	63	6,288	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1618	14135	REGAL CIR	TRUXTON DR	CDS	E	AAC	7	411	32	13,152	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1661	14063	RODERICK LN	VERONICA DR	MADELINE DR	E	AAC	7	828	36	30,558	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1684	14065	RUMSEY LN	WARFIELD DR	ELVA CIR	E	AAC	7	311	36	11,946	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1694	15971	SACRAMENTO LN	SALT LAKE DR	BOISE DR	E	AAC	7	1,021	36	37,256	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1708	14037	SALT LAKE DR	TOPEKA LN	CDS	E	AAC	7	231	36	9,566	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1708	15411	SALT LAKE DR	SACRAMENTO LN	TOPEKA LN	E	AAC	7	537	36	19,582	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1720	14064	SANDERSON LN	WARFIELD DR	MADELINE DR	E	AAC	7	568	36	21,198	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1762	13967	SEAHURST DR	CORALWOOD LN	MAGNOLIA AVE	E	AAC	7	182	33	5,276	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1769	13965	SEASPRAY DR	PISMO LN	SAILWIND LN	E	AAC	7	872	36	31,642	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1802	13968	SHERRY CIR	RANDI LN	CDS	E	AAC	8	330	32	12,360	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1807	14044	SHORE CIR	WESTWINDS LN	CDS	E	AAC	7	232	36	8,352	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1828	14051	SKIFF CIR	WESTWINDS LN	CDS	E	AAC	7	232	36	9,602	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1901	14156	STRATHCONA DR	KELVINGROVE LN	HARBOR ISLE LN	E	AAC	7	243	36	9,498	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
1996	13945	TOPSIDE CIR	LOOKOUT LN	CDS	E	AAC	7	543	32	17,376	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2005	15459	TRANQUIL LN	ADAMS AVE	GALLANT DR	E	AAC	7	990	36	36,390	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2008	14123	TREASURE CIR	ADAMS AVE	CDS	E	AAC	7	116	34	5,444	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2022	15886	TRUXTON DR	ALLPORT LN	CAMFIELD LN	E	AAC	7	764	36	27,504	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2045	14134	VAIL DR	NEWLAND ST	ALLPORT LN	E	AAC	7	173	36	6,228	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2067	14169	VENUS CIR	CLOUDHAVEN DR	CDS	E	AAC	7	342	32	12,444	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2071	15422	VERONICA DR	RODERICK LN	OCCIDENTAL LN	E	AAC	7	941	36	35,376	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2141	14052	WESTWINDS LN	SKIFF CIR	CLIPPER DR	E	AAC	7	260	36	9,360	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2150	13943	WHITESAILS DR	YACHT LN	CDS	E	AAC	7	439	32	15,298	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2171	13942	WINDLASS DR	YACHT LN	PLUM TREE LN	E	AAC	7	366	36	13,426	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
2193	15373	YACHT LN	WINDLASS DR	KEEL DR	E	AAC	7	509	36	18,574	7/15/21	100	0	0	0	Overlay - AC Structural	07-15-2021
672	12970	ELEVENTH ST	PCH	WALNUT AVE	E	AAC	6	345	47	16,215	12/17/21	100	0	0	0	Overlay - AC Fabric	12-17-2021
672	12971	ELEVENTH ST	WALNUT AVE	OLIVE AVE	E	AAC	6	390	47	18,330	12/17/21	100	0	0	0	Overlay - AC Fabric	12-17-2021
672	12973	ELEVENTH ST	ACACIA AVE	PALM AVE	E	AAC	6	390	46	17,940	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1184	13121	LOMA AVE	LAKE ST	PARK ST	E	AAC	6	590	37	21,830	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1446	13107	OLIVE AVE	SEVENTEENTH ST	NINETEENTH ST	E	AAC	6	610	36	21,960	12/17/21	100	0	0	0	Overlay - AC Fabric	12-17-2021
1385	13110	PALM AVE	FOURTEENTH ST	SEVENTEENTH ST	E	AAC	6	955	40	38,200	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1488	13099	PARK ST	TWELTH ST	THIRTEENTH ST	E	AAC	6	450	36	16,200	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1772	13067	SECOND ST	PCH	WALNUT AVE	E	AAC	6	355	36	12,780	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1972	12979	THIRTEENTH ST	ACACIA AVE	PALM AVE	E	AAC	6	390	46	17,940	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1972	12985	THIRTEENTH ST	CREST AVE	MAIN ST	E	AAC	6	465	42	19,530	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
1972	13123	THIRTEENTH ST	PARK ST	LAKE ST	E	AAC	6	625	37	23,125	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1972	50000	THIRTEENTH ST	MAIN ST	PARK ST	E	AAC	6	350	37	12,950	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
2030	12977	TWELFTH ST	PECAN AVE	ACACIA AVE	E	AAC	6	375	46	17,250	12/17/21	100	0	0	0	Overlay - AC Fabric	12-17-2021
2030	13083	TWELFTH ST	MAIN ST	LAKE ST	E	AAC	6	885	47	41,595	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
2032	13022	TWENTY-FIRST ST	PCH	WALNUT AVE	E	AAC	6	370	50	18,500	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
2033	13026	TWENTY-SECOND ST	WALNUT AVE	OLIVE AVE	E	AAC	6	395	46	18,860	12/17/21	100	0	0	0	Overlay - AC Structural	12-17-2021
5	12882	ACACIA AVE	PECAN AVE	SEVENTH ST	E	AAC	6	315	35	11,025	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
14	15859	AHSANTE DR	DELAWARE ST	ALSUNA LN	E	AAC	6	285	36	11,517	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
16	15675	ALABAMA ST	SPRINGFIELD AVE	UTICA AVE	E	AAC	6	660	36	23,625	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
16	15676	ALABAMA ST	ADAMS AVE	SPRINGFIELD AVE	E	AAC	6	618	35	22,355	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
112	15704	ALSUNA LN	ARIANA CIR	AHSANTE DR	E	AAC	6	500	36	18,250	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
112	15858	ALSUNA LN	AHSANTE DR	UTICA AVE	E	AAC	6	565	36	20,340	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
114	15860	ALTAMAR DR	ALSUNA LN	FLORIDA ST	E	AAC	6	293	36	11,348	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
147	14729	ARIANA CIR	ALSUNA LN	CDS (W)	E	AAC	6	180	32	8,015	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
349	14724	CALIFORNIA ST	UTICA AVE	CDS	E	AAC	6	305	36	13,845	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
349	14725	CALIFORNIA ST	TORONTO AVE	UTICA AVE	E	AAC	6	310	36	11,160	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
349	14726	CALIFORNIA ST	SPRINGFIELD AVE	TORONTO AVE	E	AAC	6	330	36	11,880	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
349	14727	CALIFORNIA ST	ROCHESTER AVE	SPRINGFIELD AVE	E	AAC	6	330	36	11,880	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
349	14728	CALIFORNIA ST	ADAMS AVE	ROCHESTER AVE	E	AAC	6	285	36	10,260	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
662	13071	EIGHTH ST	PCH	WALNUT AVE	E	AAC	6	390	50	19,785	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
672	13076	ELEVENTH ST	OLIVE AVE	ORANGE AVE	E	AAC	6	395	47	18,565	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
691	15706	ENGLAND ST	END	YORKTOWN AVE	E	AAC	7	540	36	19,440	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
758	15694	FLORIDA ST	ADAMS AVE	UTICA AVE	E	AAC	6	1,260	36	45,360	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
758	15695	FLORIDA ST	UTICA AVE	YORKTOWN AVE	E	AAC	6	1,260	36	45,360	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
929	15705	HESS CIR	UTICA AVE	END	E	AAC	6	307	34	12,845	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
969	14712	HUNTINGTON ST	ADAMS AVE	SPRINGFIELD AVE	E	AAC	6	615	36	21,526	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
969	15693	HUNTINGTON ST	UTICA AVE	YORKTOWN AVE	E	AAC	6	1,153	36	41,508	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1008	14731	JAY CIR	FLORIDA ST	CDS	E	AAC	6	210	32	8,785	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1404	12959	NINTH ST	OLIVE AVE	ORANGE AVE	E	AAC	6	395	48	18,960	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1404	12960	NINTH ST	PECAN AVE	ACACIA AVE	E	AAC	6	375	46	17,250	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1404	12961	NINTH ST	ORANGE AVE	PECAN AVE	E	AAC	6	375	48	18,000	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1404	12963	NINTH ST	WALNUT AVE	OLIVE AVE	E	AAC	6	395	48	18,960	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1404	12964	NINTH ST	ACACIA AVE	PALM AVE	E	AAC	6	375	46	17,250	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1446	12911	OLIVE AVE	EIGHTH ST	ELEVENTH ST	E	AAC	6	930	37	34,410	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1505	12901	PECAN AVE	PECAN AVE	EIGHTH ST	E	AAC	6	540	36	19,440	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1653	15703	ROCHESTER AVE	CALIFORNIA ST	DELAWARE ST	E	AAC	6	270	36	9,720	12/20/21	100	0	0	0	Overlay - AC Fabric	12-20-2021
1653	15856	ROCHESTER AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	435	36	15,660	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1653	15857	ROCHESTER AVE	HUNTINGTON ST	CALIFORNIA ST	E	AAC	6	288	36	10,368	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1772	12943	SECOND ST	OLIVE AVE	ORANGE AVE	E	AAC	6	385	36	14,365	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1780	12950	SEVENTH ST	WALNUT AVE	OLIVE AVE	E	AAC	6	390	48	18,720	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1862	15701	SPRINGFIELD AVE	HUNTINGTON ST	CALIFORNIA ST	E	AAC	6	287	36	10,332	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1862	15850	SPRINGFIELD AVE	LAKE ST	ALABAMA ST	E	AAC	6	315	36	11,340	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1862	15855	SPRINGFIELD AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	436	36	15,696	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
1965	12968	TENTH ST	PECAN AVE	ACACIA AVE	E	AAC	6	376	46	17,296	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2000	14722	TORONTO AVE	CALIFORNIA ST	DELAWARE ST	E	AAC	6	285	36	9,479	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2000	15700	TORONTO AVE	HUNTINGTON ST	CALIFORNIA ST	E	AAC	6	298	36	9,896	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2000	15854	TORONTO AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	450	36	15,435	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2043	14715	UTICA AVE	DELAWARE ST	FLORIDA ST	E	AAC	6	625	36	22,500	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2043	14716	UTICA AVE	FLORIDA ST	BEACH BLVD	E	AAC	6	625	36	22,500	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2043	14721	UTICA AVE	ALABAMA ST	CDS	E	AAC	6	133	36	4,348	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2043	15697	UTICA AVE	HUNTINGTON ST	DELAWARE ST	E	AAC	6	620	36	22,320	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2043	15853	UTICA AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	465	36	16,740	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2151	15707	WHITESANDS DR	YORKTOWN AVE	END	E	AAC	6	345	36	13,120	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
2156	15699	WICHITA AVE	ALABAMA ST	HUNTINGTON ST	E	AAC	6	450	36	16,200	12/20/21	100	0	0	0	Overlay - AC Structural	12-20-2021
85	780	ATLANTA AVE	BROOKHURST ST	END	E	AC	8	532	40	21,280	2/25/22	100	28	72	0	New Construction	01-01-1980
85	785	ATLANTA AVE	END	BROOKHURST	E	AC	8	532	40	21,280	2/25/22	100	30	70	0	New Construction - Initial	01-01-1980
182	15981	BALMORAL DR	EDWARDS ST	END	E	AC	5	1,200	36	44,700	4/4/22	100	86	0	14	New Construction	01-01-1980
346	13412	CALEDONIA CIR	BALMORAL DR	CDS	E	AC	5	350	36	14,100	4/4/22	100	40	46	14	New Construction	01-01-1980
932	15180	HIGHLAND LN	BRAEMAR DR	VARSITY DR	E	AC	5	280	36	10,080	4/4/22	100	67	33	0	New Construction	01-01-1980
1459	13414	ORKNEY CIR	BRAEMAR DR	CDS	E	AC	5	125	36	6,750	4/4/22	100	55	0	45	New Construction	01-01-1980

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1745	13413	SCOTIA CIR	BALMORAL DR	CDS	E	AC	5	350	36	14,100	4/4/22	100	32	56	12	New Construction	01-01-1980
1830	13635	SKYE LN	BALMORAL DR	BRAEMAR DR	E	AC	5	236	36	8,996	4/4/22	100	66	0	34	New Construction	01-01-1980
1882	13497	STARK ST	ALLEY MALAGA LN	MALAGA LN	E	AC	4	150	36	150	4/9/22	100	53	0	47	New Construction	01-01-1980
5	16030	ACACIA AVE	SEVENTH ST.	EIGHTH ST	E	AAC	6	280	38	10,640	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
187	12858	BAR HARBOR LN	QUIET BAY LN	SCENIC BAY LN	E	AAC	5	348	36	13,108	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
579	13904	DEEP HARBOR DR	QUIET BY LN	GOLDENWEST ST	E	AAC	5	130	35	4,550	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
661	13004	EIGHTEENTH ST	ACACIA AVE	PALM AVE	E	AAC	6	390	46	17,940	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
661	13005	EIGHTEENTH ST	PECAN AVE	ACACIA AVE	E	AAC	6	410	46	18,860	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
661	13007	EIGHTEENTH ST	PCH	WALNUT AVE	E	AAC	6	375	50	17,880	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
661	13094	EIGHTEENTH ST	ORANGE AVE	PECAN AVE	E	AAC	6	395	46	18,170	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
1352	13047	MORNING TIDE DR	ISLAND BAY LN	OCEAN BLUFF CIR	E	AAC	5	1,284	36	46,556	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1403	13009	NINETEENTH ST	ACACIA AVE	PALM AVE	E	AAC	6	390	46	17,940	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1403	13010	NINETEENTH ST	PECAN AVE	ACACIA AVE	E	AAC	6	405	46	18,630	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1403	13095	NINETEENTH ST	ORANGE AVE	PECAN AVE	E	AAC	6	395	46	18,170	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1432	12851	OCEAN BLUFF CIR	MORNING TIDE DR	CDS	E	AAC	5	232	36	11,360	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1446	13106	OLIVE AVE	NINETEENTH ST	TWENTY-SECOND ST	E	AAC	6	825	36	29,700	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
1505	12889	PECAN AVE	ELEVENTH ST	FOURTEENTH ST	E	AAC	6	880	36	31,680	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1592	13903	QUIET BAY LN	DEEP HARBOR DR	CDS	E	AAC	5	290	36	12,380	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1592	15361	QUIET BAY LN	BAR HARBOR LN	DEEP HARBOR LN	E	AAC	5	805	36	30,069	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1593	12857	QUIET SURF CIR	SCENIC BAY LN	CDS	E	AAC	5	177	32	7,630	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1740	13049	SCENIC BAY LN	ISLAND BAY LN	CDS	E	AAC	5	860	36	32,580	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1771	13902	SEAWAY CIR	QUIET BAY LN	CDS	E	AAC	5	132	30	6,245	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1965	16031	TENTH ST	ORANGE AVE	PECAN AVE	E	AAC	6	380	46	17,480	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
1994	12933	WALNUT AVE	EIGHTH ST	ELEVENTH ST	E	AAC	6	880	38	33,440	7/27/22	100	0	0	0	Overlay - AC Structural	07-27-2022
1994	13108	WALNUT AVE	TWENTIETH ST	GOLDENWEST ST	E	AAC	6	915	36	32,940	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
1994	13109	WALNUT AVE	SEVENTEENTH ST	TWENTIETH ST	E	AAC	6	875	36	31,500	7/27/22	100	0	0	0	Overlay - AC Fabric	07-27-2022
3	14587	ABERDEEN DR	INVERNESS LN	KINGSWOOD LN	E	AAC	8	170	24	4,080	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
3	15643	ABERDEEN DR	KESWICK LN	COVENTRY LN	E	AAC	8	258	24	6,012	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
3	15644	ABERDEEN DR	CLAREMONT LN	CAMBRIDGE LN	E	AAC	8	204	24	4,716	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
2288	17021	ADAMS AVE FRONTAGE	SUTTON LN	DERBYSHIRE LN	E	AAC	8	663	28	18,564	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
140	14100	ARAGON CIR	SHANGRI LA DR	CDS	E	AAC	8	346	36	15,456	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
145	14576	ARGYLE DR	KESWICK LN	COVENTRY LN	E	AAC	8	204	24	4,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
145	14577	ARGYLE DR	CLAREMONT LN	CAMBRIDGE LN	E	AAC	8	204	24	4,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
145	14578	ARGYLE DR	INVERNESS LN	KINGSWOOD LN	E	AAC	8	170	24	4,080	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
235	14592	BERKSHIRE DR	DEVONSHIRE DR	CORNWALL DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
313	13996	BRIGANTINE LN	FAIR TIDE CR	YORKTOWN AVE	E	AAC	8	148	36	5,040	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
319	14080	BROMLEY LN	BICKLEY DR	PETTSWOOD DR	E	AAC	8	259	36	10,824	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
336	14563	BURNLEY LN	RALEIGH DR	KENSINGTON DR	E	AAC	8	269	24	6,456	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
2294	15630	BUSHARD ST FRONTAGE	TELHAN DR	PETTSWOOD DR	E	AAC	8	519	27	14,013	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
356	14581	CAMBRIDGE LN	DEVONSHIRE DR	CORNWALL DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
356	14582	CAMBRIDGE LN	ARGYLE DR	ABERDEEN DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
356	14583	CAMBRIDGE LN	CONTINENTAL DR	ABERDEEN DR	E	AAC	8	116	24	2,784	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
356	14584	CAMBRIDGE LN	CONTINENTAL DR	DEVONSHIRE DR	E	AAC	8	116	24	2,784	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
363	14091	CANBERRA LN	YORKTOWN AVE	MONITOR DR	E	AAC	8	170	36	6,120	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
363	14092	CANBERRA LN	CONSTITUTION DR	LURLINE DR	E	AAC	8	260	36	9,360	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
363	15436	CANBERRA LN	MONITOR DR	CONSTITUTION DR	E	AAC	8	780	36	28,080	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
418	15637	CHARING CROSS DR	KESWICK LN	COVERNTRY LN	E	AAC	8	185	24	4,240	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
439	15904	CHRISTMAS DR	PITCAIRN LN	END	E	AAC	8	878	32	29,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
449	14579	CLAREMONT LN	DEVONSHIRE DR	CORWALL DR	E	AAC	8	263	24	6,312	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
449	14580	CLAREMONT LN	ARGYLE DR	ABERDEEN DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
493	15435	CONSTITUTION LN	BROOKHURST ST	CANBERRA LN	E	AAC	8	1,156	36	41,616	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
496	15641	CONTINENTAL DR	CAMBRIDGE LN	BROOKHURST ST	E	AAC	8	617	36	20,712	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
496	15642	CONTINENTAL DR	COVENTRY LN	CAMBRIDGE LN	E	AAC	8	483	36	17,388	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
497	14019	COOK CIR	TOBAGO LN	CDS	E	AAC	8	358	32	13,256	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
507	14564	CORNWALL DR	CAMBRIDGE LN	INVERNESS LN	E	AAC	8	204	24	4,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
507	14565	CORNWALL DR	BERKSHIRE LN	KINGSWOOD LN	E	AAC	8	204	24	4,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
507	15898	CORNWALL DR	BUSHARD ST	DERBYSHIRE LN	E	AAC	8	819	36	29,032	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
507	15899	CORNWALL DR	DERBYSHIRE LN	CLAREMONT LN	E	AAC	8	926	24	21,998	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
520	14573	COVENTRY LN	CORNWALL DR	CHASING CROSS DR	E	AAC	8	320	24	7,680	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
520	14574	COVENTRY LN	ARGYLE DR	ABERDEEN DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
520	14575	COVENTRY LN	DEVONSHIRE DR	CORNWALL DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
520	15638	COVENTRY LN	ABERDEEN DR	DEVONSHIRE DR	E	AAC	8	232	20	4,640	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
547	14094	CUTTY SARK DR	RANGER LN	LEXINGTON LN	E	AAC	8	260	36	9,134	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
547	15439	CUTTY SARK DR	BROOKHURST ST	RANGER LN	E	AAC	8	1,370	36	49,320	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
594	15634	DERBYSHIRE LN	CORNWALL DR	KENSINGTON DR	E	AAC	8	393	36	14,148	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
594	15835	DERBYSHIRE LN	ADAMS AVE	KENSINGTON DR	E	AAC	8	198	36	7,128	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
598	14585	DEVONSHIRE DR	KESWICK LN	COVENTRY LN	E	AAC	8	187	20	3,740	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
598	14586	DEVONSHIRE DR	COVENTRY LN	CLAREMONT LN	E	AAC	8	204	24	4,896	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
598	15639	DEVONSHIRE DR	KINGSWOOD LN	BERKSHIRE LN	E	AAC	8	203	24	4,872	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
598	15640	DEVONSHIRE DR	CAMBRIDGE LN	INVERNESS LN	E	AAC	8	206	24	4,944	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
642	14558	DURHAM DR	DERBYSHIRE LN	VERMONT LN	E	AAC	8	390	24	9,360	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
682	14079	ELMSFORD LN	WARBURTON DR	TELHAN DR	E	AAC	8	239	36	9,354	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
737	14017	FIJI LN	KAMUELA DR	CHRISTMAS SR	E	AAC	8	1,019	36	36,684	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
759	13989	FLOUNDER DR	SALMON LN	END	E	AAC	8	130	36	4,680	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
759	15388	FLOUNDER DR	BUSHARD ST	SALMON LN	E	AAC	8	1,189	36	42,804	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
779	14082	FREDERICK CIR	EDUCATION LN	CDS	E	AAC	8	472	36	18,792	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
976	15445	INDEPENDENCE LN	YORKTOWN AVE	SHANGRI LA DR	E	AAC	8	442	36	15,912	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
986	14590	INVERNESS LN	ARGYLE DR	ABERDEEN DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
986	14591	INVERNESS LN	DEVONSHIRE DR	CORNWALL DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1035	14002	KAIMU DR	KIPAHULU DR	TONGA LN	E	AAC	8	670	36	24,120	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1038	14010	KAMUELA DR	MAUNA LN	PITCAIM LN	E	AAC	8	1,080	36	38,880	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1038	15400	KAMUELA DR	PITCAIM LN	CDS	E	AAC	8	877	36	33,372	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1038	15905	KAMUELA DR	BROOKHURST ST	MAUNA LN	E	AAC	8	592	36	21,312	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1057	14555	KENSINGTON DR	SHEFFIELD LN	BURNLEY LN	E	AAC	8	202	24	4,648	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1057	14556	KENSINGTON DR	SIDCUP LN	LURES LN	E	AAC	8	202	24	4,848	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1057	14557	KENSINGTON DR	DERBYSHIRE LN	VERMONT LN	E	AAC	8	390	24	9,160	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1064	14568	KESWICK LN	CORNWALL DR	CHASING CROSS DR	E	AAC	8	320	24	7,680	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1064	14569	KESWICK LN	ARGYLE DR	ABERDEEN DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1064	15636	KESWICK LN	ABERDEEN DR	CORNWALL DR	E	AAC	8	495	24	11,880	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1078	14588	KINGSWOOD LN	CONTINENTAL DR	DEVONSHIRE DR	E	AAC	8	115	24	2,760	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1078	14589	KINGSWOOD LN	DEVONSHIRE DR	CORNWALL DR	E	AAC	8	267	24	6,408	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1078	15645	KINGSWOOD LN	ARGYLE DR	CONTINENTAL DR	E	AAC	8	383	24	9,192	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1080	13998	KIPAHULU DR	GARFIELD AVE	KAIMU DR	E	AAC	8	187	36	6,732	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1080	15396	KIPAHULU DR	KAIMU DR	KUKUI DR	E	AAC	8	801	36	28,836	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1096	13999	KUKUI DR	BROOKHURST ST	KIPAHULU DR	E	AAC	8	682	36	24,552	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1096	14000	KUKUI DR	KIPAHULU DR	MOOREA LN	E	AAC	8	1,101	36	39,636	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1096	14014	KUKUI DR	MOOREA LN	BIKINI LN	E	AAC	8	693	36	25,698	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1149	14566	LEIGHTON LN	CORNWALL DR	END	E	AAC	8	227	24	5,448	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1159	14096	LEXINGTON LN	SHANGRI LA DR	LURLINE DR	E	AAC	8	780	36	29,080	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1207	14559	LURES LN	RALEIGH DR	KENSINGTON DR	E	AAC	8	269	24	6,456	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1207	14560	LURES LN	CORNWALL DR	END	E	AAC	8	174	24	4,176	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1208	15437	LURLINE DR	CANBERRA LN	LEXINGTON LN	E	AAC	8	520	36	19,720	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1223	14001	MAIKAI DR	KIPAHULU DR	TONGA LN	E	AAC	8	671	36	24,156	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1270	15438	MATSONIA LN	CONSTITUTION DR	CUTTY SARK DR	E	AAC	8	520	36	18,720	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1272	15821	MAUNA LN	KAMUELA DR	YORKTOWN AVE	E	AAC	8	1,188	36	42,768	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1273	14097	MAURETANIA CIR	CARMANIA LN	CDS	E	AAC	8	303	32	11,696	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1344	14083	MOORE CIR	EDUCATION LN	CDS	E	AAC	8	472	36	18,792	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1442	14011	OLANA LN	KAMUELA DR	YORKTOWN AVE	E	AAC	8	1,132	36	40,752	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1461	14098	ORONSAY CIR	CARMANIA LN	CDS	E	AAC	8	295	32	11,440	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1476	14020	PAGO PAGO CIR	TOBAGO LN	END	E	AAC	8	358	32	13,256	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1484	14004	PAPUA LN	MAIKAI DR	PUA DR	E	AAC	8	259	36	9,324	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1517	15586	PETTSWOOD DR	BUSHARD ST	BROMLEY LN	E	AAC	8	1,190	36	43,590	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1536	14021	PITCAIRN LN	CHRISTMAS DR	YORKTOWN AVE	E	AAC	8	170	36	6,120	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1536	15399	PITCAIRN LN	KAMUELA DR	CHRISTMAS DR	E	AAC	8	1,019	36	36,684	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1547	13991	POLLACK DR	WEAKFISH LN	SALMON LN	E	AAC	8	1,019	36	36,684	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1601	15632	RALEIGH DR	SIDCUP LN	LURES LN	E	AAC	8	202	24	4,848	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1601	15633	RALEIGH DR	SHEFFIELD LN	BURNLEY LN	E	AAC	8	202	24	4,848	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1706	13990	SALMON LN	FLOUNDER DR	POLLACK DR	E	AAC	8	260	36	9,360	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1706	15394	SALMON LN	POLLACK DR	YORKTOWN AVE	E	AAC	8	929	36	33,444	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1710	14007	SAMOA DR	SUVA LN	END	E	AAC	8	196	32	8,072	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1710	14013	SAMOA DR	BIKINI LN	SUVA LN	E	AAC	8	675	36	24,300	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1785	15443	SHALOM DR	LEXINGTON LN	CDS	E	AAC	8	590	36	23,040	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1792	14561	SHEFFIELD LN	RALEIGH DR	KENSINGTON DR	E	AAC	8	269	24	6,456	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1813	14553	SIDCUP LN	CORNWALL DR	END	E	AAC	8	176	24	4,224	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1813	14554	SIDCUP LN	CORNWALL DR	RALEIGH DR	E	AAC	8	125	24	3,000	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1813	15631	SIDCUP LN	RALEIGH DR	ADAMS AVE FRONTAGE	E	AAC	8	378	24	9,072	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1939	15836	SUTTON LN	ADAMS AVE	CHASING CROSS DR	E	AAC	8	215	24	5,160	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1954	14015	TANA DR	BIKINI LN	WARD ST	E	AAC	8	170	36	6,120	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1976	14077	TIBBETT LN	INNSBRUCK DR	WOODLAWN DR	E	AAC	8	245	36	9,570	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1989	14016	TOBAGO LN	KAMUELA DR	SUNDAY DR	E	AAC	8	254	36	9,144	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1989	15402	TOBAGO LN	SUNDAY DR	CHRISTMAS DR	E	AAC	8	765	36	27,540	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
1992	14003	TONGA LN	KAIMU DR	MAIKAI DR	E	AAC	8	270	36	9,720	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
2070	14567	VERMONT LN	CORNWALL DR	END	E	AAC	8	228	24	5,472	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
2070	15635	VERMONT LN	KENISINGTON DR	CORNWALL DR	E	AAC	8	338	24	8,112	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
2125	13985	WEAKFISH LN	FLOUNDER DR	POLLACK DR	E	AAC	8	260	36	9,072	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
2125	15392	WEAKFISH LN	POLLACK DR	CDS	E	AAC	8	830	32	26,560	2/8/23	100	0	0	0	Overlay - AC Structural	02-08-2023
31	14191	ALISA LN	BAY MEADOW DR	INDIANAPOLIS AVE	E	AAC	8	534	36	18,936	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
203	15948	BAY MEADOW DR	BUSHARD ST	GRAYSTONE LN	E	AAC	8	1,195	36	43,020	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
218	14201	BEAUMONT CIR	NIAGARA DR	CDS	E	AAC	8	356	32	13,392	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
402	14194	CASTLE ROCK CIR	BAY MEADOW DR	END	E	AAC	8	426	34	16,284	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
474	14200	COLGATE CIR	NIAGARA DR	CDS	E	AAC	8	355	32	13,360	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
594	14173	DERBYSHIRE LN	ADAMS AVE	OLYMPIC DR	E	AAC	8	187	45	7,609	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
820	14178	GLACIER CIR	ROCKY MOUNTAIN DR	CDS	E	AAC	8	364	36	14,604	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
984	15896	INTERIOR LN	OLYMPIC DR	YELLOWSTONE DR	E	AAC	8	1,129	36	41,144	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1020	14202	JILL DR	VIVA CIR	LAWSON LN	E	AAC	8	264	34	8,976	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1133	14180	LASSEN CIR	BIG BEND LN	CDS	E	AAC	8	504	36	19,944	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1139	14199	LAWSON LN	ADAMS AVE	NIAGARA DR	E	AAC	8	546	35	19,110	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1278	14179	MC KINLEY LN	ROCKY MOUNTAIN DR	YELLOWSTONE DR	E	AAC	8	872	36	32,142	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1307	15488	MIDLAND LN	MEREDITH DR	CDS	E	AAC	8	872	32	30,654	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1396	16019	NIAGARA DR	LAWSON LN	MIDLAND LN	E	AAC	8	756	36	27,216	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1447	15480	OLYMPIC DR	BIG BEND LN	INTERIOR LN	E	AAC	8	1,006	36	36,966	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1616	14195	REDWOOD LN	BIG SUR DR	VICKSBURG DR	E	AAC	8	252	36	9,822	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
1660	15483	ROCKY MOUNTAIN DR	BIG BEND LN	MC KINLEY LN	E	AAC	8	753	36	27,858	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2068	14190	VERDANT DR	GRAYSTONE LN	EVERGLADES LN	E	AAC	8	269	36	10,184	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2079	14196	VICKSBURG DR	EVERGLADES LN	REDWOOD LN	E	AAC	8	753	36	27,858	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2095	15490	VIVA CIR	CDS (S)	CDS (N)	E	AAC	8	237	32	11,584	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2136	14203	WESLEY CIR	LAWSON LN	CDS	E	AAC	8	410	32	15,120	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2196	14182	YELLOWSTONE DR	BUSHARD ST	BIG BEND LN	E	AAC	8	167	42	6,794	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
2196	15484	YELLOWSTONE DR	BIG BEND LN	INTERIOR LN	E	AAC	8	1,012	36	36,932	2/13/23	100	0	0	0	Overlay - AC Structural	02-13-2023
138	15950	AQUATIC LN	CLIFF DR	EL CAPITAN DR	E	AAC	8	730	36	27,530	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
243	14299	BEVERLY DR	SUBURBIA LN	LAVONNE LN	E	AAC	8	1,027	36	36,972	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
249	14213	BIRCHWOOD DR	BROOKHURST ST	CRAIMER LN	E	AAC	8	1,176	36	42,336	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
240	14204	BROOKHURST ST	END	MEREDITH DR	E	AAC	8	242	27	6,534	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
240	14209	BROOKHURST ST	MEREDITH DR	JON DAY DR	E	AAC	8	270	27	7,290	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
240	15491	BROOKHURST ST	JON DAY DR	CRAILET DR	E	AAC	8	790	27	21,330	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
457	14302	CLIFF DR	OYSTER BED LN	SPINDRIFT LN	E	AAC	8	311	36	11,196	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
457	15528	CLIFF DR	BROOKHURST ST	OYSTER BED LN	E	AAC	8	708	36	25,488	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
523	15492	CRAILET DR	BROOKHURST ST	KENWORTH CIR	E	AAC	8	205	36	7,380	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
524	14208	CRAIMER LN	MEREDITH DR	JON DAY DR	E	AAC	8	260	36	9,360	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
524	14215	CRAIMER LN	JON DAY DR	STONEYBROOK DR	E	AAC	8	262	36	9,432	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
524	15493	CRAIMER LN	STONEYBROOK DR	WARWICK DR	E	AAC	8	931	36	33,516	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
548	14306	CYNTHIA DR	SUBURBIA LN	LAVONNE LN	E	AAC	8	1,063	36	38,268	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
559	15563	DANA DR	BROOKHURST ST	GALBAR CR	E	AAC	8	555	36	21,230	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
658	15527	EDYE DR	SUBURBIA LN	LAVONNE LN	E	AAC	8	897	36	34,792	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
665	15529	EL CAPITAN DR	AQUATIC LN	SPINDRIFT LN	E	AAC	8	645	36	24,470	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
790	14366	GALBAR CIR	DANA DR	END	E	AAC	8	331	36	13,916	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
924	14298	HERCULES DR	BROOKHURST ST	SUBURBUA LN	E	AAC	8	185	36	6,660	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023

BranchID	Sec ID	Name	From	To	Rank	Type	Zone	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1060	14210	KENWORTH CIR	CRAILET DR	CDS	E	AAC	8	245	32	9,640	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1137	15526	LAVONNE LN	CYNTHIA DR	EDYE DR	E	AAC	8	776	36	28,936	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1235	14367	MANESSA CIR	DANA DR	END	E	AAC	8	322	32	10,304	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1468	14301	OYSTER BED LN	EDYE DR	CLIFF DR	E	AAC	8	254	36	9,144	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1814	14304	SIGNET CIR	AQUATIC LN	END	E	AAC	8	448	36	18,128	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1852	14979	SPAR CIR	BROOKHURST ST	END	E	AAC	8	579	36	20,844	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1859	15530	SPINDRIFT LN	CLIFF DR	CDS	E	AAC	8	1,179	36	45,444	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1865	15584	SPRIT CIR	BROOKHURST ST	END	E	AAC	8	501	36	18,036	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1879	14305	STARBOARD CIR	SURGE LN	CDS	E	AAC	8	199	36	8,664	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1903	15949	SUBURBIA LN	EDYE DR	CDS	E	AAC	8	918	36	35,548	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1928	14303	SUNTAN CIR	AQUATIC LN	END	E	AAC	8	510	36	20,360	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1935	15531	SURGE LN	EL CAPITAN DR	ATLANTA AVE	E	AAC	8	624	36	22,464	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
1970	14300	THESEUS DR	SUBURBIA LN	LAVONNE LN	E	AAC	8	962	36	34,632	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
2115	14217	WARWICK DR	CRAIMER LN	RAVENWOOD LN	E	AAC	8	254	36	9,144	2/14/23	100	0	0	0	Overlay - AC Structural	02-14-2023
709	15395	FAIR TIDE CIR	END	END	E	AAC	8	404	32	16,528	4/8/24	100	0	0	0	Overlay - AC Structural	02-08-2023
705	13898	EVENING HILL DR	SHADY HARBOR CIR	SURFDALE LN	E	AC	5	389	36	14,004	5/6/24	100	0	0	0	Surface Treatment - Slurry Seal	11-28-2019
1631	14443	SAYBROOK LN	HEIL AVE	ALLEY SEABROOK LN	E	AAC	2	193	36	6,948	5/10/24	100	0	0	0	Overlay - AC Structural	12-01-2017
								318.9		**62,521,829**							

XIII. APPENDIX C – GIS DIGITAL DATA

Introduction

The OCTA GIS Section maintains a spatial inventory of transportation infrastructure which mostly consists of major arterial streets, roads, and highways. A key component of road information is pavement condition. Maintaining an inventory of pavement condition will enhance OCTA's GIS visualization and analysis capabilities and assist in understanding the transportation investment needs throughout the region. Therefore, a GIS dataset in digital format should be included in this report.

Structure of GIS Data

The GIS dataset must consist of linear geographic features that represent road/street segments. All segments that are part of the report should be included in the GIS dataset. The attribute information of each segment should generally follow the format of the Complete Listing of Current Street Conditions in Appendix B above.

The GIS data requirements are discussed below. Most commercial and open-source GIS software provide industry-standard tools to manage GIS data to meet these requirements.

GIS Digital Data Format

The GIS data must be submitted in either one of the following formats:

- Esri Shapefile, or
- Esri File Geodatabase

Metadata

The GIS data are required to have associated metadata. The minimum metadata items required are:

- Title of Dataset
- Tags (A set of words that can be used by GIS to search for the resource. For example: "pavement", "transportation", "roads")
- Summary (A brief purpose statement of the dataset)
- Description (A brief narrative of the dataset's content)
- Credits (A recognition of those who created or contributed to the resource)

Spatial Geometry Type

The spatial geometry of the segment features must be lines that represent the roadway centerline as accurately as possible.

Projection

The GIS data must have spatial reference information and have its coordinate system identified and embedded in or associated with the data file(s). All GIS data submitted to OCTA should be in the following projected coordinate system:

- NAD 1983 State Plane California VI FIPS 0406 (US Feet) - More information about this system can be found at: https://spatialreference.org/ref/epsg/nad83-california-zone-6-ftus/

GIS Feature Attributes

The required segment attributes are:

- Street name
- Unique segment identifier (Segment ID from original source if available)
- Name of intersecting road at the beginning of a segment
- Name of intersecting road at the end of the segment
- Current pavement condition index (PCI)
- Current PCI inspection date
- Length of road segment in feet
- Width of road segment in feet
- Paved area of road segment in square feet or square yards
- Projected PCI at end of Seven-Year Road Maintenance and Rehabilitation Plan

Additional attributes such as number of through travel lanes, direction of travel and pavement surface type may be provided. An example of a GIS attribute table for road segments is shown below (Note that there are additional attributes such as surface, functional class, and number of travel lanes).

XIV. APPENDIX D – QUALITY ASSURANCE / QUALITY CONTROL PLAN

Introduction

When performing data collection in any field, the need for quality control is paramount as it is essential for accurate planning, analysis and design. This is particularly true for collecting pavement distress data for a pavement management program.

The Quality Assurance / Quality Control (QA/QC) Plan establishes minimum quality standards for performance and procedures for update of the pavement management program.

Objectives

This document constitutes a formal QA/QC Plan for the City of Huntington Beach. It was prepared on March, 2018 and last revised in March, 2024.

Specifically, it is intended for the 2024 Pavement Management Plan Update. The focus is on the collection of network-level pavement distress data (defined by National Cooperative Highway Research Program (NCHRP) Synthesis 401 Quality Management of Pavement Data Collection, as "Network-level data collection involves collection of large quantities of pavement condition data, which is often converted to individual condition indices or aggregated into composite condition indices".

This document also addresses the QA/QC plan requirements of the Orange County Transportation Authority (OCTA)'s "Countywide Pavement Management Plan Guidelines" (Section 2.4), adopted in May 2010.

Structure of QA/QC Plan

The following components are addressed in this QA/QC Plan:

- Condition survey procedures used;
- Accuracy required for data collection;
- Inspector qualifications and experience; and
- Safety.

Condition Survey Procedures

The governing document in performing condition surveys for the City of Huntington Beach is ASTM D6433-18 "Standard Practice for Roads and Parking Lots Pavement Condition Index (PCI) Surveys." Both asphalt concrete (AC) and Portland cement concrete (PCC) pavements are included in this protocol. The following distresses are collected for each pavement type:

Asphalt Concrete	Portland Cement Concrete (Jointed)
1. Alligator (fatigue) cracking	1. Blow-up/Buckling
2. Bleeding	2. Corner Breaks
3. Block Cracking	3. Divided Slab
4. Bumps and sags	4. Durability ("D") Cracking
5. Corrugation	5. Faulting
6. Depression	6. Joint Seal damage
7. Edge Cracking	7. Lane/Shoulder Drop-off
8. Joint Reflection Cracking	8. Linear Cracking
9. Lane/Shoulder Drop-off	9. Patching (large) and Utility Cuts
10. Longitudinal & Transverse Cracking	10. Patching (small)
11. Patching and Utility Cut Patching	11. Polished Aggregate
12. Polished aggregate	12. Popouts
13. Potholes	13. Pumping
14. Railroad Crossing	14. Punchout
15. Rutting	15. Railroad Crossing
16. Shoving	16. Scaling, map cracking and crazing
17. Slippage Cracking	17. Shrinkage Cracks
18. Swell	18. Spalling (corner)
19. Weathering	19. Spalling (joint)
20. Raveling	

As required by the Orange County Transportation Authority (OCTA), the City of Huntington Beach must prepare and implement a quality assurance / quality control (QA/QC) plan regarding pavement management inspection as they pertain to MicroPAVER. For the purposes of this report, Bucknam has demonstrated below how our project team implemented QA/QC procedures during the project.

Our QA/QC plan focuses on the how each pavement inspection is performed, what distresses are collected and ensures that it complies with the OCTA guidelines defined within the "Countywide Pavement Management Plan Guidelines (CPMPG)".

As shown within the OCTA (CPMPG), our staff followed and delivered on the requirements stated within Chapter 2, page 2-5 which require specific QA/QC data (Items A through G). Additionally, Chapter 3 requires numerous data/deliverables from local agencies for OC Go eligibility. All general PCI budgetary report submittals will follow the Chapter 3 guidelines.

In conjunction with the outlined items within the CPMPG Section 2 we have summarized our QA/QC procedures below:

a. **Descriptions of condition survey** - Our staff follows the required Condition Survey Protocols (CPMPG, Chapter 2); our staff assesses each pavement section for the minimum distresses outlined within Chapter 2, page 2-1. Additionally, based on the pavement conditions found, we collect all MicroPAVER/StreetSaver Army Corps of Engineers (ACOE) distresses, if found within the sample sections; for example, if slippage cracking, potholes, etc. are found our survey technicians record the proper information.

b. **How data was collected** - Our surveys follow the OCTA accepted walking requirements. All sections that our staff surveys are performed through the walking method, approximately 10% of all sections surveyed were complemented with windshield surveys based on unique conditions found. Our staff physically measures the width of every section as well as measure for any square footage adjustment that need to be added or taken away from a sections "true area" (i.e. cul-de-sac, bus pads, street width variances, etc.). Samples taken always include a minimum of 2,500 SF coverage unless specific section limits prohibit this. Arterial section samples utilize a 3,500 SF sample size due to the larger section area (this is within the ASTM D6433-18 sample size calculation. Field crews typically include one individual for residential pavement sections while Arterial (MPAH) routes utilize a two-person crew for safety, traffic control and increases quality control.

c. **Accuracy required for data collection** - We use a statistical sampling approach for measuring the quality of our field technician's work. In this manner, 10 percent of the original surveys are re-surveyed by a different survey crew than the original, supervised by a field supervisor, and the results are compared to the original surveys. Our QC process involves checking the field crews' work in a "blind study" fashion. Quality control checks are performed at the end of each survey week. This ensures that all field personnel are properly collecting section samples, distress types and distress severities for all street segments.

    - When QA/QC issues are found, our staff documents the issues within MicroPAVER's user interface. If distress types found are not within the 97% accuracy our QA/QC is expanded beyond our minimum 10% resurvey to 20% of the original survey

d. **Random and Systematic Re-Inspections** – As described above our staff re-inspects, as a minimum, 10% of the original survey (OCTA only requires 5%). Per the agencies requests, our staff will submit PCI reports to the agency as project status reports for their review. Agencies will typically review specific pavement sections for PCI accuracy based on recent overlay or slurry seal maintenance; this serves as an initial accuracy check on our surveys (outside Bucknam QC efforts). Additionally, our staff performs "ride-a-long" surveys with local agency staff to build consensus on how our MicroPAVER/StreetSaver ACOE surveys are performed, recorded and reported on.

    Random re-inspections will include a representative selection across the following categories:

    - Functional classed (i.e. MPAH, locals);
    - Surface types (e.g. AC or PCC);
    - Pavement conditions (e.g. good, fair, poor);
    - Inspectors;
    - Geographical areas, if applicable.

For systematic re-inspections, this could be due to noticed trends such as specific treatment types (e.g. open-graded mixed), a specific inspector or geographical area. In these cases Bucknam continues to utilize a 10% re-inspection policy.

e. **PCI Comparison with Past Surveys** - if previous inspection data is available, new PCI's calculated through the most recent inspections will be compared to previous PCI's. If the variance in PCI is greater than +/- 10 PCI points, these sections will be flagged for further investigation and/or re-inspection (In the cases that a PCI increases or decreases by 10 points follows the established CPMPG guidelines; Appendix A, page A-18).

f. **Schedule of data submittal** – Pending on the City's last major PMP submittal, Bucknam will assist the agency in submitting the following:

- Master Plan of Arterial Highways (MPAH) routes will be surveyed and reported on at least once every two years
- Local streets will be surveyed and reported on every six years
- Corresponding MPAH and local PCI reporting and budgetary reporting will be submitted every two years

g. **Experience of Inspectors** – Bucknam staff have been trained on the use of StreetSaver and the segment calibration/verification and inspection practices. Mr. Peter Bucknam (Project Manager) has completed the MicroPAVER Certification of Professional Development courses. All Bucknam field technicians are trained using the ASTM D6433 survey methodologies and have passed OCTA's prequalification testing every year since 2010. Bucknam Infrastructure Group inspectors have attended formal training on pavement condition distress surveys. This training was conducted prior to performing any work using the ASTM D6433 protocols, consistent with OCTA's requirements.

Inspector Name	Date of ASTM D6433 Training	Training Conducted by
Shaun Russo	Feb-23	OCTA
Aaron Cohodas	Feb-24	OCTA

h. **Field data collection safety procedures** – Bucknam field survey techniques utilize the following procedures:

a. All vehicles are properly marked or flagged with appropriate sign markings indicating that a "PAVEMENT SURVEY IS IN PROGRESS"

b. All vehicles have the proper flashing amber light beacons placed on the top of the vehicle to allow for proper visibility and line-of-site warning

c. Large MPAH routes are surveyed using two field technicians to increase traffic control warning and safety

d. While parking or stopping along the survey route, vehicles legally park within the right-of-way or use a parking lot

e. All field technicians wear ANSI – 105 Class II safety vests

XV. APPENDIX E – PAVEMENT MANAGEMENT DATA FILES

The City of Huntington Beach MicroPAVER database (.e70 file) has been enclosed for City and OCTA use. This data and the associated reporting data includes:

- Street names and limits for the City's public streets
- Street identifiers (Branch ID, Section ID)
- Direction
- Begin and end of section
- Length, width and true areas
- Functional Classification (MPAH, Local)
- Number of travel lanes
- Pavement Condition Index (PCI) and date of inspection
- Type of recommended treatment
- Cost of recommended treatment

XVI. APPENDIX F – GIS MAPS / CURRENT CONDITIONS

