# *FINAL REPORT*

# *UPDATED CITYWIDE PAVEMENT MANAGEMENT PLAN OC Go*

## *2026-2033*




***Submitted to:***

***City of Huntington Beach, CA***

***May 20, 2026***

BUCKNAM INFRASTRUCTURE GROUP, INC

May 20, 2026

Mr. Joe Fuentes
Department of Public Works
**CITY OF HUNTINGTON BEACH**
2000 Main Street
Huntington Beach, CA 92648

**Subject: City of Huntington Beach –OCTA Pavement Management Compliance Report 2026**

Dear Joe:

As part of the 2026 Update of the Pavement Management Plan (PMP) for the City of Huntington Beach, *Bucknam Infrastructure Group, Inc.* is pleased to submit the PMP reporting required by the Orange County Transportation Authority (OCTA). This data/report will be submitted to OCTA as part of the City's required biennial PMP prior to June 30, 2026.

The information contained in this report was used to develop the recommended improvement program for the pavement network. The report covers the following categories:

- **Pavement Management Plan Certification**
- **Quality Assurance / Quality Control (QA/QC) Plan**
- **Pavement Management Data Files (electronic Huntington Beach.e70 file format)**
- **Pavement Management Plan that includes the following:**
    - **Average Pavement Conditions For Each Segment in the Network (PCI Report)**
      The Pavement Condition Index report shows the present condition of each street in the pavement network (Arterials and Locals). In addition, the report shows the basic geometry of each street segment.
    - **Seven-year Projected PCI Under Existing Funding Levels**
      This report identifies the projected PCI's based on the local agencies current funding programs. This report details the PCI projects for the entire network, Master Plan of Arterial Highways (MPAH) roadways and Local streets.
    - **Seven-year Plan for Road Maintenance and Rehabilitation - Forecast Maintenance & Rehabilitation (FMR) Report**
      The FMR Report projects the street maintenance activities required for the next seven years, broken down to show maintenance levels for recommended streets. This includes all scheduled projects provided by the City for fiscal years 2026 through 2032.
    - **Alternative Funding Levels**
      OCTA has requested two reports indicating the necessary funding to maintain the City's current weighted average PCI as well as the necessary funding to improve the weighted average PCI by one PCI point over the next seven years.

- **Backlog by Fiscal Year (re: unfunded restoration, rehabilitation and reconstruction)**

- **Percentage of total network in each of the five condition categories based on centerline mileage**

- **Local Match Reduction Reporting**

    - In order to be eligible for Local Match Reduction of 10%, the following must be submitted:
        - Measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one PCI point.
        - No reduction in the overall weighted (by area) average PCI in the MPAH or local street categories

        - or –

        - Have road pavement conditions, for the overall network, during the previous reporting period within the highest twenty (20%) of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in "good condition".

- **GIS Digital Data**

- **Quality Assurance / Quality Control (QA/QC) Plan**

- **Pavement Management Data Files**

- **GIS Maps / Current Conditions**

These reports will be submitted to the City of Huntington Beach as part of the biennial Pavement Management Plan that is due prior to June 30, 2026. These reports will be packaged in a way that it will be easy for staff to review.

All comments received from the City have been incorporated in the reports that follow (pending). It has been a pleasure working with you and the City on updating your Pavement Management Plan. We look forward to the continued success of this project and future teamwork with City staff.
Sincerely,

***Bucknam Infrastructure Group, Inc.***



Peter J. Bucknam
Project Manager
Infrastructure Management – GIS Services

BUCKNAM
INFRASTRUCTURE GROUP, INC
3548 Seagate Way, Suite 230
Oceanside, CA 92056
T: (760) 216-6529
www.bucknam-inc.com

## AGENCY SUBMITTAL TABLE OF CONTENTS

I. Pavement Management Plan Certification ..... 2

II. Executive Summary ..... 3

III. Background (City of Huntington Beach) ..... 4

IV. Current Pavement Conditions (PCI) ..... 7

V. Projected Pavement Conditions (PCI) – Current Funding ..... 8

VI. Alternative Funding Levels ..... 9
- a. Maintain Existing Average Network PCI ..... 9
- b. Improve Average Network PCI ..... 9

VII. Current and Projected Backlog by Year of Pavement Maintenance Needs ..... 9

VIII. Centerline Mileage ..... 10

IX. Percentage of Network in Each of Five Condition Categories Based on Centerline Miles ..... 10

X. Reduction in M2 Local Match ..... 11

XI. Appendix A – Seven-Year Road Maintenance and Rehabilitation Plan Based on Current or Expected Funding Level ..... 12

XII. Appendix B – Complete Street Listing Current Conditions ..... 13

XIII. Appendix C – GIS Digital Data ..... 14

XIV. Appendix D – Quality Assurance / Quality Control Plan ..... 16
- Introduction ..... 16
- Objectives ..... 16
- Structure of QA/QC Plan ..... 16
- Condition Survey Procedures ..... 17
- Accuracy Required for Data Collection ..... 18
- Random and Systematic Re-Inspections ..... 18
- PCI Comparison with Past Surveys ..... 19
- Inspector Qualifications and Experience ..... 19
- Safety Procedures ..... 20

XV. Appendix E – Pavement Management Data Files ..... 21

XVI. Appendix F – GIS Maps – Current Conditions ..... 22

# CITY OF HUNTINGTON BEACH PAVEMENT MANAGEMENT PLAN

- part of -

# COUNTYWIDE PAVEMENT MANAGEMENT PLAN GUIDELINES

***(OCTA Guideline – April 2026)***

Prepared by: Bucknam Infrastructure Group, Inc.
Submitted to OCTA: June 30, 2026

## I. Pavement Management Plan Certification

The City of Huntington Beach, CA certifies that it has a Pavement Management Plan in conformance with the criteria stated in the Orange County Transportation Authority Ordinance No. 3. This ordinance requires that a Pavement Management Plan be in place and maintained to qualify for allocation of revenues generated from renewed Measure M (M2).

The plan was developed by Bucknam Infrastructure Group, Inc. using MicroPAVER, a pavement management system conforming to American Society for Testing and Materials (ASTM) Standard D6433, and contains, at a minimum, the following elements:

- Inventory of Master Plan of Arterial Highway (MPAH) and Local routes reviewed and updated biennially. The last update of the inventory was completed on April, 2026 for the Arterial (MPAH) and April 2026 for the Local streets;
- Assessment of the pavement condition for all routes in the system, updated biennially. The last field review of the pavement condition was completed in April, 2026;
- Percentage of all section of pavement needing:
  - Preventive Maintenance = 26.3%;
  - Rehabilitation = 29.5%;
  - Reconstruction = 1.6%
- Budget needs for preventive maintenance, rehabilitation and/or reconstruction of deficient sections of pavement for:
  - Current biennial period $29,826,300;
  - following biennial period $29,905,000
- Funds budgeted or available for Preventive Maintenance, Rehabilitation and/or Reconstruction.
  - Current biennial period $23,600,000;
  - following biennial period $23,600,000
- Backlog by year of unfunded rehabilitation, restoration and reconstruction needs (see page 9);
- The Pavement Management Plan is consistent with countywide pavement condition assessment standards as described in the OCTA Countywide Pavement Management Plan Guidelines adopted by the OCTA Board of Directors.

*An electronic copy of the Pavement Management Plan (with MicroPAVER or StreetSaver compatible files) has been or will be submitted with the certification statement. A copy of this certification is being provided to the Orange County Transportation Authority.

**Submitted by:**

Chau Vu
Name (Print)

City of Huntington Beach
Jurisdiction

Signed

5/21/26
Date

Director of Public Works
Title

# II. EXECUTIVE SUMMARY

## 2026 UPDATE OF PAVEMENT MANAGEMENT PLAN (PMP)

As the City of Huntington Beach's infrastructure continues to mature Public Works priorities such as Local street maintenance and Arterial rehabilitation are key projects to City staff. With the City mostly built-out, wear and tear on the infrastructure will occur at an ever increasing rate. Pavement aging through annual weathering, dynamic and static vehicle loading, and increased usage, compounded with the increased cost of performing maintenance and rehabilitation, add to the yearly operational budget of the pavement network. System sustainability can only be achieved through proactive scheduling and the implementation of cost-efficient pavement applications.

Over the past twenty years the City has made proactive and efficient improvement regarding its overall condition status as well as greatly reduced its deferred maintenance burdens. The City's overall weighted PCI is 80.3 which is one of the above average in the County and close to the optimal industry standard PCI range of 82 to 85. Funding the Huntington Beach PMP over the next seven years will be manageable and achievable based on city management proactivity, frequent inspections and biennial budgetary review.

In the upcoming years as the City continues to build upon this study through future inspections and maintenance work history, Huntington Beach pavement data will continue to provide reliable data. This will enhance the PMP through detailed Orange County Transportation Authority (OCTA) OC Go funding analysis, City specific budgetary reporting and level of service reporting.

The Huntington Beach PMP has been developed to assist City personnel by providing current data on the City's street network and to develop cost-effective maintenance strategies to maintain a desirable level of pavement performance on a network scale, while optimizing the expenditure of limited fiscal resources. The project consisted of analyzing the City's 2025 dataset for quality and usability. In doing this, we were tasked to generate an updated Capital Improvement Program report that identified recommendations and deficiencies in the current operating and maintenance efforts put forth by the City.

We surveyed all designated arterial, collector (MPAH) and Local Zone 2 routes this past spring to assist the City in being compliant with OCTA – OC Go April 2026 guidelines. Additionally, we updated the City's unique Pavement Management – GIS layer that will continue to assist the City in analyzing pavement conditions and other attribute information through the use of MyRoads® and ESRI ArcGIS.

Bucknam Infrastructure Group reviewed the City's previous maintenance efforts and the current 2026-27 proposed street improvements for pertinent pavement information in order to generate a CIP report that identified recommendations and opportunities for improvement in the current operating and maintenance efforts put forth by the City. The result of these work efforts is this report.

## III. BACKGROUND (CITY OF HUNTINGTON BEACH)

In late 1990, voters throughout Orange County approved a ½-cent sales tax for transportation improvements known as OC Go, formerly known as Measure M2. Funding for streets and roads are included within the sales tax and are distributed to locals agencies through both formula and a competitive method. In late 2006, the renewal of OC Go was approved by voters that would continue the ½-cent sales tax for thirty additional years, starting in 2011.

The primary of goal of this report is to comply with established guidelines from OCTA to ensure that field data collection and reporting efforts performed by outside consultants or local agency staff are consistent. This is required in order that funding allocations can be reviewed and based on agency comparable pavement conditions. Specifically, our findings and recommendations provide Public Works administrators, managers and field personnel with:

- a PMP report consistent with OCTA OC Go guidelines
- the present condition status of the pavement network (arterial, collector, residential and industrial streets), as a whole and of any grouping or individual component within the City;
- a ranked list of all streets, or segments of streets, by condition within the network;
- rehabilitation/maintenance needs of each street segment by year;
- an optimized priority maintenance and rehabilitation program based on cost/benefit analysis and various levels of funding;
- optimum annual pavement expenditure levels for pavement maintenance for the next seven (7) years;
- prediction of the life-cycle performance of the City's pavement network and each individual street section; and
- pavement condition data and analysis presented in GIS through MyRoads® and ESRI ArcGIS

Pavement is a dynamic structure where deterioration is constantly occurring; thus the pavement management system needs to be updated on a regular basis to reflect these changes in pavement conditions, pavement maintenance histories, and maintenance strategies based upon budgetary constraints. In our approach to develop the City's forecasted maintenance recommendations we worked with Huntington Beach Public Works/Engineering staff in identifying unit costs for all maintenance practices used on an annual basis. Currently, based upon the City's maintenance practices and their associated unit costs, the total replacement value of the Huntington Beach pavement network is $1,286,972,400. This value clearly indicates that the City's pavement network is the most valuable and essential asset to Huntington Beach. The City's use of slurry seal, AC Overlay and remove & replace (R&R) practices are typically applied at a five year, ten year and 25 year frequency respectively. These frequencies are typical but the City may see increases in deterioration rates due to environmental, load and high average daily traffic (ADT) volumes. For example, high ADT volumes along one of Huntington Beach's arterial streets will increase deterioration rates for a previously applied AC Overlay compared to a small local street. These deterioration rates are monitored through frequent inspections and functional class deterioration analysis within the City's PMP database.

## FINDINGS AND RECOMMENDATIONS

Through our assessment of historical maintenance performed within the City and through our discussions with City staff the conditional data found across the network clearly shows that the City has applied strong, preventative maintenance strategies over the past decade. Pavement management involves frequent preventative maintenance; as pavement deteriorates through heavy traffic impacts, weathering and time, preventative maintenances (such as slurry seal, stop gap, etc.) have limited benefits. More aggressive maintenance applications have to be used.

Our study has shown that key overlay projects will be needed over the next seven years to maintain the network's high level of condition. Currently, the City's two major streets networks combined (Arterial & Local) hold average weighted PCI value of 80.3; it is our recommendation that a proactive overlay program and a continued slurry seal program be scheduled on the Local network over the next several fiscal years. This will ensure that the Local and citywide weighted PCI's will increase thus allowing for more frequent preventative maintenance in the near future. This can only happen if funding for the Local network is increased from $5.8 million per year to $6.5 million per year.

We have found and recommend the following detailed items which should be reviewed and considered for a proactive approach to the future management of the PMP:

### ARTERIAL / COLLECTOR (MPAH) FINDINGS AND RECOMMENDATIONS

The actual workload requirements identified indicate that the Arterial (MPAH) street network is currently in "good" condition. To maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 9 to maintain a "good" network weighted average PCI value. Our MPAH findings for conditional data and recommendations for revenue expenditures are shown below:

- The MPAH network has a weighted PCI of 77.4
- The MPAH network consists of 167.7 centerline miles and 34,273,820 SF of pavement;
- Currently, 38% of the MPAH network (63.0 centerline miles) qualify for slurry seal/stop gap maintenance; 31% of the Arterial network (52.2 centerline miles) qualify for rehabilitation/reconstruction maintenance;
- At a minimum, MPAH maintenance projects should focus on the maintaining the current PCI above a weighted average of 79 over the next 7 years;
    - Fund the MPAH PMP CIP at an average annual level of $5,240,100/yr for the term of the CIP to generate the PCI identified on page 9;
- Develop a proactive fiscal and planned approach to identify MPAH overlay projects based on the deterioration modeling within MicroPAVER;
    - Demonstrated budget shown on page 9 is projected to increase the MPAH weighted PCI

of 77.4 to 79.5 after seven years, additionally, the citywide deferred backlog decreases from a level of $55.1 million to $40.5 million after seven years; and

- Perform pavement inspections on the MPAH network every two years to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2.


**LOCAL FINDINGS AND RECOMMENDATIONS**

The actual workload requirements identified indicate that the Local street network is currently in "good" condition. To maintain this condition, it is critical that preventive maintenance and overlay activities are funded at the levels identified on page 9 to maintain a "good" network weighted average PCI value. Our Local network findings for conditional data and recommendations for revenue expenditures are shown below:

- The Local network has a weighted PCI of 81.9;
- The Local network consists of 318.9 centerline miles and 62,521,829 SF of pavement;
- Currently, 31% of the Local network (99.5 centerline miles) qualifies for slurry seal/stop gap maintenance; 17% of the Local network (55.5 centerline miles) qualify for rehabilitation/reconstruction maintenance;
- At a minimum, Local maintenance projects should focus on the maintaining the current PCI above a weighted average of 82 over the next 7 years;
- Develop a proactive fiscal and planned approach to identify local overlay projects based on the deterioration modeling within MicroPAVER;
    - Continue to utilize the City's twelve (12) Zone Maintenance Schedule;
        - Apply the proper Local budget to allow all streets within the selected zone to be addressed per year;
        - This policy and application will generate even greater ROI in the next several years;
    - Increase the Local revenues to an average annual level of $9,731,600/yr for the term of the CIP to generate a higher weighted PCI by FY 2032-33; and
    - Demonstrated budget shown on page 9 is projected to increase the Local weighted PCI of 81.9 to 83.8 after seven years, additionally, the citywide deferred backlog decreases from a level of $55.1 million to $40.5 million after seven years; and
- Perform pavement inspections on the Local network every six years to continue the City's solid planning model within MicroPAVER to track PCI deterioration; also follows new OCTA guidelines for Measure M2

## IV. CURRENT PAVEMENT CONDITIONS (PCI)


| Rank | Mi. | SF | PCI 2026 | 2024 | 2022 | 2020 | 2018 | 2016 |
|---|---|---|---|---|---|---|---|---|
| MPAH | 168.2 | 34,345,600 | 77.4 | 80.4 | 81.6 | 80.2 | 76.1 | 74.7 |
| Local | 318.6 | 62,474,849 | 81.9 | 82.4 | 81.4 | 77.2 | 76.5 | 77.6 |
| **Citywide** | **486.8** | **96,820,449** | **80.3** | **81.7** | **81.5** | **78.9** | **76.4** | **76.7** |

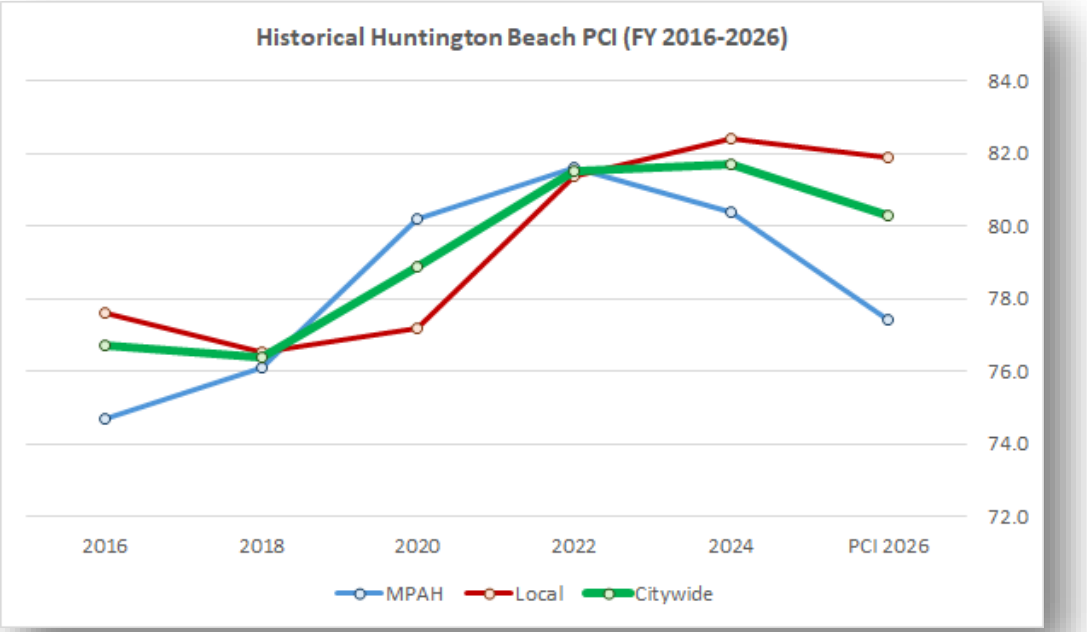


| Condition | PCI Range | MPAH | Locals | Total Mi. | % of Network |
|---|---|---|---|---|---|
| Very Good | (86-100) | 53.0 | 154.6 | 207.6 | 42.6% |
| Good | (75-85) | 48.0 | 80.1 | 128.1 | 26.3% |
| Fair | (60-74) | 47.0 | 54.7 | 101.7 | 20.9% |
| Poor | (41-59) | 17.8 | 23.9 | 41.7 | 8.6% |
| Very Poor | (0-40) | 2.4 | 5.3 | 7.7 | 1.6% |
| | | **168.2** | **318.6** | **486.8** | |

## V. PROJECTED PAVEMENT CONDITIONS (PCI) – CURRENT FUNDING

| HB MPAH / Local Annual Budget Schedule | | | | Network PCI | MPAH PCI | Local PCI |
|---|---|---|---|---|---|---|
| Fiscal Year | MPAH | Local | Total $ | 80.3 | 77.4 | 81.9 |
| 2026-27 | $6,000,000 | $5,800,000 | $11,800,000 | 80.7 | 77.7 | 82.3 |
| 2027-28 | $6,000,000 | $5,800,000 | $11,800,000 | 80.5 | 77.4 | 82.2 |
| 2028-29 | $6,000,000 | $5,800,000 | $11,800,000 | 80.3 | 77.2 | 82.0 |
| 2029-30 | $6,000,000 | $5,800,000 | $11,800,000 | 80.0 | 76.9 | 81.7 |
| 2030-31 | $6,000,000 | $5,800,000 | $11,800,000 | 79.7 | 76.6 | 81.5 |
| 2031-32 | $6,000,000 | $5,800,000 | $11,800,000 | 79.0 | 75.9 | 80.9 |
| 2032-33 | $6,000,000 | $5,800,000 | $11,800,000 | 78.3 | 75.6 | 80.3 |
| | $42,000,000 | $40,600,000 | $82,600,000 | | | |

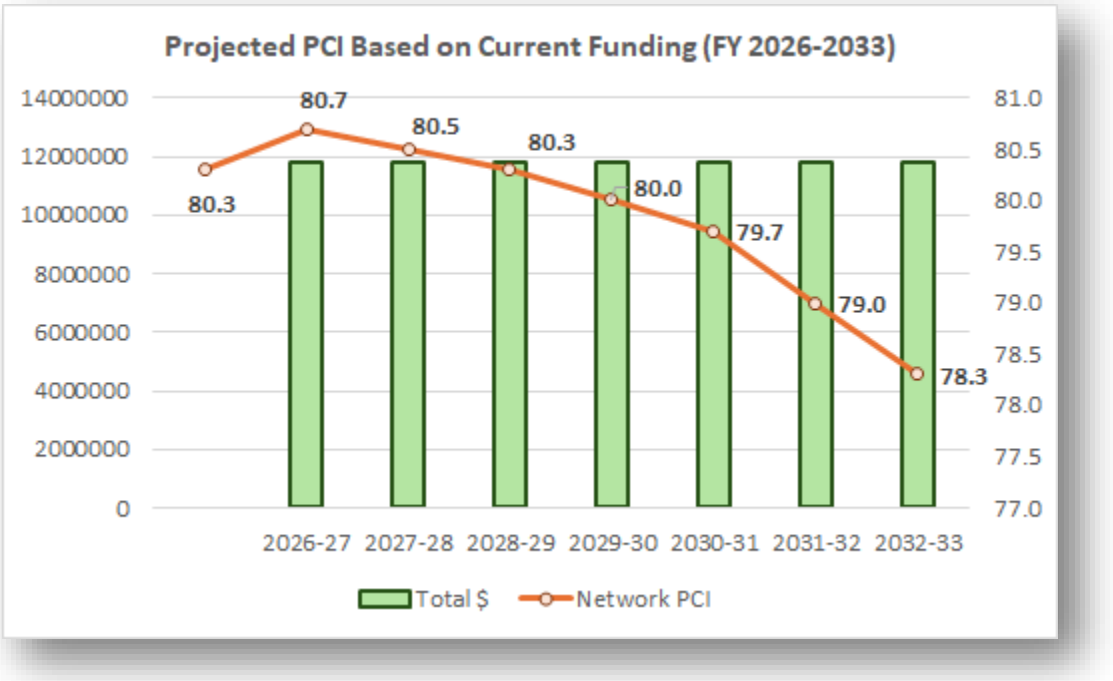

## VI. ALTERNATIVE FUNDING LEVELS

*Maintain Existing Average Network PCI*

| Fiscal Year | Maintain PCI Funding | Network PCI | MPAH PCI | Local PCI |
|---|---|---|---|---|
| **Today** | ~ | **80.3** | **77.4** | **81.9** |
| **2026-27** | $13,791,700 | 81.3 | 78.4 | 82.9 |
| **2027-28** | $13,788,200 | 81.7 | 78.8 | 83.3 |
| **2028-29** | $13,786,500 | 81.9 | 78.9 | 83.5 |
| **2029-30** | $13,788,300 | 82.1 | 79.1 | 83.7 |
| **2030-31** | $13,787,900 | 82.3 | 79.2 | 83.9 |
| **2031-32** | $13,790,400 | 81.7 | 78.6 | 83.3 |
| **2032-33** | $13,789,700 | 80.9 | 77.8 | 82.2 |
| **Total** | **$96,522,700** | | | |

*Funding an additional $14 million over seven years sustains the PCI at 80/81.*

*Improve Average Network PCI*

| Fiscal Year | Increase PCI Funding | Network PCI | MPAH PCI | Local PCI |
|---|---|---|---|---|
| **Today** | ~ | **80.3** | **77.4** | **81.9** |
| **2026-27** | $14,871,000 | 81.5 | 78.6 | 83.1 |
| **2027-28** | $14,955,300 | 82.0 | 79.0 | 83.6 |
| **2028-29** | $14,852,400 | 82.3 | 79.3 | 83.9 |
| **2029-30** | $15,052,600 | 82.7 | 79.6 | 84.2 |
| **2030-31** | $15,199,800 | 83.1 | 80.0 | 84.5 |
| **2031-32** | $14,743,000 | 82.7 | 79.7 | 83.9 |
| **2032-33** | $15,127,800 | 82.6 | 79.5 | 83.8 |
| **Total** | **$104,801,900** | | | |

*Funding an additional $22.2 million over seven years increases the PCI by two (2) points.*

## VII. CURRENT AND PROJECTED BACKLOG BY YEAR OF PAVEMENT MAINTENANCE NEEDS

| Plan Year | Current Funding Backlog | Maintain PCI Backlog | Increase PCI Backlog |
|---|---|---|---|
| **Current** | **$55,111,900** | **$55,111,900** | **$55,111,900** |
| **2026-27** | $57,044,300 | $50,051,900 | $48,206,100 |
| **2027-28** | $59,409,300 | $56,145,000 | $41,373,600 |
| **2028-29** | $61,742,200 | $55,709,200 | $33,888,100 |
| **2029-30** | $62,496,700 | $57,159,000 | $32,845,600 |
| **2030-31** | $60,745,900 | $58,148,200 | $30,104,100 |
| **2031-32** | $72,040,200 | $56,248,900 | $34,222,700 |
| **2032-33** | $85,558,200 | $60,128,700 | $40,515,600 |

**DEFERRED MAINTENANCE**

Delaying repairs on streets where pavement conditions indicate a need generates deferred maintenance or "backlog". Deferred maintenance is work that is postponed to a future budget cycle, or until funds are available. As maintenance is deferred, the opportunity to apply preventive, life extending pavement treatments is forfeited and the ultimate cost of rehabilitation multiplies (i.e. slurry seal costs to overlay costs). By using the City's pavement maintenance applications and their associated unit costs, when a budgetary model is exercised within the PMP software the amount of deferred maintenance is calculated. Based upon the available budget applied to the model, deferred maintenance will increase or decrease.

**As maintenance is deferred, the opportunity to apply life extending preventive pavement applications is lost and the ultimate cost of rehabilitation multiples.**

## VIII. CENTERLINE MILEAGE

| Rank | PCI | Mi. | SF |
|---|---|---|---|
| MPAH | 77.4 | 168.2 | 34,345,600 |
| Local | 81.9 | 318.6 | 62,474,849 |
| Citywide | 80.3 | 486.8 | 96,820,449 |

## IX. PERCENTAGE OF NETWORK IN EACH OF FIVE CONDITION CATEGORIES BASED ON CENTERLINE MILES

| ndition | PCI Range | Network | Percent Area of Total Pavement | Area of Pavement (SF) | Percent Centerline Mi. of Network | Centerline Mileage of Network |
|---|---|---|---|---|---|---|
| Very Good | (86-100) | MPAH | 11.0% | 10,696,050 | 10.9% | 53.0 |
| | | Local | 31.1% | 30,128,622 | 31.8% | 154.6 |
| Good | (75-85) | MPAH | 10.3% | 10,005,800 | 9.9% | 48.0 |
| | | Local | 16.2% | 15,726,263 | 16.5% | 80.1 |
| Fair | (60-74) | MPAH | 10.0% | 9,725,915 | 9.7% | 47.0 |
| | | Local | 11.2% | 10,863,154 | 11.2% | 54.7 |
| Poor | (41-59) | MPAH | 3.6% | 3,468,649 | 3.7% | 17.8 |
| | | Local | 4.9% | 4,708,806 | 4.9% | 23.9 |
| Very Poor | (0-40) | MPAH | 0.5% | 449,186 | 0.5% | 2.4 |
| | | Local | 1.1% | 1,048,004 | 1.1% | 5.3 |
| | | | | **96,820,449** | | **486.8** |

# X. REDUCTION IN M2 LOCAL MATCH

A local agency match reduction of 10% of the eligible cost for projects submitted for consideration of funding through the M2 Comprehensive Transportation Funding Programs (CTFP) call for projects is available if the local agency either:

a. Shows measurable improvement of paved road conditions during the previous reporting period defined as an overall weighted (by area) average system improvement of one Pavement Condition Index (PCI) point with no reduction in the overall weighted (by area) average PCI in the Master Plan of Arterial Highways (MPAH) or local categories:

or

b. Have road pavement conditions during the previous reporting period, within the highest 20% of the scale for road pavement conditions in conformance with OCTA Ordinance No. 3, defined as a PCI of 75 or higher, otherwise defined as in "good condition".

Road conditions found through our 2026 PMP management study shows that the City **is eligible** for Local Match Reduction based on the current network weighted PCI of 80.3. Additionally, the City of Huntington Beach has demonstrated with the enclosed budget projection (page 8) that the City's weighted average PCI (by area) remains above a PCI of 75 after the seven year program.

# XI. APPENDIX A – SEVEN YEAR ROAD MAINTENANCE AND REHABILITATION PLAN BASED ON CURRENT OR EXPECTED FUNDING LEVEL

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | ***Arterials / Collector (MPAH)*** | | | | | | | | | | | | | | | |
| 194 | 12 | BOLSA AVE | BOLSA CHICA ST | GRAHAM ST | A | AC | ~ | 2,718 | 38 | 103,284 | 4/24/26 | 72 | 26 | 67 | 7 | Type II Slurry Seal | $67,135 |
| 194 | 15 | BOLSA AVE | GRAHAM ST | TRAVELWAY | A | AC | ~ | 648 | 38 | 24,624 | 4/28/26 | 19 | 52 | 33 | 15 | AC Recon | $316,911 |
| 194 | 16 | BOLSA AVE | TRAVELWAY | DAN LN | A | AC | ~ | 609 | 38 | 23,142 | 4/28/26 | 26 | 46 | 38 | 16 | AC Recon | $297,838 |
| 194 | 17 | BOLSA AVE | DAN LN | SPRINGDALE ST | A | AC | ~ | 1,325 | 38 | 50,350 | 4/24/26 | 35 | 85 | 15 | 0 | Grind - ARHM | $452,143 |
| 194 | 17009 | BOLSA AVE | DAN LN | TRAVELWAY | A | AC | ~ | 609 | 38 | 23,142 | 4/24/26 | 65 | 90 | 10 | 0 | Grind - ARHM | $207,815 |
| 194 | 17010 | BOLSA AVE | EDWARDS ST | DRAKE LN | A | AC | ~ | 1,165 | 34 | 39,610 | 4/24/26 | 27 | 66 | 24 | 10 | AC Recon | $509,781 |
| 194 | 173 | BOLSA AVE | SPRINGDALE ST | DRAKE LN | A | AC | ~ | 1,481 | 34 | 50,354 | 4/24/26 | 40 | 72 | 28 | 0 | Grind - ARHM | $452,179 |
| 194 | 20 | BOLSA AVE | DRAKE LN | EDWARDS ST | A | AC | ~ | 1,165 | 34 | 39,610 | 4/24/26 | 28 | 81 | 12 | 7 | AC Recon | $509,781 |
| 194 | 24 | BOLSA AVE | EDWARDS ST | VICTORIA LN | A | AAC | ~ | 1,316 | 34 | 44,744 | 4/24/26 | 54 | 87 | 13 | 0 | Grind - ARHM | $401,801 |
| 194 | 25 | BOLSA AVE | VICTORIA LN | GOLDENWEST ST | A | AAC | ~ | 1,330 | 36 | 47,880 | 4/24/26 | 81 | 32 | 68 | 0 | Type II Slurry Seal | $31,122 |
| 194 | 459 | BOLSA AVE | SPRINGDALE ST | DAN LN | A | AC | ~ | 1,325 | 38 | 50,350 | 4/24/26 | 55 | 66 | 23 | 11 | Grind - ARHM | $452,143 |
| 194 | 466 | BOLSA AVE | VICTORIA LN | EDWARDS ST | A | AAC | ~ | 1,316 | 46 | 60,536 | 4/21/26 | 51 | 70 | 27 | 3 | Grind - ARHM | $543,613 |
| 194 | 467 | BOLSA AVE | GOLDENWEST ST | VICTORIA LN | A | AAC | ~ | 1,330 | 46 | 61,180 | 4/21/26 | 73 | 71 | 29 | 0 | Type II Slurry Seal | $39,767 |
| 194 | 615 | BOLSA AVE | DRAKE LN | SPRINGDALE ST | A | AC | ~ | 1,481 | 34 | 50,354 | 4/24/26 | 30 | 64 | 32 | 4 | Grind - ARHM | $452,179 |
| 1670 | 364 | SEVENTEENTH ST | PCH | ORANGE AVE | A | AC | ~ | 1,239 | 28 | 34,692 | 4/23/26 | 61 | 21 | 79 | 0 | Grind - ARHM | $311,534 |
| 1670 | 365 | SEVENTEENTH ST | ORANGE AVE | PALM AVE | A | AC | ~ | 1,237 | 28 | 34,636 | 4/23/26 | 57 | 24 | 75 | 1 | Grind - ARHM | $311,031 |
| 1670 | 806 | SEVENTEENTH ST | ORANGE AVE | PCH | A | AC | ~ | 1,239 | 28 | 34,692 | 4/13/26 | 66 | 39 | 61 | 0 | Grind - ARHM | $311,534 |
| 1670 | 807 | SEVENTEENTH ST | PALM AVE | ORANGE AVE | A | AC | ~ | 1,237 | 28 | 34,636 | 4/13/26 | 49 | 37 | 63 | 0 | Grind - ARHM | $311,031 |
| | | | | | | | | | | | | | | | | | **$5,979,338** |
| 789 | 336 | HAMILTON AVE | BUSHARD ST | VIA STRAITS LN | C | AC | ~ | 1,067 | 31 | 33,077 | 5/6/26 | 70 | 32 | 67 | 1 | Type II Slurry Seal | $22,492 |
| 789 | 337 | HAMILTON AVE | VIA STRAITS LN | BROOKHURST ST | C | AC | ~ | 1,573 | 31 | 48,763 | 5/6/26 | 67 | 38 | 62 | 0 | Type II Slurry Seal | $33,159 |
| 789 | 437 | HAMILTON AVE | NORTHSHORE LN | BUSHARD ST | C | AC | ~ | 714 | 31 | 22,134 | 5/6/26 | 64 | 15 | 33 | 52 | Grind - ARHM | $206,732 |
| 789 | 515 | HAMILTON AVE | NORTHSHORE LN | POLYNESIAN LN | C | AC | ~ | 1,338 | 31 | 41,478 | 4/27/26 | 63 | 35 | 59 | 6 | Grind - ARHM | $387,405 |
| 789 | 516 | HAMILTON AVE | POLYNESIAN LN | MAGNOLIA ST | C | AC | ~ | 590 | 31 | 18,290 | 4/27/26 | 42 | 44 | 49 | 7 | Grind - ARHM | $170,829 |
| 789 | 60890 | HAMILTON AVE | BROOKHURST ST | BRIDGE | C | AC | ~ | 345 | 31 | 10,695 | 5/6/26 | 61 | 30 | 70 | 0 | Grind - ARHM | $99,891 |
| 789 | 60900 | HAMILTON AVE | BRIDGE | BROOKHURST ST | C | AC | ~ | 345 | 32 | 11,040 | 5/6/26 | 67 | 59 | 41 | 0 | Type II Slurry Seal | $7,507 |
| 789 | 73 | HAMILTON AVE | POLYNESIAN LN | NORTHSHORE LN | A | AC | ~ | 1,338 | 31 | 41,478 | 5/6/26 | 66 | 48 | 27 | 25 | Grind - ARHM | $387,405 |
| 789 | 74 | HAMILTON AVE | MAGNOLIA ST | POLYNESIAN LN | C | AC | ~ | 590 | 31 | 18,290 | 5/6/26 | 69 | 62 | 38 | 0 | Type II Slurry Seal | $12,437 |
| 789 | 778 | HAMILTON AVE | VIA STRAITS LN | BUSHARD ST | C | AC | ~ | 1,067 | 31 | 33,077 | 4/16/26 | 64 | 28 | 72 | 0 | Grind - ARHM | $308,939 |
| 789 | 779 | HAMILTON AVE | BROOKHURST ST | VIA STRAITS LN | C | AC | ~ | 1,573 | 31 | 48,763 | 4/27/26 | 44 | 45 | 52 | 3 | Grind - ARHM | $455,446 |
| 789 | 879 | HAMILTON AVE | BUSHARD ST | NORTHSHORE LN | C | AC | ~ | 714 | 31 | 22,134 | 4/27/26 | 71 | 34 | 66 | 0 | Type II Slurry Seal | $15,051 |
| 1290 | 123 | NEWLAND ST | FRIESLAND DR.(W) | SLATER AVE | A | AC | ~ | 1,175 | 30 | 35,250 | 4/30/26 | 58 | 35 | 37 | 28 | Grind - ARHM | $329,235 |
| 1290 | 124 | NEWLAND ST | MODALE DR | KINGSPORT DR | A | AAC | ~ | 937 | 30 | 28,110 | 4/24/26 | 62 | 30 | 67 | 3 | Grind - ARHM | $262,547 |
| 1290 | 125 | NEWLAND ST | KINGSPORT DR | GARFIELD AVE | A | AAC | ~ | 385 | 30 | 11,550 | 4/24/26 | 66 | 12 | 87 | 1 | Grind - ARHM | $107,877 |
| 1290 | 127 | NEWLAND ST | DEEPVIEW DR | ADAMS AVE | A | AAC | ~ | 1,193 | 60 | 71,580 | 4/21/26 | 64 | 19 | 81 | 0 | Grind - ARHM | $668,557 |
| 1290 | 128 | NEWLAND ST | ADAMS AVE | KELSO DR | A | AAC | ~ | 959 | 60 | 57,540 | 4/30/26 | 63 | 29 | 70 | 1 | Grind - ARHM | $537,424 |
| 1290 | 129 | NEWLAND ST | INDIANAPOLIS AVE | PUERTO DR | A | AAC | ~ | 1,931 | 60 | 115,860 | 4/29/26 | 62 | 23 | 75 | 2 | Grind - ARHM | $1,082,132 |
| 1290 | 130 | NEWLAND ST | PUERTO DR | ATLANTA AVE | A | AAC | ~ | 720 | 60 | 43,200 | 4/29/26 | 61 | 22 | 78 | 0 | Grind - ARHM | $403,488 |
| 1290 | 152 | NEWLAND ST | HAMILTON AVE | EDISON AVE | A | AAC | ~ | 848 | 48 | 40,704 | 4/15/26 | 76 | 37 | 62 | 1 | Type II Slurry Seal | $27,679 |
| 1290 | 255 | NEWLAND ST | WARNER AVE | FRIESLAND DR | A | AC | ~ | 1,466 | 30 | 43,980 | 4/30/26 | 55 | 44 | 45 | 11 | Grind - ARHM | $410,773 |
| 1290 | 290 | NEWLAND ST | YORKTOWN AVE | DEEPVIEW DR | A | AAC | ~ | 1,447 | 60 | 86,820 | 4/21/26 | 67 | 23 | 77 | 0 | Type II Slurry Seal | $59,038 |
| | | | | | | | | | | | | | | | | | **$5,996,043** |
| 500 | 14998 | DELAWARE ST | ATLANTA AVE | END | C | AC | ~ | 874 | 30 | 26,220 | 4/9/26 | 73 | 7 | 53 | 40 | Type II Slurry Seal | $18,354 |
| 500 | 160 | DELAWARE ST | UTICA AVE | YORKTOWN AVE | C | AC | ~ | 1,321 | 60 | 79,260 | 4/29/26 | 64 | 22 | 71 | 7 | Grind - ARHM | $769,615 |
| 500 | 355 | DELAWARE ST | ADAMS AVE | UTICA AVE | C | AC | ~ | 1,320 | 60 | 79,200 | 4/29/26 | 65 | 21 | 78 | 1 | Grind - ARHM | $769,032 |
| 500 | 383 | DELAWARE ST | GARFIELD AVE | CLAY AVE | C | AAC | ~ | 1,320 | 60 | 79,200 | 4/13/26 | 69 | 27 | 62 | 11 | Type II Slurry Seal | $55,440 |
| 500 | 384 | DELAWARE ST | YORKTOWN AVE | CLAY AVE | C | AAC | ~ | 1,320 | 60 | 79,200 | 4/30/26 | 61 | 29 | 69 | 2 | Grind - ARHM | $769,032 |
| 500 | 385 | DELAWARE ST | MAIN ST | GARFIELD AVE | C | AAC | ~ | 1,405 | 60 | 84,300 | 4/20/26 | 67 | 19 | 74 | 7 | Type II Slurry Seal | $59,010 |
| 500 | 431 | DELAWARE ST | MEMPHIS AVE | ADAMS AVE | C | AC | ~ | 1,321 | 60 | 79,260 | 4/29/26 | 64 | 26 | 73 | 1 | Grind - ARHM | $769,615 |
| 1290 | 424 | NEWLAND ST | HEIL AVE | LAMAR DR | A | AC | ~ | 931 | 60 | 55,860 | 5/1/26 | 55 | 50 | 44 | 6 | Grind - ARHM | $542,401 |
| 1290 | 425 | NEWLAND ST | ARNETT DR | WARNER AVE | A | AC | ~ | 866 | 60 | 51,960 | 5/1/26 | 51 | 49 | 39 | 12 | Grind - ARHM | $504,532 |
| 1290 | 429 | NEWLAND ST | LAMAR DR | ARNETT DR | A | AC | ~ | 844 | 60 | 50,640 | 5/1/26 | 57 | 45 | 48 | 7 | Grind - ARHM | $491,714 |
| 1290 | 432 | NEWLAND ST | ATLANTA AVE | ST AUGUSTINE DR | A | AC | ~ | 1,454 | 60 | 87,240 | 4/15/26 | 79 | 34 | 55 | 11 | Type II Slurry Seal | $61,068 |
| 1290 | 435 | NEWLAND ST | ST AUGUSTINE DR | HAMILTON AVE | A | AC | ~ | 1,185 | 60 | 71,100 | 4/15/26 | 75 | 28 | 62 | 10 | Type II Slurry Seal | $49,770 |
| 1290 | 565 | NEWLAND ST | SLATER AVE | FRIESLAND DR | A | AC | ~ | 1,175 | 27 | 31,725 | 4/30/26 | 60 | 36 | 55 | 9 | Grind - ARHM | $308,050 |
| 1290 | 697 | NEWLAND ST | FRIESLAND DR | WARNER AVE | A | AC | ~ | 1,466 | 27 | 39,582 | 4/30/26 | 59 | 37 | 52 | 11 | Grind - ARHM | $384,341 |
| 1290 | 709 | NEWLAND ST | MODALE DR | ELLIS AVE | A | AAC | ~ | 1,322 | 27 | 35,694 | 4/24/26 | 62 | 21 | 71 | 8 | Grind - ARHM | $346,589 |
| | | | | | | | | | | | | | | | | | **$5,898,562** |
| 566 | 182 | EDINGER AVE | SHER LN | BEACH BL | A | AC | ~ | 1,590 | 31 | 49,290 | 4/22/26 | 63 | 24 | 47 | 29 | Grind - ARHM | $497,829 |
| 566 | 183 | EDINGER AVE | GOTHARD ST | SHER LN | A | AC | ~ | 1,711 | 31 | 53,041 | 4/16/26 | 71 | 31 | 58 | 11 | Type II Slurry Seal | $38,720 |
| 566 | 195 | EDINGER AVE | EDWARDS ST | SHERBECK LN | A | AC | ~ | 1,452 | 39 | 56,628 | 4/27/26 | 68 | 0 | 98 | 2 | Type II Slurry Seal | $41,338 |
| 566 | 196 | EDINGER AVE | SHERBECK LN | GOLDENWEST ST | A | AC | ~ | 1,192 | 39 | 46,488 | 4/27/26 | 66 | 0 | 89 | 11 | Grind - ARHM | $469,529 |
| 566 | 205 | EDINGER AVE | SAYBROOK LN | FANTASIA LN | A | AC | ~ | 1,491 | 72 | 107,352 | 4/28/26 | 76 | 27 | 55 | 18 | Type II Slurry Seal | $78,367 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 566 | 206 | EDINGER AVE | MELODY LN | BOLSA CHICA ST | A | AC | ~ | 1,451 | 60 | 87,060 | 4/28/26 | 73 | 78 | 17 | 5 | Type II Slurry Seal | $63,554 |
| 566 | 625 | EDINGER AVE | SHER LN | GOTHARD ST | A | AC | ~ | 1,711 | 31 | 53,041 | 4/16/26 | 68 | 31 | 69 | 0 | Type II Slurry Seal | $38,720 |
| 566 | 637 | EDINGER AVE | SHERBECK LN | EDWARDS ST | A | AC | ~ | 1,452 | 39 | 56,628 | 4/27/26 | 67 | 0 | 96 | 4 | Type II Slurry Seal | $41,338 |
| 566 | 85 | EDINGER AVE | CLUBHOUSE LN | SPRINGDALE ST | A | AAC | ~ | 1,371 | 64 | 87,744 | 4/7/26 | 85 | 14 | 86 | 0 | Type II Slurry Seal | $64,053 |
| 566 | 88 | EDINGER AVE | FANTASIA LN | MELODY AVE | A | AC | ~ | 1,060 | 60 | 63,600 | 4/28/26 | 74 | 46 | 45 | 9 | Type II Slurry Seal | $46,428 |
| 1751 | 170 | SPRINGDALE ST | SKYLAB RD | BOLSA AVE | A | AAC | ~ | 1,435 | 33 | 54,855 | 4/24/26 | 62 | 0 | 100 | 0 | Grind - ARHM | $554,036 |
| 1751 | 171 | SPRINGDALE ST | BRIARCLIFF DR | SKYLAB RD | A | AAC | ~ | 1,084 | 33 | 35,772 | 4/24/26 | 61 | 0 | 100 | 0 | Grind - ARHM | $361,297 |
| 1751 | 172 | SPRINGDALE ST | CHINOOK DR | BRIARCLIFF DR | A | AAC | ~ | 1,048 | 42 | 44,016 | 4/13/26 | 71 | 0 | 99 | 1 | Type II Slurry Seal | $32,132 |
| 1751 | 197 | SPRINGDALE ST | EDINGER AVE | MEADOWLARK DR | A | AAC | ~ | 1,455 | 39 | 56,745 | 4/28/26 | 72 | 0 | 100 | 0 | Type II Slurry Seal | $41,424 |
| 1751 | 198 | SPRINGDALE ST | MEADOWLARK DR | HEIL AVE | A | AAC | ~ | 1,185 | 39 | 46,215 | 4/28/26 | 73 | 0 | 100 | 0 | Type II Slurry Seal | $33,737 |
| 1751 | 225 | SPRINGDALE ST | HEIL AVE | DOYLE DR | A | AAC | ~ | 1,450 | 33 | 49,100 | 4/28/26 | 69 | 0 | 100 | 0 | Type II Slurry Seal | $35,843 |
| 1751 | 247 | SPRINGDALE ST | SLATER AVE | FRITCH DR | A | AC | ~ | 1,462 | 40 | 58,480 | 5/4/26 | 40 | 45 | 49 | 6 | Grind - ARHM | $590,648 |
| 1751 | 248 | SPRINGDALE ST | FRITCH DR | TALBERT AVE | A | AC | ~ | 1,185 | 40 | 47,400 | 5/4/26 | 41 | 43 | 45 | 12 | Grind - ARHM | $478,740 |
| 1751 | 32 | SPRINGDALE ST | MC FADDEN AVE | PRISCILLA DR | A | AAC | ~ | 961 | 38 | 36,518 | 4/28/26 | 59 | 100 | 0 | 0 | Grind - ARHM | $368,832 |
| 1751 | 33 | SPRINGDALE ST | PRISCILLA DR | ROYALIST DR | A | AAC | ~ | 1,040 | 38 | 39,520 | 4/28/26 | 65 | 100 | 0 | 0 | Grind - ARHM | $399,152 |
| 1751 | 460 | SPRINGDALE ST | MACHINE DR | ENGINEER DR | A | AAC | ~ | 1,142 | 39 | 44,538 | 4/28/26 | 82 | 29 | 71 | 0 | Type II Slurry Seal | $32,513 |
| 1751 | 461 | SPRINGDALE ST | MC FADDEN AVE | MACHINE DR | A | AAC | ~ | 817 | 39 | 31,863 | 4/28/26 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $23,260 |
| 1751 | 474 | SPRINGDALE ST | PRISCILLA (E) | MC FADDEN AVE | A | AAC | ~ | 961 | 38 | 36,518 | 4/28/26 | 81 | 68 | 32 | 0 | Type II Slurry Seal | $26,658 |
| 1751 | 475 | SPRINGDALE ST | ROYALIST DR | PRISCILLA DR | A | AAC | ~ | 1,040 | 38 | 39,520 | 4/28/26 | 69 | 83 | 0 | 17 | Type II Slurry Seal | $28,850 |
| 1751 | 476 | SPRINGDALE ST | EDINGER AVE | ROYALIST DR | A | AAC | ~ | 641 | 39 | 24,999 | 4/28/26 | 72 | 71 | 29 | 0 | Type II Slurry Seal | $18,249 |
| 1751 | 612 | SPRINGDALE ST | BOLSA AVE | SKYLAB RD | A | AAC | ~ | 1,435 | 33 | 50,855 | 4/24/26 | 76 | 0 | 100 | 0 | Type II Slurry Seal | $37,124 |
| 1751 | 613 | SPRINGDALE ST | SKYLAB RD | BRIARCLIFF DR | A | AAC | ~ | 1,084 | 33 | 35,772 | 4/24/26 | 61 | 0 | 100 | 0 | Grind - ARHM | $361,297 |
| 1751 | 614 | SPRINGDALE ST | BRIARCLIFF DR (W) | CHINOOK DR | A | AAC | ~ | 1,048 | 42 | 44,016 | 4/13/26 | 70 | 0 | 100 | 0 | Type II Slurry Seal | $32,132 |
| 1751 | 616 | SPRINGDALE ST | ENGINEER DR | BOLSA AVE | A | AAC | ~ | 685 | 39 | 26,715 | 4/28/26 | 82 | 0 | 100 | 0 | Type II Slurry Seal | $19,502 |
| 1751 | 639 | SPRINGDALE ST | MEADOWLARK DR | EDINGER AVE | A | AAC | ~ | 1,455 | 39 | 56,745 | 4/28/26 | 80 | 0 | 100 | 0 | Type II Slurry Seal | $41,424 |
| 1751 | 640 | SPRINGDALE ST | HEIL AVE | MEADOWLARK DR | A | AAC | ~ | 1,185 | 39 | 46,215 | 4/28/26 | 69 | 0 | 100 | 0 | Type II Slurry Seal | $33,737 |
| 1751 | 689 | SPRINGDALE ST | FRITCH DR | SLATER AVE | A | AC | ~ | 1,462 | 40 | 58,480 | 5/4/26 | 61 | 21 | 77 | 2 | Grind - ARHM | $590,648 |
| 1751 | 690 | SPRINGDALE ST | TALBERT AVE | FRITCH DR | A | AC | ~ | 1,185 | 40 | 47,400 | 5/4/26 | 49 | 35 | 53 | 12 | Grind - ARHM | $478,740 |
| | | | | | | | | | | | | | | | | | **$5,999,850** |
| 703 | 270 | GARFIELD AVE | GOLDENWEST ST | GOTHARD ST | A | AC | ~ | 1,320 | 38 | 50,160 | 5/4/26 | 65 | 32 | 65 | 3 | Grind - ARHM | $527,182 |
| 703 | 271 | GARFIELD AVE | GOTHARD ST | MAIN ST | A | AC | ~ | 1,238 | 45 | 55,710 | 5/8/26 | 55 | 36 | 57 | 7 | Grind - ARHM | $585,512 |
| 703 | 712 | GARFIELD AVE | GOTHARD ST | GOLDENWEST ST | A | AC | ~ | 1,320 | 43 | 56,760 | 5/8/26 | 65 | 36 | 54 | 10 | Grind - ARHM | $596,548 |
| 703 | 713 | GARFIELD AVE | MAIN ST | GOTHARD ST | A | AC | ~ | 1,238 | 45 | 55,710 | 5/4/26 | 48 | 33 | 61 | 6 | Grind - ARHM | $585,512 |
| 825 | 447 | HEIL AVE | SABOT LN | GOLDENWEST ST | A | AC | ~ | 828 | 61 | 50,508 | 5/4/26 | 62 | 51 | 30 | 19 | Grind - ARHM | $530,839 |
| 1127 | 352 | MAGNOLIA ST | INDIANAPOLIS AVE | CARROLTOWN DR | A | AC | ~ | 1,524 | 40 | 60,960 | 5/6/26 | 69 | 56 | 44 | 0 | Type II Slurry Seal | $46,330 |
| 1127 | 353 | MAGNOLIA ST | CARROLLTOWN DR | ATLANTA DR | A | AC | ~ | 1,117 | 40 | 44,680 | 5/6/26 | 71 | 42 | 58 | 0 | Type II Slurry Seal | $33,957 |
| 1127 | 556 | MAGNOLIA ST | INDIANAPOLIS AVE | BEDEL DR | A | AC | ~ | 794 | 33 | 28,202 | 4/8/26 | 64 | 68 | 32 | 0 | Grind - ARHM | $296,403 |
| 1127 | 557 | MAGNOLIA ST | STILWELL DR | ATLANTA AVE | A | AC | ~ | 1,346 | 40 | 53,840 | 4/16/26 | 65 | 38 | 61 | 1 | Grind - ARHM | $565,858 |
| 1127 | 789 | MAGNOLIA ST | HAMILTON AVE | STILWELL DR | A | AC | ~ | 1,293 | 40 | 51,720 | 4/16/26 | 62 | 26 | 73 | 1 | Grind - ARHM | $543,577 |
| 1351 | 314 | ORANGE AVE | NINTH ST | THIRTEENTH ST | C | AC | ~ | 1,302 | 25 | 32,550 | 4/27/26 | 68 | 27 | 40 | 33 | Type II Slurry Seal | $24,738 |
| 1351 | 315 | ORANGE AVE | SIXTH ST | NINTH ST | C | AC | ~ | 974 | 25 | 24,350 | 4/27/26 | 70 | 33 | 40 | 27 | Type II Slurry Seal | $18,506 |
| 1351 | 316 | ORANGE AVE | THIRTEENTH ST | SEVENTEENTH ST | C | AC | ~ | 1,307 | 25 | 32,675 | 4/27/26 | 77 | 48 | 52 | 0 | Type II Slurry Seal | $24,833 |
| 1351 | 325 | ORANGE AVE | THIRD ST | SIXTH ST | C | AC | ~ | 952 | 25 | 23,800 | 4/27/26 | 80 | 18 | 51 | 31 | Type II Slurry Seal | $18,088 |
| 1351 | 326 | ORANGE AVE | ATLANTA AVE | THIRD ST | C | AC | ~ | 657 | 25 | 16,425 | 4/27/26 | 53 | 72 | 27 | 1 | Grind - ARHM | $172,627 |
| 1351 | 362 | ORANGE AVE | SEVENTEENTH ST | GOLDENWEST ST | C | AC | ~ | 1,965 | 25 | 49,125 | 4/13/26 | 55 | 36 | 52 | 12 | Grind - ARHM | $516,304 |
| 1351 | 756 | ORANGE AVE | THIRTEENTH ST | NINTH ST | C | AC | ~ | 1,302 | 25 | 32,550 | 4/27/26 | 68 | 23 | 57 | 20 | Type II Slurry Seal | $24,738 |
| 1351 | 757 | ORANGE AVE | NINTH ST | SIXTH ST | C | AC | ~ | 974 | 25 | 24,350 | 4/27/26 | 73 | 21 | 40 | 39 | Type II Slurry Seal | $18,506 |
| 1351 | 758 | ORANGE AVE | SEVENTEENTH ST | THIRTEENTH ST | C | AC | ~ | 1,307 | 25 | 32,675 | 4/27/26 | 66 | 42 | 47 | 11 | Grind - ARHM | $343,414 |
| 1351 | 768 | ORANGE AVE | THIRD ST | ATLANTA AVE | C | AC | ~ | 657 | 25 | 16,425 | 4/27/26 | 76 | 39 | 61 | 0 | Type II Slurry Seal | $12,483 |
| 1351 | 804 | ORANGE AVE | GOLDENWEST ST | SEVENTEENTH ST | C | AC | ~ | 1,965 | 25 | 49,125 | 4/13/26 | 56 | 28 | 56 | 16 | Grind - ARHM | $516,304 |
| | | | | | | | | | | | | | | | | | **$6,002,258** |
| 743 | 139 | GOLDENWEST ST | CENTRAL PARK | EQUESTRIAN CENTER | A | AC | ~ | 1,959 | 40 | 82,360 | 5/5/26 | 75 | 18 | 58 | 24 | Type II Slurry Seal | $65,064 |
| 743 | 239 | GOLDENWEST ST | BETTY DR | SLATER AVE | A | AC | ~ | 1,193 | 39 | 46,527 | 5/5/26 | 82 | 0 | 100 | 0 | Type II Slurry Seal | $36,756 |
| 743 | 450 | GOLDENWEST ST | RIO VISTA DR | SLATER AVE | A | AC | ~ | 1,166 | 40 | 46,640 | 5/6/26 | 65 | 29 | 61 | 10 | Grind - ARHM | $509,775 |
| 743 | 451 | GOLDENWEST ST | ELLIS AVE | EQUESTRIAN CENTER | A | AC | ~ | 681 | 40 | 27,240 | 5/5/26 | 83 | 28 | 67 | 5 | Type II Slurry Seal | $21,520 |
| 743 | 580 | GOLDENWEST ST | CENTRAL PARK | RIO VISTA DR | A | AC | ~ | 1,478 | 40 | 62,620 | 5/6/26 | 56 | 37 | 53 | 10 | Grind - ARHM | $684,437 |
| 743 | 581 | GOLDENWEST ST | EQUESTRIAN CENTER | CENTRAL PARK | A | AC | ~ | 1,959 | 40 | 81,860 | 5/6/26 | 57 | 35 | 61 | 4 | Grind - ARHM | $894,730 |
| 743 | 681 | GOLDENWEST ST | SLATER AVE | BETTY DR | A | AC | ~ | 1,193 | 39 | 46,527 | 5/6/26 | 75 | 41 | 56 | 3 | Type II Slurry Seal | $36,756 |
| 743 | 833 | GOLDENWEST ST | BETTY DR | WARNER AVE | A | AC | ~ | 1,452 | 40 | 60,330 | 5/6/26 | 60 | 44 | 43 | 13 | Grind - ARHM | $659,407 |
| 743 | 9908 | GOLDENWEST ST | SLATER AVE | RIO VISTA DR | A | AC | ~ | 1,168 | 40 | 46,720 | 5/5/26 | 65 | 26 | 65 | 9 | Grind - ARHM | $510,650 |
| 743 | 9909 | GOLDENWEST ST | EQUESTRIAN CENTER | ELLIS AVE | A | AC | ~ | 681 | 40 | 30,740 | 5/5/26 | 76 | 0 | 100 | 0 | Type II Slurry Seal | $24,285 |
| 1127 | 794 | MAGNOLIA ST | CARROLLTOWN DR | INDIANAPOLIS AVE | A | AC | ~ | 1,524 | 40 | 60,960 | 4/14/26 | 30 | 53 | 40 | 7 | Grind - ARHM | $666,293 |
| 1127 | 795 | MAGNOLIA ST | ATLANTA AVE | CARROLLTOWN DR | A | AC | ~ | 1,117 | 40 | 44,680 | 4/14/26 | 55 | 26 | 66 | 8 | Grind - ARHM | $488,352 |
| 2082 | 442 | YORKTOWN AVE | BUSHARD ST | SALMON LN | C | AC | ~ | 1,190 | 33 | 39,270 | 4/23/26 | 76 | 36 | 64 | 0 | Type II Slurry Seal | $31,023 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2082 | 822 | YORKTOWN AVE | LAKE ST | MAIN ST | C | AC | ~ | 1,174 | 31 | 36,394 | 4/28/26 | 66 | 56 | 28 | 16 | Grind - ARHM | $397,786 |
| 2082 | 839 | YORKTOWN AVE | DELAWARE ST | LAKE ST | C | AC | ~ | 1,601 | 31 | 49,631 | 4/28/26 | 62 | 19 | 61 | 20 | Grind - ARHM | $542,467 |
| 2082 | 884 | YORKTOWN AVE | SALMON LN | BUSHARD ST | C | AC | ~ | 1,190 | 33 | 39,270 | 4/24/26 | 39 | 52 | 44 | 4 | Grind - ARHM | $429,221 |
| | | | | | | | | | | | | | | | | | **$5,998,522** |
| 240 | 295 | BROOKHURST ST | ADAMS AVE | PECK AVE | A | AC | ~ | 1,649 | 39 | 66,811 | 4/8/26 | 68 | 29 | 58 | 13 | Type II Slurry Seal | $54,785 |
| 240 | 296 | BROOKHURST ST | PECK DR | INDIANAPOLIS AVE | A | AC | ~ | 1,000 | 39 | 40,250 | 4/8/26 | 72 | 26 | 66 | 8 | Type II Slurry Seal | $33,005 |
| 240 | 338 | BROOKHURST ST | HAMILTON AVE | TRAVELWAY | A | AC | ~ | 1,316 | 39 | 54,824 | 5/6/26 | 74 | 25 | 59 | 16 | Type II Slurry Seal | $44,956 |
| 240 | 339 | BROOKHURST ST | TRAVELWAY | BANNING AVE | A | AC | ~ | 1,578 | 43 | 69,854 | 4/22/26 | 70 | 32 | 56 | 12 | Type II Slurry Seal | $57,280 |
| 240 | 348 | BROOKHURST ST | INDIANAPOLIS AVE | CLIFF DR | A | AC | ~ | 1,295 | 39 | 53,005 | 4/14/26 | 84 | 0 | 100 | 0 | Type II Slurry Seal | $43,464 |
| 240 | 349 | BROOKHURST ST | CLIFF DR | ATLANTA AVE | A | AC | ~ | 1,348 | 39 | 55,072 | 4/14/26 | 84 | 12 | 88 | 0 | Type II Slurry Seal | $45,159 |
| 240 | 50510 | BROOKHURST ST | TRAVELWAY | HAMILTON AVE | A | AC | ~ | 1,316 | 41 | 56,956 | 5/6/26 | 70 | 21 | 67 | 12 | Type II Slurry Seal | $46,704 |
| 240 | 519 | BROOKHURST ST | BUSHARD ST | BANNING AVE | A | AC | ~ | 2,434 | 43 | 106,662 | 4/22/26 | 73 | 30 | 70 | 0 | Type II Slurry Seal | $87,463 |
| 240 | 520 | BROOKHURST ST | PCH | BUSHARD ST | A | AC | ~ | 1,235 | 45 | 55,575 | 4/22/26 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $45,572 |
| 240 | 738 | BROOKHURST ST | INDIANAPOLIS AVE | PECK DR | A | AC | ~ | 1,000 | 39 | 39,000 | 4/27/26 | 60 | 29 | 61 | 10 | Grind - ARHM | $443,040 |
| 240 | 77 | BROOKHURST ST | BANNING AVE | BUSHARD ST | A | AC | ~ | 2,434 | 43 | 108,412 | 4/22/26 | 78 | 0 | 100 | 0 | Type II Slurry Seal | $88,898 |
| 240 | 781 | BROOKHURST ST | BANNING AVE | TRAVELWAY | A | AC | ~ | 1,578 | 43 | 69,854 | 4/22/26 | 66 | 56 | 44 | 0 | Grind - ARHM | $793,541 |
| 240 | 786 | BROOKHURST ST | HAMILTON AVE | EFFINGHAM DR | A | AC | ~ | 1,446 | 41 | 61,786 | 5/5/26 | 81 | 0 | 87 | 13 | Type II Slurry Seal | $50,665 |
| 240 | 790 | BROOKHURST ST | CLIFF DR | INDIANAPOLIS AVE | A | AC | ~ | 1,295 | 39 | 53,005 | 4/14/26 | 68 | 50 | 50 | 0 | Type II Slurry Seal | $43,464 |
| 240 | 791 | BROOKHURST ST | ATLANTA AVE | CLIFF DR | A | AC | ~ | 1,345 | 39 | 52,455 | 4/14/26 | 74 | 24 | 76 | 0 | Type II Slurry Seal | $43,013 |
| 240 | 881 | BROOKHURST ST | EFFINGHAM DR | ATLANTA AVE | A | AC | ~ | 1,196 | 41 | 51,036 | 5/5/26 | 82 | 0 | 90 | 10 | Type II Slurry Seal | $41,850 |
| 703 | 155 | GARFIELD AVE | BUSHARD ST (N) | BLUEFIN LN | A | AC | ~ | 585 | 33 | 19,305 | 4/9/26 | 71 | 30 | 70 | 0 | Type II Slurry Seal | $15,830 |
| 703 | 156 | GARFIELD AVE | BROOKHURST ST | KIPAHULU DR | A | AC | ~ | 681 | 33 | 22,473 | 4/21/26 | 68 | 22 | 63 | 15 | Type II Slurry Seal | $18,428 |
| 703 | 158 | GARFIELD AVE | WARD ST | END | A | AC | ~ | 1,505 | 22 | 33,110 | 4/21/26 | 52 | 40 | 35 | 25 | Grind - ARHM | $376,130 |
| 703 | 493 | GARFIELD AVE | BROOKFIELD MANOR | BLUEFIN LN | A | AC | ~ | 1,213 | 33 | 40,029 | 4/20/26 | 66 | 22 | 78 | 0 | Grind - ARHM | $454,729 |
| 703 | 494 | GARFIELD AVE | BROOKHURST ST | BROOKFIELD MANOR | A | AC | ~ | 839 | 33 | 27,687 | 4/20/26 | 66 | 53 | 47 | 0 | Grind - ARHM | $314,524 |
| 703 | 51 | GARFIELD AVE | BLUEFIN LN | BROOKFIELD MANOR | A | AC | ~ | 1,213 | 33 | 40,029 | 4/9/26 | 62 | 33 | 60 | 7 | Grind - ARHM | $454,729 |
| 703 | 52 | GARFIELD AVE | BROOKFIELD MANOR | BROOKHURST ST | A | AC | ~ | 839 | 33 | 27,687 | 4/9/26 | 58 | 60 | 40 | 0 | Grind - ARHM | $314,524 |
| 887 | 299 | INDIANAPOLIS AVE | TITAN LN | BUSHARD ST | C | AC | ~ | 988 | 24 | 23,712 | 4/14/26 | 81 | 16 | 84 | 0 | Type II Slurry Seal | $19,444 |
| 887 | 300 | INDIANAPOLIS AVE | BUSHARD ST | EVERGLADES LN | C | AC | ~ | 1,451 | 24 | 34,824 | 4/14/26 | 84 | 0 | 100 | 0 | Type II Slurry Seal | $28,556 |
| 887 | 310 | INDIANAPOLIS AVE | BEACH BLVD | FARNSWORTH LN | C | AC | ~ | 1,325 | 24 | 31,800 | 4/30/26 | 85 | 17 | 83 | 0 | Type II Slurry Seal | $26,076 |
| 887 | 311 | INDIANAPOLIS AVE | FARNSWORTH LN | NEWLAND ST | C | AC | ~ | 1,325 | 24 | 31,800 | 4/30/26 | 86 | 18 | 82 | 0 | Type II Slurry Seal | $26,076 |
| 887 | 436 | INDIANAPOLIS AVE | KELVINGROVE LN | TITAN LN | C | AC | ~ | 775 | 24 | 18,600 | 4/14/26 | 82 | 0 | 100 | 0 | Type II Slurry Seal | $15,252 |
| 887 | 508 | INDIANAPOLIS AVE | KELVINGROVE LN | MAGNOLIA ST | A | AC | ~ | 880 | 24 | 21,120 | 4/8/26 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $17,318 |
| 887 | 66 | INDIANAPOLIS AVE | MAGNOLIA ST | KELVINGROVE LN | C | AC | ~ | 880 | 24 | 21,120 | 4/14/26 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $17,318 |
| 887 | 753 | INDIANAPOLIS AVE | NEWLAND ST | FARNSWORTH LN | C | AC | ~ | 1,325 | 24 | 31,800 | 4/8/26 | 86 | 18 | 82 | 0 | Type II Slurry Seal | $26,076 |
| 887 | 878 | INDIANAPOLIS AVE | TITAN LN | KELVINGROVE LN | C | AC | ~ | 775 | 24 | 18,600 | 4/8/26 | 82 | 0 | 74 | 26 | Type II Slurry Seal | $15,252 |
| 1385 | 140 | PALM AVE | SURF DR | CHERRYHILL LN | C | AC | ~ | 2,090 | 22 | 47,480 | 4/9/26 | 85 | 66 | 34 | 0 | Type II Slurry Seal | $38,934 |
| 1385 | 363 | PALM AVE | SEVENTEENTH ST | GOLDENWEST ST | C | AC | ~ | 1,965 | 24 | 47,160 | 4/23/26 | 57 | 47 | 49 | 4 | Grind - ARHM | $535,738 |
| 1385 | 367 | PALM AVE | OFELIA LN | GOLDENWEST ST | C | AC | ~ | 1,476 | 29 | 48,804 | 4/23/26 | 74 | 31 | 69 | 0 | Type II Slurry Seal | $40,019 |
| 1385 | 368 | PALM AVE | CHERRYHILL LN (N) | OFELIA LN | C | AC | ~ | 2,210 | 29 | 66,840 | 4/9/26 | 81 | 26 | 74 | 0 | Type II Slurry Seal | $54,809 |
| 1385 | 399 | PALM AVE | SEAPOINT DR | SURF DR | C | AC | ~ | 665 | 28 | 19,370 | 4/9/26 | 84 | 31 | 69 | 0 | Type II Slurry Seal | $15,883 |
| 1385 | 582 | PALM AVE | CHERRYHILL LN | SURF DR | C | AC | ~ | 2,090 | 22 | 48,480 | 4/9/26 | 81 | 23 | 77 | 0 | Type II Slurry Seal | $39,754 |
| 1385 | 805 | PALM AVE | GOLDENWEST ST | SEVENTEENTH ST | C | AC | ~ | 1,965 | 24 | 47,160 | 4/23/26 | 64 | 24 | 75 | 1 | Grind - ARHM | $535,738 |
| 1385 | 809 | PALM AVE | GOLDENWEST ST | OFELIA LN | A | AC | ~ | 1,476 | 31 | 45,756 | 4/23/26 | 62 | 60 | 39 | 1 | Grind - ARHM | $519,788 |
| 1385 | 810 | PALM AVE | OFELIA LN | CHERRYHILL LN | C | AC | ~ | 2,210 | 31 | 68,510 | 4/9/26 | 85 | 21 | 79 | 0 | Type II Slurry Seal | $56,178 |
| 1385 | 841 | PALM AVE | SURF DR | SEAPOINT DR | C | AC | ~ | 665 | 31 | 22,865 | 4/9/26 | 80 | 0 | 89 | 11 | Type II Slurry Seal | $18,749 |
| | | | | | | | | | | | | | | | | | **$5,958,711** |
| | | ***Locals*** | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| 1 | 14829 | A ST | ROBIDOUX DR | WARNER AVE | E | AC | 4 | 644 | 36 | 23,184 | 3/31/22 | 82 | 0 | 39 | 61 | Type II Slurry Seal | $6,955 |
| 117 | 13487 | AMAZON DR | ALLEY GANGES LN | SHER LN | E | AC | 4 | 818 | 36 | 29,948 | 3/18/22 | 77 | 71 | 29 | 0 | Type II Slurry Seal | $8,984 |
| 118 | 14759 | AMBERLEAF CIR | DELAWARE ST | CDS | E | AC | 4 | 514 | 36 | 18,504 | 5/7/24 | 78 | 64 | 36 | 0 | Type II Slurry Seal | $5,551 |
| 129 | 15223 | ANITA LN | SHER LN | NANCY DR | E | AC | 4 | 1,054 | 36 | 37,944 | 3/18/22 | 84 | 58 | 42 | 0 | Type II Slurry Seal | $11,383 |
| 152 | 13576 | ASH ST | SYCAMORE AVE | CYPRESS AVE | E | AC | 4 | 424 | 36 | 15,264 | 5/30/24 | 63 | 27 | 59 | 14 | Grind - AC Overlay | $49,455 |
| 152 | 15266 | ASH ST | CYPRESS AVE | MANDRELL DR | E | AC | 4 | 675 | 36 | 24,300 | 5/30/24 | 53 | 76 | 19 | 5 | Grind - AC Overlay | $78,732 |
| 152 | 15267 | ASH ST | WARNER AVE | SYCAMORE AVE | E | AC | 4 | 398 | 36 | 14,328 | 5/30/24 | 61 | 45 | 39 | 16 | Grind - AC Overlay | $46,423 |
| 192 | 14793 | BARON CIR | TALBERT AVE | CDS | E | AAC | 4 | 603 | 36 | 23,208 | 4/20/26 | 84 | 16 | 84 | 0 | Type II Slurry Seal | $6,962 |
| 196 | 14425 | BARTON DR | KOLEDO LN | QUEENS LN | E | AAC | 4 | 298 | 36 | 10,728 | 5/30/24 | 85 | 0 | 81 | 19 | Type II Slurry Seal | $3,218 |
| 225 | 15725 | BELL CIR | TALBERT AVE | CDS | E | AC | 4 | 562 | 36 | 21,732 | 5/13/24 | 78 | 82 | 18 | 0 | Type II Slurry Seal | $6,520 |
| 233 | 14792 | BELVA DR | GOTHARD ST | METZLER LN | E | AC | 4 | 437 | 40 | 17,480 | 5/9/24 | 84 | 21 | 60 | 19 | Type II Slurry Seal | $5,244 |
| 304 | 15248 | BRESSEL LN | MERLE CIR | WARNER AVE | E | AC | 4 | 486 | 36 | 17,746 | 4/6/22 | 84 | 74 | 26 | 0 | Type II Slurry Seal | $5,324 |
| 322 | 14783 | BROOKSHIRE LN | WINDFIELD DR | TALBERT AVE | E | AC | 4 | 344 | 46 | 15,324 | 5/13/24 | 71 | 31 | 33 | 36 | Grind - AC Overlay | $49,650 |
| 327 | 14851 | BRUSH DR | ALLEY NEWLAND ST | NEWLAND ST | E | AC | 4 | 152 | 36 | 5,472 | 4/6/22 | 85 | 68 | 32 | 0 | Type II Slurry Seal | $1,642 |
| 327 | 15759 | BRUSH DR | WAITE LN | HART CIR | E | AC | 4 | 526 | 36 | 18,936 | 5/9/24 | 67 | 75 | 25 | 0 | Grind - AC Overlay | $61,353 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 337 | 14788 | BURTON DR | GRIFFIN LN | SAMPSON LN | E | AC | 4 | 126 | 40 | 5,040 | 5/8/24 | 80 | 44 | 46 | 10 | Type II Slurry Seal | $1,512 |
| 357 | 13545 | CAMEL CIR | ROSS LN | END | E | AC | 4 | 199 | 32 | 7,618 | 3/31/22 | 86 | 63 | 33 | 4 | Type II Slurry Seal | $2,285 |
| 360 | 14794 | CAMERON ST | SLATER AVE | NEWMAN AVE | E | AAC | 4 | 1,322 | 36 | 43,592 | 4/13/26 | 86 | 51 | 38 | 11 | Type II Slurry Seal | $13,078 |
| 549 | 13567 | CYPRESS AVE | OAK LN | ASH ST | E | AC | 4 | 447 | 36 | 16,092 | 5/30/24 | 80 | 0 | 93 | 7 | Type II Slurry Seal | $4,828 |
| 549 | 13579 | CYPRESS AVE | ASH ST. | ELM ST | E | AC | 4 | 436 | 36 | 15,696 | 5/30/24 | 65 | 17 | 67 | 16 | Grind - AC Overlay | $50,855 |
| 549 | 13580 | CYPRESS AVE | ELM ST | BEACH BLVD | E | AC | 4 | 439 | 36 | 15,804 | 5/30/24 | 58 | 28 | 54 | 18 | Grind - AC Overlay | $51,205 |
| 549 | 15262 | CYPRESS AVE | EMERALD LN | OAK LN | E | AC | 4 | 317 | 36 | 11,412 | 5/30/24 | 59 | 63 | 25 | 12 | Grind - AC Overlay | $36,975 |
| 551 | 15258 | DAIRYVIEW CIR | END | END | E | AAC | 4 | 511 | 36 | 21,396 | 5/28/24 | 82 | 39 | 37 | 24 | Type II Slurry Seal | $6,419 |
| 561 | 13655 | DANCY CIR | SPRINGTIME LN | CDS | E | AC | 4 | 223 | 32 | 8,636 | 4/8/24 | 64 | 69 | 31 | 0 | Grind - AC Overlay | $27,981 |
| 567 | 15729 | DARSY DR | FOREST LN | CDS | E | AC | 4 | 398 | 34 | 15,832 | 5/13/24 | 85 | 32 | 63 | 5 | Type II Slurry Seal | $4,750 |
| 575 | 13551 | DE VILLE CIR | LANDAU LN | CDS | E | AC | 4 | 518 | 36 | 18,648 | 3/31/22 | 74 | 68 | 32 | 0 | Type II Slurry Seal | $5,594 |
| 610 | 13531 | DONALD CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 86 | 39 | 61 | 0 | Type II Slurry Seal | $3,735 |
| 670 | 13527 | ELBE CIR | RHINE DR | CDS | E | AC | 4 | 264 | 32 | 9,948 | 3/18/22 | 79 | 50 | 50 | 0 | Type II Slurry Seal | $2,984 |
| 678 | 13578 | ELM ST | SYCAMORE AVE | CYPRESS AVE | E | AC | 4 | 424 | 36 | 15,264 | 5/30/24 | 66 | 47 | 28 | 25 | Grind - AC Overlay | $49,455 |
| 678 | 13581 | ELM ST | CYPRESS AVE | CDS | E | AC | 4 | 443 | 36 | 17,448 | 5/30/24 | 77 | 15 | 63 | 22 | Type II Slurry Seal | $5,234 |
| 685 | 14978 | EMERALD LN | FIR DR | CYPRESS AVE | E | AC | 4 | 669 | 36 | 24,084 | 5/30/24 | 70 | 68 | 24 | 8 | Grind - AC Overlay | $78,032 |
| 694 | 14778 | ENTERPRISE LN | PRODAN DR | MOUNTJOY DR | E | AAC | 4 | 1,030 | 40 | 42,700 | 4/14/26 | 86 | 46 | 52 | 2 | Type II Slurry Seal | $12,810 |
| 695 | 15651 | ERNEST AVE | GOLDENWEST ST | GOTHARD ST | E | AC | 4 | 1,321 | 40 | 52,840 | 3/5/24 | 83 | 45 | 55 | 0 | Type II Slurry Seal | $15,852 |
| 740 | 15261 | FIR DR | EMERALD LN | OAK LN | E | AC | 4 | 318 | 36 | 11,448 | 5/30/24 | 76 | 57 | 43 | 0 | Type II Slurry Seal | $3,434 |
| 758 | 14756 | FLORIDA ST | MAIN ST | PROFESSIONAL CIR | E | AC | 4 | 221 | 36 | 7,956 | 5/9/24 | 75 | 56 | 16 | 28 | Type II Slurry Seal | $2,387 |
| 758 | 15004 | FLORIDA ST | SHAFFER CIR | GARFIELD AVE | E | AC | 4 | 478 | 36 | 17,208 | 4/8/24 | 75 | 73 | 27 | 0 | Type II Slurry Seal | $5,162 |
| 758 | 15005 | FLORIDA ST | PROFESSIONAL CIR | SHAFFER CIR | E | AC | 4 | 1,365 | 36 | 49,140 | 4/8/24 | 80 | 53 | 26 | 21 | Type II Slurry Seal | $14,742 |
| 766 | 15728 | FOREST LN | DARSY DR | NEWMAN AVE | E | AC | 4 | 530 | 36 | 19,830 | 5/13/24 | 67 | 50 | 50 | 0 | Grind - AC Overlay | $64,249 |
| 771 | 14773 | FOX CIR | STEEP LN | CDS | E | AAC | 4 | 126 | 18 | 2,518 | 4/14/26 | 72 | 55 | 45 | 0 | Grind - AC Overlay | $8,158 |
| 809 | 14784 | GEORGETOWN LN | WOODWIND DR | WINDFIELD DR | E | AC | 4 | 765 | 40 | 30,600 | 5/13/24 | 76 | 24 | 76 | 0 | Type II Slurry Seal | $9,180 |
| 827 | 13496 | GLENCOE AVE | SILVER LN | BEACH BLVD | E | AC | 4 | 1,320 | 36 | 47,520 | 3/18/22 | 84 | 82 | 18 | 0 | Type II Slurry Seal | $14,256 |
| 860 | 14789 | GRIFFIN LN | SLATER AVE | BURTON DR | E | AC | 4 | 448 | 40 | 17,920 | 5/8/24 | 81 | 41 | 59 | 0 | Type II Slurry Seal | $5,376 |
| 865 | 14814 | GUILDERS DR | MARKEN LN | JEFFERSON LN | E | AC | 4 | 780 | 36 | 28,330 | 4/6/22 | 62 | 87 | 13 | 0 | Grind - AC Overlay | $91,789 |
| 866 | 13638 | GULF LN | TALBERT AVE | ALLEY TALBERT AVE | E | AC | 4 | 159 | 36 | 5,724 | 5/13/24 | 76 | 59 | 41 | 0 | Type II Slurry Seal | $1,717 |
| 866 | 15275 | GULF LN | ALLEY TALBERT AVE | CDS | E | AC | 4 | 534 | 36 | 19,224 | 5/13/24 | 75 | 53 | 47 | 0 | Type II Slurry Seal | $5,767 |
| 873 | 14824 | HAGUE LN | AMSTERDAM DR | EDAM CIR | E | AC | 4 | 245 | 36 | 8,820 | 3/31/22 | 57 | 83 | 17 | 0 | Grind - AC Overlay | $28,577 |
| 885 | 14987 | HAPPY DR | JOLLY LN | JOYFUL LN | E | AC | 4 | 509 | 36 | 18,324 | 5/13/24 | 83 | 15 | 85 | 0 | Type II Slurry Seal | $5,497 |
| 904 | 13642 | HARTLUND ST | LE CONTE DR | CDS | E | AC | 4 | 475 | 34 | 17,950 | 4/8/24 | 59 | 71 | 17 | 12 | Grind - AC Overlay | $58,158 |
| 904 | 15274 | HARTLUND ST | ALLEY TALBERT AVE | MAGIC CIR | E | AAC | 4 | 437 | 34 | 14,858 | 4/13/26 | 86 | 30 | 70 | 0 | Type II Slurry Seal | $4,457 |
| 925 | 14843 | HERITAGE LN | TERYY DR | LANCASTER DR | E | AC | 4 | 465 | 36 | 16,990 | 4/6/22 | 85 | 50 | 45 | 5 | Type II Slurry Seal | $5,097 |
| 947 | 14817 | HOLLAND DR | MARKEN LN | END | E | AC | 4 | 96 | 36 | 3,456 | 4/6/22 | 77 | 0 | 100 | 0 | Type II Slurry Seal | $1,037 |
| 947 | 15016 | HOLLAND DR | BEACH BLVD | CDS | E | AC | 4 | 625 | 36 | 23,750 | 4/6/22 | 86 | 43 | 57 | 0 | Type II Slurry Seal | $7,125 |
| 970 | 14977 | HUNTINGTON VILLAGE | MC FADDEN AVE | CENTER AVE | E | AC | 4 | 1,711 | 44 | 75,284 | 4/1/22 | 42 | 65 | 30 | 5 | Grind - AC Overlay | $243,920 |
| 1000 | 14807 | JACQUELYN LN | ALLEY BARTON DR | ALLEY SLATER AVE | E | AC | 4 | 500 | 36 | 19,000 | 5/28/24 | 73 | 66 | 20 | 14 | Type II Slurry Seal | $5,700 |
| 1000 | 14808 | JACQUELYN LN | ALLEY SLATER AVE | SLATER AVE | E | AC | 4 | 150 | 36 | 5,400 | 5/30/24 | 85 | 50 | 48 | 2 | Type II Slurry Seal | $1,620 |
| 1002 | 14996 | JALM DR | NEWLAND ST | CDS | E | AC | 4 | 536 | 36 | 21,296 | 5/13/24 | 81 | 13 | 87 | 0 | Type II Slurry Seal | $6,389 |
| 1004 | 14785 | JAMESTOWN LN | WOODWIND DR | WINDFIELD DR | E | AC | 4 | 766 | 40 | 30,640 | 5/13/24 | 79 | 40 | 47 | 13 | Type II Slurry Seal | $9,192 |
| 1010 | 14800 | JEFFERSON LN | SLATER AVE | MICHAEL DR | E | AAC | 4 | 530 | 36 | 18,080 | 4/13/26 | 84 | 22 | 19 | 59 | Type II Slurry Seal | $5,424 |
| 1010 | 14801 | JEFFERSON LN | MICHAEL DR | DANY DR | E | AC | 4 | 260 | 36 | 9,072 | 5/13/24 | 81 | 39 | 61 | 0 | Type II Slurry Seal | $2,722 |
| 2290 | 17025 | JOLLY LN | HAPPY DR | TALBERT AVE | E | AC | 4 | 466 | 36 | 18,176 | 5/13/24 | 84 | 25 | 71 | 4 | Type II Slurry Seal | $5,453 |
| 1026 | 14545 | JOYFUL LN | TALBERT AVE | HAPPY DR | E | AC | 4 | 508 | 36 | 18,288 | 5/13/24 | 86 | 19 | 54 | 27 | Type II Slurry Seal | $5,486 |
| 1028 | 13532 | JUDY CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 72 | 69 | 31 | 0 | Grind - AC Overlay | $40,338 |
| 1037 | 14823 | KAMPEN LN | AMSTERDAM DR | VALENCIA DR | E | AC | 4 | 1,010 | 36 | 36,360 | 3/31/22 | 73 | 66 | 34 | 0 | Type II Slurry Seal | $10,908 |
| 1089 | 13570 | KOLEDO LN | ALLEY SLATER AVE | SLATER AVE | E | AC | 4 | 150 | 36 | 5,400 | 5/30/24 | 39 | 72 | 25 | 3 | Grind - AC Overlay | $17,496 |
| 1102 | 13657 | LA PALMA DR | PATTERSON LN | CDS | E | AAC | 4 | 281 | 32 | 10,492 | 4/13/26 | 82 | 36 | 35 | 29 | Type II Slurry Seal | $3,148 |
| 1119 | 15253 | LANDAU LN | HEIL AVE | ROYAL DR | E | AC | 4 | 1,349 | 36 | 48,564 | 3/31/22 | 84 | 0 | 100 | 0 | Type II Slurry Seal | $14,569 |
| 1160 | 14805 | LIBERTY AVE | JACQUELYN LN | ALLEY LIBERTY AVE | E | AAC | 4 | 155 | 36 | 5,580 | 4/13/26 | 81 | 0 | 100 | 0 | Type II Slurry Seal | $1,674 |
| 1160 | 15732 | LIBERTY AVE | CRABB LN | JACQUELYN LN | E | AAC | 4 | 325 | 36 | 11,700 | 4/13/26 | 82 | 38 | 62 | 0 | Type II Slurry Seal | $3,510 |
| 1182 | 13530 | LOIS CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 76 | 60 | 40 | 0 | Type II Slurry Seal | $3,735 |
| 1212 | 15245 | LYNDON ST | WARNER AVE | CDS | E | AC | 4 | 466 | 36 | 18,576 | 3/31/22 | 85 | 47 | 49 | 4 | Type II Slurry Seal | $5,573 |
| 1221 | 13639 | MAGIC CIR | HARTLUND ST | CDS | E | AC | 4 | 121 | 32 | 5,372 | 4/8/24 | 65 | 56 | 44 | 0 | Grind - AC Overlay | $17,405 |
| 1224 | 14832 | MAJOR CIR | B ST | CDS | E | AC | 4 | 303 | 34 | 11,552 | 3/31/22 | 57 | 76 | 24 | 0 | Grind - AC Overlay | $37,428 |
| 1234 | 15264 | MANDRELL DR | ALLEY OAK LN | ASH ST | E | AC | 4 | 437 | 36 | 16,232 | 5/30/24 | 51 | 62 | 31 | 7 | Grind - AC Overlay | $52,592 |
| 1238 | 14767 | MANITOBA LN | ALBERTA DR | YUKON DR | E | AC | 4 | 246 | 36 | 9,856 | 5/13/24 | 83 | 0 | 94 | 6 | Type II Slurry Seal | $2,957 |
| 1302 | 14791 | METZLER LN | BELVA DR | CDS | E | AC | 4 | 310 | 40 | 14,200 | 5/9/24 | 82 | 17 | 80 | 3 | Type II Slurry Seal | $4,260 |
| 1303 | 14796 | MICHAEL DR | VAN BUREN ST | CDS | E | AC | 4 | 190 | 32 | 7,880 | 5/13/24 | 82 | 33 | 67 | 0 | Type II Slurry Seal | $2,364 |
| 1303 | 14797 | MICHAEL DR | VAN BUREN ST | JEFFERSON LN | E | AC | 4 | 561 | 34 | 19,074 | 5/13/24 | 85 | 17 | 83 | 0 | Type II Slurry Seal | $5,722 |
| 1303 | 14798 | MICHAEL DR | JEFFERSON LN | CDS | E | AC | 4 | 81 | 36 | 4,416 | 5/13/24 | 79 | 34 | 64 | 2 | Type II Slurry Seal | $1,325 |
| 1348 | 14810 | MORGAN LN | SLATER AVE | SPEER AVE | E | AAC | 4 | 661 | 36 | 23,796 | 4/13/26 | 85 | 12 | 82 | 6 | Type II Slurry Seal | $7,139 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1391 | 15013 | NEWMAN AVE | BEACH BLVD | CDS | E | AAC | 4 | 1,330 | 36 | 47,880 | 4/13/26 | 86 | 15 | 85 | 0 | Type II Slurry Seal | $14,364 |
| 1391 | 15014 | NEWMAN AVE | BEACH BLVD | VAN BUREN ST | E | AC | 4 | 955 | 40 | 36,920 | 5/13/24 | 77 | 72 | 27 | 1 | Type II Slurry Seal | $11,076 |
| 1391 | 15727 | NEWMAN AVE | VAN BUREN ST | CDS | E | AC | 4 | 1,049 | 40 | 43,460 | 5/13/24 | 85 | 21 | 57 | 22 | Type II Slurry Seal | $13,038 |
| 1398 | 15652 | NICHOLS ST | WARNER AVE | CDS | E | AC | 4 | 615 | 36 | 23,940 | 3/31/22 | 80 | 65 | 35 | 0 | Type II Slurry Seal | $7,182 |
| 1405 | 14799 | NOBLE CIR | FOREST LN | CDS | E | AC | 4 | 400 | 34 | 15,100 | 5/13/24 | 75 | 34 | 66 | 0 | Type II Slurry Seal | $4,530 |
| 1426 | 13565 | OAK LN | ALLEY ASH ST | ALLEY OAK LN | E | AC | 4 | 176 | 36 | 6,336 | 5/30/24 | 62 | 63 | 34 | 3 | Grind - AC Overlay | $20,529 |
| 1426 | 15259 | OAK LN | WARNER AVE | SYCAMORE AVE | E | AC | 4 | 397 | 36 | 14,292 | 5/30/24 | 48 | 90 | 10 | 0 | Grind - AC Overlay | $46,306 |
| 1426 | 15260 | OAK LN | SYCAMORE AVE | ALLEY ASH ST | E | AC | 4 | 933 | 36 | 33,588 | 5/30/24 | 48 | 75 | 16 | 9 | Grind - AC Overlay | $108,825 |
| 1456 | 13533 | ORINDA CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 77 | 49 | 38 | 13 | Type II Slurry Seal | $3,735 |
| 1489 | 13543 | PARKER CIR | ROSS LN | CDS | E | AC | 4 | 244 | 32 | 9,058 | 3/31/22 | 83 | 65 | 35 | 0 | Type II Slurry Seal | $2,717 |
| 1495 | 14548 | PASEO CIR | NEWLAND ST | CDS | E | AC | 4 | 362 | 36 | 15,032 | 5/13/24 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $4,510 |
| 1509 | 13646 | PEMBERCO CIR | STERLING AVE | CDS | E | AAC | 4 | 130 | 32 | 5,660 | 4/13/26 | 78 | 35 | 55 | 10 | Type II Slurry Seal | $1,698 |
| 1545 | 14827 | POLDER CIR | HAGUE LN | CDS | E | AC | 4 | 554 | 36 | 21,194 | 3/31/22 | 79 | 56 | 44 | 0 | Type II Slurry Seal | $6,358 |
| 1574 | 14776 | PRODAN DR | GOTHARD ST | ENTERPRISE LN | E | AC | 4 | 402 | 40 | 16,830 | 5/9/24 | 64 | 70 | 30 | 0 | Grind - AC Overlay | $54,529 |
| 1578 | 14757 | PROFESSIONAL CIR | FLORIDA ST | CDS | E | AC | 4 | 314 | 22 | 6,908 | 4/8/24 | 53 | 69 | 17 | 14 | Grind - AC Overlay | $22,382 |
| 1588 | 14774 | QUEBEC DR | HUNTINGTON DR | CDS | E | AC | 4 | 150 | 34 | 6,600 | 5/13/24 | 83 | 0 | 100 | 0 | Type II Slurry Seal | $1,980 |
| 1589 | 13569 | QUEENS LN | ALLEY BARTON DR | ALLEY SLATER AVE | E | AAC | 4 | 501 | 36 | 18,036 | 5/30/24 | 82 | 45 | 55 | 0 | Type II Slurry Seal | $5,411 |
| 1622 | 15743 | REMBRANDT DR | HAGUE LN | NEWLAND ST | E | AC | 4 | 653 | 36 | 23,508 | 3/31/22 | 86 | 44 | 56 | 0 | Type II Slurry Seal | $7,052 |
| 1633 | 14787 | REYNOLDS CIR | SAMPSON LN | CDS | E | AC | 4 | 304 | 40 | 13,660 | 5/8/24 | 84 | 22 | 72 | 6 | Type II Slurry Seal | $4,098 |
| 1636 | 15243 | RHINE DR | DON DR | LOIRE CIR | E | AC | 4 | 520 | 36 | 18,720 | 3/18/22 | 80 | 63 | 37 | 0 | Type II Slurry Seal | $5,616 |
| 1638 | 13489 | RHONE LN | SHER LN | KIM LN | E | AC | 4 | 851 | 36 | 30,636 | 3/18/22 | 85 | 60 | 40 | 0 | Type II Slurry Seal | $9,191 |
| 1663 | 14427 | ROLF CIR | HARTLUND ST | CDS | E | AC | 4 | 121 | 32 | 5,372 | 4/8/24 | 61 | 59 | 41 | 0 | Grind - AC Overlay | $17,405 |
| 1666 | 15726 | RONALD RD | ALLEY RONALD RD | BEACH BLVD | E | AC | 4 | 1,310 | 36 | 48,410 | 5/9/24 | 73 | 75 | 23 | 2 | Type II Slurry Seal | $14,523 |
| 1671 | 14803 | ROSANNA DR | GERALDINE LN | ROXANNE LN | E | AAC | 4 | 288 | 36 | 11,118 | 4/13/26 | 85 | 34 | 66 | 0 | Type II Slurry Seal | $3,335 |
| 1678 | 14424 | ROYAL DR | ROSS LN | LANDAU LN | E | AC | 4 | 245 | 36 | 8,820 | 3/31/22 | 72 | 83 | 17 | 0 | Grind - AC Overlay | $28,577 |
| 1681 | 13542 | ROYER CIR | ROSS LN | CDS | E | AC | 4 | 244 | 32 | 9,058 | 3/31/22 | 73 | 76 | 23 | 1 | Type II Slurry Seal | $2,717 |
| 1687 | 13470 | RUSHMOOR LN | ETNA CIR | SUGAR AVE | E | AC | 4 | 682 | 36 | 24,336 | 5/13/24 | 65 | 72 | 28 | 0 | Grind - AC Overlay | $78,849 |
| 1687 | 15212 | RUSHMOOR LN | WHITNEY DR | ETNA CIR | E | AC | 4 | 626 | 36 | 22,536 | 5/13/24 | 73 | 68 | 32 | 0 | Type II Slurry Seal | $6,761 |
| 1711 | 14786 | SAMPSON LN | WOODWIND DR | CDS | E | AC | 4 | 540 | 40 | 22,800 | 5/8/24 | 55 | 73 | 27 | 0 | Grind - AC Overlay | $73,872 |
| 1711 | 15724 | SAMPSON LN | BURTON DR | WOODWIND DR | E | AC | 4 | 1,119 | 40 | 44,760 | 5/8/24 | 81 | 43 | 48 | 9 | Type II Slurry Seal | $13,428 |
| 1761 | 14992 | SEAGATE DR | PROMENADE PKWY | CDS | E | AC | 4 | 592 | 42 | 26,114 | 3/5/24 | 85 | 0 | 45 | 55 | Type II Slurry Seal | $7,834 |
| 1784 | 14755 | SHAFFER CIR | FLORIDA ST | CDS | E | AAC | 4 | 184 | 34 | 6,256 | 5/5/26 | 83 | 0 | 100 | 0 | Type II Slurry Seal | $1,877 |
| 1789 | 15211 | SHASTA LN | WHITNEY DR | SUGAR AVE | E | AC | 4 | 1,290 | 36 | 46,440 | 5/13/24 | 59 | 72 | 27 | 1 | Grind - AC Overlay | $150,466 |
| 1856 | 15015 | SPEER AVE | MORGAN LN | BEACH BLVD | E | AAC | 4 | 1,320 | 26 | 33,940 | 4/13/26 | 86 | 7 | 93 | 0 | Type II Slurry Seal | $10,182 |
| 1856 | 15733 | SPEER AVE | CRABB LN | MORGAN LN | E | AAC | 4 | 479 | 36 | 17,244 | 4/13/26 | 80 | 33 | 67 | 0 | Type II Slurry Seal | $5,173 |
| 1864 | 15282 | SPRINGTIME LN | LE CORTE DR | FORELLE DR | E | AC | 4 | 527 | 36 | 18,684 | 4/8/24 | 64 | 78 | 15 | 7 | Grind - AC Overlay | $60,536 |
| 1886 | 15861 | STEEP LN | FOX CIR | ELLIS AVE | E | AC | 4 | 321 | 36 | 11,268 | 5/13/24 | 85 | 16 | 84 | 0 | Type II Slurry Seal | $3,380 |
| 1889 | 13647 | STERLING AVE | PEMBERCO CIR | LISA LN | E | AC | 4 | 282 | 33 | 9,306 | 5/9/24 | 57 | 79 | 21 | 0 | Grind - AC Overlay | $30,151 |
| 1889 | 13648 | STERLING AVE | LISA LN | WHARTON ST | E | AC | 4 | 272 | 33 | 8,712 | 5/9/24 | 56 | 77 | 23 | 0 | Grind - AC Overlay | $28,227 |
| 1889 | 15279 | STERLING AVE | BEACH BLVD | PEMBERCO CIR | E | AC | 4 | 906 | 33 | 29,634 | 5/9/24 | 64 | 71 | 27 | 2 | Grind - AC Overlay | $96,014 |
| 1944 | 13566 | SYCAMORE AVE | OAK LN | ASH ST | E | AC | 4 | 447 | 36 | 16,092 | 5/30/24 | 81 | 10 | 87 | 3 | Type II Slurry Seal | $4,828 |
| 1944 | 13577 | SYCAMORE AVE | ASH ST | ELM ST | E | AC | 4 | 436 | 36 | 15,696 | 5/30/24 | 56 | 80 | 17 | 3 | Grind - AC Overlay | $50,855 |
| 1969 | 13525 | THAMES LN | SEINE DR | RHINE DR | E | AC | 4 | 406 | 36 | 14,616 | 3/18/22 | 82 | 58 | 42 | 0 | Type II Slurry Seal | $4,385 |
| 1969 | 15242 | THAMES LN | HEIL AVE | SEINE DR | E | AC | 4 | 382 | 36 | 13,752 | 3/18/22 | 71 | 72 | 28 | 0 | Grind - AC Overlay | $44,556 |
| 1973 | 13652 | THOMAS CIR | TAYLOR DR | END | E | AC | 4 | 232 | 32 | 8,924 | 4/8/24 | 54 | 60 | 40 | 0 | Grind - AC Overlay | $28,914 |
| 1986 | 15714 | TIMBER CIR | DELAWARE ST | CDS | E | AC | 4 | 319 | 17 | 6,673 | 4/9/24 | 78 | 49 | 51 | 0 | Type II Slurry Seal | $2,002 |
| 2049 | 13645 | VALLEA CIR | STERLING AVE | END | E | AC | 4 | 130 | 32 | 5,660 | 4/8/24 | 59 | 62 | 26 | 12 | Grind - AC Overlay | $18,338 |
| 2052 | 14795 | VAN BUREN LN | MICHAEL DR | NEWMAN AVE | E | AC | 4 | 781 | 36 | 27,828 | 5/13/24 | 76 | 76 | 24 | 0 | Type II Slurry Seal | $8,348 |
| 2052 | 15863 | VAN BUREN LN | SLATER AVE | MICHAEL DR | E | AAC | 4 | 541 | 36 | 18,888 | 5/13/24 | 81 | 33 | 66 | 1 | Type II Slurry Seal | $5,666 |
| 2084 | 14994 | VIEWPOINT LN | CHRYSLER CIR | TERRY DR | E | AC | 4 | 689 | 36 | 24,804 | 4/6/22 | 83 | 64 | 36 | 0 | Type II Slurry Seal | $7,441 |
| 2084 | 15653 | VIEWPOINT LN | TERRY DR | DAMASK DR | E | AC | 4 | 549 | 36 | 20,264 | 4/6/22 | 73 | 81 | 19 | 0 | Type II Slurry Seal | $6,079 |
| 2097 | 13486 | VOLGA DR | ALLEY GANGES LN | SHER LN | E | AC | 4 | 817 | 36 | 29,412 | 3/18/22 | 78 | 77 | 23 | 0 | Type II Slurry Seal | $8,824 |
| 2116 | 13529 | WASHINGTON AVE | LYNDON ST | NICHOLS ST | E | ACT | 4 | 530 | 36 | 19,080 | 3/31/22 | 85 | 53 | 47 | 0 | Type II Slurry Seal | $5,724 |
| 2170 | 15722 | WINDFIELD DR | JAMESTOWN LN | GEORGETOWN LN | E | AC | 4 | 283 | 40 | 11,320 | 5/13/24 | 82 | 44 | 51 | 5 | Type II Slurry Seal | $3,396 |
| 2189 | 15723 | WOODWIND DR | SAMPSON LN | GEORGETOWN LN | E | AC | 4 | 911 | 40 | 37,190 | 5/13/24 | 75 | 67 | 33 | 0 | Type II Slurry Seal | $11,157 |
| 2200 | 14766 | YUKON DR | HUNTINGTON ST | MANITOBA LN | E | AC | 4 | 478 | 45 | 22,260 | 5/13/24 | 81 | 0 | 100 | 0 | Type II Slurry Seal | $6,678 |
| 2204 | 14811 | ZEIDER LN | FRIESLAND DR | SLATER AVE | E | AC | 4 | 1,180 | 36 | 42,480 | 3/25/24 | 67 | 54 | 38 | 8 | Grind - AC Overlay | $137,635 |
| | | | | | | | | | | | | | | | | | **$2,918,458** |
| 26 | 14948 | ALFAWN CIR | SELKIRK DR | END | E | AC | 5 | 102 | 36 | 5,172 | 3/30/26 | 84 | 51 | 49 | 0 | Type II Slurry Seal | $1,603 |
| 108 | 15977 | ALLSTONE DR | RAINGLEN LN | END | E | AC | 5 | 587 | 36 | 21,132 | 3/31/26 | 76 | 0 | 92 | 8 | Type II Slurry Seal | $6,551 |
| 109 | 14915 | ALMELO LN | GHENT DR | NORDINA DR | E | AC | 5 | 1,125 | 36 | 40,500 | 4/1/26 | 82 | 57 | 43 | 0 | Type II Slurry Seal | $12,555 |
| 113 | 13360 | ALTA VISTA CIR | SANTA YNEZ DR | END | E | AC | 5 | 350 | 36 | 13,950 | 5/28/24 | 27 | 90 | 10 | 0 | Grind - AC Overlay | $47,012 |
| 115 | 15187 | ALTAMIRANO LN | VILLA NUEVA DR | CADIZ CIR | E | AC | 5 | 1,101 | 36 | 41,136 | 5/23/24 | 79 | 78 | 20 | 2 | Type II Slurry Seal | $12,752 |
| 119 | 15806 | AMBERTON LN | HELMSIDE DR | MARYPORT DR | E | AC | 5 | 551 | 36 | 20,836 | 3/30/26 | 83 | 43 | 49 | 8 | Type II Slurry Seal | $6,459 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 134 | 14903 | APEL LN | TILBURG DR | FRANS LN | E | AC | 5 | 421 | 36 | 15,156 | 4/1/26 | 73 | 100 | 0 | 0 | Type II Slurry Seal | $4,698 |
| 134 | 15787 | APEL LN | BRANNED DR | TILBURG DR | E | AC | 5 | 1,279 | 36 | 46,294 | 5/8/26 | 50 | 70 | 30 | 0 | Grind - AC Overlay | $156,011 |
| 139 | 13426 | ARACENA DR | CARRANZA LN | SAN DOVAL LN | E | AAC | 5 | 256 | 36 | 9,966 | 5/24/24 | 71 | 50 | 48 | 2 | Type II Slurry Seal | $3,089 |
| 149 | 13409 | ARMADA DR | COLLINS CIR | EDWARDS ST | E | AC | 5 | 308 | 36 | 11,088 | 5/13/24 | 48 | 74 | 16 | 10 | Grind - AC Overlay | $37,367 |
| 149 | 15980 | ARMADA DR | FLINTSTONE LN | COLLINS CIR | E | AC | 5 | 1,013 | 36 | 36,468 | 5/20/24 | 59 | 71 | 16 | 13 | Grind - AC Overlay | $122,897 |
| 151 | 15172 | ARROWHEAD DR | STILL HARBOR LN | CDS | E | AC | 5 | 336 | 36 | 13,596 | 5/21/24 | 55 | 52 | 48 | 0 | Grind - AC Overlay | $45,819 |
| 160 | 13364 | ATHENA DR | MADERA LN | EDWARDS ST | E | AAC | 5 | 170 | 36 | 6,120 | 5/22/24 | 81 | 0 | 99 | 1 | Type II Slurry Seal | $1,897 |
| 160 | 15151 | ATHENA DR | LIDO LN | MADERA LN | E | AAC | 5 | 1,020 | 36 | 36,720 | 5/22/24 | 81 | 0 | 99 | 1 | Type II Slurry Seal | $11,383 |
| 169 | 13350 | AUTUMN CIR | CDS | ROSEMONT DR | E | AC | 5 | 320 | 36 | 13,020 | 5/28/24 | 46 | 78 | 21 | 1 | Grind - AC Overlay | $43,877 |
| 170 | 13352 | AVALON LN | PALO ALTO DR | POINT LOMA DR | E | AC | 5 | 1,025 | 36 | 36,900 | 5/21/24 | 48 | 69 | 31 | 0 | Grind - AC Overlay | $124,353 |
| 171 | 15985 | AVILLA LN | CRISTA PALMA DR | JARDINES DR | E | AAC | 5 | 971 | 36 | 34,668 | 5/22/24 | 81 | 10 | 90 | 0 | Type II Slurry Seal | $10,747 |
| 186 | 14946 | BANKTON DR | END | GAINSFORD LN | E | AC | 5 | 146 | 36 | 5,256 | 3/31/26 | 85 | 0 | 100 | 0 | Type II Slurry Seal | $1,629 |
| 186 | 15805 | BANKTON DR | GAINSFORD LN | END | E | AC | 5 | 424 | 36 | 17,264 | 5/8/26 | 78 | 56 | 38 | 6 | Type II Slurry Seal | $5,352 |
| 198 | 15976 | BARWOOD DR | RAINGLEN LN | BECKWALL LN | E | AC | 5 | 652 | 36 | 23,184 | 3/31/26 | 85 | 50 | 50 | 0 | Type II Slurry Seal | $7,187 |
| 201 | 14921 | BATES CIR | ALLSTONE DR | END | E | AC | 5 | 217 | 36 | 9,612 | 3/31/26 | 77 | 28 | 69 | 3 | Type II Slurry Seal | $2,980 |
| 202 | 13402 | BAXTER CIR | AMADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/21/24 | 58 | 91 | 8 | 1 | Grind - AC Overlay | $46,061 |
| 219 | 14941 | BECK CIR | GAINSFORD LN | END | E | AC | 5 | 154 | 36 | 5,544 | 3/31/26 | 68 | 60 | 34 | 6 | Type II Slurry Seal | $1,719 |
| 226 | 13436 | BELLFIELD LN | MIDWAY DR | GRIMSBY DR | E | AC | 5 | 203 | 36 | 7,308 | 3/31/26 | 79 | 38 | 53 | 9 | Type II Slurry Seal | $2,265 |
| 226 | 15191 | BELLFIELD LN | GRIMSBY DR | CDS | E | AC | 5 | 1,048 | 34 | 35,632 | 3/31/26 | 77 | 35 | 65 | 0 | Type II Slurry Seal | $11,046 |
| 236 | 14926 | BERLARK CIR | SERENE DR | END | E | AC | 5 | 424 | 36 | 17,064 | 3/30/26 | 78 | 67 | 33 | 0 | Type II Slurry Seal | $5,290 |
| 237 | 15777 | BERLIN LN | ROGERS DR | KERN DR | E | AC | 5 | 1,238 | 36 | 44,818 | 5/8/26 | 31 | 70 | 30 | 0 | Grind - AC Overlay | $151,037 |
| 239 | 15163 | BERSHIRE DR | SHOREHAM LN | STAMONT LN | E | AC | 5 | 782 | 36 | 27,504 | 3/30/26 | 59 | 92 | 8 | 0 | Grind - AC Overlay | $92,688 |
| 277 | 13386 | BOLTON CIR | WOODBORO DR | END | E | AC | 5 | 136 | 36 | 6,396 | 3/31/26 | 81 | 0 | 67 | 33 | Type II Slurry Seal | $1,983 |
| 294 | 15776 | BRANNEN DR | APEL LN | SPRINGDALE ST | E | AC | 5 | 940 | 36 | 33,840 | 5/8/26 | 65 | 56 | 44 | 0 | Grind - AC Overlay | $114,041 |
| 303 | 13460 | BRENTWELL CIR | GLENFOX DR | END | E | AAC | 5 | 472 | 36 | 18,492 | 5/29/24 | 54 | 58 | 42 | 0 | Grind - AC Overlay | $62,318 |
| 314 | 15810 | BRIGHTON DR | CRESTMOOR LN | WHITFORD LN | E | AC | 5 | 670 | 36 | 25,120 | 3/31/26 | 62 | 77 | 23 | 0 | Grind - AC Overlay | $84,654 |
| 343 | 13425 | CADIZ CIR | ALTAMIRANO LN | END | E | AAC | 5 | 100 | 50 | 5,750 | 5/29/24 | 61 | 42 | 45 | 13 | Grind - AC Overlay | $19,378 |
| 352 | 13432 | CALPE CIR | SAN LEANDRO LN | END | E | AAC | 5 | 100 | 50 | 6,000 | 5/29/24 | 68 | 40 | 59 | 1 | Type II Slurry Seal | $1,860 |
| 380 | 13437 | CARBECK DR | BELLFIELD LN | FOSS LN | E | AC | 5 | 863 | 36 | 31,068 | 3/31/26 | 67 | 42 | 39 | 19 | Type II Slurry Seal | $9,631 |
| 381 | 13379 | CARDIFF CIR | MARYPORT DR | END | E | AC | 5 | 75 | 36 | 3,950 | 3/31/26 | 37 | 73 | 27 | 0 | Grind - AC Overlay | $13,312 |
| 391 | 13430 | CARRANZA LN | COLON CIR | SALAMANCA LN | E | AAC | 5 | 207 | 36 | 7,452 | 5/29/24 | 71 | 7 | 75 | 18 | Type II Slurry Seal | $2,310 |
| 391 | 15188 | CARRANZA LN | VILLA NUEVA DR | COLON CIR | E | AAC | 5 | 813 | 36 | 29,268 | 5/24/24 | 56 | 64 | 36 | 0 | Grind - AC Overlay | $98,633 |
| 411 | 15581 | CENTRAL PARK DR | EDWARDS ST | CLIFFVIEW LN | E | AC | 5 | 1,310 | 80 | 104,800 | 5/23/24 | 78 | 38 | 37 | 25 | Type II Slurry Seal | $32,488 |
| 416 | 14912 | CHAPPARAL LN | LIEGE DR | NORDINA DR | E | AC | 5 | 1,409 | 36 | 50,724 | 5/8/26 | 66 | 69 | 31 | 0 | Grind - AC Overlay | $170,940 |
| 454 | 13464 | CLEARWATER CIR | INLET DR | END | E | AC | 5 | 481 | 36 | 18,816 | 5/29/24 | 76 | 8 | 85 | 7 | Type II Slurry Seal | $5,833 |
| 459 | 14419 | CLIFFVIEW LN | CENTRAL PARK DR | LAKEVIEW DR | E | AC | 5 | 273 | 30 | 8,190 | 5/29/24 | 69 | 36 | 42 | 22 | Type II Slurry Seal | $2,539 |
| 476 | 15171 | COLLIE LN | FENLEY DR | ARROWHEAD DR | E | AC | 5 | 1,125 | 36 | 40,500 | 5/24/24 | 45 | 65 | 29 | 6 | Grind - AC Overlay | $136,485 |
| 477 | 13405 | COLLINS CIR | ARNADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/29/24 | 34 | 91 | 9 | 0 | Grind - AC Overlay | $46,061 |
| 478 | 15984 | COLLINS LN | MOTION CIR | COLLINS CIR | E | AC | 5 | 774 | 36 | 28,614 | 5/20/24 | 81 | 73 | 27 | 0 | Type II Slurry Seal | $8,870 |
| 479 | 13428 | COLON CIR | CARRANZA LN | END | E | AAC | 5 | 92 | 42 | 5,364 | 5/29/24 | 65 | 32 | 68 | 0 | Grind - AC Overlay | $18,077 |
| 503 | 14416 | CORDOBA LN | SLATER AVE | CRISTA PALMA DR | E | AC | 5 | 173 | 36 | 5,940 | 5/24/24 | 63 | 89 | 11 | 0 | Grind - AC Overlay | $20,018 |
| 508 | 13356 | CORONADO LN | SONOMA DR | CDS | E | AC | 5 | 179 | 36 | 7,794 | 5/24/24 | 62 | 64 | 36 | 0 | Grind - AC Overlay | $26,266 |
| 508 | 15146 | CORONADO LN | SLATER AVE | SONOMA AVE | E | AC | 5 | 682 | 36 | 24,324 | 5/24/24 | 66 | 44 | 56 | 0 | Grind - AC Overlay | $81,972 |
| 531 | 14947 | CRESTMOOR LN | BRIGHTON DR | MARYPORT DR | E | AC | 5 | 306 | 36 | 11,016 | 3/31/26 | 72 | 78 | 22 | 0 | Type II Slurry Seal | $3,415 |
| 531 | 15807 | CRESTMOOR LN | WINDCROFT DR | BRIGHTON DR | E | AC | 5 | 661 | 36 | 23,796 | 3/31/26 | 80 | 53 | 41 | 6 | Type II Slurry Seal | $7,377 |
| 535 | 13416 | CRISTA PALMA DR | AVILLA LN. | END | E | AAC | 5 | 416 | 36 | 16,976 | 5/29/24 | 68 | 31 | 68 | 1 | Type II Slurry Seal | $5,263 |
| 535 | 15181 | CRISTA PALMA DR | SAN ROQUE LN | AVILLA LN | E | AC | 5 | 1,108 | 36 | 40,638 | 5/23/24 | 80 | 34 | 66 | 0 | Type II Slurry Seal | $12,598 |
| 540 | 14928 | CROWN CIR | BARWOOD DR | END | E | AC | 5 | 431 | 36 | 17,516 | 3/31/26 | 78 | 24 | 69 | 7 | Type II Slurry Seal | $5,430 |
| 574 | 14930 | DE LONG CIR | PRICE DR | END | E | AC | 5 | 385 | 36 | 15,360 | 3/30/26 | 85 | 40 | 60 | 0 | Type II Slurry Seal | $4,762 |
| 587 | 13401 | DELLGLEN CIR | FOXSHIELD DR | CDS | E | AC | 5 | 360 | 36 | 14,760 | 5/21/24 | 51 | 76 | 16 | 8 | Grind - AC Overlay | $49,741 |
| 592 | 13382 | DENVALE CIR | SELKIRK DR | END | E | AC | 5 | 126 | 36 | 6,036 | 3/30/26 | 75 | 54 | 39 | 7 | Type II Slurry Seal | $1,871 |
| 595 | 13363 | DESTRY CIR | MARCELLENA DR | CDS | E | AC | 5 | 135 | 36 | 6,300 | 5/28/24 | 40 | 72 | 28 | 0 | Grind - AC Overlay | $21,231 |
| 608 | 13454 | DOLPHINWOOD DR | OXBORO LN | END | E | AC | 5 | 186 | 36 | 6,408 | 5/29/24 | 28 | 86 | 14 | 0 | Grind - AC Overlay | $21,595 |
| 4070 | 50430 | EDWARDS ST FRONTAGE | ARMADA DR | VATCHER DR | E | AC | 5 | 864 | 30 | 25,920 | 5/29/24 | 62 | 80 | 20 | 0 | Grind - AC Overlay | $87,350 |
| 4070 | 50440 | EDWARDS ST FRONTAGE | MEADOW CREST DR | FREEBORN DR | E | AC | 5 | 611 | 30 | 18,330 | 5/30/24 | 52 | 81 | 17 | 2 | Grind - AC Overlay | $61,772 |
| 666 | 14415 | EL CORTIJO DR | EDWARDS ST | ALTAMIRANO LN | E | AAC | 5 | 167 | 36 | 5,724 | 5/20/24 | 74 | 32 | 68 | 0 | Type II Slurry Seal | $1,774 |
| 668 | 15986 | EL NOPAL LN | VIA ANGELINA DR | RIO VISTA DR | E | AAC | 5 | 751 | 36 | 28,036 | 5/29/24 | 73 | 22 | 78 | 0 | Type II Slurry Seal | $8,691 |
| 683 | 13355 | ELSINORE CIR | SONOMA DR | CDS | E | AC | 5 | 179 | 36 | 7,994 | 5/28/24 | 39 | 77 | 23 | 0 | Grind - AC Overlay | $26,940 |
| 686 | 13362 | ENCINO CIR | SANTA YNEZ DR | CDS | E | AC | 5 | 350 | 36 | 13,950 | 5/28/24 | 26 | 87 | 13 | 0 | AC Recon | $186,651 |
| 692 | 14896 | ENGLEWOOD CIR | FREEBORN DR | CDS | E | AC | 5 | 364 | 36 | 16,704 | 5/30/24 | 51 | 71 | 29 | 0 | Grind - AC Overlay | $56,292 |
| 697 | 15779 | ERWIN LN | FREEBORN DR | CDS | E | AC | 5 | 592 | 36 | 22,662 | 5/30/24 | 50 | 71 | 29 | 0 | Grind - AC Overlay | $76,371 |
| 705 | 13896 | EVENING HILL DR | MANOR POINT CIR | SHADY HARBOR CIR | E | AC | 5 | 355 | 36 | 12,780 | 5/6/24 | 81 | 21 | 79 | 0 | Type II Slurry Seal | $3,962 |
| 715 | 15974 | FALKIRK LN | RIDGEBURY DR | END | E | AC | 5 | 1,100 | 36 | 39,024 | 3/30/26 | 70 | 85 | 0 | 15 | Type II Slurry Seal | $12,097 |
| 717 | 13410 | FALLINGWATER DR | FLINTSTONE LN. | EDWARDS ST | E | AC | 5 | 1,335 | 36 | 48,060 | 5/20/24 | 51 | 81 | 9 | 10 | Grind - AC Overlay | $161,962 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 720 | 14933 | FANWOOD DR | GAINSFORD LN | RAINGLEN LN | E | AC | 5 | 389 | 36 | 14,754 | 3/31/26 | 79 | 29 | 66 | 5 | Type II Slurry Seal | $4,574 |
| 725 | 13381 | FELSON CIR | SELKIRK DR | END | E | AC | 5 | 114 | 36 | 5,904 | 3/30/26 | 77 | 62 | 38 | 0 | Type II Slurry Seal | $1,830 |
| 726 | 15978 | FENLEY DR | STILL HARBOR LN | FLINTSTONE LN | E | AC | 5 | 1,135 | 36 | 42,360 | 5/21/24 | 59 | 77 | 23 | 0 | Grind - AC Overlay | $142,753 |
| 731 | 13399 | FERNPOINT CIR | HAMSHIRE DR | CDS | E | AC | 5 | 429 | 36 | 17,244 | 5/21/24 | 60 | 76 | 21 | 3 | Grind - AC Overlay | $58,112 |
| 732 | 13450 | FIELDBURY LN | TALBERT AVE | TALEGATE DR | E | AC | 5 | 162 | 48 | 7,392 | 5/29/24 | 50 | 93 | 7 | 0 | Grind - AC Overlay | $24,911 |
| 732 | 13462 | FIELDBURY LN | GLENFOX DR | TALBERT AVE | E | AAC | 5 | 499 | 36 | 17,964 | 5/29/24 | 57 | 58 | 40 | 2 | Grind - AC Overlay | $60,539 |
| 732 | 15202 | FIELDBURY LN | TALEGATE DR | NORBROOK DR | E | AC | 5 | 875 | 36 | 31,212 | 5/29/24 | 43 | 90 | 10 | 0 | Grind - AC Overlay | $105,184 |
| 756 | 13397 | FLINTSTONE LN | FENLEY DR | AMADA DR | E | AC | 5 | 780 | 36 | 28,080 | 5/21/24 | 56 | 81 | 13 | 6 | Grind - AC Overlay | $94,630 |
| 756 | 15175 | FLINTSTONE LN | AMADA DR | VATCHER DR | E | AC | 5 | 866 | 36 | 31,926 | 5/28/24 | 56 | 83 | 17 | 0 | Grind - AC Overlay | $107,591 |
| 762 | 15791 | FORBES LN | APEL LN | NORDINA DR | E | AC | 5 | 1,190 | 36 | 43,090 | 5/8/26 | 51 | 62 | 38 | 0 | Grind - AC Overlay | $145,213 |
| 768 | 13438 | FOSS LN | MIDWAY DR | CDS | E | AC | 5 | 127 | 36 | 4,572 | 3/31/26 | 77 | 42 | 58 | 0 | Type II Slurry Seal | $1,417 |
| 768 | 15194 | FOSS LN | KENBROOK DR | MIDWAY DR | E | AC | 5 | 552 | 36 | 19,872 | 3/31/26 | 77 | 55 | 37 | 8 | Type II Slurry Seal | $6,160 |
| 772 | 15983 | FOXSHIELD DR | BLUEGATE LN | HALLCROFT LN | E | AC | 5 | 759 | 36 | 27,324 | 5/21/24 | 70 | 69 | 27 | 4 | Type II Slurry Seal | $8,470 |
| 777 | 14909 | FRANS LN | GLENSTONE DR | CDS | E | AC | 5 | 193 | 36 | 8,198 | 4/2/26 | 81 | 100 | 0 | 0 | Type II Slurry Seal | $2,541 |
| 777 | 15792 | FRANS LN | APEL LN | GLENSTONE DR | E | AC | 5 | 383 | 36 | 14,038 | 4/2/26 | 71 | 78 | 22 | 0 | Type II Slurry Seal | $4,352 |
| 778 | 14886 | FRASER LN | SUMMERDALE DR | JUNE DR | E | AAC | 5 | 239 | 36 | 9,508 | 5/30/24 | 75 | 8 | 92 | 0 | Type II Slurry Seal | $2,947 |
| 780 | 14894 | FREEBORN DR | LIDO LN | ERWIN LN | E | AAC | 5 | 405 | 36 | 15,720 | 5/22/24 | 76 | 0 | 97 | 3 | Type II Slurry Seal | $4,873 |
| 780 | 15784 | FREEBORN DR | ERWIN LN | EDWARDS ST | E | AAC | 5 | 785 | 36 | 28,590 | 5/22/24 | 79 | 0 | 94 | 6 | Type II Slurry Seal | $8,863 |
| 781 | 13465 | FRESHWATER CIR | INLET DR | END | E | AC | 5 | 478 | 36 | 18,708 | 5/29/24 | 74 | 24 | 65 | 11 | Type II Slurry Seal | $5,799 |
| 784 | 14901 | FRIML LN | ROGERS DR | KERN DR | E | AC | 5 | 1,120 | 36 | 40,320 | 4/1/26 | 81 | 63 | 37 | 0 | Type II Slurry Seal | $12,499 |
| 785 | 14412 | FRITCH DR | SPRINGDALE ST | STILL HARBOR LN | E | AC | 5 | 180 | 36 | 6,480 | 5/28/24 | 27 | 84 | 10 | 6 | Grind - AC Overlay | $21,838 |
| 788 | 14945 | GAINSFORD LN | BECK CIR | BANKTON DR | E | AC | 5 | 305 | 36 | 10,692 | 3/31/26 | 76 | 41 | 59 | 0 | Type II Slurry Seal | $3,315 |
| 788 | 15804 | GAINSFORD LN | FANWOOD DR | BECK CIR | E | AC | 5 | 794 | 36 | 29,334 | 5/8/26 | 64 | 64 | 36 | 0 | Grind - AC Overlay | $98,856 |
| 791 | 14417 | GALICIA LN | JARDINES DR | VILLA NUEVA DR | E | AC | 5 | 205 | 36 | 7,380 | 5/20/24 | 71 | 81 | 19 | 0 | Type II Slurry Seal | $2,288 |
| 792 | 15174 | GALIPEAN DR | COLLIE LN | PRESCOTT LN | E | AC | 5 | 633 | 36 | 22,788 | 5/20/24 | 70 | 80 | 19 | 1 | Type II Slurry Seal | $7,064 |
| 812 | 14879 | GERSHWIN DR | GRAHAM ST | BERLIN LN | E | AC | 5 | 167 | 36 | 6,012 | 4/1/26 | 65 | 87 | 13 | 0 | Grind - AC Overlay | $20,260 |
| 814 | 15789 | GHENT DR | BREDA LN | WILD ROSE LN | E | AC | 5 | 513 | 36 | 18,718 | 4/2/26 | 83 | 44 | 56 | 0 | Type II Slurry Seal | $5,803 |
| 828 | 13461 | GLENFOX DR | HEATHPOINT LN | WELLBROOK CIR | E | AAC | 5 | 269 | 36 | 10,434 | 5/23/24 | 56 | 47 | 53 | 0 | Grind - AC Overlay | $35,163 |
| 828 | 15208 | GLENFOX DR | WELLBROOK CIR | LAKEPOINT LN | E | AAC | 5 | 755 | 36 | 26,892 | 5/23/24 | 69 | 47 | 47 | 6 | Type II Slurry Seal | $8,337 |
| 831 | 15793 | GLENSTONE DR | GRAHAM ST | FRANS LN | E | AC | 5 | 423 | 36 | 15,228 | 5/8/26 | 56 | 71 | 29 | 0 | Grind - AC Overlay | $51,318 |
| 861 | 14931 | GRIFFITH CIR | PRICE DR | END | E | AC | 5 | 385 | 36 | 15,660 | 3/30/26 | 68 | 50 | 50 | 0 | Type II Slurry Seal | $4,855 |
| 862 | 15166 | GRIMSBY DR | WHITFORD LN | TALBERT AVE | E | AC | 5 | 850 | 36 | 30,312 | 3/30/26 | 69 | 17 | 70 | 13 | Type II Slurry Seal | $9,397 |
| 864 | 14872 | GROVE CIR | SUMMERDALE DR | END | E | AAC | 5 | 246 | 36 | 10,584 | 5/30/24 | 81 | 36 | 64 | 0 | Type II Slurry Seal | $3,281 |
| 869 | 13622 | GURNEY LN | ATHENA DR | MARCELLENA DR | E | AC | 5 | 400 | 36 | 15,540 | 5/28/24 | 42 | 72 | 28 | 0 | Grind - AC Overlay | $52,370 |
| 878 | 15178 | HALLCROFT LN | HAMSHIRE DR | VARSITY DR | E | AC | 5 | 532 | 36 | 19,152 | 5/21/24 | 53 | 86 | 13 | 1 | Grind - AC Overlay | $64,542 |
| 879 | 14414 | HALLPORT LN | VARSITY DR | NEWBURY DR | E | AAC | 5 | 155 | 36 | 5,292 | 5/23/24 | 67 | 0 | 74 | 26 | Type II Slurry Seal | $1,641 |
| 882 | 15982 | HAMSHIRE DR | SPRINGDALE ST | HALLCROFT LN | E | AC | 5 | 1,191 | 36 | 42,876 | 5/21/24 | 68 | 83 | 17 | 0 | Type II Slurry Seal | $13,292 |
| 902 | 13385 | HARTFIELD CIR | BERSHIRE DR | END | E | AC | 5 | 155 | 36 | 7,080 | 3/31/26 | 65 | 30 | 61 | 9 | Grind - AC Overlay | $23,860 |
| 917 | 13458 | HEATHPOINT LN | NEWBURY DR | GLENFOX DR | E | AC | 5 | 256 | 36 | 9,966 | 5/23/24 | 68 | 71 | 29 | 0 | Type II Slurry Seal | $3,089 |
| 920 | 14938 | HELMSIDE DR | AMBERTON LN | CRESTMOOR LN | E | AC | 5 | 292 | 36 | 11,512 | 3/30/26 | 77 | 35 | 44 | 21 | Type II Slurry Seal | $3,569 |
| 923 | 15767 | HERBERT LN | ROGERS DR | RENOIR CIR | E | AC | 5 | 500 | 36 | 18,000 | 5/8/26 | 28 | 80 | 20 | 0 | Grind - AC Overlay | $60,660 |
| 982 | 14422 | INLET DR | LAKEPOINT LN | EDWARDS ST | E | AAC | 5 | 175 | 36 | 6,012 | 5/29/24 | 77 | 0 | 97 | 3 | Type II Slurry Seal | $1,864 |
| 982 | 14423 | INLET DR | EDWARDS ST | CLEARWATER CIR | E | AC | 5 | 155 | 36 | 5,580 | 5/29/24 | 55 | 76 | 24 | 0 | Grind - AC Overlay | $18,805 |
| 982 | 15582 | INLET DR | CLEARWATER CIR | LAKEVIEW DR | E | AC | 5 | 583 | 36 | 20,988 | 5/29/24 | 79 | 36 | 51 | 13 | Type II Slurry Seal | $6,506 |
| 991 | 13441 | IRONGATE CIR | NEWMOON LN | END | E | AAC | 5 | 476 | 36 | 18,636 | 5/22/24 | 66 | 24 | 69 | 7 | Grind - AC Overlay | $62,803 |
| 998 | 13444 | IVORYCREST LN | VARSITY DR | JASONWOOD DR | E | AAC | 5 | 166 | 36 | 5,976 | 5/29/24 | 64 | 56 | 43 | 1 | Grind - AC Overlay | $20,139 |
| 998 | 15200 | IVORYCREST LN | JASONWOOD DR | NORBROOK DR | E | AAC | 5 | 828 | 36 | 29,808 | 5/23/24 | 64 | 42 | 46 | 12 | Grind - AC Overlay | $100,453 |
| 1006 | 13424 | JARDINES DR | AVILLA LN | END | E | AAC | 5 | 528 | 36 | 21,008 | 5/29/24 | 73 | 0 | 95 | 5 | Type II Slurry Seal | $6,512 |
| 1006 | 15183 | JARDINES DR | SAN ROGUE LN | AVILLA LN | E | AAC | 5 | 1,108 | 36 | 40,388 | 5/20/24 | 74 | 35 | 56 | 9 | Type II Slurry Seal | $12,520 |
| 1007 | 15196 | JASONWOOD DR | IVORYCREST LN | END | E | AAC | 5 | 836 | 36 | 31,896 | 5/22/24 | 61 | 33 | 67 | 0 | Grind - AC Overlay | $107,490 |
| 1027 | 13440 | JUDWICK CIR | NEWMOON LN | END | E | AAC | 5 | 479 | 36 | 18,744 | 5/22/24 | 61 | 31 | 64 | 5 | Grind - AC Overlay | $63,167 |
| 1032 | 14887 | JUNE DR | FRASER LN | ERWIN LN | E | AC | 5 | 251 | 36 | 9,338 | 5/22/24 | 43 | 69 | 29 | 2 | Grind - AC Overlay | $31,469 |
| 2304 | 60810 | KELLEY CIR | PRESCOTT LN | CDS | E | AC | 5 | 410 | 36 | 18,360 | 5/13/24 | 50 | 79 | 21 | 0 | Grind - AC Overlay | $61,873 |
| 4040 | 50210 | KENBROOK DR | BELLFIELD LN | FOSS LN | E | AC | 5 | 567 | 33 | 18,711 | 3/31/26 | 62 | 77 | 0 | 23 | Grind - AC Overlay | $63,056 |
| 4040 | 50220 | KENBROOK DR | FOSS LN | SPRINGDALE ST | E | AC | 5 | 180 | 33 | 5,440 | 3/31/26 | 71 | 100 | 0 | 0 | Type II Slurry Seal | $1,686 |
| 1059 | 13439 | KENWICK CIR | NEWMOON LN | END | E | AAC | 5 | 488 | 36 | 19,068 | 5/23/24 | 62 | 50 | 49 | 1 | Grind - AC Overlay | $64,259 |
| 1063 | 14883 | KERN DR | TIFFANY CIR | RENOIR CIR | E | AC | 5 | 354 | 36 | 12,744 | 5/8/26 | 28 | 83 | 17 | 0 | Grind - AC Overlay | $42,947 |
| 1063 | 14902 | KERN DR | BERLIN LN | CDS | E | AC | 5 | 105 | 36 | 5,030 | 4/1/26 | 46 | 80 | 20 | 0 | Grind - AC Overlay | $16,951 |
| 1063 | 15782 | KERN DR | BERLIN LN | TIFFANY CIR | E | AC | 5 | 849 | 36 | 30,564 | 5/8/26 | 25 | 84 | 13 | 3 | AC Recon | $408,946 |
| 1082 | 15271 | KISER DR | STILL HARBOR LN | PRESCOTT LN | E | AC | 5 | 858 | 36 | 32,388 | 5/28/24 | 45 | 78 | 22 | 0 | Grind - AC Overlay | $109,148 |
| 1101 | 15144 | LA MESA LN | PALO ALTO DR | POINT LOMA DR | E | AC | 5 | 1,020 | 36 | 36,720 | 5/24/24 | 64 | 59 | 41 | 0 | Grind - AC Overlay | $123,746 |
| 1109 | 13459 | LAKEPOINT LN | INLET DR | END | E | AC | 5 | 268 | 36 | 11,448 | 5/29/24 | 84 | 30 | 49 | 21 | Type II Slurry Seal | $3,549 |
| 1109 | 15207 | LAKEPOINT LN | NEWBURY DR | INLET DR | E | AAC | 5 | 519 | 36 | 19,434 | 5/29/24 | 64 | 47 | 50 | 3 | Grind - AC Overlay | $65,493 |
| 1111 | 15826 | LAKEVIEW DR | INLET DR | CLIFFVIEW LN | E | AC | 5 | 700 | 30 | 21,750 | 5/29/24 | 82 | 39 | 61 | 0 | Type II Slurry Seal | $6,743 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1117 | 13388 | LANCEFIELD DR | SHAMLEY CIR | WELLBANK LN | E | AC | 5 | 255 | 36 | 10,180 | 3/31/26 | 70 | 0 | 84 | 16 | Type II Slurry Seal | $3,156 |
| 1117 | 15167 | LANCEFIELD DR | OLDGLEN LN | SHAMLEY CIR | E | AC | 5 | 509 | 36 | 19,324 | 3/31/26 | 69 | 17 | 83 | 0 | Type II Slurry Seal | $5,990 |
| 1125 | 13400 | LARCREST CIR | FOXSHIELD DR | CDS | E | AC | 5 | 250 | 36 | 10,250 | 5/21/24 | 26 | 87 | 11 | 2 | AC Recon | $137,145 |
| 1128 | 15808 | LARKMONT DR | CRESTMOOR LN | HELENBROOK LN | E | AC | 5 | 517 | 36 | 19,362 | 3/31/26 | 80 | 31 | 66 | 3 | Type II Slurry Seal | $6,002 |
| 1142 | 13448 | LEAF CIR | PACEMONT DR | END | E | AAC | 5 | 380 | 36 | 17,680 | 5/29/24 | 66 | 48 | 51 | 1 | Grind - AC Overlay | $59,582 |
| 1157 | 13634 | LEWIS LN | GALIPEAN DR | WINTERGREEN DR | E | AC | 5 | 531 | 36 | 19,866 | 5/20/24 | 30 | 85 | 4 | 11 | Grind - AC Overlay | $66,948 |
| 1162 | 13621 | LIDO LN | MARIPOSA DR | SANTA YNEZ DR | E | AC | 5 | 320 | 36 | 12,660 | 5/28/24 | 29 | 91 | 6 | 3 | Grind - AC Overlay | $42,664 |
| 1162 | 15147 | LIDO LN | FREEBORN DR | MARIPOSA DR | E | AC | 5 | 953 | 36 | 35,240 | 5/28/24 | 52 | 75 | 25 | 0 | Grind - AC Overlay | $118,759 |
| 1163 | 14890 | LIEGE DR | CHAPPARAL LN | WILD ROSE LN | E | AC | 5 | 629 | 36 | 22,644 | 4/1/26 | 83 | 61 | 39 | 0 | Type II Slurry Seal | $7,020 |
| 1176 | 13906 | LITTLE HARBOR DR | SUMMER BREEZE LN | GOLDENWEST ST | E | AC | 5 | 130 | 36 | 5,526 | 6/30/21 | 70 | 43 | 18 | 39 | Type II Slurry Seal | $1,713 |
| 1177 | 13443 | LITTLEFIELD DR | NEWMOON LN | TWINFORD LN | E | AAC | 5 | 328 | 36 | 11,808 | 5/23/24 | 52 | 48 | 38 | 14 | Grind - AC Overlay | $39,793 |
| 1177 | 15195 | LITTLEFIELD DR | SPRINGDALE ST | NEWMOON LN | E | AAC | 5 | 629 | 36 | 22,644 | 5/23/24 | 57 | 64 | 35 | 1 | Grind - AC Overlay | $76,310 |
| 1193 | 13421 | LOS AMIGOS CIR | VIA ESPANA LN | END | E | AAC | 5 | 916 | 36 | 34,476 | 5/29/24 | 74 | 19 | 81 | 0 | Type II Slurry Seal | $10,688 |
| 1197 | 14936 | LOURDES DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 36,192 | 3/30/26 | 82 | 63 | 28 | 9 | Type II Slurry Seal | $11,220 |
| 1205 | 13435 | LUCIENTO DR | SALAMANCA LN | SAN LEANDRO LN | E | AAC | 5 | 438 | 36 | 15,768 | 5/23/24 | 73 | 35 | 65 | 0 | Type II Slurry Seal | $4,888 |
| 1205 | 15189 | LUCIENTO DR | CADIZ CIR | SALAMANCA LN | E | AAC | 5 | 429 | 36 | 15,444 | 5/23/24 | 81 | 0 | 100 | 0 | Type II Slurry Seal | $4,788 |
| 1206 | 14942 | LUDLOW CIR | AMDERTON LN | END | E | AC | 5 | 258 | 36 | 11,088 | 3/30/26 | 72 | 85 | 6 | 9 | Type II Slurry Seal | $3,437 |
| 1219 | 13623 | MADERA LN | SANTA YNEZ DR | CDS | E | AC | 5 | 485 | 36 | 19,020 | 5/28/24 | 38 | 84 | 16 | 0 | Grind - AC Overlay | $64,097 |
| 1240 | 15199 | MANORFIELD DR | OLDGATE LN | OXBORO LN | E | AAC | 5 | 1,032 | 36 | 37,152 | 5/23/24 | 53 | 48 | 28 | 24 | Grind - AC Overlay | $125,202 |
| 1246 | 15150 | MARCELLENA DR | LIDO LN | GURNEY LN | E | AC | 5 | 529 | 36 | 20,184 | 5/28/24 | 39 | 74 | 22 | 4 | Grind - AC Overlay | $68,020 |
| 1253 | 14405 | MARIPOSA DR | CORONADO LN | LIDO LN | E | AC | 5 | 262 | 36 | 9,432 | 5/21/24 | 47 | 74 | 21 | 5 | Grind - AC Overlay | $31,786 |
| 1264 | 15160 | MARYPORT DR | CRESTMOOR LN | SHOREHAM LN | E | AC | 5 | 524 | 36 | 18,864 | 3/31/26 | 81 | 0 | 94 | 6 | Type II Slurry Seal | $5,848 |
| 1264 | 15809 | MARYPORT DR | FALKIRK LN | CRESTMOOR LN | E | AC | 5 | 521 | 36 | 18,756 | 3/30/26 | 68 | 49 | 48 | 3 | Type II Slurry Seal | $5,814 |
| 1277 | 14411 | MC CARTHY DR | SPRINGDALE ST | STILL HARBOR LN | E | AC | 5 | 180 | 36 | 6,480 | 5/24/24 | 26 | 96 | 4 | 0 | AC Recon | $86,702 |
| 1279 | 13404 | MC KINNEY CIR | ARMADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/29/24 | 62 | 81 | 15 | 4 | Grind - AC Overlay | $46,061 |
| 1283 | 14874 | MEADOWCREST DR | NORTHFIELD LN | EDWARDS ST | E | AC | 5 | 540 | 36 | 20,580 | 5/30/24 | 66 | 51 | 49 | 0 | Grind - AC Overlay | $69,355 |
| 1308 | 15192 | MIDWAY DR | BELLFIELD LN | FOSS LN | E | AC | 5 | 1,047 | 36 | 37,692 | 3/31/26 | 75 | 26 | 60 | 14 | Type II Slurry Seal | $11,685 |
| 1319 | 13361 | MIRA LOMA CIR | SANTA YNEZ DR | CDS | E | AC | 5 | 350 | 36 | 13,950 | 5/28/24 | 36 | 85 | 13 | 2 | Grind - AC Overlay | $47,012 |
| 1323 | 14918 | MISTY LN | SLATER AVE | PRICE DR | E | AC | 5 | 170 | 36 | 6,120 | 3/30/26 | 75 | 41 | 59 | 0 | Type II Slurry Seal | $1,897 |
| 1323 | 15168 | MISTY LN | RAPHAEL DR | PADUA DR | E | AC | 5 | 780 | 36 | 28,080 | 3/30/26 | 71 | 49 | 51 | 0 | Type II Slurry Seal | $8,705 |
| 1323 | 15800 | MISTY LN | PRICE DR | RAPHAEL DR | E | AC | 5 | 905 | 36 | 32,580 | 3/30/26 | 67 | 41 | 59 | 0 | Type II Slurry Seal | $10,100 |
| 1331 | 14927 | MONTBURY CIR | SERENE DR | END | E | AC | 5 | 420 | 36 | 16,920 | 3/30/26 | 78 | 58 | 42 | 0 | Type II Slurry Seal | $5,245 |
| 1335 | 13418 | MONTOYA CIR | SAN ROQUE LN | END | E | AAC | 5 | 285 | 36 | 11,760 | 5/29/24 | 75 | 0 | 100 | 0 | Type II Slurry Seal | $3,646 |
| 1339 | 13451 | MOONFIELD DR | IVORYCREST LN | FIELDBURY LN | E | AAC | 5 | 917 | 36 | 33,012 | 5/23/24 | 61 | 44 | 51 | 5 | Grind - AC Overlay | $111,250 |
| 1354 | 13624 | MORRO BAY LN | SANTA YNEZ DR | SLATER AVE | E | AC | 5 | 170 | 36 | 6,120 | 5/28/24 | 57 | 82 | 18 | 0 | Grind - AC Overlay | $20,624 |
| 1356 | 14923 | MOSS DR | WRIGHTWOOD LN | SPRINGDALE ST | E | AC | 5 | 180 | 36 | 6,204 | 3/30/26 | 75 | 50 | 50 | 0 | Type II Slurry Seal | $1,923 |
| 1358 | 14917 | MOSSVALE CIR | WOODFERN LN | END | E | AC | 5 | 548 | 35 | 20,980 | 3/30/26 | 73 | 60 | 35 | 5 | Type II Slurry Seal | $6,504 |
| 1364 | 13398 | MUTHER LN | KISER DR | HAMSHIRE DR | E | AC | 5 | 257 | 36 | 9,252 | 5/21/24 | 76 | 83 | 14 | 3 | Type II Slurry Seal | $2,868 |
| 1371 | 13358 | NAPA CIR | OJAI LN | CDS | E | AC | 5 | 216 | 36 | 10,266 | 5/28/24 | 53 | 63 | 37 | 0 | Grind - AC Overlay | $34,596 |
| 1377 | 15801 | NEARGATE DR | RAINGLEN LN | GRAHAM ST | E | AC | 5 | 587 | 36 | 20,844 | 5/8/26 | 54 | 70 | 30 | 0 | Grind - AC Overlay | $70,244 |
| 1383 | 13457 | NEWBURY DR | LAKEPOINT LN | HALLPORT LN | E | AAC | 5 | 542 | 36 | 20,262 | 5/29/24 | 69 | 34 | 65 | 1 | Type II Slurry Seal | $6,281 |
| 1383 | 15206 | NEWBURY DR | HALLPORT LN | END | E | AAC | 5 | 785 | 36 | 30,060 | 5/29/24 | 68 | 35 | 65 | 0 | Type II Slurry Seal | $9,319 |
| 1392 | 13442 | NEWMOON LN | JASONWOOD DR | IRONGATE CIR | E | AAC | 5 | 255 | 36 | 9,180 | 5/22/24 | 68 | 21 | 78 | 1 | Type II Slurry Seal | $2,846 |
| 1392 | 15197 | NEWMOON LN | IRONGATE CIR | LITTLEFIELD DR | E | AAC | 5 | 814 | 36 | 29,304 | 5/23/24 | 65 | 35 | 65 | 0 | Grind - AC Overlay | $98,754 |
| 1406 | 13445 | NORBROOK DR | IVORYCREST LN | TWINFORD LN | E | AAC | 5 | 136 | 36 | 5,646 | 5/21/24 | 70 | 39 | 57 | 4 | Type II Slurry Seal | $1,750 |
| 1406 | 13452 | NORBROOK DR | FIELDBURY LN | END | E | AAC | 5 | 104 | 36 | 3,744 | 5/29/24 | 55 | 50 | 49 | 1 | Grind - AC Overlay | $12,617 |
| 1406 | 15203 | NORBROOK DR | TWINFORD LN | FIELDBURY LN | E | AAC | 5 | 664 | 36 | 23,904 | 5/21/24 | 60 | 53 | 47 | 0 | Grind - AC Overlay | $80,556 |
| 1409 | 14913 | NORDINA DR | FORBES LN | CHAPPARAL LN | E | AC | 5 | 249 | 36 | 9,214 | 4/1/26 | 69 | 100 | 0 | 0 | Type II Slurry Seal | $2,856 |
| 1409 | 15795 | NORDINA DR | CHAPPARAL LN | WILD ROSE LN | E | AC | 5 | 767 | 36 | 27,862 | 5/8/26 | 65 | 47 | 53 | 0 | Grind - AC Overlay | $93,895 |
| 1415 | 14895 | NORTHFIELD LN | MEADOWCREST DR | FREEBORN DR | E | AC | 5 | 610 | 36 | 21,960 | 5/30/24 | 55 | 68 | 32 | 0 | Grind - AC Overlay | $74,005 |
| 1423 | 13394 | NUTWOOD CIR | PRESCOTT LN | CDS | E | AC | 5 | 340 | 36 | 13,490 | 5/21/24 | 52 | 81 | 16 | 3 | Grind - AC Overlay | $45,461 |
| 1441 | 13359 | OJAI LN | NAPA CIR | POINT LOMA DR | E | AC | 5 | 262 | 36 | 10,572 | 5/28/24 | 70 | 41 | 59 | 0 | Type II Slurry Seal | $3,277 |
| 1444 | 15198 | OLDGATE LN | LITTLEFIELD DR | END | E | AAC | 5 | 337 | 36 | 12,132 | 5/23/24 | 73 | 22 | 75 | 3 | Type II Slurry Seal | $3,761 |
| 1445 | 13387 | OLDGLEN LN | LANCEFIELD DR | WOODBORO DR | E | AC | 5 | 315 | 36 | 12,340 | 3/31/26 | 84 | 0 | 61 | 39 | Type II Slurry Seal | $3,825 |
| 1463 | 14600 | OVERLOOK DR | EDWARDS ST | WILDFLOWER LN | E | AC | 5 | 403 | 36 | 14,508 | 5/7/24 | 83 | 37 | 41 | 22 | Type II Slurry Seal | $4,497 |
| 1465 | 13455 | OXBORO LN | MANOFIELD DR | END | E | AAC | 5 | 115 | 36 | 4,140 | 5/29/24 | 70 | 0 | 99 | 1 | Type II Slurry Seal | $1,283 |
| 1465 | 15205 | OXBORO LN | NORBROOK DR | MANOFIELD DR | E | AAC | 5 | 547 | 36 | 19,692 | 5/21/24 | 64 | 40 | 59 | 1 | Grind - AC Overlay | $66,362 |
| 1469 | 13449 | PACEMONT DR | IVORYCREST LN | VESTRY CIR | E | AC | 5 | 213 | 36 | 7,668 | 5/23/24 | 85 | 59 | 37 | 4 | Type II Slurry Seal | $2,377 |
| 1474 | 13383 | PADUA DR | WRIGHTWOOD LN | SPRINGDALE ST | E | AC | 5 | 180 | 36 | 6,480 | 3/30/26 | 74 | 58 | 38 | 4 | Type II Slurry Seal | $2,009 |
| 1474 | 15164 | PADUA DR | WHITFORD LN | WRIGHTWOOD LN | E | AC | 5 | 1,295 | 36 | 45,820 | 5/8/26 | 54 | 64 | 35 | 1 | Grind - AC Overlay | $154,413 |
| 1481 | 15142 | PALO ALTO DR | SPRINGDALE ST | PINEHURST LN | E | AC | 5 | 700 | 36 | 26,340 | 5/22/24 | 53 | 59 | 41 | 0 | Grind - AC Overlay | $88,766 |
| 1514 | 13411 | PEPPER LN | VATCHER DR | BALMORAL DR | E | AC | 5 | 253 | 36 | 9,108 | 5/20/24 | 74 | 64 | 29 | 7 | Type II Slurry Seal | $2,823 |
| 1529 | 15269 | PINEHURST LN | SUMMERDALE DR | PALO ALTO DR | E | AC | 5 | 860 | 36 | 32,100 | 5/21/24 | 45 | 63 | 37 | 0 | Grind - AC Overlay | $108,177 |
| 1529 | 15829 | PINEHURST LN | WARNER AVE | SUMMERDALE DR | E | AC | 5 | 595 | 36 | 21,420 | 5/30/24 | 47 | 80 | 20 | 0 | Grind - AC Overlay | $72,185 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1531 | 13392 | PINON DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 35,892 | 3/30/26 | 69 | 79 | 17 | 4 | Type II Slurry Seal | $11,127 |
| 1544 | 13353 | POINT LOMA DR | OJAI LN | CORONADO LN | E | AC | 5 | 474 | 36 | 17,064 | 5/21/24 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $5,290 |
| 1544 | 15143 | POINT LOMA DR | AVALON LN | OJAI LN | E | AC | 5 | 515 | 36 | 19,680 | 5/21/24 | 85 | 14 | 82 | 4 | Type II Slurry Seal | $6,101 |
| 1556 | 13389 | PORTSIDE CIR | LANCEFIELD DR | END | E | AC | 5 | 102 | 36 | 5,472 | 3/31/26 | 65 | 31 | 57 | 12 | Grind - AC Overlay | $18,441 |
| 1564 | 15173 | PRESCOTT LN | KELLEY CIR | KISER DR | E | AC | 5 | 1,129 | 36 | 41,394 | 5/20/24 | 61 | 86 | 13 | 1 | Grind - AC Overlay | $139,498 |
| 1564 | 15979 | PRESCOTT LN | FENLEY DR | KELLEY CIR | E | AC | 5 | 516 | 36 | 18,576 | 5/20/24 | 63 | 89 | 11 | 0 | Grind - AC Overlay | $62,601 |
| 1568 | 14919 | PRICE DR | MISTY LN | DE LONG CIR | E | AC | 5 | 254 | 36 | 8,868 | 3/30/26 | 77 | 45 | 55 | 0 | Type II Slurry Seal | $2,749 |
| 1568 | 15797 | PRICE DR | DE LONG CIR | WRIGHTWOOD LN | E | AC | 5 | 759 | 36 | 28,074 | 3/30/26 | 70 | 18 | 78 | 4 | Type II Slurry Seal | $8,703 |
| 1584 | 14924 | PUTNEY CIR | BARWOOD DR | END | E | AC | 5 | 313 | 36 | 13,268 | 3/31/26 | 82 | 0 | 77 | 23 | Type II Slurry Seal | $4,113 |
| 1586 | 15008 | QUARTERHORSE LN | ELLIS AVE | CHURCHILL DR | E | AC | 5 | 1,480 | 36 | 53,280 | 5/7/24 | 84 | 58 | 35 | 7 | Type II Slurry Seal | $16,517 |
| 1596 | 15190 | QUINTANA LN | VILLA NUEVA DR | CARRANZA LN | E | AAC | 5 | 1,020 | 36 | 36,720 | 5/29/24 | 65 | 39 | 60 | 1 | Grind - AC Overlay | $123,746 |
| 1598 | 13453 | RAIN CIR | NORBROOK DR | END | E | AAC | 5 | 280 | 36 | 11,880 | 5/23/24 | 72 | 40 | 47 | 13 | Type II Slurry Seal | $3,683 |
| 1599 | 14939 | RAINGLEN LN | BANKTON DR | NEARGATE DR | E | AC | 5 | 357 | 36 | 12,852 | 3/31/26 | 75 | 29 | 71 | 0 | Type II Slurry Seal | $3,984 |
| 1599 | 15831 | RAINGLEN LN | NEARGATE DR | END | E | AC | 5 | 897 | 36 | 34,292 | 3/31/26 | 69 | 44 | 53 | 3 | Type II Slurry Seal | $10,631 |
| 1606 | 14940 | RAPHAEL DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 35,892 | 3/30/26 | 81 | 58 | 29 | 13 | Type II Slurry Seal | $11,127 |
| 1623 | 14862 | REMINGTON LN | WARNER AVE | ROGERS DR | E | AC | 5 | 191 | 36 | 6,876 | 4/29/26 | 43 | 100 | 0 | 0 | Grind - AC Overlay | $23,172 |
| 1627 | 14876 | RENOIR CIR | KERN DR | CDS | E | AC | 5 | 50 | 36 | 1,800 | 4/1/26 | 72 | 0 | 100 | 0 | Type II Slurry Seal | $558 |
| 1641 | 15802 | RIDGEBURY DR | GRAHAM ST | CRESTMOOR LN | E | AC | 5 | 716 | 36 | 25,776 | 5/8/26 | 60 | 45 | 55 | 0 | Grind - AC Overlay | $86,865 |
| 1644 | 15186 | RIO VISTA DR | GOLDENWEST ST | END | E | AAC | 5 | 539 | 36 | 21,404 | 5/29/24 | 71 | 8 | 92 | 0 | Type II Slurry Seal | $6,635 |
| 1645 | 13447 | RIVERSIDE CIR | PACEMONT DR | END | E | AAC | 5 | 360 | 36 | 14,460 | 5/23/24 | 63 | 42 | 47 | 11 | Grind - AC Overlay | $48,730 |
| 1662 | 15762 | RODGERS DR | BERLIN LN | TWAIN LN | E | AC | 5 | 508 | 36 | 18,538 | 5/8/26 | 84 | 48 | 52 | 0 | Type II Slurry Seal | $5,747 |
| 1662 | 15763 | RODGERS DR | TWAIN LN | CDS | E | AC | 5 | 798 | 36 | 29,978 | 5/8/26 | 74 | 59 | 41 | 0 | Type II Slurry Seal | $9,293 |
| 1672 | 13351 | ROSEMONT DR | AUTUMN CIR | PINEHURST LN | E | AAC | 5 | 260 | 36 | 9,360 | 5/21/24 | 70 | 17 | 79 | 4 | Type II Slurry Seal | $2,902 |
| 1672 | 15141 | ROSEMONT DR | SPRINGDALE ST | AUTUMN CIR | E | AAC | 5 | 440 | 36 | 15,840 | 5/21/24 | 83 | 0 | 100 | 0 | Type II Slurry Seal | $4,910 |
| 1690 | 13419 | SABBICAS CIR | SAN ROQUE LN | END | E | AAC | 5 | 285 | 36 | 12,260 | 5/29/24 | 70 | 52 | 48 | 0 | Type II Slurry Seal | $3,801 |
| 1695 | 15007 | SADDLEBACK LN | ELLIS AVE | CDS | E | AC | 5 | 1,434 | 36 | 51,624 | 5/6/24 | 79 | 56 | 39 | 5 | Type II Slurry Seal | $16,003 |
| 1702 | 13433 | SALAMANCA LN | CARRANZA LN | LUCIENTO DR | E | AAC | 5 | 254 | 36 | 8,856 | 5/24/24 | 81 | 19 | 81 | 0 | Type II Slurry Seal | $2,745 |
| 1713 | 13427 | SAN DOVAL LN | VILLA NUEVA DR | ARACENA DR | E | AAC | 5 | 596 | 36 | 22,206 | 5/24/24 | 68 | 31 | 69 | 0 | Type II Slurry Seal | $6,884 |
| 1714 | 13431 | SAN LEANDRO LN | VILLA NUEVA DR | CALPE CIR | E | AAC | 5 | 1,084 | 36 | 38,736 | 5/23/24 | 69 | 47 | 49 | 4 | Type II Slurry Seal | $12,008 |
| 1717 | 13420 | SAN ROQUE LN | CRISTA PALMA DR | SEGOVIA CIR | E | AAC | 5 | 246 | 36 | 9,606 | 5/29/24 | 77 | 21 | 79 | 0 | Type II Slurry Seal | $2,978 |
| 1717 | 15182 | SAN ROQUE LN | SEGOVIA CIR | JARDINES DR | E | AAC | 5 | 730 | 36 | 27,030 | 5/23/24 | 79 | 18 | 74 | 8 | Type II Slurry Seal | $8,379 |
| 1731 | 15148 | SANTA YNEZ DR | LIDO LN | MIRA LOMA CIR | E | AC | 5 | 509 | 36 | 19,464 | 5/21/24 | 80 | 51 | 49 | 0 | Type II Slurry Seal | $6,034 |
| 1731 | 15149 | SANTA YNEZ DR | MIRA LOMA CIR | MADERA LN | E | AC | 5 | 511 | 36 | 19,280 | 5/21/24 | 77 | 62 | 38 | 0 | Type II Slurry Seal | $5,977 |
| 1752 | 12853 | SEA CANYON CIR | MORNING TIDE DR | CDS | E | AC | 5 | 363 | 32 | 14,055 | 6/30/21 | 68 | 77 | 15 | 8 | Type II Slurry Seal | $4,357 |
| 1773 | 13417 | SEGOVIA CIR | SAN ROQUE LN | END | E | AAC | 5 | 285 | 36 | 11,760 | 5/29/24 | 70 | 17 | 82 | 1 | Type II Slurry Seal | $3,646 |
| 1775 | 15161 | SELKIRK DR | FALKIRK LN | DENVALE CIR | E | AC | 5 | 765 | 36 | 27,264 | 3/30/26 | 82 | 31 | 64 | 5 | Type II Slurry Seal | $8,452 |
| 1778 | 14925 | SERENE DR | WOODFERN LN | END | E | AC | 5 | 499 | 36 | 19,964 | 3/30/26 | 73 | 52 | 42 | 6 | Type II Slurry Seal | $6,189 |
| 1778 | 14929 | SERENE DR | MISTY LN | MONTBURY CIR | E | AC | 5 | 254 | 36 | 8,856 | 3/30/26 | 74 | 52 | 48 | 0 | Type II Slurry Seal | $2,745 |
| 1778 | 15799 | SERENE DR | MONTBURY CIR | WOODFERN LN | E | AC | 5 | 618 | 36 | 22,248 | 3/30/26 | 73 | 65 | 34 | 1 | Type II Slurry Seal | $6,897 |
| 1786 | 13390 | SHAMLEY CIR | LANCEFIELD DR | END | E | AC | 5 | 102 | 36 | 5,472 | 3/31/26 | 65 | 32 | 64 | 4 | Grind - AC Overlay | $18,441 |
| 1809 | 15162 | SHOREHAM LN | BRIGHTON DR | BERSHIRE DR | E | AC | 5 | 913 | 36 | 32,292 | 3/30/26 | 63 | 100 | 0 | 0 | Grind - AC Overlay | $108,824 |
| 1810 | 13468 | SHOREVEIW CIR | LAKEVIEW DR | END | E | AC | 5 | 237 | 32 | 9,084 | 5/29/24 | 59 | 51 | 49 | 0 | Grind - AC Overlay | $30,613 |
| 1812 | 13899 | SICILY CIR | EVENING HILL DR | CDS | E | AC | 5 | 361 | 36 | 16,196 | 5/6/24 | 85 | 0 | 100 | 0 | Type II Slurry Seal | $5,021 |
| 1819 | 13408 | SILVERHEEL CIR | COLLINS LN | CDS | E | AC | 5 | 222 | 36 | 9,492 | 5/20/24 | 75 | 81 | 19 | 0 | Type II Slurry Seal | $2,943 |
| 1846 | 13357 | SONOMA DR | ELSINORE CIR | CORONADO LN | E | AAC | 5 | 253 | 36 | 9,108 | 5/24/24 | 78 | 0 | 100 | 0 | Type II Slurry Seal | $2,823 |
| 1846 | 15145 | SONOMA DR | LA MESA LN | ELSINORE CIR | E | AAC | 5 | 499 | 36 | 17,964 | 5/24/24 | 79 | 0 | 100 | 0 | Type II Slurry Seal | $5,569 |
| 1848 | 13429 | SORIA CIR | QUINTANA LN | END | E | AAC | 5 | 92 | 42 | 5,364 | 5/29/24 | 63 | 47 | 38 | 15 | Grind - AC Overlay | $18,077 |
| 1871 | 15017 | ST GEORGE LN | WARNER AVE | ST PAUL CIR | E | AC | 5 | 335 | 36 | 13,200 | 5/20/24 | 81 | 0 | 100 | 0 | Type II Slurry Seal | $4,092 |
| 1873 | 14864 | ST PAUL CIR | ST GEORGE LN | END | E | AC | 5 | 545 | 36 | 22,110 | 5/20/24 | 74 | 58 | 42 | 0 | Type II Slurry Seal | $6,854 |
| 1884 | 13630 | STARMONT LN | GRIMSBY DR | BERSHIRE DR | E | AC | 5 | 440 | 36 | 15,552 | 3/31/26 | 68 | 27 | 71 | 2 | Type II Slurry Seal | $4,821 |
| 1887 | 13403 | STEINER CIR | ARMADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/29/24 | 55 | 87 | 12 | 1 | Grind - AC Overlay | $46,061 |
| 1893 | 13393 | STILL HARBOR LN | FENLEY DR | MC CARTHY DR | E | AC | 5 | 460 | 36 | 17,310 | 5/28/24 | 42 | 80 | 17 | 3 | Grind - AC Overlay | $58,335 |
| 1893 | 13632 | STILL HARBOR LN | WINTERGREEN DR | KISER DR | E | AC | 5 | 260 | 36 | 10,110 | 5/21/24 | 79 | 78 | 22 | 0 | Type II Slurry Seal | $3,134 |
| 1893 | 15170 | STILL HARBOR LN | MC CARTHY DR | WINTERGREEN DR | E | AC | 5 | 928 | 36 | 33,408 | 5/21/24 | 64 | 92 | 8 | 0 | Grind - AC Overlay | $112,585 |
| 1909 | 14871 | SUMMERDALE DR | TREEHAVEN LN | PINEHURST LN | E | AC | 5 | 485 | 36 | 19,492 | 5/21/24 | 76 | 38 | 62 | 0 | Type II Slurry Seal | $6,043 |
| 1909 | 15771 | SUMMERDALE DR | PINEHURST LN | ALLEY PINEHURST LN | E | AC | 5 | 125 | 36 | 4,500 | 5/30/24 | 40 | 78 | 22 | 0 | Grind - AC Overlay | $15,165 |
| 1909 | 15772 | SUMMERDALE DR | ALLEY PINEHURST LN | ALLEY GROVE CIR | E | AC | 5 | 257 | 36 | 9,252 | 5/30/24 | 49 | 82 | 18 | 0 | Grind - AC Overlay | $31,179 |
| 1909 | 15773 | SUMMERDALE DR | ALLEY GROVE CIR | FRASER LN | E | AC | 5 | 594 | 36 | 21,384 | 5/30/24 | 62 | 62 | 35 | 3 | Grind - AC Overlay | $72,064 |
| 1950 | 13456 | TALEGATE DR | FIELDBURY LN | END | E | AAC | 5 | 265 | 36 | 9,252 | 5/29/24 | 66 | 43 | 53 | 4 | Grind - AC Overlay | $31,179 |
| 1967 | 13391 | TERRIER DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 35,892 | 3/30/26 | 67 | 29 | 71 | 0 | Type II Slurry Seal | $11,127 |
| 1981 | 14884 | TIFFANY CIR | KERN DR | CDS | E | AC | 5 | 542 | 36 | 20,762 | 4/1/26 | 73 | 28 | 72 | 0 | Type II Slurry Seal | $6,436 |
| 1984 | 15790 | TILBURG DR | APEL LN | FORBES LN | E | AC | 5 | 775 | 36 | 27,900 | 5/8/26 | 54 | 62 | 38 | 0 | Grind - AC Overlay | $94,023 |
| 1998 | 13396 | TORIN DR | PRESCOTT LN | FLINTSTONE LN | E | AC | 5 | 260 | 36 | 9,360 | 5/20/24 | 68 | 80 | 19 | 1 | Type II Slurry Seal | $2,902 |
| 2009 | 14893 | TREEHAVEN LN | SUMMERDALE DR | ROSEMONT DR | E | AC | 5 | 595 | 36 | 23,676 | 5/28/24 | 58 | 73 | 27 | 0 | Grind - AC Overlay | $79,788 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2028 | 14920 | TUSCAN CIR | ALLSTONE DR | END | E | AC | 5 | 144 | 36 | 6,984 | 3/31/26 | 73 | 27 | 67 | 6 | Type II Slurry Seal | $2,165 |
| 2029 | 14891 | TWAIN LN | ROGERS DR | KERN DR | E | AC | 5 | 989 | 36 | 35,604 | 4/1/26 | 73 | 55 | 45 | 0 | Type II Slurry Seal | $11,037 |
| 2034 | 15204 | TWINFORD LN | NORBOOK DR | MANOFIELD DR | E | AAC | 5 | 511 | 36 | 18,396 | 5/23/24 | 74 | 24 | 76 | 0 | Type II Slurry Seal | $5,703 |
| 2042 | 13467 | UPPERLAKE CIR | LAKEVIEW DR | END | E | AC | 5 | 375 | 36 | 15,000 | 5/29/24 | 57 | 56 | 43 | 1 | Grind - AC Overlay | $50,550 |
| 2048 | 14911 | VALEWORTH CIR | GLENSTONE DR | CDS | E | AC | 5 | 198 | 36 | 8,378 | 4/2/26 | 55 | 89 | 11 | 0 | Grind - AC Overlay | $28,234 |
| 2058 | 13415 | VARSITY DR | HIGHLAND LN | CDS | E | AC | 5 | 383 | 36 | 13,788 | 5/29/24 | 45 | 91 | 9 | 0 | Grind - AC Overlay | $46,466 |
| 2058 | 14413 | VARSITY DR | HALLCROFT LN | IVORYCREST LN | E | AC | 5 | 345 | 36 | 12,420 | 5/23/24 | 39 | 91 | 9 | 0 | Grind - AC Overlay | $41,855 |
| 2058 | 15578 | VARSITY DR | HALLCROFT LN | EDWARDS ST | E | AC | 5 | 1,418 | 36 | 51,048 | 5/23/24 | 59 | 57 | 41 | 2 | Grind - AC Overlay | $172,032 |
| 2060 | 15177 | VATCHER DR | FLINTSTONE LN | EDWARDS ST | E | AC | 5 | 1,335 | 36 | 48,060 | 5/28/24 | 54 | 85 | 15 | 0 | Grind - AC Overlay | $161,962 |
| 2073 | 13446 | VESTRY CIR | PACEMONT DR | END | E | AAC | 5 | 362 | 36 | 14,532 | 5/29/24 | 68 | 16 | 76 | 8 | Type II Slurry Seal | $4,505 |
| 2074 | 15185 | VIA ANGELINA DR | AVILLA LN | EL NOPAL LN | E | AAC | 5 | 1,141 | 36 | 42,076 | 5/22/24 | 70 | 25 | 74 | 1 | Type II Slurry Seal | $13,044 |
| 2075 | 13423 | VIA CARONA DR | AVILLA LN | EL NOPAL LN | E | AAC | 5 | 1,142 | 36 | 41,112 | 5/22/24 | 70 | 33 | 66 | 1 | Type II Slurry Seal | $12,745 |
| 2076 | 15184 | VIA ESPANA LN | SLATER AVE | VIA ANGELINA DR | E | AAC | 5 | 418 | 36 | 15,048 | 5/22/24 | 75 | 14 | 84 | 2 | Type II Slurry Seal | $4,665 |
| 2086 | 15579 | VILLA NUEVA DR | CARRANZA NL | QUINTANA LN | E | AC | 5 | 512 | 36 | 18,432 | 5/23/24 | 81 | 56 | 44 | 0 | Type II Slurry Seal | $5,714 |
| 2086 | 15580 | VILLA NUEVA DR | QUINTANA LN | END | E | AC | 5 | 381 | 36 | 13,428 | 5/20/24 | 82 | 56 | 44 | 0 | Type II Slurry Seal | $4,163 |
| 2093 | 13422 | VISTA DEL SOL DR | AVILLA LN | EL NOPAL LN | E | AAC | 5 | 1,142 | 36 | 41,112 | 5/22/24 | 71 | 40 | 60 | 0 | Type II Slurry Seal | $12,745 |
| 1997 | 14986 | WARNER AVE | WARNER AVE | PINEHURST LN | E | AC | 5 | 751 | 36 | 27,036 | 5/22/24 | 49 | 82 | 18 | 0 | Grind - AC Overlay | $91,111 |
| 2130 | 13631 | WELLBANK LN | LANCEFIELD DR | WOODBORO DR | E | AC | 5 | 353 | 36 | 14,208 | 3/31/26 | 69 | 30 | 70 | 0 | Type II Slurry Seal | $4,404 |
| 2131 | 13463 | WELLBROOK CIR | GLENFOX DR | END | E | AAC | 5 | 267 | 36 | 11,112 | 5/29/24 | 62 | 23 | 60 | 17 | Grind - AC Overlay | $37,447 |
| 2134 | 14905 | WENDY CIR | FRANS LN | CDS | E | AC | 5 | 263 | 36 | 10,718 | 4/2/26 | 86 | 60 | 40 | 0 | Type II Slurry Seal | $3,323 |
| 2139 | 13466 | WESTLAKE CIR | INLET DR | END | E | AC | 5 | 478 | 36 | 19,208 | 5/29/24 | 45 | 65 | 35 | 0 | Grind - AC Overlay | $64,731 |
| 2146 | 14866 | WHISTLER CIR | HERBERT LN | CDS | E | AC | 5 | 193 | 36 | 8,198 | 4/1/26 | 78 | 10 | 90 | 0 | Type II Slurry Seal | $2,541 |
| 2153 | 15975 | WHITFORD LN | BRIGHTON DR | BERSHIRE DR | E | AC | 5 | 1,100 | 36 | 40,350 | 3/30/26 | 80 | 37 | 49 | 14 | Type II Slurry Seal | $12,509 |
| 2160 | 14889 | WILD ROSE LN | BRANNEN DR | LIEGE DR | E | AC | 5 | 256 | 36 | 9,216 | 4/2/26 | 71 | 60 | 40 | 0 | Type II Slurry Seal | $2,857 |
| 2160 | 15788 | WILD ROSE LN | LIEGE DR | NORDINA DR | E | AC | 5 | 1,380 | 36 | 49,930 | 5/8/26 | 62 | 48 | 50 | 2 | Grind - AC Overlay | $168,264 |
| 2168 | 14935 | WINDCROFT DR | CRESTMOOR LN | HELENBROOK LN | E | AC | 5 | 494 | 36 | 18,534 | 3/31/26 | 84 | 29 | 66 | 5 | Type II Slurry Seal | $5,746 |
| 2176 | 13633 | WINTERGREEN DR | STILL HARBOR LN | LEWIS LN | E | AC | 5 | 599 | 36 | 22,314 | 5/28/24 | 35 | 92 | 8 | 0 | Grind - AC Overlay | $75,198 |
| 2180 | 13384 | WOODBORO DR | WHITFORD LN | BOLTON CIR | E | AC | 5 | 340 | 36 | 11,952 | 3/31/26 | 82 | 0 | 100 | 0 | Type II Slurry Seal | $3,705 |
| 2180 | 15165 | WOODBORO DR | BOLTON CIR | WELLBANK LN | E | AC | 5 | 1,214 | 36 | 44,704 | 3/30/26 | 80 | 7 | 83 | 10 | Type II Slurry Seal | $13,858 |
| 2182 | 15796 | WOODFERN LN | SLATER AVE | SERENE DR | E | AC | 5 | 455 | 36 | 16,380 | 3/30/26 | 77 | 100 | 0 | 0 | Type II Slurry Seal | $5,078 |
| 2192 | 14922 | WRIGHTWOOD LN | PRICE DR | MOSS DR | E | AC | 5 | 225 | 36 | 9,100 | 3/30/26 | 74 | 30 | 65 | 5 | Type II Slurry Seal | $2,821 |
| 2192 | 15169 | WRIGHTWOOD LN | PINON DR | PADUA DR | E | AC | 5 | 520 | 36 | 18,720 | 3/30/26 | 71 | 71 | 29 | 0 | Type II Slurry Seal | $5,803 |
| 2192 | 15803 | WRIGHTWOOD LN | MOSS DR | PINON DR | E | AC | 5 | 940 | 36 | 33,840 | 3/30/26 | 68 | 60 | 40 | 0 | Type II Slurry Seal | $10,490 |
| 2198 | 13354 | YOSEMITE CIR | SONOMA DR | CDS | E | AC | 5 | 250 | 36 | 10,350 | 5/28/24 | 49 | 78 | 22 | 0 | Grind - AC Overlay | $34,880 |
| | | | | | | | | | | | | | | | | | **$10,445,371** |
| 5 | 12873 | ACACIA AVE | ELEVENTH ST | FOURTEENTH ST | E | AC | 6 | 865 | 36 | 31,140 | 6/23/21 | 81 | 40 | 16 | 44 | Type II Slurry Seal | $9,965 |
| 9 | 13061 | ADAMS AVE | MAIN ST | SEVENTEENTH ST | E | AC | 6 | 745 | 46 | 36,075 | 6/30/21 | 86 | 0 | 54 | 46 | Type II Slurry Seal | $11,544 |
| 16 | 14653 | ALABAMA ST | ALLEY ADAMS AVE | ADAMS AVE | E | AC | 6 | 190 | 36 | 6,840 | 8/15/23 | 80 | 73 | 27 | 0 | Type II Slurry Seal | $2,189 |
| 16 | 14654 | ALABAMA ST | MEMPHIS AVE | NASHVILLE AVE | E | AC | 6 | 329 | 37 | 12,173 | 8/14/23 | 63 | 54 | 27 | 19 | Grind - AC Overlay | $42,606 |
| 16 | 14655 | ALABAMA ST | ALLEY MEMPHIS AVE | MEMPHIS AVE | E | AC | 6 | 165 | 37 | 6,105 | 8/14/23 | 65 | 59 | 36 | 5 | Grind - AC Overlay | $21,368 |
| 16 | 15674 | ALABAMA ST | UTICA AVE. | WITCHITA AVE | E | AC | 6 | 650 | 36 | 23,400 | 6/29/21 | 78 | 70 | 20 | 10 | Type II Slurry Seal | $7,488 |
| 16 | 15677 | ALABAMA ST | OSWEGO AVE | ALLEY ADAMS AVE | E | AC | 6 | 470 | 36 | 16,920 | 8/15/23 | 65 | 83 | 16 | 1 | Grind - AC Overlay | $59,220 |
| 16 | 15678 | ALABAMA ST | NASHVILLE AVE | OSWEGO AVE | E | AC | 6 | 330 | 36 | 11,880 | 8/15/23 | 58 | 59 | 15 | 26 | Grind - AC Overlay | $41,580 |
| 16 | 15679 | ALABAMA ST | ALLEY LINCOLN AVE | ALLEY MEMPHIS AVE | E | AC | 6 | 330 | 37 | 12,210 | 8/14/23 | 74 | 51 | 40 | 9 | Type II Slurry Seal | $3,907 |
| 16 | 15680 | ALABAMA ST | ALLEY KNOXVILLE AVE | ALLEY LINCOLN AVE | E | AC | 6 | 330 | 37 | 12,210 | 8/14/23 | 72 | 42 | 41 | 17 | Grind - AC Overlay | $42,735 |
| 16 | 15681 | ALABAMA ST | INDIANAPOLIS AVE | ALLEY KNOXVILLE AVE | E | AC | 6 | 495 | 37 | 18,315 | 8/14/23 | 57 | 63 | 29 | 8 | Grind - AC Overlay | $64,103 |
| 147 | 14730 | ARIANA CIR | ALSUNA LN | CDS (E) | E | AC | 6 | 140 | 32 | 6,840 | 6/29/21 | 27 | 73 | 8 | 19 | Grind - AC Overlay | $23,940 |
| 157 | 13040 | ASPENWOOD LN | ADAMS AVE | SHIPLEY ST | E | PCC | 6 | 190 | 20 | 4,780 | 7/8/21 | 85 | 100 | 0 | 0 | Type II Slurry Seal | $1,530 |
| 173 | 14707 | BACKBAY CIR | OCEANHILL DR | CDS | E | AC | 6 | 266 | 32 | 10,012 | 8/15/23 | 59 | 79 | 10 | 11 | Grind - AC Overlay | $35,042 |
| 349 | 14663 | CALIFORNIA ST | NASHVILLE AVE | OSWEGO AVE | E | AC | 6 | 330 | 36 | 11,880 | 8/15/23 | 32 | 82 | 18 | 0 | Grind - AC Overlay | $41,580 |
| 349 | 14664 | CALIFORNIA ST | LINCOLN AVE | MEMPHIS AVE | E | AAC | 6 | 330 | 37 | 11,803 | 8/14/23 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $3,777 |
| 349 | 14665 | CALIFORNIA ST | KNOXVILLE AVE | LINCOLN AVE | E | AAC | 6 | 330 | 37 | 11,877 | 8/14/23 | 76 | 61 | 31 | 8 | Type II Slurry Seal | $3,801 |
| 349 | 14666 | CALIFORNIA ST | JOILET AVE | KNOXVILLE AVE | E | AAC | 6 | 330 | 37 | 11,988 | 8/14/23 | 70 | 41 | 59 | 0 | Grind - AC Overlay | $41,958 |
| 530 | 12991 | CREST AVE | MAIN ST | ELEVENTH ST | E | AC | 6 | 612 | 43 | 27,795 | 7/8/21 | 73 | 30 | 58 | 12 | Type II Slurry Seal | $8,894 |
| 530 | 12992 | CREST AVE | LAKE ST | MAIN ST | E | AC | 6 | 665 | 45 | 30,095 | 7/8/21 | 76 | 37 | 62 | 1 | Type II Slurry Seal | $9,630 |
| 530 | 13085 | CREST AVE | CREST AVE | THIRTEENTH ST | E | AC | 6 | 192 | 45 | 8,940 | 7/8/21 | 86 | 26 | 74 | 0 | Type II Slurry Seal | $2,861 |
| 530 | 13086 | CREST AVE | ELEVENTH ST | TWELTH ST | E | AC | 6 | 675 | 43 | 29,025 | 7/8/21 | 68 | 52 | 40 | 8 | Grind - AC Overlay | $101,588 |
| 530 | 13124 | CREST AVE | THIRTEENTH ST | FOURTEENTH ST | E | AC | 6 | 265 | 45 | 12,175 | 7/8/21 | 75 | 9 | 41 | 50 | Type II Slurry Seal | $3,896 |
| 661 | 13006 | EIGHTEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/22/21 | 79 | 0 | 16 | 84 | Type II Slurry Seal | $6,035 |
| 661 | 13008 | EIGHTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/22/21 | 84 | 0 | 31 | 69 | Type II Slurry Seal | $5,814 |
| 662 | 12954 | EIGHTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 410 | 48 | 19,680 | 6/22/21 | 76 | 52 | 32 | 16 | Type II Slurry Seal | $6,298 |
| 662 | 12955 | EIGHTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 48 | 19,680 | 6/22/21 | 77 | 25 | 45 | 30 | Type II Slurry Seal | $6,298 |
| 662 | 12956 | EIGHTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 390 | 47 | 18,330 | 6/22/21 | 86 | 0 | 80 | 20 | Type II Slurry Seal | $5,866 |
| 662 | 13072 | EIGHTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 48 | 18,960 | 6/30/21 | 79 | 12 | 47 | 41 | Type II Slurry Seal | $6,067 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 662 | 16032 | EIGHTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 396 | 48 | 19,008 | 6/30/21 | 84 | 0 | 87 | 13 | Type II Slurry Seal | $6,083 |
| 672 | 12972 | ELEVENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/22/21 | 75 | 52 | 39 | 9 | Type II Slurry Seal | $6,035 |
| 672 | 13077 | ELEVENTH ST | PALM AVE | MAIN ST | E | AC | 6 | 702 | 43 | 30,186 | 7/8/21 | 79 | 34 | 59 | 7 | Type II Slurry Seal | $9,660 |
| 672 | 13084 | ELEVENTH ST | MAIN ST | LAKE ST | E | AC | 6 | 782 | 47 | 41,595 | 7/8/21 | 75 | 58 | 42 | 0 | Type II Slurry Seal | $13,310 |
| 672 | 16029 | ELEVENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/30/21 | 53 | 44 | 32 | 24 | Grind - AC Overlay | $62,790 |
| 691 | 14669 | ENGLAND ST | LINCOLN AVE | MEMPHIS AVE | E | AAC | 6 | 331 | 36 | 11,916 | 8/15/23 | 82 | 0 | 100 | 0 | Type II Slurry Seal | $3,813 |
| 691 | 14671 | ENGLAND ST | JOILET AVE | KNOXVILLE AVE | E | AC | 6 | 330 | 37 | 11,883 | 8/15/23 | 51 | 78 | 22 | 0 | Grind - AC Overlay | $41,591 |
| 691 | 14672 | ENGLAND ST | INDIANAPOLIS AVE | JOILET AVE | E | AAC | 6 | 330 | 37 | 11,877 | 8/15/23 | 55 | 70 | 30 | 0 | Grind - AC Overlay | $41,570 |
| 691 | 14741 | ENGLAND ST | YORKTOWN AVE | CDS | E | AAC | 6 | 537 | 36 | 22,365 | 7/8/21 | 33 | 64 | 26 | 10 | Grind - AC Overlay | $78,278 |
| 758 | 14673 | FLORIDA ST | INDIANAPOLIS AVE | JOILET AVE | E | AAC | 6 | 330 | 37 | 12,210 | 8/15/23 | 84 | 0 | 64 | 36 | Type II Slurry Seal | $3,907 |
| 758 | 15683 | FLORIDA ST | KNOXVILLE AVE | MEMPHIS AVE | E | AC | 6 | 661 | 36 | 23,796 | 8/15/23 | 58 | 61 | 39 | 0 | Grind - AC Overlay | $83,286 |
| 770 | 12995 | FOURTEENTH ST | CREST AVE | LOMA AVE | E | AC | 6 | 845 | 45 | 41,745 | 6/30/21 | 71 | 46 | 30 | 24 | Grind - AC Overlay | $146,108 |
| 770 | 13090 | FOURTEENTH ST | PALM AVE | CREST AVE | E | AC | 6 | 556 | 45 | 25,020 | 6/30/21 | 84 | 48 | 44 | 8 | Type II Slurry Seal | $8,006 |
| 810 | 14675 | GEORGIA ST | INDIANAPOLIS AVE | JOILET AVE | E | AC | 6 | 331 | 37 | 11,840 | 8/15/23 | 72 | 45 | 38 | 17 | Grind - AC Overlay | $41,440 |
| 936 | 14709 | HILLCREST CIR | OCEANHILL DR | CDS | E | AC | 6 | 248 | 32 | 9,436 | 8/15/23 | 51 | 86 | 14 | 0 | Grind - AC Overlay | $33,026 |
| 969 | 14656 | HUNTINGTON ST | NASHVILLE AVE | OSWEGO AVE | E | AC | 6 | 330 | 36 | 11,592 | 8/14/23 | 86 | 25 | 37 | 38 | Type II Slurry Seal | $3,709 |
| 969 | 14657 | HUNTINGTON ST | MEMPHIS AVE | NASHVILLE AVE | E | AC | 6 | 330 | 37 | 12,210 | 8/14/23 | 77 | 68 | 24 | 8 | Type II Slurry Seal | $3,907 |
| 969 | 14658 | HUNTINGTON ST | KNOXVILLE AVE | LINCOLN AVE | E | AC | 6 | 330 | 40 | 13,200 | 8/14/23 | 86 | 39 | 56 | 5 | Type II Slurry Seal | $4,224 |
| 969 | 14659 | HUNTINGTON ST | LINCOLN AVE | MEMPHIS AVE | E | AC | 6 | 330 | 37 | 11,877 | 8/14/23 | 52 | 81 | 13 | 6 | Grind - AC Overlay | $41,570 |
| 969 | 14660 | HUNTINGTON ST | JOILET AVE | KNOXVILLE AVE | E | AC | 6 | 330 | 40 | 13,200 | 8/14/23 | 67 | 28 | 70 | 2 | Grind - AC Overlay | $46,200 |
| 969 | 14661 | HUNTINGTON ST | INDIANAPOLIS AVE | JOILET AVE | E | AC | 6 | 330 | 40 | 13,200 | 8/14/23 | 53 | 62 | 38 | 0 | Grind - AC Overlay | $46,200 |
| 969 | 14711 | HUNTINGTON ST | SPRINGFIELD AVE | UTICA AVE | E | AC | 6 | 640 | 36 | 22,490 | 6/29/21 | 81 | 42 | 27 | 31 | Type II Slurry Seal | $7,197 |
| 969 | 15682 | HUNTINGTON ST | OSWEGO AVE | ADAMS AVE | E | AAC | 6 | 660 | 36 | 23,760 | 8/14/23 | 86 | 32 | 68 | 0 | Type II Slurry Seal | $7,603 |
| 1023 | 14704 | JOLIET AVE | GEORGIA ST | BEACH BLVD | E | AC | 6 | 315 | 37 | 11,655 | 8/15/23 | 82 | 0 | 79 | 21 | Type II Slurry Seal | $3,730 |
| 1023 | 15873 | JOLIET AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 485 | 37 | 17,723 | 8/15/23 | 63 | 35 | 58 | 7 | Grind - AC Overlay | $62,031 |
| 1023 | 15874 | JOLIET AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 330 | 37 | 12,210 | 8/15/23 | 67 | 26 | 67 | 7 | Grind - AC Overlay | $42,735 |
| 1023 | 15876 | JOLIET AVE | DELAWARE ST | ENGLAND ST | E | AC | 6 | 331 | 37 | 12,247 | 8/15/23 | 43 | 81 | 19 | 0 | Grind - AC Overlay | $42,865 |
| 1023 | 15881 | JOLIET AVE | ENGLAND ST | FLORIDA ST | E | AC | 6 | 330 | 37 | 12,210 | 8/15/23 | 65 | 36 | 37 | 27 | Grind - AC Overlay | $42,735 |
| 1023 | 15882 | JOLIET AVE | FLORIDA ST | GEORGIA ST | E | AC | 6 | 345 | 37 | 12,765 | 8/15/23 | 28 | 89 | 10 | 1 | Grind - AC Overlay | $44,678 |
| 1088 | 14693 | KNOXVILLE AVE | ALABAMA ST | ALLEY ALABAMA ST | E | AAC | 6 | 323 | 37 | 11,951 | 8/15/23 | 78 | 0 | 100 | 0 | Type II Slurry Seal | $3,824 |
| 1088 | 14694 | KNOXVILLE AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 162 | 37 | 5,994 | 8/15/23 | 78 | 0 | 100 | 0 | Type II Slurry Seal | $1,918 |
| 1088 | 14695 | KNOXVILLE AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 6 | 330 | 37 | 12,210 | 8/15/23 | 74 | 63 | 29 | 8 | Type II Slurry Seal | $3,907 |
| 1088 | 14697 | KNOXVILLE AVE | CALIFORNIA ST | ALLEY CALIFORNIA ST | E | AC | 6 | 160 | 37 | 5,920 | 8/15/23 | 72 | 50 | 29 | 21 | Grind - AC Overlay | $20,720 |
| 1088 | 14699 | KNOXVILLE AVE | DELAWARE ST | ALLEY DELAWARE ST | E | AAC | 6 | 171 | 37 | 6,327 | 8/15/23 | 53 | 52 | 48 | 0 | Grind - AC Overlay | $22,145 |
| 1088 | 14700 | KNOXVILLE AVE | ALLEY DELAWARE ST | ENGLAND ST | E | AC | 6 | 160 | 37 | 5,920 | 8/15/23 | 58 | 55 | 45 | 0 | Grind - AC Overlay | $20,720 |
| 1088 | 14701 | KNOXVILLE AVE | ENGLAND ST | ALLEY ENGLAND ST | E | AC | 6 | 165 | 37 | 6,105 | 8/15/23 | 61 | 0 | 53 | 47 | Grind - AC Overlay | $21,368 |
| 1088 | 14702 | KNOXVILLE AVE | ALLEY ENGLAND ST | FLORIDA ST | E | AC | 6 | 165 | 37 | 6,105 | 8/15/23 | 52 | 52 | 48 | 0 | Grind - AC Overlay | $21,368 |
| 1088 | 14703 | KNOXVILLE AVE | FLORIDA ST | BEACH BLVD | E | AC | 6 | 660 | 37 | 24,420 | 8/15/23 | 52 | 62 | 31 | 7 | Grind - AC Overlay | $85,470 |
| 1110 | 14705 | LAKESIDE LN | MEMPHIS AVE | OCEANHILL DR | E | AAC | 6 | 986 | 34 | 33,524 | 8/15/23 | 84 | 44 | 54 | 2 | Type II Slurry Seal | $10,728 |
| 1169 | 14683 | LINCOLN AVE | ALABAMA ST | ALLEY ALABAMA ST | E | AAC | 6 | 323 | 37 | 11,951 | 8/15/23 | 85 | 14 | 79 | 7 | Type II Slurry Seal | $3,824 |
| 1169 | 14684 | LINCOLN AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 162 | 37 | 5,994 | 5/6/26 | 86 | 100 | 0 | 0 | Type II Slurry Seal | $1,918 |
| 1169 | 14685 | LINCOLN AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 330 | 37 | 12,210 | 8/15/23 | 60 | 68 | 32 | 0 | Grind - AC Overlay | $42,735 |
| 1169 | 14687 | LINCOLN AVE | CALIFORNIA ST | ALLEY CALIFORNIA ST | E | AAC | 6 | 160 | 37 | 5,920 | 8/15/23 | 52 | 56 | 44 | 0 | Grind - AC Overlay | $20,720 |
| 1169 | 14688 | LINCOLN AVE | ALLEY CALIFORNIA ST | DELAWARE ST | E | AAC | 6 | 169 | 37 | 5,957 | 8/15/23 | 58 | 58 | 42 | 0 | Grind - AC Overlay | $20,850 |
| 1169 | 14689 | LINCOLN AVE | DELAWARE ST | ALLEY DELAWARE ST | E | AC | 6 | 171 | 36 | 5,868 | 8/15/23 | 67 | 46 | 54 | 0 | Grind - AC Overlay | $20,538 |
| 1169 | 14690 | LINCOLN AVE | ALLEY DELAWARE ST | ENGLAND ST | E | AC | 6 | 160 | 36 | 5,760 | 8/15/23 | 52 | 53 | 47 | 0 | Grind - AC Overlay | $20,160 |
| 1169 | 14691 | LINCOLN AVE | ENGLAND ST | ALLEY ENGLAND ST | E | AC | 6 | 165 | 37 | 6,031 | 8/15/23 | 59 | 44 | 56 | 0 | Grind - AC Overlay | $21,109 |
| 1169 | 14692 | LINCOLN AVE | ALLEY ENGLAND ST | FLORIDA ST | E | AC | 6 | 165 | 37 | 6,105 | 8/15/23 | 50 | 40 | 35 | 25 | Grind - AC Overlay | $21,368 |
| 1184 | 50480 | LOMA AVE | PARK ST | MAIN ST | E | AC | 6 | 349 | 36 | 12,564 | 6/28/21 | 86 | 41 | 59 | 0 | Type II Slurry Seal | $4,020 |
| 1130 | 13055 | MAIN ST | ADAMS AVE | SEVENTEENTH ST | E | AAC | 6 | 1,191 | 30 | 11,910 | 6/29/21 | 81 | 63 | 37 | 0 | Type II Slurry Seal | $3,811 |
| 1296 | 14681 | MEMPHIS AVE | HUNTINGTON ST | DELAWARE ST | E | AC | 6 | 659 | 37 | 24,087 | 8/15/23 | 77 | 70 | 23 | 7 | Type II Slurry Seal | $7,708 |
| 1296 | 14682 | MEMPHIS AVE | DELAWARE ST | FLORIDA ST | E | AAC | 6 | 661 | 36 | 23,508 | 8/15/23 | 70 | 58 | 27 | 15 | Grind - AC Overlay | $82,278 |
| 1296 | 15688 | MEMPHIS AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 6 | 485 | 36 | 17,460 | 8/14/23 | 68 | 90 | 9 | 1 | Grind - AC Overlay | $61,110 |
| 1296 | 15691 | MEMPHIS AVE | FLORIDA ST | BEACH BLVD | E | AC | 6 | 660 | 36 | 23,472 | 8/15/23 | 65 | 79 | 21 | 0 | Grind - AC Overlay | $82,152 |
| 1296 | 15847 | MEMPHIS AVE | LAKE ST | ALABAMA ST | E | AC | 6 | 372 | 36 | 13,392 | 8/14/23 | 50 | 79 | 21 | 0 | Grind - AC Overlay | $46,872 |
| 1373 | 14680 | NASHVILLE AVE | HUNTINGTON ST | DELAWARE ST | E | AAC | 6 | 660 | 37 | 23,828 | 8/14/23 | 83 | 19 | 81 | 0 | Type II Slurry Seal | $7,625 |
| 1373 | 15686 | NASHVILLE AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 485 | 37 | 17,649 | 8/14/23 | 81 | 49 | 51 | 0 | Type II Slurry Seal | $5,648 |
| 1403 | 13011 | NINETEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 415 | 46 | 19,090 | 6/23/21 | 78 | 85 | 15 | 0 | Type II Slurry Seal | $6,109 |
| 1436 | 14706 | OCEANHILL DR | DELAWARE ST | CDS | E | AAC | 6 | 1,218 | 34 | 42,912 | 8/15/23 | 86 | 21 | 62 | 17 | Type II Slurry Seal | $13,732 |
| 1446 | 12905 | OLIVE AVE | ELEVENTH ST | FOURTEENTH ST | E | AC | 6 | 930 | 38 | 35,340 | 6/23/21 | 86 | 0 | 62 | 38 | Type II Slurry Seal | $11,309 |
| 1446 | 12926 | OLIVE AVE | SECOND ST | THIRD ST | E | AC | 6 | 265 | 26 | 6,890 | 6/30/21 | 76 | 80 | 19 | 1 | Type II Slurry Seal | $2,205 |
| 1446 | 16034 | OLIVE AVE | 22ND ST | GOLDENWEST ST | E | AC | 6 | 255 | 36 | 9,430 | 6/23/21 | 82 | 61 | 37 | 2 | Type II Slurry Seal | $3,018 |
| 1462 | 14678 | OSWEGO AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 162 | 36 | 5,544 | 8/14/23 | 81 | 55 | 45 | 0 | Type II Slurry Seal | $1,774 |
| 1462 | 14679 | OSWEGO AVE | HUNTINGTON ST | DELAWARE ST | E | AAC | 6 | 660 | 36 | 23,184 | 8/14/23 | 82 | 41 | 59 | 0 | Type II Slurry Seal | $7,419 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1462 | 15848 | OSWEGO AVE | LAKE ST | ALABAMA ST | E | AAC | 6 | 372 | 37 | 13,764 | 8/15/23 | 75 | 66 | 34 | 0 | Type II Slurry Seal | $4,404 |
| 1385 | 12869 | PALM AVE | MAIN ST | ELEVENTH ST | E | AC | 6 | 1,320 | 40 | 52,800 | 6/23/21 | 81 | 59 | 14 | 27 | Type II Slurry Seal | $16,896 |
| 1488 | 13033 | PARK ST | THIRTEENTH ST | ADAMS AVE | E | AC | 6 | 646 | 37 | 23,902 | 6/29/21 | 67 | 58 | 20 | 22 | Grind - AC Overlay | $83,657 |
| 1488 | 14733 | PARK ST | UTICA AVE | LAKE ST | E | AC | 6 | 1,145 | 36 | 41,220 | 6/29/21 | 86 | 51 | 4 | 45 | Type II Slurry Seal | $13,190 |
| 1505 | 12958 | PECAN AVE | ACACIA AVE | MAIN ST | E | AC | 6 | 42 | 65 | 2,380 | 7/8/21 | 81 | 23 | 77 | 0 | Type II Slurry Seal | $762 |
| 1505 | 13104 | PECAN AVE | TWENTIETH ST | GOLDENWEST ST | E | AC | 6 | 795 | 36 | 28,920 | 6/23/21 | 72 | 72 | 10 | 18 | Grind - AC Overlay | $101,220 |
| 1505 | 13112 | PECAN AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AC | 6 | 930 | 36 | 33,480 | 6/23/21 | 77 | 49 | 18 | 33 | Type II Slurry Seal | $10,714 |
| 1528 | 13034 | PINE ST | SPRINGFIELD AVE | UTICA AVE | E | AC | 6 | 642 | 37 | 23,754 | 6/29/21 | 84 | 41 | 46 | 13 | Type II Slurry Seal | $7,601 |
| 1528 | 13035 | PINE ST | ADAMS AVE | SPRINGFIELD AVE | E | AC | 6 | 645 | 37 | 23,865 | 6/29/21 | 75 | 57 | 32 | 11 | Type II Slurry Seal | $7,637 |
| 1528 | 13036 | PINE ST | THIRTEENTH ST | ADAMS AVE | E | AC | 6 | 645 | 37 | 23,865 | 6/29/21 | 79 | 31 | 39 | 30 | Type II Slurry Seal | $7,637 |
| 1528 | 14735 | PINE ST | UTICA AVE | PARK ST | E | AC | 6 | 660 | 36 | 23,760 | 6/29/21 | 86 | 0 | 0 | 100 | Type II Slurry Seal | $7,603 |
| 1553 | 15684 | PORTLAND AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 485 | 36 | 16,884 | 8/14/23 | 71 | 48 | 46 | 6 | Grind - AC Overlay | $59,094 |
| 1554 | 14677 | PORTLAND CIR | HUNTINGTON ST | END | E | AAC | 6 | 576 | 36 | 22,236 | 8/15/23 | 74 | 16 | 76 | 8 | Type II Slurry Seal | $7,116 |
| 1646 | 14708 | RIVERVIEW CIR | OCEANHILL DR | CDS | E | AC | 6 | 248 | 32 | 9,436 | 8/15/23 | 27 | 94 | 6 | 0 | Grind - AC Overlay | $33,026 |
| 1772 | 12944 | SECOND ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 385 | 36 | 13,860 | 6/22/21 | 66 | 57 | 43 | 0 | Grind - AC Overlay | $48,510 |
| 1780 | 12949 | SEVENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 390 | 48 | 18,720 | 6/23/21 | 81 | 11 | 45 | 44 | Type II Slurry Seal | $5,990 |
| 1780 | 12952 | SEVENTH ST | PCH | WALNUT AVE | E | AC | 6 | 390 | 48 | 18,720 | 6/22/21 | 80 | 24 | 47 | 29 | Type II Slurry Seal | $5,990 |
| 1780 | 13069 | SEVENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 375 | 46 | 17,250 | 6/22/21 | 78 | 0 | 56 | 44 | Type II Slurry Seal | $5,520 |
| 1780 | 13070 | SEVENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 360 | 48 | 17,280 | 6/23/21 | 79 | 43 | 30 | 27 | Type II Slurry Seal | $5,530 |
| 1780 | 16033 | SEVENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/23/21 | 80 | 23 | 38 | 39 | Type II Slurry Seal | $5,814 |
| 1805 | 13100 | SHIPLEY ST | ADAMS AVE | CDS | E | AC | 6 | 464 | 36 | 17,250 | 7/8/21 | 73 | 47 | 37 | 16 | Type II Slurry Seal | $5,520 |
| 1825 | 13003 | SIXTEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 81 | 0 | 18 | 82 | Type II Slurry Seal | $5,741 |
| 1825 | 13093 | SIXTEENTH ST | PCH | WALNUT AVE | E | AC | 6 | 370 | 46 | 16,825 | 6/22/21 | 85 | 0 | 25 | 75 | Type II Slurry Seal | $5,384 |
| 1862 | 15702 | SPRINGFIELD AVE | CALIFORNIA ST | DELWARE ST | E | AC | 6 | 280 | 36 | 10,080 | 6/30/21 | 68 | 71 | 18 | 11 | Grind - AC Overlay | $35,280 |
| 1862 | 15849 | SPRINGFIELD AVE | LAKE ST | PARK ST | E | AC | 6 | 585 | 36 | 21,060 | 6/30/21 | 77 | 23 | 77 | 0 | Type II Slurry Seal | $6,739 |
| 1965 | 12966 | TENTH ST | PCH | WALNUT AVE | E | AC | 6 | 375 | 50 | 18,750 | 6/22/21 | 75 | 43 | 35 | 22 | Type II Slurry Seal | $6,000 |
| 1965 | 12967 | TENTH ST | WALNUT AVE | OLIVE AVE | E | AAC | 6 | 395 | 46 | 18,170 | 6/22/21 | 68 | 46 | 29 | 25 | Grind - AC Overlay | $63,595 |
| 1965 | 12969 | TENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/22/21 | 71 | 37 | 39 | 24 | Grind - AC Overlay | $59,570 |
| 1965 | 12989 | TENTH ST | MAIN ST | LAKE ST | E | AC | 6 | 648 | 37 | 23,976 | 7/8/21 | 81 | 25 | 73 | 2 | Type II Slurry Seal | $7,672 |
| 1965 | 13073 | TENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 380 | 46 | 17,480 | 6/22/21 | 72 | 29 | 31 | 40 | Grind - AC Overlay | $61,180 |
| 1965 | 13074 | TENTH ST | PALM AVE | CREST AVE | E | AC | 6 | 275 | 40 | 12,450 | 6/22/21 | 78 | 17 | 38 | 45 | Type II Slurry Seal | $3,984 |
| 1971 | 12945 | THIRD ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 375 | 36 | 13,500 | 6/30/21 | 77 | 58 | 32 | 10 | Type II Slurry Seal | $4,320 |
| 1971 | 12946 | THIRD ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 355 | 36 | 12,780 | 6/30/21 | 80 | 65 | 35 | 0 | Type II Slurry Seal | $4,090 |
| 1972 | 12980 | THIRTEENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/22/21 | 74 | 0 | 81 | 19 | Type II Slurry Seal | $6,035 |
| 1972 | 12981 | THIRTEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 71 | 8 | 91 | 1 | Grind - AC Overlay | $62,790 |
| 1972 | 12982 | THIRTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 375 | 46 | 17,250 | 6/22/21 | 68 | 0 | 86 | 14 | Grind - AC Overlay | $60,375 |
| 1972 | 12983 | THIRTEENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 73 | 0 | 89 | 11 | Type II Slurry Seal | $5,741 |
| 1972 | 12984 | THIRTEENTH ST | PALM AVE | CREST AVE | E | AC | 6 | 610 | 42 | 25,620 | 7/8/21 | 84 | 20 | 32 | 48 | Type II Slurry Seal | $8,198 |
| 1972 | 13081 | THIRTEENTH ST | PCH | WALNUT AVE | E | AC | 6 | 365 | 50 | 18,570 | 6/22/21 | 77 | 41 | 38 | 21 | Type II Slurry Seal | $5,942 |
| 2030 | 12976 | TWELFTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/22/21 | 67 | 65 | 35 | 0 | Grind - AC Overlay | $59,570 |
| 2030 | 13079 | TWELFTH ST | PCH | WALNUT AVE | E | AC | 6 | 340 | 50 | 17,142 | 6/22/21 | 80 | 0 | 59 | 41 | Type II Slurry Seal | $5,485 |
| 2030 | 13082 | TWELFTH ST | CREST AVE | MAIN ST | E | AC | 6 | 415 | 43 | 17,845 | 7/8/21 | 80 | 54 | 46 | 0 | Type II Slurry Seal | $5,710 |
| 2031 | 13014 | TWENTIETH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 386 | 46 | 17,756 | 6/30/21 | 86 | 61 | 33 | 6 | Type II Slurry Seal | $5,682 |
| 2031 | 13018 | TWENTIETH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 74 | 81 | 19 | 0 | Type II Slurry Seal | $5,814 |
| 2032 | 13019 | TWENTY-FIRST ST | ACACIA AVE | PALM AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 67 | 49 | 18 | 33 | Grind - AC Overlay | $63,595 |
| 2032 | 13021 | TWENTY-FIRST ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 415 | 46 | 19,090 | 6/30/21 | 68 | 71 | 8 | 21 | Grind - AC Overlay | $66,815 |
| 2032 | 13023 | TWENTY-FIRST ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 83 | 79 | 16 | 5 | Type II Slurry Seal | $5,814 |
| 2032 | 13097 | TWENTY-FIRST ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 84 | 68 | 21 | 11 | Type II Slurry Seal | $5,814 |
| 2033 | 13027 | TWENTY-SECOND ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 70 | 64 | 14 | 22 | Grind - AC Overlay | $63,595 |
| 2033 | 13098 | TWENTY-SECOND ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 77 | 40 | 14 | 46 | Type II Slurry Seal | $5,814 |
| 2043 | 14717 | UTICA AVE | LAKE ST | PARK ST | E | AC | 6 | 650 | 36 | 23,400 | 7/8/21 | 79 | 19 | 37 | 44 | Type II Slurry Seal | $7,488 |
| 2043 | 15001 | UTICA AVE | LAKE ST | CDS | E | AC | 6 | 184 | 36 | 7,040 | 7/8/21 | 67 | 64 | 36 | 0 | Grind - AC Overlay | $24,640 |
| 2043 | 15698 | UTICA AVE | PARK ST | MAIN ST | E | AC | 6 | 365 | 36 | 13,140 | 7/8/21 | 82 | 13 | 36 | 51 | Type II Slurry Seal | $4,205 |
| 2064 | 15852 | VENICE AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 6 | 450 | 36 | 16,100 | 7/8/21 | 82 | 0 | 100 | 0 | Type II Slurry Seal | $5,152 |
| 1994 | 12929 | WALNUT AVE | ELEVENTH ST | FOURTEENTH ST | E | AC | 6 | 930 | 39 | 36,270 | 6/23/21 | 74 | 36 | 38 | 26 | Type II Slurry Seal | $11,606 |
| 1994 | 12939 | WALNUT AVE | SIXTH ST | EIGHTH ST | E | AC | 6 | 560 | 37 | 20,720 | 7/8/21 | 78 | 47 | 52 | 1 | Type II Slurry Seal | $6,630 |
| 1994 | 13114 | WALNUT AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AC | 6 | 875 | 36 | 31,500 | 6/23/21 | 67 | 42 | 14 | 44 | Grind - AC Overlay | $110,250 |
| | | | | | | | | | | | | | | | | | **$3,651,788** |
| 6 | 13946 | ACAPULCO CIR | SAUSALITO LN | CDS | E | AC | 7 | 654 | 34 | 23,486 | 4/15/26 | 85 | 47 | 48 | 5 | Type II Slurry Seal | $7,985 |
| 12 | 14164 | ADRIAN CIR | END | HAZELBROOK DR | E | AC | 7 | 496 | 36 | 19,356 | 4/16/26 | 83 | 72 | 25 | 3 | Type II Slurry Seal | $6,581 |
| 20 | 14043 | ALBATROSS DR | WINDWARD LN | WESTWINDS LN | E | AC | 7 | 1,012 | 36 | 36,432 | 4/20/26 | 78 | 88 | 5 | 7 | Type II Slurry Seal | $12,387 |
| 124 | 14171 | ANCHOR CIR | CLOUDHAVEN DR | CDS | E | AC | 7 | 164 | 32 | 6,748 | 4/21/26 | 82 | 79 | 21 | 0 | Type II Slurry Seal | $2,294 |
| 125 | 15973 | ANCHORAGE DR | TOPEKA LN | TRIDENT LN | E | AC | 7 | 1,275 | 36 | 46,650 | 4/20/26 | 78 | 82 | 16 | 2 | Type II Slurry Seal | $15,861 |
| 167 | 14041 | AUSTIN DR | PHOENIX LN | TOPEKA LN | E | AC | 7 | 252 | 36 | 9,072 | 4/20/26 | 55 | 100 | 0 | 0 | Grind - AC Overlay | $33,022 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 222 | 15467 | BEDEL DR | MANSARD LN | VILLAGE DR | E | AC | 7 | 408 | 36 | 14,688 | 4/16/26 | 77 | 77 | 23 | 0 | Type II Slurry Seal | $4,994 |
| 228 | 14058 | BELLMEAD DR | BRIARLY LN | FELCLIFF LN | E | AC | 7 | 1,027 | 36 | 36,972 | 4/20/26 | 82 | 75 | 25 | 0 | Type II Slurry Seal | $12,570 |
| 287 | 14027 | BOWMAN LN | HURSTWELL DR | DRYBANK DR | E | AAC | 7 | 536 | 36 | 19,296 | 8/17/23 | 86 | 0 | 91 | 9 | Type II Slurry Seal | $6,561 |
| 302 | 15891 | BRENTSTONE LN | BURLCREST DR | CHARFORD DR | E | AC | 7 | 1,183 | 36 | 42,588 | 4/16/26 | 83 | 59 | 37 | 4 | Type II Slurry Seal | $14,480 |
| 307 | 15959 | BRIARLY LN | DOREMERE DR | LOWMEAD DR | E | AC | 7 | 1,007 | 36 | 37,002 | 4/20/26 | 81 | 86 | 14 | 0 | Type II Slurry Seal | $12,581 |
| 312 | 13947 | BRIDGEWAY LN | GARFIELD AVE | BROOKSIDE DR | E | AC | 7 | 410 | 36 | 14,760 | 4/15/26 | 48 | 100 | 0 | 0 | Grind - AC Overlay | $53,726 |
| 323 | 13948 | BROOKSIDE DR | BRIDGEWAY LN | HOMESTEAD LN | E | AC | 7 | 306 | 36 | 11,016 | 4/15/26 | 57 | 98 | 0 | 2 | Grind - AC Overlay | $40,098 |
| 325 | 15472 | BROWNING DR | HARBOR ISLE LN | CDS | E | AC | 7 | 557 | 32 | 20,124 | 4/21/26 | 82 | 38 | 62 | 0 | Type II Slurry Seal | $6,842 |
| 342 | 14024 | CADE CIR | DRYBROOK LN | END | E | AAC | 7 | 294 | 32 | 9,408 | 8/17/23 | 86 | 24 | 59 | 17 | Type II Slurry Seal | $3,199 |
| 394 | 14038 | CARSON DR | NEWLAND AVE | SACRAMENTO LN | E | AC | 7 | 167 | 36 | 6,012 | 5/5/26 | 74 | 29 | 71 | 0 | Type II Slurry Seal | $2,044 |
| 430 | 14071 | CHESAPEAKE LN | GRODON DDR | ADAMS AVE | E | AC | 7 | 1,063 | 36 | 39,268 | 4/16/26 | 79 | 74 | 26 | 0 | Type II Slurry Seal | $13,351 |
| 451 | 15408 | CLARKDALE DR | EDGEWOOD LN | END | E | AC | 7 | 720 | 34 | 24,480 | 8/21/23 | 23 | 77 | 5 | 18 | AC Recon | $354,470 |
| 452 | 14747 | CLAY AVE | MAIN ST | HOLLY ST | E | AC | 7 | 368 | 30 | 11,040 | 3/12/24 | 86 | 0 | 58 | 42 | Type II Slurry Seal | $3,754 |
| 452 | 15712 | CLAY AVE | FLORIDA ST | BEACH BLVD | E | AC | 7 | 661 | 36 | 23,796 | 4/9/24 | 83 | 0 | 65 | 35 | Type II Slurry Seal | $8,091 |
| 456 | 14738 | CLEVELAND DR | HUNTINGTON ST | CDS | E | AAC | 7 | 330 | 32 | 10,560 | 4/6/26 | 82 | 0 | 100 | 0 | Type II Slurry Seal | $3,590 |
| 460 | 50520 | CLIFFWOOD DR | TIDELAND LN | CDS | E | AC | 7 | 238 | 32 | 9,416 | 4/21/26 | 86 | 24 | 76 | 0 | Type II Slurry Seal | $3,201 |
| 462 | 15894 | CLOUDHAVEN DR | MOONCREST CIR | TIDELAND LN | E | AC | 7 | 721 | 36 | 27,456 | 4/16/26 | 84 | 63 | 37 | 0 | Type II Slurry Seal | $9,335 |
| 473 | 14970 | COLDWATER LN | YORKTOWN AVE | SCRIBE DR | E | AC | 7 | 364 | 36 | 13,104 | 8/21/23 | 77 | 76 | 18 | 6 | Type II Slurry Seal | $4,455 |
| 473 | 14971 | COLDWATER LN | SCRIBE DR | DRYBANK DR | E | AC | 7 | 1,479 | 36 | 53,244 | 8/21/23 | 85 | 0 | 79 | 21 | Type II Slurry Seal | $18,103 |
| 473 | 15403 | COLDWATER LN | DRYBANK DR | ADAMS AVE | E | AC | 7 | 1,074 | 36 | 38,664 | 8/21/23 | 78 | 64 | 27 | 9 | Type II Slurry Seal | $13,146 |
| 501 | 14050 | CORAL CIR | WESTWINDS LN | CDS | E | AC | 7 | 232 | 36 | 8,352 | 4/20/26 | 81 | 39 | 58 | 3 | Type II Slurry Seal | $2,840 |
| 529 | 13963 | CRESCENT DR | PISMO LN | CORALWOOD LN | E | AC | 7 | 1,116 | 36 | 40,676 | 4/15/26 | 85 | 61 | 39 | 0 | Type II Slurry Seal | $13,830 |
| 546 | 14055 | CUTTER DR | ESTUARY LN | ISTHMUS LN | E | AC | 7 | 260 | 36 | 9,860 | 4/20/26 | 75 | 75 | 25 | 0 | Type II Slurry Seal | $3,352 |
| 556 | 14031 | DALLAS CIR | FLAGSTONE LN | END | E | AC | 7 | 466 | 34 | 15,844 | 8/21/23 | 72 | 67 | 25 | 8 | Grind - AC Overlay | $57,672 |
| 560 | 13935 | DANBURY CIR | NEWHAVEN LN | CDS | E | AC | 7 | 408 | 36 | 18,648 | 4/2/24 | 78 | 49 | 37 | 14 | Type II Slurry Seal | $6,340 |
| 580 | 15404 | DEEPCLIFF DR | DRYBROOK LN | END | E | AAC | 7 | 528 | 36 | 19,008 | 8/17/23 | 82 | 0 | 100 | 0 | Type II Slurry Seal | $6,463 |
| 581 | 14030 | DEEPVIEW DR | RUMFORD LN | DOREMERE DR | E | AC | 7 | 171 | 36 | 6,156 | 8/21/23 | 46 | 91 | 9 | 0 | Grind - AC Overlay | $22,408 |
| 581 | 15407 | DEEPVIEW DR | EDGEWOOD LN | RUMFORD LN | E | AC | 7 | 588 | 36 | 21,168 | 8/21/23 | 35 | 82 | 10 | 8 | Grind - AC Overlay | $77,052 |
| 582 | 14162 | DEERVALE LN | CANDLEWOOD DR | HAZELBROOK DR | E | AC | 7 | 743 | 36 | 26,748 | 4/16/26 | 85 | 32 | 63 | 5 | Type II Slurry Seal | $9,094 |
| 593 | 14036 | DENVER LN | YORKTOWN AVE | SALT LAKE DR | E | AC | 7 | 166 | 36 | 5,976 | 4/20/26 | 78 | 0 | 94 | 6 | Type II Slurry Seal | $2,032 |
| 602 | 15969 | DITMAR LN | DEEPCLIFF DR | HURSTWELL DR | E | AC | 7 | 986 | 36 | 35,496 | 8/17/23 | 82 | 0 | 77 | 23 | Type II Slurry Seal | $12,069 |
| 629 | 15406 | DRYBANK DR | COLDWATER LN | EDGEWOOD LN | E | AC | 7 | 735 | 36 | 26,460 | 8/17/23 | 70 | 67 | 23 | 10 | Grind - AC Overlay | $96,314 |
| 630 | 15970 | DRYBROOK LN | DEEPCLIFF DR | HURSTWELL DR | E | AC | 7 | 991 | 36 | 35,676 | 8/17/23 | 83 | 56 | 38 | 6 | Type II Slurry Seal | $12,130 |
| 654 | 15962 | EDGEWOOD LN | DEEPVIEW DR | CLARKDALE DR | E | AC | 7 | 1,049 | 36 | 37,764 | 8/21/23 | 32 | 85 | 4 | 11 | Grind - AC Overlay | $137,461 |
| 700 | 15837 | ESTUARY LN | DOLPHIN DR | ADAMS AVE | E | AC | 7 | 1,451 | 36 | 52,236 | 4/20/26 | 71 | 95 | 3 | 2 | Grind - AC Overlay | $190,139 |
| 724 | 14449 | FELCLIFF LN | ADAMS AVE | CROWN REEF LN | E | AC | 7 | 127 | 36 | 4,572 | 4/6/22 | 73 | 0 | 100 | 0 | Type II Slurry Seal | $1,554 |
| 748 | 15961 | FLAGSTONE LN | DEEPVIEW DR | CLARKDALE DR | E | AC | 7 | 1,041 | 36 | 37,476 | 8/21/23 | 57 | 68 | 30 | 2 | Grind - AC Overlay | $136,413 |
| 758 | 14742 | FLORIDA ST | YORKTOWN AVE | WILLIAMS AVE | E | AC | 7 | 660 | 36 | 23,760 | 4/9/24 | 68 | 71 | 29 | 0 | Grind - AC Overlay | $86,486 |
| 758 | 15710 | FLORIDA ST | GARFIELD AVE | CLAY AVE | E | AC | 7 | 1,320 | 40 | 52,800 | 4/9/24 | 83 | 59 | 41 | 0 | Type II Slurry Seal | $17,952 |
| 758 | 15711 | FLORIDA ST | WILLIAMS AVE | CLAY AVE | E | AC | 7 | 660 | 36 | 23,760 | 4/9/24 | 82 | 44 | 56 | 0 | Type II Slurry Seal | $8,078 |
| 813 | 14444 | GETTYSBURG DR | MAGNOLIA ST FRONTAGE | LOTUS LN | E | AC | 7 | 1,036 | 36 | 37,296 | 4/20/26 | 86 | 52 | 48 | 0 | Type II Slurry Seal | $12,681 |
| 819 | 13936 | GILFORD CIR | NEWHAVEN LN | CDS | E | AC | 7 | 408 | 36 | 17,768 | 4/2/24 | 83 | 71 | 29 | 0 | Type II Slurry Seal | $6,041 |
| 847 | 15915 | GRANT DR | WEYMOUTH LN | HARDING LN | E | AC | 7 | 942 | 37 | 34,854 | 4/2/24 | 79 | 55 | 45 | 0 | Type II Slurry Seal | $11,850 |
| 859 | 15365 | GREGORY LN | GARFIELD AVE | CDS | E | AC | 7 | 1,164 | 27 | 31,428 | 4/8/24 | 78 | 67 | 33 | 0 | Type II Slurry Seal | $10,686 |
| 880 | 15371 | HAMDEN LN | GARFIELD AVE | NEWHAVEN LN | E | AC | 7 | 1,434 | 36 | 51,624 | 4/2/24 | 85 | 0 | 87 | 13 | Type II Slurry Seal | $17,552 |
| 922 | 15466 | HENTON DR | BRENTSTONE LN | CDS | E | AC | 7 | 547 | 32 | 17,504 | 4/21/26 | 77 | 46 | 54 | 0 | Type II Slurry Seal | $5,951 |
| 969 | 14736 | HUNTINGTON ST | GARFIELD AVE | CLAY AVE | E | AAC | 7 | 1,320 | 36 | 47,520 | 4/6/26 | 85 | 0 | 94 | 6 | Type II Slurry Seal | $16,157 |
| 969 | 14737 | HUNTINGTON ST | YORKTOWN AVE | SEVENTEENTH ST | E | AAC | 7 | 317 | 36 | 11,412 | 4/6/26 | 82 | 16 | 84 | 0 | Type II Slurry Seal | $3,880 |
| 969 | 15709 | HUNTINGTON ST | SEVENTEENTH ST | CLAY AVE | E | AAC | 7 | 1,105 | 36 | 39,780 | 4/6/26 | 83 | 37 | 63 | 0 | Type II Slurry Seal | $13,525 |
| 999 | 14032 | IVY CIR | FLAGSTONELN | END | E | AC | 7 | 466 | 34 | 15,844 | 8/21/23 | 50 | 57 | 16 | 27 | Grind - AC Overlay | $57,672 |
| 1018 | 14152 | JETT DR | SUNSHINE DR | JOHNSON LN | E | AC | 7 | 255 | 36 | 9,180 | 4/21/26 | 82 | 49 | 51 | 0 | Type II Slurry Seal | $3,121 |
| 1021 | 15892 | JOHSON LN | GUSS DR | BROWNING DR | E | AC | 7 | 750 | 36 | 27,000 | 4/21/26 | 81 | 47 | 44 | 9 | Type II Slurry Seal | $9,180 |
| 1053 | 15473 | KELVINGROVE LN | INDIANAPOLIS AVE | CDS | E | AC | 7 | 493 | 32 | 17,576 | 4/21/26 | 83 | 38 | 62 | 0 | Type II Slurry Seal | $5,976 |
| 1075 | 15409 | KINGSDALE DR | COLDWATER LN | EDGEWOOD LN | E | AC | 7 | 835 | 36 | 30,060 | 8/21/23 | 65 | 59 | 33 | 8 | Grind - AC Overlay | $109,418 |
| 1086 | 14130 | KNIGHTS CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 85 | 61 | 39 | 0 | Type II Slurry Seal | $2,468 |
| 1135 | 13915 | LAURA CIR | GREGORY LN | CDS | E | AC | 7 | 160 | 27 | 5,570 | 4/8/24 | 85 | 31 | 69 | 0 | Type II Slurry Seal | $1,894 |
| 1146 | 14061 | LEECREST LN | LARKPORT DR | LOWMEAD DR | E | AC | 7 | 266 | 36 | 10,326 | 4/20/26 | 84 | 56 | 44 | 0 | Type II Slurry Seal | $3,511 |
| 4050 | 50250 | LOOKOUT LN | NAPLES DR | KEEL DR | E | AC | 7 | 500 | 35 | 17,500 | 4/15/26 | 65 | 71 | 29 | 0 | Grind - AC Overlay | $63,700 |
| 1192 | 15379 | LORRAINE DR | SAUSALITO LN | BAYWATER LN | E | AC | 7 | 916 | 36 | 32,976 | 4/15/26 | 85 | 45 | 41 | 14 | Type II Slurry Seal | $11,212 |
| 1200 | 14059 | LOWMEAD DR | BRIARLY LN | LEECREST LN | E | AC | 7 | 628 | 36 | 24,108 | 4/20/26 | 73 | 89 | 11 | 0 | Type II Slurry Seal | $8,197 |
| 1241 | 15890 | MANSARD LN | HENTON DR | BAINFORD DR | E | AC | 7 | 941 | 36 | 34,376 | 4/16/26 | 86 | 73 | 27 | 0 | Type II Slurry Seal | $11,688 |
| 1288 | 14151 | MEDITERRANEAN DR | MAGNOLIA ST | HARBOR ISLE LN | E | AC | 7 | 1,117 | 36 | 40,212 | 4/16/26 | 82 | 82 | 18 | 0 | Type II Slurry Seal | $13,672 |
| 1370 | 15822 | NANTUCKET DR | WATERBURY LN | BUSHARD ST | E | AC | 7 | 1,122 | 36 | 40,392 | 4/16/26 | 86 | 83 | 10 | 7 | Type II Slurry Seal | $13,733 |
| 1376 | 15824 | NAUTILUS DR | MARINA LN | BUSHARD ST | E | AC | 7 | 1,106 | 36 | 40,566 | 4/16/26 | 84 | 58 | 39 | 3 | Type II Slurry Seal | $13,792 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1389 | 15370 | NEWHAVEN LN | BRIDGEPORT DR | ALLEY GILFORD CIR | E | AC | 7 | 877 | 36 | 31,572 | 4/2/24 | 69 | 67 | 30 | 3 | Grind - AC Overlay | $114,922 |
| 1431 | 15423 | OCCIDENTAL LN | VERONICA DR | MADELINE DR | E | AC | 7 | 827 | 36 | 31,272 | 4/20/26 | 83 | 83 | 3 | 14 | Type II Slurry Seal | $10,632 |
| 1473 | 14154 | PADDOCK CIR | JOHNSON LN | CDS | E | AC | 7 | 324 | 32 | 10,368 | 4/21/26 | 83 | 0 | 95 | 5 | Type II Slurry Seal | $3,525 |
| 1475 | 14125 | PAGE CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 80 | 79 | 21 | 0 | Type II Slurry Seal | $2,468 |
| 1543 | 14028 | POE DR | DITMAR LN | RUMFORD LN | E | AAC | 7 | 261 | 36 | 9,396 | 8/17/23 | 81 | 56 | 42 | 2 | Type II Slurry Seal | $3,195 |
| 1570 | 14129 | PRINCESS CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 81 | 85 | 15 | 0 | Type II Slurry Seal | $2,468 |
| 1656 | 13961 | ROCKCREST LN | SAILPORT DR | YORKTOWN AVE | E | AC | 7 | 173 | 33 | 5,019 | 5/5/26 | 78 | 86 | 0 | 14 | Type II Slurry Seal | $1,706 |
| 1683 | 14029 | RUMFORD LN | POE DR | DEEPVIEW DR | E | AAC | 7 | 520 | 36 | 18,720 | 8/17/23 | 73 | 28 | 58 | 14 | Type II Slurry Seal | $6,365 |
| 1748 | 14153 | SCOUGALL CIR | JOHNSON LN | CDS | E | AC | 7 | 323 | 32 | 11,836 | 4/21/26 | 80 | 18 | 82 | 0 | Type II Slurry Seal | $4,024 |
| 1670 | 14739 | SEVENTEENTH ST | FLORIDA ST | CLAY AVE | E | AC | 7 | 660 | 36 | 23,760 | 3/13/24 | 84 | 0 | 67 | 33 | Type II Slurry Seal | $8,078 |
| 1670 | 15003 | SEVENTEENTH ST | HUNTINGTON ST | DELAWARE ST | E | AC | 7 | 1,043 | 56 | 58,408 | 3/13/24 | 69 | 65 | 27 | 8 | Grind - AC Overlay | $212,605 |
| 1806 | 14045 | SHOAL CIR | WESTWINDS LN | CDS | E | AC | 7 | 232 | 36 | 9,602 | 4/20/26 | 70 | 68 | 32 | 0 | Grind - AC Overlay | $34,951 |
| 1811 | 14150 | SHOREWOOD CIR | ADAMS AVE | CDS | E | AC | 7 | 630 | 36 | 24,480 | 4/21/26 | 79 | 80 | 18 | 2 | Type II Slurry Seal | $8,323 |
| 1867 | 14131 | SQUIRES CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 84 | 47 | 53 | 0 | Type II Slurry Seal | $2,468 |
| 1910 | 15372 | SUMMERFIELD LN | GARFIELD AVE | DEAUVILLE DR | E | AC | 7 | 515 | 36 | 19,518 | 4/2/24 | 85 | 68 | 26 | 6 | Type II Slurry Seal | $6,636 |
| 1927 | 14989 | SUNSHINE DR | MAGNOLIA ST FRONTAGE | JETT DR | E | AC | 7 | 677 | 36 | 24,372 | 4/21/26 | 81 | 92 | 8 | 0 | Type II Slurry Seal | $8,286 |
| 1942 | 16021 | SWANSEA LN | BURLCREST DR | CDS | E | AC | 7 | 956 | 36 | 35,916 | 4/16/26 | 80 | 81 | 19 | 0 | Type II Slurry Seal | $12,211 |
| 1979 | 15478 | TIDELAND LN | CLIFFWOOD DR | CLOUDHAVEN DR | E | AC | 7 | 350 | 36 | 14,100 | 4/21/26 | 83 | 52 | 48 | 0 | Type II Slurry Seal | $4,794 |
| 1993 | 15972 | TOPEKA LN | SALT LAKE DR | DOLPHIN DR | E | AC | 7 | 1,026 | 36 | 37,686 | 4/20/26 | 86 | 71 | 29 | 0 | Type II Slurry Seal | $12,813 |
| 2012 | 14048 | TRIDENT LN | DOLPHIN DR | CLIPPER DR | E | AC | 7 | 807 | 36 | 29,052 | 4/20/26 | 74 | 83 | 14 | 3 | Type II Slurry Seal | $9,878 |
| 2012 | 15414 | TRIDENT LN | ANCHORAGE DR | DOLPHIN DR | E | AC | 7 | 757 | 36 | 28,002 | 4/20/26 | 72 | 90 | 7 | 3 | Grind - AC Overlay | $101,927 |
| 2063 | 14033 | VELVET CIR | FLAGSTONE LN | END | E | AC | 7 | 466 | 34 | 15,844 | 8/21/23 | 34 | 88 | 6 | 6 | Grind - AC Overlay | $57,672 |
| 2087 | 15650 | VILLAGE DR | JETT DR | MAGNOLIA ST | E | AC | 7 | 743 | 36 | 26,748 | 4/21/26 | 86 | 100 | 0 | 0 | Type II Slurry Seal | $9,094 |
| 2113 | 15424 | WARFIELD DR | SANDERSON LN | OCCIDENTAL LN | E | AC | 7 | 681 | 36 | 25,266 | 4/20/26 | 85 | 74 | 19 | 7 | Type II Slurry Seal | $8,590 |
| 2128 | 15410 | WEEMS LN | KINGSDALE DR | END | E | AAC | 7 | 649 | 36 | 23,364 | 8/21/23 | 74 | 49 | 51 | 0 | Type II Slurry Seal | $7,944 |
| 2141 | 14046 | WESTWINDS LN | ALBATROSS DR | SHORE CIR | E | AC | 7 | 260 | 36 | 10,110 | 4/20/26 | 83 | 50 | 50 | 0 | Type II Slurry Seal | $3,437 |
| 2141 | 15415 | WESTWINDS LN | SHORE CIR | BREAKERS DR | E | AC | 7 | 520 | 36 | 18,720 | 4/20/26 | 75 | 97 | 0 | 3 | Type II Slurry Seal | $6,365 |
| 2141 | 15416 | WESTWINDS LN | BREAKERS DR | SKIFF CIR | E | AC | 7 | 780 | 36 | 28,080 | 4/20/26 | 75 | 97 | 0 | 3 | Type II Slurry Seal | $9,547 |
| 2165 | 14956 | WILLIAMS AVE | FLORIDA ST | BEACH BLVD | E | AC | 7 | 660 | 36 | 23,760 | 4/9/24 | 80 | 45 | 39 | 16 | Type II Slurry Seal | $8,078 |
| 2190 | 15368 | WORCHESTER LN | FALMOUTH DR | WENLOCK CIR | E | AAC | 7 | 1,180 | 36 | 43,639 | 4/14/26 | 82 | 0 | 100 | 0 | Type II Slurry Seal | $14,837 |
| | | | | | | | | | | | | | | | | | **$2,691,805** |
| 2288 | 17020 | ADAMS AVE FRONTAGE | DERBYSHIRE LN | SIDCUP LN | E | AC | 8 | 672 | 28 | 18,816 | 3/11/22 | 57 | 70 | 30 | 0 | Grind - AC Overlay | $71,313 |
| 2288 | 17022 | ADAMS AVE FRONTAGE | SUTTON LN | EAST END | E | AC | 8 | 120 | 28 | 3,360 | 3/11/22 | 77 | 12 | 88 | 0 | Type II Slurry Seal | $1,176 |
| 2288 | 50300 | ADAMS AVE FRONTAGE | CARMANIA LN | END | E | AC | 8 | 123 | 25 | 3,075 | 3/3/22 | 85 | 0 | 81 | 19 | Type II Slurry Seal | $1,076 |
| 2288 | 50310 | ADAMS AVE FRONTAGE | CARMANIA LN (N) | RANGER LN | E | AC | 8 | 520 | 25 | 13,000 | 3/3/22 | 71 | 50 | 29 | 21 | Grind - AC Overlay | $49,270 |
| 2288 | 50330 | ADAMS AVE FRONTAGE | PICCADILLY LN | END | E | AC | 8 | 348 | 25 | 8,700 | 3/3/22 | 67 | 44 | 49 | 7 | Grind - AC Overlay | $32,973 |
| 131 | 15583 | ANNIK DR | MC LAREN LN. | HICKORY LN | E | AC | 8 | 940 | 36 | 35,340 | 5/5/26 | 71 | 100 | 0 | 0 | Grind - AC Overlay | $133,939 |
| 155 | 14593 | ASHWORTH CIR | CONSTITUTION DR | CDS | E | AC | 8 | 238 | 36 | 10,368 | 3/7/22 | 81 | 0 | 88 | 12 | Type II Slurry Seal | $3,629 |
| 179 | 14288 | BALGAIR CIR | SCOTSTOUN DR | CDS | E | AC | 8 | 452 | 32 | 16,132 | 3/19/24 | 84 | 0 | 97 | 3 | Type II Slurry Seal | $5,646 |
| 221 | 14354 | BECKWOURTH CIR | CORNERBROOK DR | CDS | E | AC | 8 | 341 | 36 | 13,776 | 5/20/24 | 81 | 75 | 25 | 0 | Type II Slurry Seal | $4,822 |
| 246 | 15486 | BIG SUR DR | WIND CAVE LN | RUNNING SPRINGS LN | E | AC | 8 | 754 | 32 | 24,378 | 3/1/22 | 82 | 15 | 85 | 0 | Type II Slurry Seal | $8,532 |
| 247 | 15401 | BIKINI LN | SAMOA DR | KUKUI DR | E | AC | 8 | 802 | 36 | 30,372 | 3/3/22 | 44 | 86 | 9 | 5 | Grind - AC Overlay | $115,110 |
| 248 | 14355 | BINGHAMPTON CIR | EFFINGHAM DR | CDS | E | AC | 8 | 495 | 36 | 19,320 | 4/10/24 | 78 | 68 | 13 | 19 | Type II Slurry Seal | $6,762 |
| 252 | 14093 | BISMARK DR | BROOKHURST ST | MATSONIA LN | E | AC | 8 | 886 | 36 | 31,896 | 3/3/22 | 71 | 37 | 59 | 4 | Grind - AC Overlay | $120,886 |
| 254 | 14350 | BLACKFIN CIR | CHUBASCO LN | CDS | E | AC | 8 | 228 | 36 | 9,708 | 4/1/24 | 67 | 31 | 69 | 0 | Grind - AC Overlay | $36,793 |
| 264 | 14348 | BLUEFIELD DR | COCOBANA LN | STRATHMOOR LN | E | AAC | 8 | 250 | 36 | 9,000 | 4/1/24 | 83 | 23 | 33 | 44 | Type II Slurry Seal | $3,150 |
| 279 | 14084 | BOND CIR | EDUCATION LN | CDS | E | AC | 8 | 472 | 36 | 18,792 | 3/9/22 | 84 | 53 | 41 | 6 | Type II Slurry Seal | $6,577 |
| 289 | 13973 | BRABHAM DR | MC LAREN LN | HICKORY LN | E | AC | 8 | 940 | 36 | 33,840 | 4/15/26 | 70 | 84 | 16 | 0 | Grind - AC Overlay | $128,254 |
| 240 | 14430 | BROOKHURST ST | KAMUELA DR. | YORKTOWN AVE | E | AC | 8 | 1,121 | 26 | 29,146 | 2/25/22 | 81 | 0 | 41 | 59 | Type II Slurry Seal | $10,201 |
| 321 | 14075 | BROOKLINE CIR | INNSBRUCK DR | CDS | E | AC | 8 | 365 | 32 | 13,180 | 3/9/22 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $4,613 |
| 2294 | 15628 | BUSHARD ST FRONTAGE | INNSBRUCK DR | WOODLAWN DR | E | AC | 8 | 252 | 27 | 6,804 | 3/9/22 | 72 | 72 | 14 | 14 | Grind - AC Overlay | $25,787 |
| 2294 | 15629 | BUSHARD ST FRONTAGE | WOODLAWN DR | TELHAN DR | E | AC | 8 | 506 | 27 | 13,662 | 3/9/22 | 73 | 81 | 19 | 0 | Grind - AC Overlay | $51,779 |
| 345 | 15511 | CAITHNESS DR | PAISLET LN | QUEENS PARK LN | E | AAC | 8 | 1,026 | 36 | 39,288 | 3/18/24 | 85 | 48 | 48 | 4 | Type II Slurry Seal | $13,751 |
| 385 | 14099 | CARMANIA LN | ORONSAY CR | ADAMS AVE | E | AC | 8 | 729 | 36 | 26,244 | 2/28/22 | 71 | 60 | 25 | 15 | Grind - AC Overlay | $99,465 |
| 390 | 13988 | CARP CIR | VERLARDO DR | CDS | E | AC | 8 | 449 | 36 | 18,164 | 3/7/22 | 83 | 0 | 100 | 0 | Type II Slurry Seal | $6,357 |
| 407 | 14176 | CATHAY CIR | INTERIOR LN | CDS | E | AC | 8 | 379 | 32 | 13,628 | 2/23/22 | 73 | 57 | 43 | 0 | Grind - AC Overlay | $51,650 |
| 413 | 14294 | CHANCE CIR | NATIONAL LN | CDS | E | AAC | 8 | 491 | 36 | 20,716 | 3/18/24 | 78 | 40 | 60 | 0 | Type II Slurry Seal | $7,251 |
| 442 | 16014 | CHUBASCO LN | ORIENT DR | PANACEA DR | E | AC | 8 | 1,016 | 36 | 37,326 | 4/1/24 | 78 | 0 | 100 | 0 | Type II Slurry Seal | $13,064 |
| 445 | 13979 | CINDY LN | KNEEP DR | GRAND DR | E | AC | 8 | 1,020 | 36 | 36,720 | 4/15/26 | 80 | 55 | 45 | 0 | Type II Slurry Seal | $12,852 |
| 467 | 14347 | COCOBANA LN | ORIENT DR | BLUEFIELD DR | E | AC | 8 | 507 | 36 | 19,002 | 4/1/24 | 83 | 0 | 58 | 42 | Type II Slurry Seal | $6,651 |
| 480 | 14186 | COLONIAL CIR | MAMMOTH DR | CDS | E | AC | 8 | 579 | 32 | 20,028 | 3/1/22 | 66 | 68 | 31 | 1 | Grind - AC Overlay | $75,906 |
| 506 | 15947 | CORNERBROOK DR | STRATHMOOR LN | AMBERWICK LN | E | AC | 8 | 1,008 | 36 | 36,288 | 4/10/24 | 76 | 70 | 30 | 0 | Type II Slurry Seal | $12,701 |
| 523 | 14214 | CRAILET DR | KENWORTH CIR | CRAIMER LN | E | AC | 8 | 1,006 | 36 | 36,216 | 2/25/22 | 68 | 77 | 16 | 7 | Grind - AC Overlay | $137,259 |
| 527 | 14177 | CRATER CIR | ROCKY MOUNTAIN DR | CDS | E | AC | 8 | 399 | 36 | 16,164 | 2/23/22 | 84 | 0 | 41 | 59 | Type II Slurry Seal | $5,657 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 586 | 14076 | DELAFIELD CIR | ROCKLAND LN | CDS | E | AC | 8 | 309 | 32 | 11,688 | 3/9/22 | 82 | 74 | 24 | 2 | Type II Slurry Seal | $4,091 |
| 622 | 14293 | DRAGON CIR | NATIONAL LN | CDS | E | AC | 8 | 491 | 36 | 20,716 | 3/18/24 | 69 | 49 | 43 | 8 | Grind - AC Overlay | $78,514 |
| 657 | 14081 | EDUCATION LN | YORKTOWN AVE | FREDERICK CIR | E | AC | 8 | 410 | 36 | 14,760 | 3/7/22 | 84 | 0 | 100 | 0 | Type II Slurry Seal | $5,166 |
| 657 | 14085 | EDUCATION LN | CONSTITUTION DR | GARRETT CIR | E | AC | 8 | 261 | 36 | 9,396 | 3/7/22 | 85 | 55 | 45 | 0 | Type II Slurry Seal | $3,289 |
| 659 | 16015 | EFFINGHAM DR | STRATHMOOR LN | BROOKHURST ST | E | AC | 8 | 1,195 | 36 | 43,020 | 4/10/24 | 57 | 67 | 14 | 19 | Grind - AC Overlay | $163,046 |
| 669 | 14296 | EL TORO LN | KITE DR | ATLANTA AVE | E | AC | 8 | 179 | 36 | 6,444 | 3/18/24 | 76 | 83 | 17 | 0 | Type II Slurry Seal | $2,255 |
| 707 | 14183 | EVERGLADES LN | KINGS CANTON DR | MAMMOTH DR | E | AC | 8 | 253 | 36 | 9,108 | 3/1/22 | 86 | 46 | 54 | 0 | Type II Slurry Seal | $3,188 |
| 707 | 16018 | EVERGLADES LN | MAMMOTH DR | INDIANAPOLIS AVE | E | AC | 8 | 1,469 | 36 | 52,884 | 3/1/22 | 82 | 32 | 52 | 16 | Type II Slurry Seal | $18,509 |
| 741 | 14343 | FIREBRAND LN | ATLANTA AVE | ORIENT DR | E | AC | 8 | 173 | 36 | 6,228 | 4/1/24 | 71 | 0 | 100 | 0 | Grind - AC Overlay | $23,604 |
| 782 | 15519 | FRIARSCOURT DR | GLENCAIRN LN | HUNTER LN | E | AC | 8 | 506 | 36 | 18,216 | 3/19/24 | 86 | 15 | 66 | 19 | Type II Slurry Seal | $6,376 |
| 798 | 15588 | GARRETT CIR | CLANCY LN | CDS | E | AC | 8 | 990 | 36 | 37,990 | 3/7/22 | 52 | 94 | 4 | 2 | Grind - AC Overlay | $143,982 |
| 826 | 14295 | GLENCAIRN LN | FRIARSCOURT DR. | SCOTTOUN DR | E | AC | 8 | 1,033 | 36 | 37,188 | 3/19/24 | 75 | 67 | 33 | 0 | Type II Slurry Seal | $13,016 |
| 846 | 15902 | GRAND DR | WATERBURY LN | CDS | E | AC | 8 | 1,026 | 36 | 38,736 | 4/15/26 | 81 | 80 | 20 | 0 | Type II Slurry Seal | $13,558 |
| 872 | 14352 | HAGERSTOWN CIR | CORNERBROOK DR | CDS | E | AC | 8 | 340 | 36 | 13,740 | 5/20/24 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $4,809 |
| 930 | 13971 | HICKORY LN | HYDE PARK DR | BRABHAM DR | E | AC | 8 | 1,286 | 36 | 47,296 | 4/15/26 | 74 | 77 | 21 | 2 | Grind - AC Overlay | $179,252 |
| 930 | 14429 | HICKORY LN | BRABHAM DR | ANNIK DR | E | AC | 8 | 260 | 36 | 10,110 | 4/15/26 | 80 | 73 | 27 | 0 | Type II Slurry Seal | $3,539 |
| 939 | 13975 | HILLSBORO CIR | LITCHFIELD DR | CDS | E | AC | 8 | 510 | 36 | 20,160 | 4/16/26 | 74 | 41 | 59 | 0 | Grind - AC Overlay | $76,406 |
| 959 | 14197 | HOT SPRINGS DR | EVERGLADES LN | RUNNING SPRINGS LN | E | AC | 8 | 1,006 | 36 | 36,716 | 3/1/22 | 82 | 43 | 32 | 25 | Type II Slurry Seal | $12,851 |
| 978 | 14346 | INDIGO CIR | ORIENT DR | CDS | E | AC | 8 | 451 | 36 | 17,736 | 4/1/24 | 85 | 0 | 100 | 0 | Type II Slurry Seal | $6,208 |
| 981 | 14344 | INFERNO LN | ORIENT DR | VOLANTE DR | E | AC | 8 | 512 | 36 | 18,932 | 4/1/24 | 80 | 42 | 30 | 28 | Type II Slurry Seal | $6,626 |
| 983 | 15900 | INNSBRUCK DR | BUSHARD ST FRONTAGE | TIBBETT LN | E | AC | 8 | 1,167 | 36 | 42,512 | 3/9/22 | 83 | 0 | 100 | 0 | Type II Slurry Seal | $14,879 |
| 1015 | 13978 | JERRILYN LN | GRAND DR | KREPP DR | E | AC | 8 | 1,020 | 36 | 36,720 | 4/15/26 | 77 | 83 | 17 | 0 | Type II Slurry Seal | $12,852 |
| 1024 | 14216 | JON DAY DR | CRAIMER LN | RAVENWOOD LN | E | AC | 8 | 313 | 36 | 12,268 | 2/28/22 | 63 | 76 | 24 | 0 | Grind - AC Overlay | $46,496 |
| 1074 | 15482 | KINGS CANYON DR | INTERIOR LN | RUNNING SPRINGS LN | E | AC | 8 | 1,286 | 36 | 46,796 | 3/1/22 | 81 | 34 | 35 | 31 | Type II Slurry Seal | $16,379 |
| 1098 | 14283 | LA CRESTA CIR | PIERVIEW LN | CDS | E | AC | 8 | 510 | 36 | 19,560 | 3/6/24 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $6,846 |
| 1139 | 15489 | LAWSON LN | NIAGARA DR | MEREDITH DR | E | AC | 8 | 516 | 35 | 18,060 | 2/28/22 | 33 | 81 | 7 | 12 | Grind - AC Overlay | $68,447 |
| 1151 | 14364 | LEMONTREE LN | CHEVY CHASE DR | CDS | E | AC | 8 | 127 | 36 | 4,572 | 5/20/24 | 85 | 0 | 47 | 53 | Type II Slurry Seal | $1,600 |
| 1151 | 15561 | LEMONTREE LN | PEPPERTREE DR | CHEVY CHASE DR | E | AC | 8 | 838 | 36 | 30,918 | 5/20/24 | 73 | 77 | 23 | 0 | Grind - AC Overlay | $117,179 |
| 1159 | 15442 | LEXINGTON LN | LURLINE DR | ADAMS AVE | E | AC | 8 | 1,358 | 36 | 48,888 | 2/28/22 | 68 | 61 | 39 | 0 | Grind - AC Overlay | $185,286 |
| 1175 | 15907 | LITCHFIELD DR | WOODWARD LN | BUSHARD ST | E | AC | 8 | 1,098 | 36 | 39,528 | 5/7/26 | 53 | 54 | 43 | 3 | Grind - AC Overlay | $149,811 |
| 1180 | 14356 | LOCKHAVEN CIR | EFFINGHAM DR | CDS | E | AC | 8 | 495 | 36 | 19,320 | 4/10/24 | 64 | 71 | 12 | 17 | Grind - AC Overlay | $73,223 |
| 1183 | 13984 | LOLA LN | ANNIK DR | YORKTOWN AVE | E | AC | 8 | 171 | 36 | 6,156 | 5/5/26 | 70 | 100 | 0 | 0 | Grind - AC Overlay | $23,331 |
| 1223 | 15398 | MAIKAI DR | TONGA LN | END | E | AC | 8 | 864 | 36 | 32,904 | 3/7/22 | 82 | 0 | 100 | 0 | Type II Slurry Seal | $11,516 |
| 1232 | 15895 | MAMMOTH DR | EVERGLADES LN | RUNNING SPRINGS LN | E | AC | 8 | 1,032 | 36 | 36,576 | 3/1/22 | 71 | 82 | 18 | 0 | Grind - AC Overlay | $138,623 |
| 1280 | 14428 | MC LAREN LN | ANNIK DR | BRABHAM DR | E | AC | 8 | 260 | 36 | 9,360 | 5/5/26 | 66 | 82 | 15 | 3 | Grind - AC Overlay | $35,474 |
| 1298 | 16020 | MEREDITH DR | BROOKHURST ST | CRAIMER LN | E | AC | 8 | 1,358 | 36 | 48,888 | 2/28/22 | 85 | 53 | 42 | 5 | Type II Slurry Seal | $17,111 |
| 1301 | 14090 | MERRIMAC DR | BROOKHURST ST | CANBERRA LN | E | AC | 8 | 1,156 | 36 | 41,616 | 3/3/22 | 77 | 40 | 60 | 0 | Type II Slurry Seal | $14,566 |
| 1345 | 14008 | MOOREA LN | PUA DR | KUKUI DR | E | AC | 8 | 260 | 36 | 9,360 | 3/7/22 | 74 | 42 | 47 | 11 | Grind - AC Overlay | $35,474 |
| 1353 | 14185 | MORRISTOWN CIR | MAMMOTH DR | CDS | E | AC | 8 | 579 | 32 | 20,028 | 3/1/22 | 79 | 43 | 54 | 3 | Type II Slurry Seal | $7,010 |
| 1375 | 16013 | NATIONAL LN | STAR DR | KITE DR | E | AC | 8 | 1,014 | 36 | 36,504 | 3/18/24 | 81 | 55 | 33 | 12 | Type II Slurry Seal | $12,776 |
| 1447 | 14174 | OLYMPIC DR | INTERIOR LN | CDS | E | AC | 8 | 379 | 32 | 13,628 | 3/1/22 | 77 | 32 | 68 | 0 | Type II Slurry Seal | $4,770 |
| 1455 | 15951 | ORIENT DR | CHUBASCO LN | COCOBANA LN | E | AC | 8 | 1,025 | 36 | 38,400 | 4/1/24 | 78 | 0 | 100 | 0 | Type II Slurry Seal | $13,440 |
| 1477 | 16016 | PAISLEY LN | CAITHNESS DR | NETHERWAY DR | E | AC | 8 | 758 | 36 | 29,640 | 3/18/24 | 83 | 37 | 42 | 21 | Type II Slurry Seal | $10,374 |
| 1483 | 15557 | PANACEA DR | BUSHARD ST | CDS | E | AC | 8 | 401 | 36 | 15,936 | 4/1/24 | 70 | 38 | 62 | 0 | Grind - AC Overlay | $60,397 |
| 1499 | 13974 | PAULINE LN | GARFIELD AVE | LITCHFIELD DR | E | AC | 8 | 630 | 36 | 22,680 | 4/16/26 | 85 | 72 | 28 | 0 | Type II Slurry Seal | $7,938 |
| 1516 | 13995 | PERCH CIR | TARPON DR | CDS | E | AC | 8 | 309 | 32 | 11,388 | 3/7/22 | 81 | 0 | 97 | 3 | Type II Slurry Seal | $3,986 |
| 1521 | 14594 | PICCADILLY LN | ADAMS AVE | ADAMS AVE | E | AC | 8 | 68 | 50 | 3,400 | 4/6/22 | 66 | 55 | 45 | 0 | Grind - AC Overlay | $12,886 |
| 1526 | 15515 | PIERVIEW LN | INDIANAPOLIS AVE | SALINE DR | E | AC | 8 | 416 | 36 | 14,720 | 3/6/24 | 85 | 17 | 83 | 0 | Type II Slurry Seal | $5,152 |
| 1571 | 14205 | PRINCETON CIR | MEREDITH DR | CDS | E | AC | 8 | 108 | 31 | 5,348 | 2/28/22 | 84 | 43 | 36 | 21 | Type II Slurry Seal | $1,872 |
| 1581 | 14009 | PUA DR | MOOREA LN | END | E | AC | 8 | 431 | 36 | 17,316 | 3/7/22 | 84 | 0 | 100 | 0 | Type II Slurry Seal | $6,061 |
| 1581 | 15397 | PUA DR | KIPAHULU LN | MOOREA LN | E | AC | 8 | 1,102 | 36 | 39,672 | 3/7/22 | 69 | 82 | 18 | 0 | Grind - AC Overlay | $150,357 |
| 1590 | 15520 | QUEENS PARK LN | UPLAND DR | ATLANTA AVE | E | AC | 8 | 747 | 36 | 26,892 | 3/19/24 | 76 | 60 | 29 | 11 | Type II Slurry Seal | $9,412 |
| 1600 | 14175 | RAINIER CIR | INTERIOR LN | CDS | E | AC | 8 | 379 | 32 | 13,628 | 2/23/22 | 81 | 26 | 74 | 0 | Type II Slurry Seal | $4,770 |
| 1605 | 15832 | RANGER LN | CUTTY SARK DR | ADAMS AVE | E | AC | 8 | 1,163 | 36 | 41,868 | 2/28/22 | 70 | 69 | 28 | 3 | Grind - AC Overlay | $158,680 |
| 1609 | 14218 | RAVENWOOD LN | JON DAY DR | WARWICK DR | E | AC | 8 | 1,219 | 36 | 45,384 | 2/28/22 | 81 | 79 | 19 | 2 | Type II Slurry Seal | $15,884 |
| 1612 | 14345 | RED JACKET CIR | ORIENT DR | CDS | E | AC | 8 | 451 | 36 | 16,236 | 4/1/24 | 83 | 14 | 86 | 0 | Type II Slurry Seal | $5,683 |
| 1617 | 15521 | REEF LN | SALINE DR | LEVEE DR | E | AC | 8 | 904 | 36 | 34,544 | 3/6/24 | 70 | 21 | 79 | 0 | Grind - AC Overlay | $130,922 |
| 1640 | 14357 | RICHMOND CIR | EFFINGHAM DR | CDS | E | AC | 8 | 495 | 36 | 19,320 | 4/10/24 | 66 | 53 | 16 | 31 | Grind - AC Overlay | $73,223 |
| 1685 | 14184 | RUNNING SPRINGS LN | KINGS CANYON DR | MAMMOTH DR | E | AC | 8 | 253 | 36 | 9,858 | 3/1/22 | 66 | 76 | 9 | 15 | Grind - AC Overlay | $37,362 |
| 1685 | 15487 | RUNNING SPRINGS LN | MAMMOTH DR | HOT SPRINGS DR | E | AC | 8 | 1,341 | 36 | 49,026 | 3/1/22 | 83 | 25 | 38 | 37 | Type II Slurry Seal | $17,159 |
| 1699 | 13992 | SAILFISH DR | WEAKFISH LN | SALMON LN | E | AC | 8 | 1,019 | 36 | 36,684 | 3/7/22 | 81 | 43 | 50 | 7 | Type II Slurry Seal | $12,839 |
| 1704 | 15516 | SALINE DR | REEF LN | PEBBLE LN | E | AC | 8 | 760 | 36 | 31,360 | 3/6/24 | 69 | 0 | 95 | 5 | Grind - AC Overlay | $118,854 |
| 1747 | 15943 | SCOTSTOUN DR | GLENCAIRN LN | QUEENS PARK LN | E | AC | 8 | 1,027 | 36 | 36,972 | 3/19/24 | 86 | 35 | 65 | 0 | Type II Slurry Seal | $12,940 |
| 1787 | 15441 | SHANGRI LA DR | LEXINGTON LN | ARAGON CIR | E | AC | 8 | 824 | 36 | 31,664 | 3/3/22 | 55 | 70 | 27 | 3 | Grind - AC Overlay | $120,007 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1792 | 14562 | SHEFFIELD LN | CORNWALL DR | RALEIGH DR | E | AC | 8 | 125 | 24 | 3,000 | 3/9/22 | 37 | 84 | 16 | 0 | Grind - AC Overlay | $11,370 |
| 1818 | 15946 | SILVER STRAND DR | REEF LN | CDS | E | AC | 8 | 1,010 | 36 | 37,560 | 3/6/24 | 86 | 0 | 88 | 12 | Type II Slurry Seal | $13,146 |
| 1829 | 15525 | SKIMMER LN | STAR DR | KITE DR | E | AC | 8 | 1,014 | 36 | 36,504 | 3/18/24 | 75 | 41 | 38 | 21 | Type II Slurry Seal | $12,776 |
| 1839 | 14188 | SMOKEY CIR | CARLSBAD LN | END | E | AC | 8 | 363 | 36 | 14,568 | 2/23/22 | 86 | 43 | 45 | 12 | Type II Slurry Seal | $5,099 |
| 1853 | 15524 | SPARKMAN LN | KITE DR | CDS | E | AC | 8 | 751 | 36 | 28,732 | 3/18/24 | 85 | 0 | 70 | 30 | Type II Slurry Seal | $10,056 |
| 1860 | 15945 | SPINNAKER DR | HORIZON LN | BROOKHURST ST | E | AC | 8 | 695 | 36 | 24,500 | 3/6/24 | 86 | 0 | 58 | 42 | Type II Slurry Seal | $8,575 |
| 1878 | 15523 | STAR DR | REEF LN | SKIMMER LN | E | AC | 8 | 1,008 | 36 | 35,744 | 3/18/24 | 83 | 25 | 63 | 12 | Type II Slurry Seal | $12,510 |
| 1895 | 13987 | STINGRAY LN | ALBACORE DR | VELARDO DR | E | AC | 8 | 709 | 36 | 27,524 | 3/7/22 | 81 | 69 | 28 | 3 | Type II Slurry Seal | $9,633 |
| 1902 | 14351 | STRATHMOOR LN | BLUEFIELD DR | EFFINGHAM DR | E | AC | 8 | 515 | 36 | 18,540 | 4/10/24 | 53 | 35 | 7 | 58 | Grind - AC Overlay | $70,267 |
| 1902 | 15558 | STRATHMOOR LN | ATLANTA AVE | BLUEFIELD DR | E | AC | 8 | 681 | 36 | 24,228 | 4/1/24 | 82 | 0 | 31 | 69 | Type II Slurry Seal | $8,480 |
| 1919 | 14018 | SUNDAY DR | TOBAGO LN | WARD ST | E | AC | 8 | 455 | 32 | 14,560 | 3/2/22 | 73 | 80 | 19 | 1 | Grind - AC Overlay | $55,182 |
| 1940 | 14005 | SUVA LN | GARFILED AVE | SAMOA DR | E | AC | 8 | 188 | 36 | 6,768 | 3/7/22 | 72 | 45 | 55 | 0 | Grind - AC Overlay | $25,651 |
| 1940 | 14006 | SUVA LN | SAMOA DR | MAIKAI DR | E | AC | 8 | 281 | 36 | 10,116 | 3/7/22 | 81 | 50 | 50 | 0 | Type II Slurry Seal | $3,541 |
| 1955 | 14206 | TANBARK CIR | MEREDITH DR | CDS | E | AC | 8 | 84 | 63 | 7,292 | 2/28/22 | 72 | 48 | 27 | 25 | Grind - AC Overlay | $27,637 |
| 1957 | 15901 | TARPON DR | WEAKFISH LN | SALMON LN | E | AC | 8 | 1,020 | 36 | 36,720 | 3/7/22 | 79 | 77 | 23 | 0 | Type II Slurry Seal | $12,852 |
| 1982 | 13977 | TIGERFISH CIR | VELARDO DR | CDS | E | AC | 8 | 450 | 36 | 18,200 | 3/7/22 | 83 | 0 | 100 | 0 | Type II Slurry Seal | $6,370 |
| 1985 | 14289 | TILLER CIR | SILVER STRAND DR | CDS | E | AC | 8 | 529 | 36 | 20,244 | 3/6/24 | 70 | 0 | 100 | 0 | Grind - AC Overlay | $76,725 |
| 2011 | 14087 | TRENTON LN | FORRESTAL DR | VALLEY FORGE DR | E | AC | 8 | 260 | 36 | 10,360 | 2/25/22 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $3,626 |
| 2017 | 14280 | TROON LN | ZETLAND DR | DUMBRECK DR | E | AAC | 8 | 236 | 36 | 9,876 | 3/18/24 | 79 | 0 | 58 | 42 | Type II Slurry Seal | $3,457 |
| 2051 | 15434 | VALLEY FORGE DR | BROOKHURST ST | CANBERRA LN | E | AC | 8 | 1,156 | 36 | 41,616 | 3/3/22 | 77 | 17 | 80 | 3 | Type II Slurry Seal | $14,566 |
| 2096 | 14349 | VOLANTE DR | CHUBASCO LN | INFERNO LN | E | AC | 8 | 254 | 36 | 9,894 | 4/1/24 | 68 | 28 | 72 | 0 | Grind - AC Overlay | $37,498 |
| 2105 | 13997 | WALLEYE LN | BASS DR | VELARDO DR | E | AC | 8 | 450 | 36 | 16,950 | 3/7/22 | 85 | 60 | 33 | 7 | Type II Slurry Seal | $5,933 |
| 2118 | 15389 | WATERBURY LN | KNEEP DR | YORKTOWN AVE | E | AC | 8 | 1,190 | 36 | 43,590 | 4/15/26 | 76 | 95 | 5 | 0 | Type II Slurry Seal | $15,257 |
| 2152 | 14192 | WHITETREE CIR | BAY MEADOW DR | END | E | AC | 8 | 426 | 34 | 16,284 | 2/23/22 | 79 | 53 | 15 | 32 | Type II Slurry Seal | $5,699 |
| 2164 | 13969 | WILLHELM CIR | RANDI LN | CDS | E | AC | 8 | 330 | 32 | 12,360 | 4/15/26 | 85 | 0 | 100 | 0 | Type II Slurry Seal | $4,326 |
| 2167 | 14187 | WIND CAVE LN | MAMMOTH DR | BIG SUR DR | E | AC | 8 | 833 | 36 | 30,488 | 3/1/22 | 82 | 31 | 57 | 12 | Type II Slurry Seal | $10,671 |
| 2184 | 14286 | WOODLEA LN | FRIARSCOURT DR | JURA DR | E | AC | 8 | 783 | 36 | 28,188 | 3/19/24 | 79 | 62 | 37 | 1 | Type II Slurry Seal | $9,866 |
| 2188 | 15387 | WOODWARD LN | VELARDO DR | CDS | E | AC | 8 | 770 | 36 | 29,520 | 4/15/26 | 78 | 81 | 19 | 0 | Type II Slurry Seal | $10,332 |
| 2082 | 14431 | YORKTOWN AVE | BROOKHURST ST | MAUNA LN | E | AC | 8 | 250 | 26 | 6,500 | 3/2/22 | 73 | 49 | 44 | 7 | Grind - AC Overlay | $24,635 |
| 2206 | 14189 | ZION CIR | CARLSBAD LN | END | E | AC | 8 | 363 | 36 | 14,568 | 2/23/22 | 85 | 0 | 33 | 67 | Type II Slurry Seal | $5,099 |
| | | | | | | | | | | | | | | | | | **$4,537,814** |
| 5 | 15842 | ACACIA AVE | LAKE ST | ALABAMA ST | E | AC | 9 | 372 | 36 | 13,392 | 8/24/23 | 61 | 77 | 8 | 15 | Grind - AC Overlay | $52,764 |
| 10 | 14372 | ADELIA CIR | CDS | POLYNESIAN LN | E | AC | 9 | 480 | 36 | 18,780 | 3/26/24 | 72 | 59 | 41 | 0 | Type II Slurry Seal | $6,761 |
| 16 | 14624 | ALABAMA ST | ALLEY FRANKFORT AVE. | FRANKFORT AVE | E | AC | 9 | 167 | 37 | 6,179 | 8/14/23 | 56 | 47 | 22 | 31 | Grind - AC Overlay | $24,345 |
| 16 | 14625 | ALABAMA ST | ATLANTA AVE | ALLEY BALTIMORE AVE | E | AC | 9 | 166 | 36 | 5,976 | 8/14/23 | 76 | 62 | 28 | 10 | Type II Slurry Seal | $2,151 |
| 16 | 15659 | ALABAMA ST | HARTFORD AVE | INDIANAPOLIS AVE | E | AC | 9 | 330 | 38 | 12,540 | 8/14/23 | 53 | 86 | 14 | 0 | Grind - AC Overlay | $49,408 |
| 16 | 15660 | ALABAMA ST | GENEVA AVE | HARTFORD AVE | E | AC | 9 | 330 | 36 | 11,880 | 8/15/23 | 70 | 59 | 24 | 17 | Type II Slurry Seal | $4,277 |
| 16 | 15661 | ALABAMA ST | FRANKFORT AVE | GENEVA AVE | E | AC | 9 | 328 | 37 | 12,136 | 8/14/23 | 74 | 40 | 30 | 30 | Type II Slurry Seal | $4,369 |
| 16 | 15662 | ALABAMA ST | PECAN AVE | ALLEY FRANKFORT AVE | E | AC | 9 | 246 | 37 | 9,102 | 8/14/23 | 67 | 72 | 21 | 7 | Type II Slurry Seal | $3,277 |
| 16 | 15663 | ALABAMA ST | DETROIT AVE | PECAN AVE | E | AC | 9 | 250 | 37 | 9,250 | 8/14/23 | 77 | 56 | 44 | 0 | Type II Slurry Seal | $3,330 |
| 16 | 15664 | ALABAMA ST | CHICAGO AVE | DETROIT AVE | E | AC | 9 | 329 | 37 | 12,173 | 8/14/23 | 69 | 67 | 18 | 15 | Type II Slurry Seal | $4,382 |
| 16 | 15665 | ALABAMA ST | ALLEY BALTIMORE AVE | CHICAGO AVE | E | AC | 9 | 494 | 37 | 18,278 | 8/14/23 | 54 | 64 | 8 | 28 | Grind - AC Overlay | $72,015 |
| 19 | 14253 | ALBANY CIR | HOPETOWN LN | CDS | E | AAC | 9 | 244 | 32 | 9,608 | 5/9/24 | 77 | 9 | 50 | 41 | Type II Slurry Seal | $3,459 |
| 29 | 14237 | ALICANTE LN | KINGFISHER DR | ALVARADO DR. | E | AC | 9 | 482 | 36 | 17,352 | 8/23/23 | 72 | 0 | 100 | 0 | Type II Slurry Seal | $6,247 |
| 106 | 14523 | ALLISON CIR | JONESPORT LN | CDS | E | AC | 9 | 215 | 32 | 8,680 | 4/24/24 | 75 | 48 | 52 | 0 | Type II Slurry Seal | $3,125 |
| 116 | 15885 | ALVARADO DR | COLIMA LN | MISSION LN | E | AC | 9 | 906 | 36 | 32,616 | 8/23/23 | 68 | 86 | 14 | 0 | Type II Slurry Seal | $11,742 |
| 132 | 15547 | ANTIGUA LN | ST AUGUSTINE DR | SANDY HOOK DR | E | AC | 9 | 1,013 | 36 | 37,218 | 8/30/23 | 84 | 47 | 49 | 4 | Type II Slurry Seal | $13,398 |
| 141 | 14332 | ARCEL CIR | KROLL LN | END | E | AC | 9 | 167 | 32 | 7,844 | 8/30/23 | 42 | 91 | 6 | 3 | Grind - AC Overlay | $30,905 |
| 142 | 14480 | ARCHER CIR | CLEARBROOK DR | CDS | E | AAC | 9 | 415 | 36 | 16,440 | 4/21/26 | 82 | 31 | 56 | 13 | Type II Slurry Seal | $5,918 |
| 175 | 14378 | BAHAMA LN | HAITI DR | RHODESIA DR | E | AAC | 9 | 752 | 36 | 28,072 | 3/26/24 | 86 | 16 | 52 | 32 | Type II Slurry Seal | $10,106 |
| 178 | 14511 | BALBOA CIR | MOLOKAI DR | CDS | E | AAC | 9 | 313 | 32 | 11,516 | 4/22/26 | 83 | 40 | 56 | 4 | Type II Slurry Seal | $4,146 |
| 183 | 14626 | BALTIMORE AVE | ALABAMA ST | ALLEY ALABAMA ST | E | AC | 9 | 322 | 37 | 11,914 | 8/14/23 | 75 | 9 | 88 | 3 | Type II Slurry Seal | $4,289 |
| 183 | 14627 | BALTIMORE AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 161 | 37 | 5,957 | 8/24/23 | 72 | 39 | 54 | 7 | Type II Slurry Seal | $2,145 |
| 183 | 14628 | BALTIMORE AVE | HUNTINGTON ST | ALLEY HUNTINGTON ST | E | AC | 9 | 156 | 37 | 5,772 | 8/14/23 | 63 | 56 | 44 | 0 | Grind - AC Overlay | $22,742 |
| 185 | 15533 | BANFF LN | CREW DR | CDS | E | AC | 9 | 997 | 36 | 39,096 | 8/30/23 | 78 | 48 | 37 | 15 | Type II Slurry Seal | $14,075 |
| 2293 | 14399 | BANNING AVE FRONTAGE | STARFIRE LN | CDS | E | AC | 9 | 370 | 27 | 11,790 | 4/17/24 | 81 | 71 | 25 | 4 | Type II Slurry Seal | $4,244 |
| 188 | 14320 | BARBADOS CIR | DORSETT DR | CDS | E | AC | 9 | 570 | 36 | 22,020 | 8/30/23 | 24 | 94 | 6 | 0 | AC Recon | $344,833 |
| 200 | 14245 | BASTIA LN | SNOWBIRD DR | ATLANTA AVE | E | AC | 9 | 246 | 36 | 8,856 | 8/30/23 | 74 | 0 | 100 | 0 | Type II Slurry Seal | $3,188 |
| 200 | 14248 | BASTIA LN | ATLANTA AVE | ATLANTA AVE | E | AC | 9 | 72 | 36 | 2,592 | 5/20/24 | 67 | 59 | 41 | 0 | Type II Slurry Seal | $933 |
| 212 | 17000 | BEACH BLVD FRONTAGE | DRIFTWOOD DR | TRAVELWAY | E | AC | 9 | 1,352 | 28 | 37,856 | 8/24/23 | 85 | 0 | 98 | 2 | Type II Slurry Seal | $13,628 |
| 213 | 14487 | BEACHSIDE DR | SEACREST LN | SEASIDE LN | E | AAC | 9 | 257 | 36 | 10,252 | 4/21/26 | 79 | 34 | 66 | 0 | Type II Slurry Seal | $3,691 |
| 214 | 15955 | BEACHWOOD LN | FIVE HARBORS DR | CAMEL LN | E | AC | 9 | 868 | 36 | 31,248 | 5/6/24 | 76 | 57 | 43 | 0 | Type II Slurry Seal | $11,249 |
| 216 | 14111 | BEAM CIR | SEAPORT DR | END | E | AAC | 9 | 155 | 32 | 4,960 | 8/21/23 | 65 | 54 | 46 | 0 | Grind - AC Overlay | $19,542 |
| 217 | 14250 | BEARSDEN CIR | COLBREGGAN DR | CDS | E | AAC | 9 | 210 | 32 | 8,520 | 5/10/24 | 76 | 42 | 58 | 0 | Type II Slurry Seal | $3,067 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 238 | 15564 | BERMUDA DR | MAGNOLIA ST | KANEHOE LN | E | AC | 9 | 1,110 | 36 | 39,672 | 3/27/24 | 84 | 50 | 50 | 0 | Type II Slurry Seal | $14,282 |
| 272 | 14370 | BOBBIE CIR | POLYNESIAN LN | CDS | E | AAC | 9 | 480 | 36 | 18,780 | 3/26/24 | 86 | 32 | 68 | 0 | Type II Slurry Seal | $6,761 |
| 275 | 14321 | BOLIN CIR | LEASURE LN | END | E | AC | 9 | 176 | 32 | 7,132 | 8/30/23 | 53 | 67 | 31 | 2 | Grind - AC Overlay | $28,100 |
| 282 | 14619 | BOOTHBAY CIR | PORT GREENWICH LN | END | E | AC | 9 | 453 | 34 | 15,402 | 8/21/23 | 72 | 83 | 17 | 0 | Type II Slurry Seal | $5,545 |
| 283 | 14473 | BORBA CIR | DAKAR LN | CDS | E | AC | 9 | 276 | 32 | 11,332 | 4/25/24 | 73 | 0 | 32 | 68 | Type II Slurry Seal | $4,080 |
| 295 | 14478 | BRANTA CIR | LANDFALL DR | CDS | E | AAC | 9 | 472 | 36 | 19,492 | 4/21/26 | 72 | 17 | 69 | 14 | Type II Slurry Seal | $7,017 |
| 298 | 14340 | BREAKWATER CIR | BOWSPIRIT LN | CDS | E | AAC | 9 | 350 | 32 | 12,700 | 4/1/24 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $4,572 |
| 305 | 14328 | BRETON LN | ST AUGUSTINE DR | HATTERAS DR | E | AC | 9 | 833 | 36 | 30,738 | 8/30/23 | 70 | 14 | 86 | 0 | Type II Slurry Seal | $11,066 |
| 305 | 15540 | BRETON LN | ST AUGUSTINE DR | CDS | E | AC | 9 | 584 | 32 | 20,188 | 8/30/23 | 59 | 72 | 28 | 0 | Grind - AC Overlay | $79,541 |
| 320 | 15506 | BROOKDALE LN | CASTLEGATE DR | SUNRIDGE DR | E | AC | 9 | 579 | 36 | 20,844 | 5/6/24 | 54 | 70 | 30 | 0 | Grind - AC Overlay | $82,125 |
| 334 | 14999 | BURLINGTON LN | CHESTERFIELD LN | ASHBURTON CIR | E | AC | 9 | 572 | 36 | 20,336 | 8/24/23 | 80 | 48 | 52 | 0 | Type II Slurry Seal | $7,321 |
| 349 | 14640 | CALIFORNIA ST | GENEVA AVE | HARTFORD AVE | E | AC | 9 | 331 | 37 | 12,247 | 8/24/23 | 83 | 0 | 100 | 0 | Type II Slurry Seal | $4,409 |
| 349 | 14641 | CALIFORNIA ST | FRANKFORT AVE | GENEVA AVE | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 65 | 0 | 100 | 0 | Grind - AC Overlay | $48,107 |
| 349 | 14642 | CALIFORNIA ST | ELMIRA AVE | FRANKFORT AVE | E | AC | 9 | 329 | 40 | 13,160 | 8/24/23 | 71 | 0 | 89 | 11 | Type II Slurry Seal | $4,738 |
| 349 | 14644 | CALIFORNIA ST | CHICAGO AVE | DETROIT AVE | E | AC | 9 | 328 | 36 | 11,808 | 8/24/23 | 72 | 62 | 38 | 0 | Type II Slurry Seal | $4,251 |
| 349 | 14668 | CALIFORNIA ST | HARTFORD AVE | INDIANAPOLIS AVE | E | AC | 9 | 329 | 37 | 12,173 | 8/14/23 | 72 | 0 | 100 | 0 | Type II Slurry Seal | $4,382 |
| 350 | 14249 | CALLIEBURN CIR | COLBREGGAN DR | CDS | E | AAC | 9 | 206 | 32 | 9,392 | 5/10/24 | 83 | 0 | 100 | 0 | Type II Slurry Seal | $3,381 |
| 359 | 14479 | CAMEO LN | CLEARBROOK DR | LANDFALL DR | E | AC | 9 | 267 | 36 | 9,612 | 4/25/24 | 75 | 80 | 20 | 0 | Type II Slurry Seal | $3,460 |
| 371 | 15654 | CAPE COTTAGE LN | NORTHPORT DR | SOUTHPORT DR | E | AC | 9 | 1,245 | 36 | 44,820 | 8/21/23 | 68 | 90 | 10 | 0 | Type II Slurry Seal | $16,135 |
| 372 | 15622 | CAPE MAY LN | PORT CYLDE DR | STONINGTON CIR | E | AC | 9 | 373 | 36 | 14,678 | 4/24/24 | 86 | 0 | 49 | 51 | Type II Slurry Seal | $5,284 |
| 372 | 15623 | CAPE MAY LN | STONINGTON CIR | JONESPORT LN | E | AAC | 9 | 546 | 36 | 19,656 | 5/5/26 | 86 | 0 | 91 | 9 | Type II Slurry Seal | $7,076 |
| 374 | 14527 | CAPE SPLIT CIR | CAPE MAY LN | CDS | E | AC | 9 | 131 | 32 | 5,992 | 4/24/24 | 86 | 14 | 50 | 36 | Type II Slurry Seal | $2,157 |
| 376 | 14506 | CAPISTRANO LN | BANNING AVE | CHRISTINE DR | E | AC | 9 | 1,001 | 36 | 36,036 | 4/17/24 | 73 | 81 | 17 | 2 | Type II Slurry Seal | $12,973 |
| 393 | 14260 | CARROLLTOWN DR | HOPETOWN LN | CDS | E | AAC | 9 | 245 | 32 | 9,340 | 5/6/24 | 77 | 30 | 51 | 19 | Type II Slurry Seal | $3,362 |
| 393 | 14261 | CARROLLTOWN DR | MAGNOLIA ST | KELVIN LN | E | AC | 9 | 176 | 36 | 6,336 | 5/9/24 | 71 | 49 | 45 | 6 | Type II Slurry Seal | $2,281 |
| 393 | 15504 | CARROLLTOWN DR | KELVIN LN | HOPETOWN LN | E | AC | 9 | 760 | 36 | 27,360 | 5/8/24 | 75 | 27 | 64 | 9 | Type II Slurry Seal | $9,850 |
| 399 | 14243 | CASTILIAN DR | COLIMA LN. | MISSION LN | E | AC | 9 | 902 | 36 | 32,472 | 8/23/23 | 64 | 71 | 29 | 0 | Grind - AC Overlay | $127,940 |
| 400 | 15618 | CASTINE DR | WOOD ISLAND LN | CDS | E | AC | 9 | 325 | 32 | 12,900 | 4/17/24 | 85 | 40 | 50 | 10 | Type II Slurry Seal | $4,644 |
| 403 | 15507 | CASTLEGATE DR | LANTERN LN | BUSHARD ST | E | AC | 9 | 548 | 36 | 19,506 | 5/8/24 | 51 | 68 | 32 | 0 | Grind - AC Overlay | $76,854 |
| 405 | 14227 | CATAMARAN LN | KINGFISHER DR | SNOWBIRD DR | E | AC | 9 | 1,044 | 36 | 37,584 | 8/23/23 | 62 | 84 | 16 | 0 | Grind - AC Overlay | $148,081 |
| 422 | 15956 | CHARWOOD LN | SUNRIDGE DR | FIRESIDE DR | E | AC | 9 | 1,262 | 36 | 46,932 | 5/7/24 | 62 | 74 | 26 | 0 | Grind - AC Overlay | $184,912 |
| 424 | 14257 | CHAUCER LN | ELLSWORTH DR | CARROLLTOWN DR | E | AAC | 9 | 902 | 36 | 32,472 | 5/8/24 | 73 | 37 | 62 | 1 | Type II Slurry Seal | $11,690 |
| 434 | 15869 | CHICAGO AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 329 | 36 | 11,844 | 8/24/23 | 79 | 35 | 60 | 5 | Type II Slurry Seal | $4,264 |
| 434 | 15870 | CHICAGO AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 36 | 17,460 | 8/24/23 | 81 | 12 | 40 | 48 | Type II Slurry Seal | $6,286 |
| 438 | 14501 | CHRISTINE DR | HULA CIR | SUSAN LN | E | AC | 9 | 249 | 36 | 9,964 | 4/17/24 | 86 | 19 | 69 | 12 | Type II Slurry Seal | $3,587 |
| 438 | 15606 | CHRISTINE DR | SUSAN LN | ISLANDER LN | E | AAC | 9 | 532 | 36 | 19,152 | 4/22/26 | 80 | 28 | 62 | 10 | Type II Slurry Seal | $6,895 |
| 438 | 15607 | CHRISTINE DR | ISLANDER LN | CDS | E | AAC | 9 | 760 | 36 | 28,860 | 4/22/26 | 82 | 57 | 43 | 0 | Type II Slurry Seal | $10,390 |
| 453 | 15597 | CLEARBROOK DR | ARCHER CIR | CDS | E | AAC | 9 | 593 | 36 | 23,148 | 4/21/26 | 81 | 10 | 68 | 22 | Type II Slurry Seal | $8,333 |
| 470 | 14265 | COHASSET LN | INDIANAPOLIS AVE | HINGHAM DR | E | AC | 9 | 370 | 36 | 13,320 | 5/8/24 | 68 | 79 | 21 | 0 | Type II Slurry Seal | $4,795 |
| 471 | 15953 | COLBREGGAN DR | CALLIEBURN CIR | MINERVA LN | E | AAC | 9 | 950 | 36 | 35,200 | 5/10/24 | 84 | 0 | 100 | 0 | Type II Slurry Seal | $12,672 |
| 475 | 14242 | COLIMA LN | CASTILIAN CIR | SNOWBIRD DR | E | AC | 9 | 253 | 36 | 9,108 | 8/23/23 | 86 | 73 | 27 | 0 | Type II Slurry Seal | $3,279 |
| 475 | 15499 | COLIMA LN | CASTILLIAN DR | END | E | AC | 9 | 535 | 36 | 19,260 | 8/23/23 | 60 | 85 | 15 | 0 | Grind - AC Overlay | $75,884 |
| 487 | 14275 | COMSTOCK DR | CHARWOOD LN | LANCELOT LN | E | AC | 9 | 701 | 36 | 25,986 | 5/6/24 | 72 | 49 | 51 | 0 | Type II Slurry Seal | $9,355 |
| 526 | 14236 | CRANE CIR | SANDPIPER LN | END | E | AC | 9 | 357 | 36 | 12,852 | 8/24/23 | 75 | 60 | 35 | 5 | Type II Slurry Seal | $4,627 |
| 532 | 15957 | CRESTVIEW LN | FIRESIDE DR | CDS | E | AC | 9 | 1,343 | 36 | 50,498 | 5/20/24 | 68 | 53 | 36 | 11 | Type II Slurry Seal | $18,179 |
| 533 | 14433 | CREW DR | BANFF LN | LOCHLEA LN | E | AC | 9 | 256 | 32 | 8,192 | 8/30/23 | 81 | 0 | 100 | 0 | Type II Slurry Seal | $2,949 |
| 544 | 15532 | CUPAR LN | CDS | CDS | E | AC | 9 | 944 | 36 | 38,718 | 8/30/23 | 67 | 27 | 73 | 0 | Type II Slurry Seal | $13,938 |
| 552 | 14472 | DAKAR LN | DRUMBEAT DR | BORBA CIR | E | AC | 9 | 202 | 32 | 6,964 | 4/25/24 | 86 | 0 | 50 | 50 | Type II Slurry Seal | $2,507 |
| 573 | 14398 | DAYTONA CIR | STARFIRE LN | CDS | E | AC | 9 | 360 | 32 | 13,020 | 4/17/24 | 81 | 61 | 39 | 0 | Type II Slurry Seal | $4,687 |
| 596 | 15666 | DETROIT AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/24/23 | 55 | 59 | 41 | 0 | Grind - AC Overlay | $70,703 |
| 596 | 15667 | DETROIT AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 354 | 36 | 12,744 | 8/24/23 | 61 | 77 | 20 | 3 | Grind - AC Overlay | $50,211 |
| 596 | 15868 | DETROIT AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 66 | 58 | 42 | 0 | Grind - AC Overlay | $48,107 |
| 601 | 14477 | DIRIGO CIR | LANDFALL DR | CDS | E | AAC | 9 | 472 | 36 | 18,492 | 4/21/26 | 72 | 20 | 63 | 17 | Type II Slurry Seal | $6,657 |
| 603 | 14341 | DOCKSIDE CIR | PIER DR | CDS | E | AAC | 9 | 372 | 36 | 14,892 | 4/1/24 | 59 | 83 | 16 | 1 | Grind - AC Overlay | $58,674 |
| 611 | 14311 | DONCASTER DR | LOCHLEA LN | NEWLAND ST | E | AC | 9 | 660 | 36 | 23,760 | 8/30/23 | 76 | 20 | 80 | 0 | Type II Slurry Seal | $8,554 |
| 617 | 15541 | DORSETT DR | MIRAMAR LN | POSTON LN | E | AC | 9 | 1,279 | 36 | 46,794 | 8/30/23 | 47 | 78 | 18 | 4 | Grind - AC Overlay | $184,368 |
| 627 | 15494 | DRIFTWOOD DR | BEACH BLVD | END | E | AC | 9 | 351 | 36 | 12,636 | 8/24/23 | 53 | 52 | 43 | 5 | Grind - AC Overlay | $49,786 |
| 628 | 15595 | DRUMBEAT DR | BUSHARD ST | CDS | E | AC | 9 | 365 | 32 | 13,480 | 4/25/24 | 82 | 0 | 47 | 53 | Type II Slurry Seal | $4,853 |
| 632 | 15450 | DUBLIN LN | SEAPORT DR | MALLOY DR | E | AC | 9 | 513 | 36 | 18,468 | 8/21/23 | 74 | 75 | 25 | 0 | Type II Slurry Seal | $6,648 |
| 648 | 14452 | EBBTIDE CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 72 | 53 | 45 | 2 | Type II Slurry Seal | $3,110 |
| 2289 | 17024 | EDISON AVE | NEWLAND AVE | SOUTH END | E | AC | 9 | 816 | 25 | 20,400 | 8/30/23 | 86 | 0 | 60 | 40 | Type II Slurry Seal | $7,344 |
| 660 | 14231 | EGRET LN | RELL DR | KINGFISHER DR | E | AC | 9 | 982 | 36 | 35,352 | 8/24/23 | 71 | 65 | 35 | 0 | Type II Slurry Seal | $12,727 |
| 675 | 14258 | ELIZABETH LN | ELLSWORTH DR | CARROLTOWN DR | E | AAC | 9 | 902 | 36 | 32,472 | 5/20/24 | 76 | 31 | 42 | 27 | Type II Slurry Seal | $11,690 |
| 677 | 14255 | ELLSWORTH DR | MAGNOLIA ST | KELVIN LN | E | AC | 9 | 176 | 32 | 5,632 | 5/9/24 | 83 | 37 | 60 | 3 | Type II Slurry Seal | $2,028 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 681 | 14629 | ELMIRA AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/24/23 | 66 | 29 | 67 | 4 | Grind - AC Overlay | $70,703 |
| 681 | 15867 | ELMIRA AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 48 | 51 | 29 | 20 | Grind - AC Overlay | $48,107 |
| 681 | 15880 | ELMIRA AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 39 | 69 | 26 | 5 | Grind - AC Overlay | $48,107 |
| 712 | 14395 | FAIRLANE CIR | RAMBLER DR | CDS | E | AC | 9 | 390 | 36 | 15,540 | 5/6/24 | 79 | 60 | 40 | 0 | Type II Slurry Seal | $5,594 |
| 722 | 14220 | FARNSWORTH LN | INDIANAPOLIS AVE | ALLEY INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/23/23 | 75 | 44 | 39 | 17 | Type II Slurry Seal | $1,970 |
| 722 | 14221 | FARNSWORTH LN | KINGFISHER DR | MARY CIR | E | AC | 9 | 262 | 36 | 9,432 | 8/23/23 | 54 | 65 | 35 | 0 | Grind - AC Overlay | $37,162 |
| 722 | 15495 | FARNSWORTH LN | ALLEY INDIANAPOLIS AVE | KINGFISHER DR | E | AC | 9 | 1,127 | 36 | 40,572 | 8/23/23 | 79 | 0 | 100 | 0 | Type II Slurry Seal | $14,606 |
| 722 | 15496 | FARNSWORTH LN | MARY CIR | SNOWVBIRD DR | E | AC | 9 | 782 | 36 | 28,152 | 8/23/23 | 59 | 44 | 56 | 0 | Grind - AC Overlay | $110,919 |
| 742 | 15510 | FIRESIDE DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 954 | 36 | 35,844 | 5/7/24 | 63 | 73 | 27 | 0 | Grind - AC Overlay | $141,225 |
| 745 | 15954 | FIVE HARBORS DR | CDS | CDS | E | AAC | 9 | 1,056 | 32 | 36,792 | 5/6/24 | 81 | 38 | 62 | 0 | Type II Slurry Seal | $13,245 |
| 753 | 14335 | FLEET LN | TIDEWATER CIR | PIER DR | E | AAC | 9 | 622 | 36 | 23,142 | 3/20/24 | 63 | 76 | 24 | 0 | Grind - AC Overlay | $91,179 |
| 753 | 15552 | FLEET LN | TIDEWATER CIR | CDS | E | AC | 9 | 349 | 36 | 12,564 | 3/20/24 | 60 | 70 | 17 | 13 | Grind - AC Overlay | $49,502 |
| 758 | 15671 | FLORIDA ST | GENEVA AVE | INDIANAPOLIS AVE | E | AC | 9 | 292 | 36 | 10,512 | 8/15/23 | 78 | 35 | 33 | 32 | Type II Slurry Seal | $3,784 |
| 774 | 14630 | FRANKFORT AVE | HILL ST | CDS | E | AC | 9 | 666 | 28 | 21,076 | 8/24/23 | 70 | 13 | 53 | 34 | Type II Slurry Seal | $7,587 |
| 774 | 15668 | FRANKFORT AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 38 | 18,430 | 8/24/23 | 76 | 0 | 61 | 39 | Type II Slurry Seal | $6,635 |
| 774 | 15669 | FRANKFORT AVE | DELAWARE ST | HILL ST | E | AC | 9 | 943 | 32 | 30,176 | 8/24/23 | 73 | 0 | 89 | 11 | Type II Slurry Seal | $10,863 |
| 774 | 15866 | FRANKFORT AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 40 | 13,200 | 8/24/23 | 76 | 0 | 77 | 23 | Type II Slurry Seal | $4,752 |
| 774 | 15879 | FRANKFORT AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 36 | 11,880 | 8/17/23 | 70 | 51 | 49 | 0 | Type II Slurry Seal | $4,277 |
| 774 | 50410 | FRANKFORT AVE | LAKE ST | ALABAMA ST | E | AC | 9 | 390 | 50 | 19,500 | 8/24/23 | 54 | 64 | 35 | 1 | Grind - AC Overlay | $76,830 |
| 806 | 14632 | GENEVA AVE | FLORIDA ST | INDIANAPOLIS AVE | E | AC | 9 | 378 | 37 | 13,986 | 8/15/23 | 57 | 63 | 28 | 9 | Grind - AC Overlay | $55,105 |
| 806 | 14633 | GENEVA AVE | ALLEY DELAWARE ST | ALLEY HARTFORD AVE | E | AC | 9 | 368 | 37 | 13,616 | 8/15/23 | 80 | 34 | 24 | 42 | Type II Slurry Seal | $4,902 |
| 806 | 15670 | GENEVA AVE | ALLEY HARTFORD AVE | FLORIDA ST | E | AC | 9 | 280 | 37 | 10,360 | 8/15/23 | 67 | 54 | 19 | 27 | Type II Slurry Seal | $3,730 |
| 806 | 15865 | GENEVA AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 40 | 13,200 | 8/15/23 | 75 | 0 | 100 | 0 | Type II Slurry Seal | $4,752 |
| 806 | 15872 | GENEVA AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/15/23 | 85 | 25 | 75 | 0 | Type II Slurry Seal | $6,460 |
| 806 | 15878 | GENEVA AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 39 | 12,870 | 8/15/23 | 80 | 0 | 100 | 0 | Type II Slurry Seal | $4,633 |
| 839 | 14230 | GOSHAWK LN | REILLY DR | KINGFISHER DR | E | AC | 9 | 985 | 36 | 35,460 | 8/24/23 | 68 | 27 | 73 | 0 | Type II Slurry Seal | $12,766 |
| 876 | 14268 | HALF LEAGUE DR | BEACHWOOD LN | SNUG HARBOR CIR | E | AC | 9 | 250 | 36 | 9,750 | 5/6/24 | 74 | 78 | 22 | 0 | Type II Slurry Seal | $3,510 |
| 883 | 14389 | HANAKAI LN | NEOLANI DR | MALAHINE DR | E | AAC | 9 | 752 | 36 | 27,822 | 5/20/24 | 78 | 42 | 47 | 11 | Type II Slurry Seal | $10,016 |
| 890 | 15605 | HARBORBREEZE LN | SHOEBREEZE DR | SUMMERWIND LN | E | AAC | 9 | 770 | 36 | 29,720 | 4/21/26 | 82 | 0 | 94 | 6 | Type II Slurry Seal | $10,699 |
| 898 | 14110 | HARPOON CIR | SEAPORT DR | END | E | AAC | 9 | 238 | 32 | 7,616 | 8/21/23 | 72 | 24 | 76 | 0 | Type II Slurry Seal | $2,742 |
| 903 | 14634 | HARTFORD AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 37 | 12,210 | 8/14/23 | 83 | 26 | 51 | 23 | Type II Slurry Seal | $4,396 |
| 903 | 14636 | HARTFORD AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 37 | 12,210 | 8/15/23 | 68 | 25 | 55 | 20 | Type II Slurry Seal | $4,396 |
| 903 | 15871 | HARTFORD AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/14/23 | 68 | 65 | 35 | 0 | Type II Slurry Seal | $6,460 |
| 909 | 15549 | HATTERAS DR | SEAFORTH LN | BRETON LN | E | AC | 9 | 533 | 36 | 19,938 | 8/30/23 | 57 | 63 | 32 | 5 | Grind - AC Overlay | $78,556 |
| 928 | 14235 | HERON CIR | SANDPIPER LN | END | E | AC | 9 | 360 | 36 | 12,960 | 8/24/23 | 85 | 51 | 46 | 3 | Type II Slurry Seal | $4,666 |
| 934 | 14475 | HILARIA CIR | LANDFALL DR. | CDS | E | AAC | 9 | 472 | 36 | 18,492 | 4/21/26 | 76 | 0 | 72 | 28 | Type II Slurry Seal | $6,657 |
| 938 | 14612 | HILLHEAD CIR | LOCHLEA LN | CDS | E | AC | 9 | 576 | 33 | 21,708 | 8/30/23 | 54 | 50 | 38 | 12 | Grind - AC Overlay | $85,530 |
| 944 | 15505 | HINGHAM DR | LANTERN LN | MONTAUK CIR | E | AC | 9 | 370 | 36 | 14,070 | 5/10/24 | 59 | 78 | 17 | 5 | Grind - AC Overlay | $55,436 |
| 956 | 14259 | HOPETOWN LN | SPENCER CIR | CARROLLTOWN DR | E | AC | 9 | 300 | 36 | 10,800 | 5/9/24 | 74 | 60 | 39 | 1 | Type II Slurry Seal | $3,888 |
| 956 | 15503 | HOPETOWN LN | ELLSWORTH DR | SPENCER CIR | E | AC | 9 | 602 | 36 | 21,672 | 5/9/24 | 83 | 37 | 62 | 1 | Type II Slurry Seal | $7,802 |
| 963 | 14400 | HUDSON DR | IMPALA LN | STARFIRE LN | E | AC | 9 | 558 | 36 | 21,588 | 4/24/24 | 72 | 83 | 17 | 0 | Type II Slurry Seal | $7,772 |
| 969 | 14645 | HUNTINGTON ST | GENEVA AVE | HARTFORD AVE | E | AC | 9 | 331 | 38 | 12,578 | 8/14/23 | 70 | 0 | 100 | 0 | Type II Slurry Seal | $4,528 |
| 969 | 14646 | HUNTINGTON ST | FRANKFORT AVE | GENEVA AVE | E | AC | 9 | 330 | 40 | 13,200 | 8/14/23 | 69 | 0 | 83 | 17 | Type II Slurry Seal | $4,752 |
| 969 | 14647 | HUNTINGTON ST | CHICAGO AVE | DETROIT AVE | E | AC | 9 | 330 | 37 | 12,210 | 8/14/23 | 52 | 92 | 7 | 1 | Grind - AC Overlay | $48,107 |
| 969 | 14648 | HUNTINGTON ST | BALTIMORE AVE | CHICAGO AVE | E | AC | 9 | 329 | 37 | 12,173 | 8/14/23 | 44 | 79 | 10 | 11 | Grind - AC Overlay | $47,962 |
| 969 | 14649 | HUNTINGTON ST | ATLANTA AVE | BALTIMORE AVE | E | AC | 9 | 335 | 37 | 12,395 | 8/24/23 | 50 | 86 | 14 | 0 | Grind - AC Overlay | $48,836 |
| 969 | 14662 | HUNTINGTON ST | HARTFORD AVE | INDIANAPOLIS AVE | E | AC | 9 | 329 | 36 | 11,844 | 8/14/23 | 62 | 51 | 49 | 0 | Grind - AC Overlay | $46,665 |
| 969 | 15672 | HUNTINGTON ST | ELMIRA AVE | FRANKFORT AVE | E | AC | 9 | 329 | 40 | 13,160 | 8/14/23 | 60 | 35 | 51 | 14 | Grind - AC Overlay | $51,850 |
| 969 | 15673 | HUNTINGTON ST | DETROIT AVE | ELMIRA AVE | E | AC | 9 | 330 | 38 | 12,540 | 8/14/23 | 64 | 33 | 53 | 14 | Grind - AC Overlay | $49,408 |
| 974 | 14396 | IMPALA LN | MOKIHANA DR | HUDSON DR | E | AC | 9 | 260 | 36 | 10,110 | 4/24/24 | 83 | 75 | 25 | 0 | Type II Slurry Seal | $3,640 |
| 974 | 15572 | IMPALA LN | NEOLANI DR | MOKIHANA DR | E | AC | 9 | 1,013 | 36 | 37,218 | 4/24/24 | 82 | 48 | 52 | 0 | Type II Slurry Seal | $13,398 |
| 987 | 14393 | IOLANI CIR | ZAMORA LN | CDS | E | AC | 9 | 235 | 32 | 9,020 | 5/20/24 | 85 | 63 | 37 | 0 | Type II Slurry Seal | $3,247 |
| 994 | 14505 | ISLANDER LN | PLAYA DR | CHRISTINE DR | E | AAC | 9 | 695 | 36 | 26,020 | 4/22/26 | 86 | 42 | 38 | 20 | Type II Slurry Seal | $9,367 |
| 1012 | 14973 | JENNY DR | LOCHLEA LN | NEWLAND ST | E | AC | 9 | 660 | 36 | 23,760 | 8/30/23 | 79 | 10 | 90 | 0 | Type II Slurry Seal | $8,554 |
| 1025 | 14524 | JONESPORT LN | ALLISON CIR | CAPE MAY LN | E | AC | 9 | 647 | 36 | 23,004 | 4/24/24 | 85 | 39 | 46 | 15 | Type II Slurry Seal | $8,281 |
| 1025 | 15615 | JONESPORT LN | MELINDA CIR | ALLISON CIR | E | AC | 9 | 248 | 36 | 9,428 | 4/17/24 | 81 | 52 | 48 | 0 | Type II Slurry Seal | $3,394 |
| 1034 | 14379 | KAHULUI DR | KIOWA LN | KANEHOE LN | E | AC | 9 | 930 | 36 | 33,480 | 3/27/24 | 77 | 71 | 16 | 13 | Type II Slurry Seal | $12,053 |
| 1039 | 14388 | KANAKOA LN | NEOLANI DR | MALAHINE DR | E | AC | 9 | 752 | 36 | 27,072 | 5/20/24 | 69 | 77 | 23 | 0 | Type II Slurry Seal | $9,746 |
| 1040 | 15567 | KANEOHE LN | HAITI DR | BERMUDA DR | E | AC | 9 | 1,008 | 36 | 36,288 | 3/27/24 | 86 | 55 | 45 | 0 | Type II Slurry Seal | $13,064 |
| 1040 | 15568 | KANEOHE LN | BERMUDA DR | KAPAA DR | E | AC | 9 | 768 | 36 | 27,648 | 3/27/24 | 85 | 53 | 47 | 0 | Type II Slurry Seal | $9,953 |
| 1041 | 14381 | KAPAA DR | KIOWA LN | KANEHOE LN | E | AC | 9 | 930 | 36 | 32,904 | 3/27/24 | 71 | 64 | 34 | 2 | Type II Slurry Seal | $11,845 |
| 3000 | 20000 | KELVIN LN | ELLSWORTH DR | CARROLTOWN DR | E | AC | 9 | 902 | 36 | 32,472 | 5/9/24 | 69 | 40 | 52 | 8 | Type II Slurry Seal | $11,690 |
| 1067 | 14104 | KILKENNY LN | MALLOY DR | ALLEY MALLOY DR | E | AC | 9 | 139 | 36 | 5,004 | 8/23/23 | 58 | 80 | 20 | 0 | Grind - AC Overlay | $19,716 |
| 1067 | 14105 | KILKENNY LN | ALLEY MALLOY DR | INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/23/23 | 29 | 93 | 7 | 0 | Grind - AC Overlay | $21,560 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1070 | 14277 | KIMBERWICK LN | FIRESIDE DR | HAVEN LN | E | AC | 9 | 177 | 36 | 6,372 | 5/7/24 | 86 | 47 | 53 | 0 | Type II Slurry Seal | $2,294 |
| 1073 | 14225 | KINGFISHER DR | CATAMARAN LN | FARNSWORTH LN | E | AC | 9 | 591 | 36 | 21,276 | 8/23/23 | 60 | 70 | 30 | 0 | Grind - AC Overlay | $83,827 |
| 1073 | 15884 | KINGFISHER DR | FARNSWORTH LN | ALICANTE LN | E | AC | 9 | 911 | 36 | 32,796 | 8/23/23 | 58 | 50 | 50 | 0 | Grind - AC Overlay | $129,216 |
| 1079 | 14382 | KIOWA LN | BERMUDA DR | KAHULUI DR | E | AC | 9 | 256 | 36 | 8,928 | 3/27/24 | 72 | 64 | 34 | 2 | Type II Slurry Seal | $3,214 |
| 1079 | 15569 | KIOWA LN | KAHULUI DR | ALOHA DR | E | AC | 9 | 768 | 36 | 27,648 | 3/27/24 | 85 | 61 | 39 | 0 | Type II Slurry Seal | $9,953 |
| 1085 | 14526 | KITTERY CIR | CASTINE DR | CDS | E | AC | 9 | 169 | 32 | 6,908 | 4/17/24 | 85 | 45 | 55 | 0 | Type II Slurry Seal | $2,487 |
| 1107 | 14502 | LAGUNA CIR | CHRISTINE DR | CDS | E | AAC | 9 | 243 | 36 | 10,248 | 4/22/26 | 76 | 65 | 20 | 15 | Type II Slurry Seal | $3,689 |
| 1118 | 14273 | LANCELOT LN | WOODCREST DR | COMSTOCK DR | E | AC | 9 | 502 | 36 | 18,822 | 5/6/24 | 60 | 52 | 48 | 0 | Grind - AC Overlay | $74,159 |
| 1120 | 14474 | LANDFALL DR | BUSHARD ST | HILARIA CIR | E | AC | 9 | 166 | 36 | 5,976 | 4/25/24 | 64 | 56 | 27 | 17 | Grind - AC Overlay | $23,545 |
| 1120 | 15577 | LANDFALL DR | DIRIGO CIR | BRANTA CIR | E | AC | 9 | 260 | 36 | 10,360 | 4/25/24 | 72 | 42 | 25 | 33 | Type II Slurry Seal | $3,730 |
| 1120 | 15596 | LANDFALL DR | HILARIA CIR | DIRIGO CIR | E | AC | 9 | 764 | 36 | 27,504 | 4/25/24 | 86 | 0 | 72 | 28 | Type II Slurry Seal | $9,901 |
| 1122 | 14270 | LANTERN LN | HINGHAM DR | CASTLEGATE DR | E | AAC | 9 | 243 | 36 | 8,748 | 5/10/24 | 76 | 44 | 33 | 23 | Type II Slurry Seal | $3,149 |
| 1144 | 15542 | LEASURE LN | ATLANTA AVE | SATTERFIELD DR | E | AC | 9 | 433 | 36 | 16,338 | 8/30/23 | 40 | 73 | 22 | 5 | Grind - AC Overlay | $64,372 |
| 1150 | 15611 | LEILANI DR | MAILBU LN | BUSHARD ST | E | AC | 9 | 894 | 36 | 32,934 | 4/17/24 | 56 | 79 | 21 | 0 | Grind - AC Overlay | $129,760 |
| 1164 | 15448 | LIGHTHOUSE LN | SEALROCK DR | END | E | AAC | 9 | 151 | 40 | 6,040 | 8/21/23 | 82 | 27 | 73 | 0 | Type II Slurry Seal | $2,174 |
| 1179 | 15534 | LOCHLEA LN | ATLANTA AVE | GALLEY DR | E | AC | 9 | 573 | 36 | 23,884 | 8/24/23 | 55 | 85 | 11 | 4 | Grind - AC Overlay | $94,103 |
| 1179 | 15535 | LOCHLEA LN | JENNY DR | HILLHEAD CIR | E | AC | 9 | 660 | 36 | 23,760 | 8/30/23 | 84 | 33 | 61 | 6 | Type II Slurry Seal | $8,554 |
| 1179 | 15536 | LOCHLEA LN | ALLEY DONCASTER DR | ALLEY LOMOND DR | E | AC | 9 | 326 | 36 | 11,736 | 8/30/23 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $4,225 |
| 1187 | 14312 | LOMOND DR | LOCHLEA LN | NEWLAND ST | E | AC | 9 | 660 | 39 | 26,766 | 8/30/23 | 69 | 66 | 34 | 0 | Type II Slurry Seal | $9,636 |
| 1188 | 14115 | LONDONDERRY LN | MALLOY DR | MUNSTER DR | E | AAC | 9 | 260 | 36 | 9,360 | 8/23/23 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $3,370 |
| 1202 | 15610 | LUAU LN | MOLOKAI DR | LANAI CIR | E | AC | 9 | 514 | 36 | 18,504 | 4/17/24 | 66 | 79 | 18 | 3 | Grind - AC Overlay | $72,906 |
| 1211 | 14274 | LYMAN DR | CRESTVIEW LN | BUSHARD ST | E | AC | 9 | 166 | 36 | 5,976 | 5/6/24 | 73 | 72 | 28 | 0 | Type II Slurry Seal | $2,151 |
| 1222 | 14380 | MAHALO DR | KIOWA LN | KANEOHE LN | E | AC | 9 | 930 | 36 | 32,904 | 3/27/24 | 81 | 75 | 25 | 0 | Type II Slurry Seal | $11,845 |
| 1226 | 15573 | MALAHINE DR | IMPALA LN | HANAKAI LN | E | AC | 9 | 516 | 36 | 19,326 | 5/20/24 | 54 | 84 | 16 | 0 | Grind - AC Overlay | $76,144 |
| 1228 | 14530 | MALIBU LN | TAHITI CIR | LEILANI DR | E | AAC | 9 | 275 | 36 | 10,650 | 4/22/26 | 84 | 48 | 49 | 3 | Type II Slurry Seal | $3,834 |
| 1228 | 15608 | MALIBU LN | BANNING AVE | TAHITI CIR | E | AAC | 9 | 944 | 36 | 33,984 | 4/22/26 | 76 | 43 | 55 | 2 | Type II Slurry Seal | $12,234 |
| 1229 | 14119 | MALLOY DR | SOMERVILLE LN | YVONNE DR | E | AC | 9 | 291 | 36 | 10,476 | 8/23/23 | 55 | 67 | 25 | 8 | Grind - AC Overlay | $41,275 |
| 1229 | 15452 | MALLOY DR | YVONNE DR | DUBLIN LN | E | AC | 9 | 1,326 | 36 | 47,736 | 8/21/23 | 67 | 81 | 17 | 2 | Type II Slurry Seal | $17,185 |
| 1263 | 14222 | MARY CIR | FARNSWORTH LN | END | E | AC | 9 | 321 | 32 | 10,272 | 8/24/23 | 69 | 31 | 69 | 0 | Type II Slurry Seal | $3,698 |
| 1268 | 14240 | MATARO LN | VARAS CIR | ALVARADO DR | E | AC | 9 | 273 | 36 | 9,828 | 8/23/23 | 79 | 31 | 69 | 0 | Type II Slurry Seal | $3,538 |
| 1292 | 14522 | MELINDA CIR | JONESPORT LN | CDS | E | AC | 9 | 409 | 32 | 15,588 | 4/17/24 | 82 | 48 | 38 | 14 | Type II Slurry Seal | $5,612 |
| 1300 | 14454 | MERMAID CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 79 | 33 | 67 | 0 | Type II Slurry Seal | $3,110 |
| 1311 | 14620 | MILLBRIDGE CIR | PORT GREENWICH LN | END | E | AC | 9 | 453 | 34 | 15,402 | 8/21/23 | 81 | 78 | 22 | 0 | Type II Slurry Seal | $5,545 |
| 1312 | 14329 | MILNE DR | ANTIGUA LN | SAND DOLLAR LN | E | AC | 9 | 252 | 36 | 9,572 | 8/30/23 | 52 | 80 | 17 | 3 | Grind - AC Overlay | $37,714 |
| 1315 | 15502 | MINERVA LN | ELLSWORTH DR | ELLSWORTH DR | E | AAC | 9 | 512 | 32 | 16,384 | 5/9/24 | 73 | 26 | 42 | 32 | Type II Slurry Seal | $5,898 |
| 1320 | 14317 | MIRAMAR LN | DORSETT DR | SABLE DR | E | AC | 9 | 512 | 36 | 18,144 | 8/30/23 | 86 | 41 | 52 | 7 | Type II Slurry Seal | $6,532 |
| 1321 | 14238 | MISSION LN | ALVARADO DR | END | E | AC | 9 | 481 | 36 | 17,316 | 8/23/23 | 83 | 0 | 89 | 11 | Type II Slurry Seal | $6,234 |
| 1325 | 14394 | MOKIHANA DR | ALLEY BUSHARD ST | BUSHARD ST | E | AAC | 9 | 120 | 36 | 4,320 | 5/6/24 | 82 | 60 | 40 | 0 | Type II Slurry Seal | $1,555 |
| 1325 | 15574 | MOKIHANA DR | IMPALA LN | ALLEY BUSHARD ST | E | AAC | 9 | 990 | 36 | 35,640 | 5/20/24 | 71 | 61 | 39 | 0 | Type II Slurry Seal | $12,830 |
| 1330 | 14266 | MONTAUK CIR | HINGHAM DR | CDS | E | AC | 9 | 279 | 32 | 11,478 | 5/8/24 | 71 | 53 | 29 | 18 | Type II Slurry Seal | $4,132 |
| 1361 | 14117 | MUNSTER DR | SOMERVILLE LN | LONDONDERRY LN | E | AC | 9 | 577 | 36 | 20,772 | 8/23/23 | 64 | 76 | 24 | 0 | Grind - AC Overlay | $81,842 |
| 1361 | 14118 | MUNSTER DR | LONDONDERRY LN | DUBLIN LN | E | AC | 9 | 1,040 | 36 | 37,440 | 8/23/23 | 84 | 19 | 59 | 22 | Type II Slurry Seal | $13,478 |
| 1382 | 15658 | NEW BRITAIN LN | ROTHERT LN | END | E | AC | 9 | 773 | 36 | 27,828 | 8/21/23 | 68 | 77 | 23 | 0 | Type II Slurry Seal | $10,018 |
| 1393 | 14512 | NEWPORT CIR | MOLOKAI DR | CDS | E | AAC | 9 | 313 | 32 | 11,516 | 4/22/26 | 77 | 52 | 48 | 0 | Type II Slurry Seal | $4,146 |
| 1418 | 14342 | NORTHSHORE LN | PIER DR | HAMILTON AVE | E | AC | 9 | 169 | 36 | 5,796 | 4/1/24 | 72 | 53 | 31 | 16 | Type II Slurry Seal | $2,087 |
| 1435 | 14494 | OCEANCREST DR | SUMMERWIND LN | CDS | E | AAC | 9 | 130 | 34 | 5,920 | 4/21/26 | 83 | 0 | 100 | 0 | Type II Slurry Seal | $2,131 |
| 1435 | 15602 | OCEANCREST DR | SUMMERWIND LN | CDS | E | AAC | 9 | 775 | 34 | 28,150 | 4/21/26 | 77 | 28 | 53 | 19 | Type II Slurry Seal | $10,134 |
| 1439 | 14262 | OCEANWOOD DR | MAGNOLIA ST | SEA MIST LN | E | AC | 9 | 379 | 36 | 14,394 | 5/6/24 | 78 | 10 | 89 | 1 | Type II Slurry Seal | $5,182 |
| 1505 | 15845 | PECAN AVE | LAKE ST | ALABAMA ST | E | AC | 9 | 372 | 37 | 13,764 | 8/24/23 | 61 | 87 | 13 | 0 | Grind - AC Overlay | $54,230 |
| 1523 | 15555 | PIER DR | NORTHSHORE LN | CDS | E | AC | 9 | 547 | 36 | 21,492 | 3/20/24 | 83 | 31 | 69 | 0 | Type II Slurry Seal | $7,737 |
| 1523 | 15556 | PIER DR | FLEET LN | NORTHSHORE LN | E | AAC | 9 | 302 | 36 | 11,622 | 3/20/24 | 71 | 80 | 20 | 0 | Type II Slurry Seal | $4,184 |
| 1539 | 14504 | PLAYA DR | SURFRIDER LN | ISLANDER LN | E | AC | 9 | 270 | 36 | 11,720 | 4/17/24 | 76 | 70 | 30 | 0 | Type II Slurry Seal | $4,219 |
| 1551 | 15614 | PORT CLYDE DR | CAPE MAY LN | ROCKPORT LN | E | AC | 9 | 612 | 36 | 24,032 | 4/17/24 | 80 | 64 | 36 | 0 | Type II Slurry Seal | $8,652 |
| 1558 | 14323 | POSTON LN | DORSETT DR | STILLWELL DR | E | AC | 9 | 659 | 36 | 24,474 | 8/30/23 | 49 | 86 | 14 | 0 | Grind - AC Overlay | $96,428 |
| 1582 | 14241 | PUERTO DR | MISSION LN | NEWLAND ST | E | AC | 9 | 167 | 36 | 6,012 | 8/23/23 | 73 | 0 | 79 | 21 | Type II Slurry Seal | $2,164 |
| 1602 | 15594 | RAMBLER DR | STARFIRE LN | ALLEY BUSHARD ST | E | AC | 9 | 403 | 36 | 14,508 | 5/20/24 | 72 | 71 | 29 | 0 | Type II Slurry Seal | $5,223 |
| 1619 | 14369 | REGATTA DR | POLYNESIAN LN | CDS | E | AAC | 9 | 480 | 36 | 18,780 | 3/26/24 | 82 | 62 | 38 | 0 | Type II Slurry Seal | $6,761 |
| 1619 | 14375 | REGATTA DR | POLYNESIAN LN | KANEOHE LN | E | AAC | 9 | 478 | 36 | 17,708 | 3/26/24 | 85 | 41 | 59 | 0 | Type II Slurry Seal | $6,375 |
| 1621 | 15883 | REILLY DR | FARNSWORTH LN | SANDPIPER LN | E | AC | 9 | 796 | 36 | 28,656 | 8/24/23 | 83 | 53 | 33 | 14 | Type II Slurry Seal | $10,316 |
| 1654 | 14484 | ROCK POINT DR | OCEANVIEW LN | SEASIDE LN | E | AAC | 9 | 515 | 36 | 19,290 | 4/21/26 | 80 | 11 | 89 | 0 | Type II Slurry Seal | $6,944 |
| 1659 | 15616 | ROCKPORT LN | PORT CLYDE DR | CDS | E | AC | 9 | 382 | 36 | 16,252 | 4/17/24 | 86 | 0 | 67 | 33 | Type II Slurry Seal | $5,851 |
| 1691 | 14319 | SABLE DR | MIRAMAR LN | BRETON LN | E | AC | 9 | 270 | 36 | 9,720 | 8/30/23 | 68 | 73 | 27 | 0 | Type II Slurry Seal | $3,499 |
| 1698 | 14453 | SAIL CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 80 | 35 | 65 | 0 | Type II Slurry Seal | $3,110 |
| 1709 | 14476 | SALUDA CIR | LANDFALL DR | CDS | E | AC | 9 | 472 | 36 | 18,492 | 4/25/24 | 80 | 0 | 48 | 52 | Type II Slurry Seal | $6,657 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1719 | 14327 | SAND DOLLAR LN | ST AUGUSTINE DR | MILNE DR | E | AC | 9 | 758 | 36 | 27,788 | 8/30/23 | 63 | 71 | 23 | 6 | Grind - AC Overlay | $109,485 |
| 1722 | 14228 | SANDPIPER LN | INDIANAPOLIS AVE | ALLEY INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/24/23 | 79 | 41 | 59 | 0 | Type II Slurry Seal | $1,970 |
| 1722 | 14232 | SANDPIPER LN | ALLEY INDIANAPOLIS AVE | REILLY DR | E | AC | 9 | 140 | 36 | 5,040 | 8/24/23 | 70 | 44 | 56 | 0 | Type II Slurry Seal | $1,814 |
| 1722 | 14233 | SANDPIPER LN | REILLY DR | TERN CIR | E | AC | 9 | 261 | 36 | 9,396 | 8/24/23 | 78 | 32 | 54 | 14 | Type II Slurry Seal | $3,383 |
| 1722 | 15498 | SANDPIPER LN | TERN CIR | KINGFISHER DR | E | AC | 9 | 758 | 36 | 27,288 | 8/24/23 | 76 | 34 | 66 | 0 | Type II Slurry Seal | $9,824 |
| 1727 | 14330 | SANDY HOOK DR | ANTIGUA LN | SEAFORTH LN | E | AC | 9 | 446 | 36 | 16,806 | 8/30/23 | 84 | 21 | 79 | 0 | Type II Slurry Seal | $6,050 |
| 1735 | 15543 | SATTERFIELD DR | LEASURE LN | SHAW LN | E | AC | 9 | 687 | 36 | 25,482 | 8/30/23 | 62 | 72 | 26 | 2 | Grind - AC Overlay | $100,399 |
| 1742 | 15501 | SCHOONER LN | SNOWBIRD DR | ATLANTA AVE | E | AC | 9 | 311 | 36 | 11,196 | 8/24/23 | 60 | 63 | 32 | 5 | Grind - AC Overlay | $44,112 |
| 1753 | 14112 | SEA CIR | SEAPORT DR | END | E | AAC | 9 | 155 | 32 | 4,960 | 8/21/23 | 70 | 0 | 79 | 21 | Type II Slurry Seal | $1,786 |
| 1754 | 14263 | SEA MIST LN | FIVE HARBORS DR | OCEANWOOD DR | E | AC | 9 | 249 | 36 | 9,714 | 5/6/24 | 84 | 0 | 100 | 0 | Type II Slurry Seal | $3,497 |
| 1756 | 14223 | SEABIRD CIR | FARNSWORTH LN | END | E | AC | 9 | 321 | 32 | 10,272 | 8/24/23 | 71 | 27 | 73 | 0 | Type II Slurry Seal | $3,698 |
| 1759 | 14488 | SEACREST LN | BEACHSIDE DR | HIGHTIDE DR | E | AAC | 9 | 773 | 36 | 28,578 | 4/21/26 | 85 | 0 | 100 | 0 | Type II Slurry Seal | $10,288 |
| 1763 | 14108 | SEALROCK DR | SEASHELL CIR | LIGHTHOUSE LN | E | AC | 9 | 246 | 36 | 8,856 | 8/21/23 | 78 | 0 | 100 | 0 | Type II Slurry Seal | $3,188 |
| 1765 | 14113 | SEAPORT DR | SEA CIR | END | E | AAC | 9 | 120 | 36 | 4,320 | 8/21/23 | 76 | 0 | 100 | 0 | Type II Slurry Seal | $1,555 |
| 1765 | 14114 | SEAPORT DR | DUBLIN LN | LIGHTHOUSE LN | E | AAC | 9 | 135 | 36 | 4,860 | 8/21/23 | 81 | 0 | 100 | 0 | Type II Slurry Seal | $1,750 |
| 1765 | 15449 | SEAPORT DR | SEA CIR | DUBLIN LN | E | AAC | 9 | 791 | 36 | 28,476 | 8/21/23 | 77 | 47 | 46 | 7 | Type II Slurry Seal | $10,251 |
| 1767 | 14106 | SEASHELL CIR | SEALROCK DR | END | E | AAC | 9 | 151 | 36 | 5,436 | 8/21/23 | 69 | 0 | 73 | 27 | Type II Slurry Seal | $1,957 |
| 1768 | 14483 | SEASIDE LN | LANDFALL DR | ROCK POINT DR | E | AAC | 9 | 656 | 36 | 23,328 | 4/21/26 | 77 | 32 | 65 | 3 | Type II Slurry Seal | $8,398 |
| 1768 | 15599 | SEASIDE LN | ROCK POINT DR | HIGHTIDE DR | E | AAC | 9 | 1,026 | 36 | 36,936 | 4/21/26 | 81 | 10 | 90 | 0 | Type II Slurry Seal | $13,297 |
| 1779 | 14101 | SEVEN SEAS LN | INDIANAPOLIS AVE | END | E | AC | 9 | 536 | 36 | 19,296 | 8/24/23 | 62 | 65 | 31 | 4 | Grind - AC Overlay | $76,026 |
| 1779 | 14219 | SEVEN SEAS LN | INDIANAPOLIS AVE | INDIANAPOLIS AVE | E | AC | 9 | 204 | 36 | 7,344 | 8/24/23 | 38 | 85 | 15 | 0 | Grind - AC Overlay | $28,935 |
| 1793 | 14264 | SHELL HARBOR CIR | FIVE HARBORS DR | CDS | E | AAC | 9 | 317 | 32 | 11,644 | 5/6/24 | 54 | 57 | 13 | 30 | Grind - AC Overlay | $45,877 |
| 1827 | 14267 | SKI HARBOR CIR | BEACHWOOD LN | CDS | E | AC | 9 | 303 | 32 | 11,196 | 5/6/24 | 83 | 33 | 49 | 18 | Type II Slurry Seal | $4,031 |
| 1841 | 15497 | SNOWBIRD DR | SCHOONER LN | BASTIA LN | E | AC | 9 | 624 | 36 | 22,464 | 8/23/23 | 83 | 66 | 34 | 0 | Type II Slurry Seal | $8,087 |
| 1842 | 14269 | SNUG HARBOR CIR | HALF LEAGUE DR | CDS | E | AC | 9 | 255 | 32 | 10,410 | 5/6/24 | 74 | 59 | 41 | 0 | Type II Slurry Seal | $3,748 |
| 1845 | 15451 | SOMERVILLE LN | MALLOY DR | END | E | AC | 9 | 390 | 36 | 14,040 | 8/23/23 | 53 | 81 | 19 | 0 | Grind - AC Overlay | $55,318 |
| 1849 | 15447 | SOUTHPORT DR | CAPE COTTAGE LN | END | E | AAC | 9 | 372 | 36 | 13,392 | 8/21/23 | 82 | 69 | 31 | 0 | Type II Slurry Seal | $4,821 |
| 1857 | 14254 | SPENCER CIR | HOPETOWN LN | CDS | E | AAC | 9 | 245 | 32 | 7,840 | 5/6/24 | 83 | 24 | 73 | 3 | Type II Slurry Seal | $2,822 |
| 1869 | 14325 | ST AUGUSTINE DR | NEWLAND ST | ANTIGUA LN | E | AC | 9 | 171 | 36 | 6,156 | 8/30/23 | 61 | 45 | 29 | 26 | Grind - AC Overlay | $24,255 |
| 1869 | 15545 | ST AUGUSTINE DR | ANTIGUA LN | SAND DOLLAR LN | E | AC | 9 | 252 | 36 | 9,072 | 2/22/22 | 63 | 49 | 36 | 15 | Grind - AC Overlay | $35,744 |
| 1869 | 15546 | ST AUGUSTINE DR | SAND DOLLAR LN | BRETON LN | E | AC | 9 | 769 | 36 | 27,684 | 8/30/23 | 32 | 90 | 6 | 4 | Grind - AC Overlay | $109,075 |
| 1872 | 14481 | ST JOHN LN | HAMILTON AVE | CLEARBROOK DR | E | AAC | 9 | 525 | 36 | 19,650 | 4/21/26 | 77 | 51 | 37 | 12 | Type II Slurry Seal | $7,074 |
| 1881 | 15576 | STARFIRE LN | HUDSON DR | DAYTONA CIR | E | AC | 9 | 899 | 36 | 33,114 | 4/17/24 | 67 | 80 | 20 | 0 | Type II Slurry Seal | $11,921 |
| 1894 | 14334 | STILWELL DR | SHAW LN | MAGNOLIA ST | E | AC | 9 | 179 | 36 | 6,444 | 8/30/23 | 24 | 96 | 4 | 0 | AC Recon | $100,913 |
| 1894 | 15551 | STILWELL DR | KROLL LN | SHAW LN | E | AC | 9 | 55 | 36 | 2,730 | 8/30/23 | 81 | 0 | 23 | 77 | Type II Slurry Seal | $983 |
| 1899 | 14542 | STONINGTON CIR | CAPE MAY LN | CDS | E | AAC | 9 | 118 | 32 | 5,276 | 5/5/26 | 84 | 0 | 77 | 23 | Type II Slurry Seal | $1,899 |
| 1907 | 14490 | SUMMER CIR | HIGHTIDE DR | CDS | E | AAC | 9 | 307 | 32 | 11,324 | 5/5/26 | 77 | 38 | 62 | 0 | Type II Slurry Seal | $4,077 |
| 1924 | 15508 | SUNRIDGE DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 955 | 36 | 35,130 | 5/20/24 | 86 | 0 | 76 | 24 | Type II Slurry Seal | $12,647 |
| 1926 | 14455 | SUNSET CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 84 | 17 | 51 | 32 | Type II Slurry Seal | $3,110 |
| 1931 | 14493 | SURFCREST DR | VACATION LN | HARBORBREEZE LN | E | AC | 9 | 259 | 36 | 9,324 | 3/26/24 | 80 | 0 | 100 | 0 | Type II Slurry Seal | $3,357 |
| 1931 | 15601 | SURFCREST DR | SEASIDE LN | VACATION LN | E | AC | 9 | 509 | 36 | 18,324 | 3/26/24 | 68 | 75 | 25 | 0 | Type II Slurry Seal | $6,597 |
| 1933 | 14503 | SURFRIDER LN | PLAYA DR | CHRISTINE DR | E | AC | 9 | 549 | 36 | 20,764 | 4/17/24 | 74 | 74 | 26 | 0 | Type II Slurry Seal | $7,475 |
| 1934 | 15025 | SURFWOOD LN | ATLANTA AVE | BURLINGTON LN | E | AC | 9 | 1,159 | 36 | 41,724 | 8/24/23 | 60 | 78 | 14 | 8 | Grind - AC Overlay | $164,393 |
| 1936 | 14432 | SURVEYOR CIR | HAMILTON AVE | END | E | AC | 9 | 496 | 41 | 22,336 | 8/30/23 | 86 | 63 | 15 | 22 | Type II Slurry Seal | $8,041 |
| 1937 | 14499 | SUSAN LN | BANNING AVE | CHRISTINE DR | E | AC | 9 | 563 | 36 | 20,268 | 4/17/24 | 65 | 84 | 16 | 0 | Grind - AC Overlay | $79,856 |
| 1966 | 14234 | TERN CIR | SANDPIPER LN | END | E | AC | 9 | 361 | 36 | 12,996 | 8/24/23 | 71 | 59 | 41 | 0 | Type II Slurry Seal | $4,679 |
| 1980 | 14336 | TIDEWATER CIR | FLEET LN | CDS | E | AC | 9 | 385 | 36 | 15,360 | 4/1/24 | 62 | 72 | 20 | 8 | Grind - AC Overlay | $60,518 |
| 1983 | 14515 | TIKI CIR | LUAU LN | CDS | E | AAC | 9 | 345 | 32 | 12,540 | 4/22/26 | 86 | 45 | 55 | 0 | Type II Slurry Seal | $4,514 |
| 1990 | 14251 | TOBERMORY CIR | COLBREGGAN DR | CDS | E | AAC | 9 | 205 | 32 | 8,060 | 5/10/24 | 79 | 51 | 46 | 3 | Type II Slurry Seal | $2,902 |
| 2044 | 14492 | VACATION LN | SURFCREST DR | HIGHTIDE DR | E | AC | 9 | 560 | 36 | 20,910 | 5/5/26 | 83 | 51 | 46 | 3 | Type II Slurry Seal | $7,528 |
| 2057 | 14239 | VARAS CIR | MATARO LN | END | E | AC | 9 | 149 | 42 | 6,258 | 8/23/23 | 77 | 0 | 100 | 0 | Type II Slurry Seal | $2,253 |
| 2117 | 14525 | WATCH HARBOR DR | BUSHARD ST | WOOD ISLAND LN | E | AC | 9 | 167 | 36 | 5,724 | 4/24/24 | 85 | 35 | 65 | 0 | Type II Slurry Seal | $2,061 |
| 2138 | 14276 | WESTCLIFF DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 954 | 36 | 34,344 | 5/7/24 | 59 | 80 | 19 | 1 | Grind - AC Overlay | $135,315 |
| 2172 | 14486 | WINDSONG CIR | SURFCREST DR | CDS | E | AC | 9 | 475 | 36 | 18,600 | 3/26/24 | 71 | 68 | 32 | 0 | Type II Slurry Seal | $6,696 |
| 2177 | 14272 | WINTERWOOD CIR | CHARWOOD LN | CDS | E | AC | 9 | 440 | 34 | 16,460 | 5/7/24 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $5,926 |
| 2181 | 15509 | WOODCREST DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 955 | 36 | 34,380 | 5/6/24 | 55 | 61 | 39 | 0 | Grind - AC Overlay | $135,457 |
| 2185 | 14521 | WOODS HOLE DR | ROCKPORT LN | JONESPORT LN | E | AC | 9 | 254 | 36 | 8,856 | 4/17/24 | 83 | 11 | 89 | 0 | Type II Slurry Seal | $3,188 |
| 2195 | 14326 | YARMOUTH LN | ST AUGUSTINE DR | HATTERAS DR | E | AC | 9 | 833 | 36 | 29,412 | 8/30/23 | 81 | 33 | 67 | 0 | Type II Slurry Seal | $10,588 |
| 2201 | 14102 | YVONNE DR | ALLEY MALLOY DR | INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/23/23 | 64 | 0 | 70 | 30 | Grind - AC Overlay | $21,560 |
| 2201 | 14103 | YVONNE DR | MALLOY DR | ALLEY MALLOY DR | E | AAC | 9 | 139 | 36 | 5,004 | 8/23/23 | 84 | 0 | 100 | 0 | Type II Slurry Seal | $1,801 |
| | | | | | | | | | | | | | | | | | **$6,925,223** |
| 4 | 14533 | ABLE LN | SKYLAB RD | BOLSA AVE | E | AC | 1 | 1,434 | 60 | 86,040 | 4/7/26 | 74 | 43 | 47 | 10 | Type II Slurry Seal | $32,695 |
| 22 | 13843 | ALBION DR | PLYMOUTH LN | ALDEN LN | E | AC | 1 | 780 | 36 | 28,080 | 12/20/24 | 35 | 78 | 13 | 9 | Grind - AC Overlay | $115,128 |
| 123 | 15292 | ANACAPA DR | CHATEAU LN | FAIRVIEW LN | E | AAC | 1 | 780 | 36 | 30,580 | 5/7/24 | 74 | 27 | 73 | 0 | Type II Slurry Seal | $11,620 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 126 | 13712 | ANDAMAN LN | CASPIAN CIR | ALLEY MCFADDEN AVE | E | AC | 1 | 147 | 36 | 5,292 | 3/21/22 | 45 | 93 | 7 | 0 | Grind - AC Overlay | $21,697 |
| 126 | 13713 | ANDAMAN LN | ALLEY MCFADDEN AVE | MCFADDEN AVE | E | AC | 1 | 159 | 36 | 5,724 | 3/21/22 | 74 | 79 | 21 | 0 | Type II Slurry Seal | $2,175 |
| 126 | 15304 | ANDAMAN LN | TASMAN DR | CASPIAN CIR | E | AC | 1 | 548 | 36 | 19,728 | 3/21/22 | 83 | 53 | 24 | 23 | Type II Slurry Seal | $7,497 |
| 133 | 13853 | ANTRIM CIR | TOWAY LN | END | E | AC | 1 | 419 | 36 | 16,334 | 1/3/25 | 35 | 81 | 4 | 15 | Grind - AC Overlay | $66,969 |
| 158 | 13720 | ASSEMBLY LN | MACHINE DR | MC FADDEN AVE | E | AC | 1 | 818 | 40 | 32,720 | 4/8/26 | 82 | 45 | 28 | 27 | Type II Slurry Seal | $12,434 |
| 2291 | 17026 | ASTRONAUTICS LN | SKYLAB RD | DELTA LN | E | AC | 1 | 2,052 | 36 | 77,872 | 4/7/26 | 81 | 11 | 58 | 31 | Type II Slurry Seal | $29,591 |
| 2291 | 17027 | ASTRONAUTICS LN | DELTA LN | RANCHO RD | E | AC | 1 | 1,592 | 36 | 61,512 | 4/7/26 | 79 | 10 | 73 | 17 | Type II Slurry Seal | $23,375 |
| 174 | 13709 | BAFFIN CIR | TASMAN DR | END | E | AC | 1 | 545 | 36 | 20,870 | 3/21/22 | 59 | 88 | 12 | 0 | Grind - AC Overlay | $85,567 |
| 209 | 13766 | BAYSIDE LN | SYDNEY DR | MEDFORD DR | E | AC | 1 | 274 | 36 | 11,364 | 4/27/26 | 71 | 17 | 60 | 23 | Type II Slurry Seal | $4,318 |
| 231 | 13678 | BELMAR CIR | ROYAL OAK DR | END | E | AAC | 1 | 350 | 32 | 13,000 | 5/7/24 | 81 | 0 | 100 | 0 | Type II Slurry Seal | $4,940 |
| 262 | 13813 | BLUEBIRD LN | DOVEWOOD DR | QUAIL CIR | E | AC | 1 | 260 | 36 | 9,360 | 3/21/22 | 86 | 50 | 50 | 0 | Type II Slurry Seal | $3,557 |
| 262 | 15326 | BLUEBIRD LN | QUAIL CIR | ROBINWOOD DR | E | AC | 1 | 780 | 36 | 28,080 | 3/21/22 | 75 | 63 | 37 | 0 | Type II Slurry Seal | $10,670 |
| 306 | 13674 | BRIARCLIFF DR | SPRINGDALE ST | CHATEAU LN | E | AC | 1 | 180 | 36 | 6,480 | 5/6/26 | 82 | 70 | 30 | 0 | Type II Slurry Seal | $2,462 |
| 306 | 13675 | BRIARCLIFF DR | FAIRVIEW LN | END | E | AC | 1 | 551 | 32 | 19,382 | 5/6/26 | 74 | 75 | 22 | 3 | Type II Slurry Seal | $7,365 |
| 306 | 15293 | BRIARCLIFF DR | CHATEAU LN | FAIRVIEW LN | E | AC | 1 | 780 | 36 | 28,080 | 4/8/22 | 75 | 55 | 34 | 11 | Type II Slurry Seal | $10,670 |
| 324 | 13761 | BROWN CIR | COLUMBIA LN | END | E | AC | 1 | 543 | 36 | 21,048 | 12/18/24 | 72 | 84 | 16 | 0 | Type II Slurry Seal | $7,998 |
| 340 | 13715 | BUSINESS DR | CHEMICAL LN | GRAHAM ST | E | AC | 1 | 1,170 | 40 | 46,800 | 3/21/22 | 57 | 76 | 23 | 1 | Grind - AC Overlay | $191,880 |
| 341 | 13837 | CABOT CIR | WINSLOW DR | END | E | AC | 1 | 339 | 36 | 13,454 | 1/3/25 | 43 | 64 | 13 | 23 | Grind - AC Overlay | $55,161 |
| 351 | 13665 | CALNEVA LN | CHINOOK DR | SAN SOUCI CIR | E | AC | 1 | 260 | 36 | 9,360 | 4/8/22 | 80 | 46 | 54 | 0 | Type II Slurry Seal | $3,557 |
| 351 | 15290 | CALNEVA LN | SAN SOUCI CIR | SPA DR | E | AC | 1 | 792 | 36 | 28,512 | 4/9/22 | 84 | 49 | 51 | 0 | Type II Slurry Seal | $10,835 |
| 354 | 13714 | CAMBAY LN | ALLEY MC FADDEN AVE | MC FADDEN AVE | E | AC | 1 | 159 | 36 | 5,724 | 3/21/22 | 72 | 0 | 80 | 20 | Type II Slurry Seal | $2,175 |
| 354 | 15303 | CAMBAY LN | ALLEY MC FADDEN AVE | END | E | AC | 1 | 826 | 36 | 29,736 | 3/21/22 | 64 | 80 | 20 | 0 | Grind - AC Overlay | $121,918 |
| 369 | 13804 | CANTERBURY DR | YORKSHIRE LN | END | E | AC | 1 | 440 | 36 | 17,340 | 4/7/26 | 81 | 73 | 22 | 5 | Type II Slurry Seal | $6,589 |
| 375 | 15307 | CAPETOWN LN | BOLSA AVE | KIMBERLY DR | E | AC | 1 | 819 | 36 | 29,196 | 12/26/24 | 85 | 0 | 25 | 75 | Type II Slurry Seal | $11,094 |
| 392 | 15921 | CARRIE LN | SLIGO CIR | EDINGER AVE | E | AC | 1 | 1,169 | 36 | 42,084 | 12/20/24 | 34 | 85 | 8 | 7 | Grind - AC Overlay | $172,544 |
| 396 | 14951 | CASCADE ST | NORTH CITY LIMIT | ANACAPA DR | E | AAC | 1 | 131 | 36 | 4,716 | 5/7/24 | 70 | 59 | 41 | 0 | Type II Slurry Seal | $1,792 |
| 398 | 13711 | CASPIAN CIR | ANDAMAN LN | END | E | AC | 1 | 532 | 36 | 20,402 | 3/21/22 | 75 | 83 | 15 | 2 | Type II Slurry Seal | $7,753 |
| 412 | 13680 | CHALET LN | GLENWOOD DR | ROYAL OAK DR | E | AAC | 1 | 280 | 36 | 13,080 | 5/7/24 | 81 | 0 | 97 | 3 | Type II Slurry Seal | $4,970 |
| 423 | 13670 | CHATEAU LN | ANACAPA DR | BRIARCLIFF DR | E | AAC | 1 | 785 | 36 | 29,760 | 5/7/24 | 77 | 0 | 97 | 3 | Type II Slurry Seal | $11,309 |
| 427 | 13718 | CHEMICAL LN | MC FADDEN AVE. | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 3/21/22 | 38 | 84 | 8 | 8 | Grind - AC Overlay | $183,024 |
| 427 | 13822 | CHEMICAL LN | PRODUCTION DR | SYSTEM DR | E | AC | 1 | 339 | 40 | 13,560 | 4/1/22 | 63 | 75 | 25 | 0 | Grind - AC Overlay | $55,596 |
| 427 | 15328 | CHEMICAL LN | RESEARCH DR | PRODUCTION DR | E | AC | 1 | 834 | 40 | 33,360 | 4/1/22 | 54 | 61 | 27 | 12 | Grind - AC Overlay | $136,776 |
| 436 | 15926 | CHINOOK DR | TROPICANA LN | SPRINGDALE ST | E | AC | 1 | 900 | 36 | 32,400 | 4/8/22 | 77 | 56 | 44 | 0 | Type II Slurry Seal | $12,312 |
| 446 | 15316 | CITADEL DR | COLUMBIA LN | EDWARDS ST | E | AC | 1 | 645 | 36 | 23,220 | 1/3/25 | 68 | 82 | 17 | 1 | Type II Slurry Seal | $8,824 |
| 481 | 13742 | COLUMBIA LN | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/27/26 | 81 | 0 | 63 | 37 | Type II Slurry Seal | $6,293 |
| 482 | 13825 | COMMERCE LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 54 | 86 | 10 | 4 | Grind - AC Overlay | $183,024 |
| 483 | 13716 | COMMERCIAL DR | CHEMICAL LN | GRAHAM ST | E | AAC | 1 | 1,170 | 40 | 46,800 | 5/3/24 | 85 | 43 | 50 | 7 | Type II Slurry Seal | $17,784 |
| 486 | 13826 | COMPUTER LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 58 | 86 | 14 | 0 | Grind - AC Overlay | $183,024 |
| 490 | 13724 | CONNECTOR LN | ENGINEER DR | MACHINE DR | E | AC | 1 | 1,141 | 40 | 45,640 | 4/8/26 | 69 | 76 | 24 | 0 | Type II Slurry Seal | $17,343 |
| 494 | 13717 | CONTAINER LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 4/1/22 | 69 | 66 | 34 | 0 | Type II Slurry Seal | $16,963 |
| 505 | 13731 | CORNELL DR | BOLSA PARK LN | END | E | AC | 1 | 294 | 36 | 12,084 | 4/8/26 | 77 | 25 | 28 | 47 | Type II Slurry Seal | $4,592 |
| 505 | 13759 | CORNELL DR | COLUMBIA LN | EDWARDS ST | E | AC | 1 | 645 | 36 | 22,644 | 12/18/24 | 83 | 77 | 16 | 7 | Type II Slurry Seal | $8,605 |
| 511 | 13696 | CORTEZ DR | SPRINGDALE ST | VANGUARD LN | E | AC | 1 | 370 | 36 | 14,070 | 4/28/26 | 79 | 45 | 55 | 0 | Type II Slurry Seal | $5,347 |
| 537 | 15330 | CROSS DR | GRAHAM ST | ALLEY TAFT LN | E | AC | 1 | 548 | 36 | 19,728 | 1/7/25 | 45 | 78 | 22 | 0 | Grind - AC Overlay | $80,885 |
| 539 | 15291 | CROUPIER CIR | CALNEVA LN | SPRINGDALE ST | E | AC | 1 | 640 | 36 | 24,290 | 4/13/26 | 81 | 46 | 54 | 0 | Type II Slurry Seal | $9,230 |
| 558 | 14402 | DAN LN | BOLSA AVE | BUCKINGHAM DR | E | AC | 1 | 314 | 40 | 12,560 | 4/7/26 | 46 | 63 | 30 | 7 | Grind - AC Overlay | $51,496 |
| 562 | 13672 | DANES CIR | BRIARCLIFF DR | END | E | AC | 1 | 504 | 36 | 19,394 | 5/6/26 | 86 | 34 | 66 | 0 | Type II Slurry Seal | $7,370 |
| 605 | 14467 | DOLLAR DR | SPA DR | NEVADA DR | E | AC | 1 | 434 | 36 | 15,624 | 4/13/26 | 76 | 0 | 91 | 9 | Type II Slurry Seal | $5,937 |
| 619 | 13809 | DOVEWOOD DR | BOLSA CHICA ST | PELICAN LN | E | AC | 1 | 520 | 36 | 18,720 | 3/21/22 | 68 | 63 | 37 | 0 | Type II Slurry Seal | $7,114 |
| 619 | 15325 | DOVEWOOD DR | PELICAN LN | HUMMINGBIRD LN | E | AC | 1 | 670 | 36 | 24,370 | 3/21/22 | 74 | 55 | 45 | 0 | Type II Slurry Seal | $9,261 |
| 620 | 13855 | DOWN DR | TOWAY LN | EDWARDS ST | E | AC | 1 | 531 | 36 | 19,366 | 12/20/24 | 31 | 95 | 5 | 0 | Grind - AC Overlay | $79,401 |
| 623 | 13740 | DRAKE LN | BOLSA AVE | ALEXANDRIA DR | E | AC | 1 | 570 | 36 | 21,270 | 4/27/26 | 76 | 36 | 48 | 16 | Type II Slurry Seal | $8,083 |
| 635 | 13764 | DUKE CIR | CITADEL DR | END | E | AC | 1 | 410 | 36 | 16,560 | 1/3/25 | 75 | 79 | 14 | 7 | Type II Slurry Seal | $6,293 |
| 639 | 13730 | DUNDEE DR | NORTH END | BOLSA PARK LN | E | AC | 1 | 294 | 36 | 12,084 | 4/8/26 | 84 | 0 | 92 | 8 | Type II Slurry Seal | $4,592 |
| 639 | 13735 | DUNDEE DR | BOLSA PARK LN | SOUTH END | E | AC | 1 | 485 | 36 | 18,960 | 4/8/26 | 80 | 0 | 100 | 0 | Type II Slurry Seal | $7,205 |
| 640 | 13663 | DUNES LN | HACIENDA DR | CHINOOK DR | E | AC | 1 | 260 | 36 | 9,360 | 4/8/22 | 83 | 46 | 33 | 21 | Type II Slurry Seal | $3,557 |
| 641 | 13852 | DUNN DR | TOWAY LN | EDWARDS ST | E | AC | 1 | 531 | 36 | 19,116 | 12/20/24 | 38 | 94 | 6 | 0 | Grind - AC Overlay | $78,376 |
| 651 | 13676 | EDGEVIEW LN | GLENWOOD DR | HARDWICK CIR | E | AC | 1 | 260 | 36 | 9,360 | 4/28/26 | 80 | 31 | 69 | 0 | Type II Slurry Seal | $3,557 |
| 651 | 13681 | EDGEVIEW LN | KELSEY CIR | LARCHWOOD DR | E | AC | 1 | 260 | 36 | 9,360 | 4/28/26 | 72 | 67 | 33 | 0 | Type II Slurry Seal | $3,557 |
| 651 | 15295 | EDGEVIEW LN | HARDWICK CIR | KELSEY CIR | E | AC | 1 | 780 | 36 | 28,080 | 4/28/26 | 68 | 48 | 52 | 0 | Type II Slurry Seal | $10,670 |
| 671 | 13721 | ELECTRONIC LN | MACHINE DR | MC FADDEN AVE | E | AC | 1 | 817 | 40 | 32,680 | 4/8/26 | 68 | 86 | 14 | 0 | Type II Slurry Seal | $12,418 |
| 680 | 13673 | ELMHURST CIR | BRIARCLIFF DR | END | E | AC | 1 | 505 | 36 | 19,930 | 5/6/26 | 80 | 21 | 79 | 0 | Type II Slurry Seal | $7,573 |
| 690 | 13719 | ENGINEER DR | GRAHAM ST | PIPELINE LN | E | AC | 1 | 1,347 | 40 | 53,560 | 4/8/26 | 74 | 63 | 30 | 7 | Type II Slurry Seal | $20,353 |
| 690 | 15922 | ENGINEER DR | PIPELINE LN | SPRINGDALE ST | E | AC | 1 | 1,206 | 40 | 47,760 | 4/8/26 | 86 | 16 | 29 | 55 | Type II Slurry Seal | $18,149 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 702 | 13778 | ETON CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 12/26/24 | 86 | 79 | 21 | 0 | Type II Slurry Seal | $6,179 |
| 713 | 13671 | FAIRVIEW LN | ANACAPA DR | BRIARCLIFF DR | E | AAC | 1 | 786 | 36 | 30,046 | 5/7/24 | 71 | 39 | 61 | 0 | Type II Slurry Seal | $11,417 |
| 733 | 13749 | FIELDSTON LN | TYNDALL DR | SHELLY DR | E | AC | 1 | 274 | 36 | 11,364 | 4/27/26 | 81 | 13 | 83 | 4 | Type II Slurry Seal | $4,318 |
| 749 | 13811 | FLAMINGO CIR | BLUEBIRD LN | END | E | AC | 1 | 530 | 36 | 20,330 | 3/21/22 | 54 | 92 | 8 | 0 | Grind - AC Overlay | $83,353 |
| 786 | 13667 | FRONTIER CIR | CALNEVA LN | END | E | AAC | 1 | 530 | 36 | 19,080 | 5/8/24 | 68 | 48 | 52 | 0 | Type II Slurry Seal | $7,250 |
| 795 | 13710 | GALWAY CIR | ANDAMAN LN | END | E | AC | 1 | 530 | 36 | 20,330 | 3/21/22 | 66 | 91 | 7 | 2 | Grind - AC Overlay | $83,353 |
| 807 | 13779 | GENOA CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 4/8/26 | 81 | 0 | 54 | 46 | Type II Slurry Seal | $6,179 |
| 832 | 13679 | GLENWOOD DR | SHINKLE CIR | CHALET LN | E | AAC | 1 | 258 | 36 | 10,788 | 5/7/24 | 80 | 0 | 100 | 0 | Type II Slurry Seal | $4,099 |
| 832 | 15294 | GLENWOOD DR | SPRINGDALE ST | SHINKLE CIR | E | AAC | 1 | 899 | 36 | 32,364 | 5/7/24 | 72 | 45 | 54 | 1 | Type II Slurry Seal | $12,298 |
| 751 | 14462 | GRAHAM ST | RANCHO RD | HAROLD PL | E | AAC | 1 | 394 | 18 | 9,092 | 5/8/24 | 76 | 36 | 37 | 27 | Type II Slurry Seal | $3,455 |
| 751 | 665 | GRAHAM ST | SLATER AVE | END | E | AC | 0 | 1,638 | 30 | 49,140 | 3/31/26 | 85 | 67 | 33 | 0 | Type II Slurry Seal | $18,673 |
| 871 | 13662 | HACIENDA DR | DUNES LN | END | E | AAC | 1 | 290 | 36 | 11,690 | 5/8/24 | 67 | 43 | 57 | 0 | Type II Slurry Seal | $4,442 |
| 871 | 14975 | HACIENDA DR | DUNES LN | SANDS DR | E | AAC | 1 | 1,230 | 36 | 44,280 | 5/8/24 | 80 | 41 | 57 | 2 | Type II Slurry Seal | $16,826 |
| 877 | 15323 | HALIFAX DR | VICTORIA LN | FLINTRIDGE LN | E | AC | 1 | 505 | 36 | 18,930 | 4/8/26 | 84 | 0 | 100 | 0 | Type II Slurry Seal | $7,193 |
| 881 | 15287 | HAMMON LN | HAROLD PL | SANDS DR | E | AC | 1 | 690 | 36 | 24,840 | 4/7/26 | 46 | 57 | 30 | 13 | Grind - AC Overlay | $101,844 |
| 884 | 13784 | HANOVER LN | MELBOURNE DR | MC FADDEN AVE | E | AC | 1 | 512 | 36 | 18,144 | 5/8/26 | 80 | 39 | 61 | 0 | Type II Slurry Seal | $6,895 |
| 884 | 15317 | HANOVER LN | PARIS CIR | HALIFAX DR | E | AC | 1 | 780 | 36 | 27,792 | 5/8/26 | 76 | 10 | 81 | 9 | Type II Slurry Seal | $10,561 |
| 894 | 13682 | HARDWICK CIR | EDGEVIEW LN | END | E | AAC | 1 | 530 | 36 | 20,830 | 5/7/24 | 71 | 25 | 75 | 0 | Type II Slurry Seal | $7,915 |
| 896 | 13693 | HARMONY CIR | SUNNYCREST LN | END | E | AAC | 1 | 352 | 32 | 13,064 | 5/7/24 | 79 | 0 | 100 | 0 | Type II Slurry Seal | $4,964 |
| 897 | 14464 | HAROLD PL | GRAHAM ST | HAMMON LN | E | AC | 1 | 1,322 | 36 | 47,592 | 4/7/26 | 75 | 28 | 72 | 0 | Type II Slurry Seal | $18,085 |
| 954 | 13851 | HOOKER DR | WILLETT LN | STANDISH LN | E | AC | 1 | 780 | 36 | 28,080 | 12/27/24 | 62 | 62 | 29 | 9 | Grind - AC Overlay | $115,128 |
| 964 | 13857 | HUGHES DR | CARRIE LN | EDWARDS ST | E | AC | 1 | 531 | 36 | 19,116 | 12/19/24 | 81 | 54 | 46 | 0 | Type II Slurry Seal | $7,264 |
| 967 | 13817 | HUMMINGBIRD LN | DOVEWOOD DR | ROBINWOOD DR | E | AC | 1 | 1,040 | 36 | 37,440 | 3/21/22 | 84 | 0 | 95 | 5 | Type II Slurry Seal | $14,227 |
| 967 | 15327 | HUMMINGBIRD LN | ROBINWOOD DR | SKYLARK DR | E | AC | 1 | 520 | 36 | 18,970 | 3/21/22 | 84 | 0 | 100 | 0 | Type II Slurry Seal | $7,209 |
| 979 | 13821 | INDUSTRIAL DR | CHEMICAL LN | GRAHAM ST | E | AAC | 1 | 1,170 | 40 | 46,800 | 5/3/24 | 81 | 43 | 55 | 2 | Type II Slurry Seal | $17,784 |
| 980 | 13820 | INDUSTRY LN | MC FADDEN AVE | RESEARCH DR | E | AAC | 1 | 1,116 | 40 | 44,640 | 5/3/24 | 81 | 42 | 54 | 4 | Type II Slurry Seal | $16,963 |
| 997 | 13683 | IVORY CIR | EDGEVIEW LN | END | E | AC | 1 | 530 | 36 | 20,830 | 5/6/26 | 74 | 84 | 16 | 0 | Type II Slurry Seal | $7,915 |
| 1054 | 13685 | KELSEY CIR | EDGEVIEW LN | END | E | AAC | 1 | 530 | 36 | 20,830 | 5/7/24 | 72 | 9 | 91 | 0 | Type II Slurry Seal | $7,915 |
| 1069 | 15308 | KIMBERLY DR | CAPETOWN LN | END | E | AC | 1 | 794 | 36 | 30,384 | 12/26/24 | 82 | 78 | 22 | 0 | Type II Slurry Seal | $11,546 |
| 1124 | 13694 | LARCHWOOD DR | SUNNYCREST LN | END | E | AC | 1 | 352 | 36 | 14,472 | 4/8/26 | 76 | 0 | 100 | 0 | Type II Slurry Seal | $5,499 |
| 1124 | 13695 | LARCHWOOD DR | NORTHRIDGE LN | SUNNYCREST LN | E | AC | 1 | 1,280 | 36 | 45,792 | 4/8/26 | 76 | 16 | 84 | 0 | Type II Slurry Seal | $17,401 |
| 1124 | 15298 | LARCHWOOD DR | SPRINGDALE ST | NORTHRIDGE LN | E | AC | 1 | 915 | 36 | 32,652 | 4/8/26 | 77 | 28 | 72 | 0 | Type II Slurry Seal | $12,408 |
| 1131 | 13691 | LARKSPUR CIR | SUNNYCREST LN | END | E | AAC | 1 | 352 | 32 | 13,064 | 5/7/24 | 81 | 0 | 100 | 0 | Type II Slurry Seal | $4,964 |
| 1216 | 15923 | MACHINE DR | PIPELINE LN | SPRINGDALE ST | E | AC | 1 | 1,254 | 40 | 50,160 | 4/8/26 | 76 | 59 | 5 | 36 | Type II Slurry Seal | $19,061 |
| 1242 | 13823 | MANUFACTURE LN | PRODUCTION DR | SYSTEM DR | E | AC | 1 | 339 | 40 | 13,810 | 4/1/22 | 79 | 44 | 53 | 3 | Type II Slurry Seal | $5,248 |
| 1243 | 15301 | MAR VISTA DR | SUNNYCREST LN | EDWARDS ST | E | AAC | 1 | 452 | 36 | 16,272 | 5/7/24 | 59 | 56 | 44 | 0 | Grind - AC Overlay | $66,715 |
| 1243 | 15925 | MAR VISTA DR | NORTHRIDGE LN | SUNNYCREST LN | E | AC | 1 | 1,300 | 36 | 46,800 | 5/8/26 | 49 | 62 | 36 | 2 | Grind - AC Overlay | $191,880 |
| 1274 | 15337 | MAYFLOWER LN | MC FADDEN AVE | PRISCILLA DR | E | AC | 1 | 961 | 36 | 34,846 | 12/20/24 | 35 | 81 | 4 | 15 | Grind - AC Overlay | $142,869 |
| 1185 | 14469 | MC FADDEN AVE | BOLSA CHICA ST | PELICAN LN | E | AC | 1 | 520 | 60 | 31,200 | 3/21/22 | 62 | 87 | 13 | 0 | Grind - AC Overlay | $127,920 |
| 1185 | 14470 | MC FADDEN AVE | INDUSTRY LN | GRAHAM ST | E | AC | 1 | 256 | 44 | 11,264 | 3/21/22 | 82 | 42 | 31 | 27 | Type II Slurry Seal | $4,280 |
| 1185 | 15591 | MC FADDEN AVE | PELICAN LN | CHEMICAL LN | E | AC | 1 | 1,028 | 60 | 61,030 | 3/21/22 | 47 | 80 | 12 | 8 | Grind - AC Overlay | $250,223 |
| 1185 | 15592 | MC FADDEN AVE | CHEMICAL LN | INDUSTRY LN | E | AC | 1 | 914 | 44 | 40,216 | 3/21/22 | 53 | 83 | 6 | 11 | Grind - AC Overlay | $164,886 |
| 1287 | 15315 | MEDFORD DR | HOLIDAY LN | END | E | AC | 1 | 540 | 36 | 20,940 | 12/18/24 | 86 | 77 | 23 | 0 | Type II Slurry Seal | $7,957 |
| 1291 | 15928 | MELBOURNE DR | HANOVER LN | VICTORIA LN | E | AC | 1 | 780 | 36 | 28,080 | 4/8/26 | 82 | 47 | 49 | 4 | Type II Slurry Seal | $10,670 |
| 1386 | 13785 | NEWCASTLE LN | OXFORD DR | HALIFAX DR | E | AC | 1 | 1,040 | 36 | 37,152 | 4/8/26 | 81 | 50 | 38 | 12 | Type II Slurry Seal | $14,118 |
| 1398 | 15838 | NICHOLS ST | BELSITO DR | WARNER AVE | E | AC | 0 | 670 | 44 | 29,480 | 5/8/24 | 82 | 0 | 100 | 0 | Type II Slurry Seal | $11,202 |
| 1398 | 15839 | NICHOLS ST | WAGON DR | BELSITO DR | E | AC | 0 | 1,645 | 44 | 72,380 | 5/8/24 | 84 | 35 | 63 | 2 | Type II Slurry Seal | $27,504 |
| 1417 | 15300 | NORTHRIDGE LN | LARCHWOOD DR | END | E | AAC | 1 | 742 | 36 | 28,712 | 5/7/24 | 57 | 55 | 45 | 0 | Grind - AC Overlay | $117,719 |
| 1420 | 13792 | NORWICH CIR | MELBOURNE DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/8/26 | 86 | 0 | 82 | 18 | Type II Slurry Seal | $6,293 |
| 1422 | 13669 | NUGGET CIR | SAHARA LN | END | E | AC | 1 | 270 | 36 | 11,220 | 4/13/26 | 83 | 0 | 100 | 0 | Type II Slurry Seal | $4,264 |
| 1430 | 13699 | OAKTREE CIR | MAR VISTA DR | END | E | AC | 1 | 480 | 36 | 19,080 | 4/8/26 | 68 | 33 | 67 | 0 | Type II Slurry Seal | $7,250 |
| 1437 | 13706 | OCEANUS DR | TRITON LN | GRAHAM ST | E | AC | 1 | 2,027 | 40 | 81,080 | 3/21/22 | 66 | 76 | 24 | 0 | Grind - AC Overlay | $332,428 |
| 1457 | 13815 | ORIOLE LN | ROBINWOOD DR | SPARROW DR | E | AC | 1 | 260 | 36 | 9,360 | 3/21/22 | 75 | 72 | 28 | 0 | Type II Slurry Seal | $3,557 |
| 1457 | 13819 | ORIOLE LN | SPARROW DR | SKYLARK DR | E | AC | 1 | 260 | 36 | 9,610 | 3/21/22 | 71 | 48 | 51 | 1 | Type II Slurry Seal | $3,652 |
| 1466 | 15930 | OXFORD DR | HANOVER LN | VICTORIA LN | E | AC | 1 | 781 | 36 | 28,116 | 12/12/24 | 85 | 76 | 24 | 0 | Type II Slurry Seal | $10,684 |
| 1486 | 13770 | PARIS CIR | HANOVER LN | END | E | AC | 1 | 433 | 36 | 17,388 | 12/18/24 | 79 | 86 | 14 | 0 | Type II Slurry Seal | $6,607 |
| 1494 | 13807 | PARTRIDGE CIR | PELICAN LN | END | E | AAC | 1 | 380 | 36 | 14,930 | 5/9/24 | 86 | 0 | 100 | 0 | Type II Slurry Seal | $5,673 |
| 1508 | 13806 | PELICAN LN | MC FADDEN AVE | ALLEY MC FADDEN AVE | E | AC | 1 | 161 | 36 | 5,796 | 3/21/22 | 35 | 84 | 10 | 6 | Grind - AC Overlay | $23,764 |
| 1508 | 15324 | PELICAN LN | ALLEY MC FADDEN AVE | DOVEWOOD DR | E | AC | 1 | 660 | 36 | 23,760 | 3/21/22 | 66 | 75 | 25 | 0 | Grind - AC Overlay | $97,416 |
| 1511 | 13700 | PENFIELD CIR | MAR VISTA DR | END | E | AC | 1 | 480 | 36 | 19,080 | 4/8/26 | 82 | 27 | 73 | 0 | Type II Slurry Seal | $7,250 |
| 1518 | 13808 | PHEASANT CIR | PELICAN LN | END | E | AAC | 1 | 380 | 36 | 14,930 | 5/9/24 | 71 | 56 | 44 | 0 | Type II Slurry Seal | $5,673 |
| 1533 | 13723 | PIPELINE LN | ENGINEER DR | MACHINE DR | E | AC | 1 | 1,141 | 40 | 45,320 | 4/8/26 | 61 | 49 | 19 | 32 | Grind - AC Overlay | $185,812 |
| 1542 | 13836 | PLYMOUTH LN | ROYALIST DR | EDINGER AVE | E | AC | 1 | 640 | 36 | 23,040 | 1/3/25 | 45 | 76 | 16 | 8 | Grind - AC Overlay | $94,464 |
| 1542 | 13844 | PLYMOUTH LN | ALBION DR | PRISCILLA DR | E | AC | 1 | 260 | 36 | 9,360 | 12/20/24 | 60 | 77 | 23 | 0 | Grind - AC Overlay | $38,376 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1542 | 13846 | PLYMOUTH LN | PRISCILLA DR | ROYALIST DR | E | AC | 1 | 1,040 | 36 | 37,440 | 1/3/25 | 48 | 74 | 17 | 9 | Grind - AC Overlay | $153,504 |
| 1562 | 13838 | PRATT CIR | WINSLOW DR | END | E | AC | 1 | 339 | 36 | 13,454 | 1/3/25 | 41 | 79 | 21 | 0 | Grind - AC Overlay | $55,161 |
| 1572 | 13832 | PRISCILLA DR | SPRINGDALE ST | AULNAY LN | E | AC | 1 | 551 | 36 | 19,836 | 12/27/24 | 56 | 75 | 25 | 0 | Grind - AC Overlay | $81,328 |
| 1572 | 13845 | PRISCILLA DR | AULNAY LN | PLYMOUTH LN | E | AC | 1 | 261 | 36 | 9,396 | 1/3/25 | 64 | 65 | 34 | 1 | Grind - AC Overlay | $38,524 |
| 1572 | 15338 | PRISCILLA DR | PLYMOUTH LN | MAYFLOWER LN | E | AC | 1 | 1,040 | 36 | 37,690 | 12/27/24 | 37 | 81 | 13 | 6 | Grind - AC Overlay | $154,529 |
| 1575 | 13827 | PRODUCER LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 35 | 83 | 6 | 11 | Grind - AC Overlay | $183,024 |
| 1576 | 13722 | PRODUCT LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 57 | 80 | 10 | 10 | Grind - AC Overlay | $183,024 |
| 1577 | 15329 | PRODUCTION DR | CHEMICAL LN | GRAHAM ST | E | AC | 1 | 1,170 | 40 | 46,320 | 4/1/22 | 64 | 61 | 37 | 2 | Grind - AC Overlay | $189,912 |
| 1583 | 13850 | PURITAN CIR | ROYALIST DR | END | E | AC | 1 | 530 | 36 | 20,330 | 12/20/24 | 56 | 64 | 36 | 0 | Grind - AC Overlay | $83,353 |
| 1585 | 13810 | QUAIL CIR | BLUEBIRD LN | END | E | AAC | 1 | 530 | 36 | 20,330 | 5/9/24 | 72 | 72 | 28 | 0 | Type II Slurry Seal | $7,725 |
| 1595 | 13701 | QUILL CIR | MAR VISTA DR | END | E | AAC | 1 | 480 | 36 | 19,080 | 5/7/24 | 71 | 22 | 78 | 0 | Type II Slurry Seal | $7,250 |
| 1626 | 13828 | RENO CIR | TAFT LN | END | E | AC | 1 | 127 | 52 | 6,604 | 1/7/25 | 65 | 51 | 42 | 7 | Grind - AC Overlay | $27,076 |
| 1629 | 15331 | RESEARCH DR | GRAHAM ST | COMPUTER LN | E | AC | 1 | 925 | 40 | 37,000 | 1/7/25 | 65 | 85 | 15 | 0 | Grind - AC Overlay | $151,700 |
| 1629 | 15332 | RESEARCH DR | COMPUTER LN | PRODUCER LN | E | AC | 1 | 1,097 | 40 | 43,880 | 1/7/25 | 60 | 83 | 10 | 7 | Grind - AC Overlay | $179,908 |
| 1629 | 15933 | RESEARCH DR | CHEMICAL LN | GRAHAM ST | E | AC | 1 | 1,170 | 40 | 46,800 | 3/21/22 | 47 | 79 | 17 | 4 | Grind - AC Overlay | $191,880 |
| 1639 | 13743 | RICE CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/9/26 | 72 | 0 | 59 | 41 | Type II Slurry Seal | $6,293 |
| 1642 | 13702 | RIDGEVIEW CIR | MAR VISTA DR | END | E | AAC | 1 | 480 | 36 | 19,280 | 5/7/24 | 73 | 23 | 77 | 0 | Type II Slurry Seal | $7,326 |
| 1647 | 14974 | RIVIERA DR | STARDUST DR | HAMMON LN | E | AAC | 1 | 1,028 | 36 | 37,008 | 5/8/24 | 72 | 70 | 30 | 0 | Type II Slurry Seal | $14,063 |
| 1652 | 15932 | ROBINWOOD DR | BOLSA CHICA ST | HUMMINGBIRD LN | E | AC | 1 | 1,190 | 36 | 42,840 | 3/21/22 | 63 | 63 | 36 | 1 | Grind - AC Overlay | $175,644 |
| 1679 | 15296 | ROYAL OAK DR | SUNNYCREST LN | EDWARDS ST | E | AC | 1 | 452 | 36 | 15,984 | 4/29/26 | 82 | 71 | 29 | 0 | Type II Slurry Seal | $6,074 |
| 1679 | 15924 | ROYAL OAK DR | CHALET LN | SUNNYCREST LN | E | AAC | 1 | 1,041 | 36 | 38,976 | 5/7/24 | 78 | 34 | 66 | 0 | Type II Slurry Seal | $14,811 |
| 1680 | 13847 | ROYALIST DR | PLYMOUTH LN | WILLETT LN | E | AC | 1 | 260 | 36 | 9,360 | 12/27/24 | 48 | 62 | 11 | 27 | Grind - AC Overlay | $38,376 |
| 1680 | 15336 | ROYALIST DR | SPRINGDALE ST | PLYMOUTH LN | E | AC | 1 | 811 | 36 | 29,196 | 12/27/24 | 37 | 79 | 5 | 16 | Grind - AC Overlay | $119,704 |
| 1680 | 16009 | ROYALIST DR | WILLET LN | STANDISH LN | E | AC | 1 | 780 | 36 | 28,080 | 12/27/24 | 45 | 83 | 13 | 4 | Grind - AC Overlay | $115,128 |
| 1688 | 13760 | RUTGERS CIR | COLUMBIA LN | END | E | AC | 1 | 543 | 36 | 21,048 | 12/18/24 | 86 | 67 | 25 | 8 | Type II Slurry Seal | $7,998 |
| 1693 | 15299 | SABRE LN | BOLSA AVE | END | E | AC | 1 | 613 | 36 | 24,068 | 4/28/26 | 75 | 35 | 65 | 0 | Type II Slurry Seal | $9,146 |
| 1697 | 13668 | SAHARA LN | CROUPIER CIR | NUGGET CIR | E | AC | 1 | 260 | 36 | 10,860 | 4/13/26 | 80 | 16 | 79 | 5 | Type II Slurry Seal | $4,127 |
| 1705 | 13793 | SALISBURY LN | MELBOURNE DR | MC FADDEN AVE | E | AC | 1 | 512 | 36 | 18,144 | 12/12/24 | 77 | 78 | 17 | 5 | Type II Slurry Seal | $6,895 |
| 1718 | 13666 | SAN SOUCI CIR | CALNEVA LN | END | E | AAC | 1 | 530 | 36 | 19,080 | 5/8/24 | 72 | 20 | 80 | 0 | Type II Slurry Seal | $7,250 |
| 1726 | 15289 | SANDS LN | HAMMON LN | TROPICANA LN | E | AAC | 1 | 520 | 36 | 18,720 | 5/8/24 | 79 | 47 | 53 | 0 | Type II Slurry Seal | $7,114 |
| 1781 | 13780 | SEVILLA CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 4/8/26 | 78 | 34 | 25 | 41 | Type II Slurry Seal | $6,179 |
| 1794 | 13739 | SHELLY DR | BOLSA PARK LN | END | E | AC | 1 | 294 | 36 | 12,384 | 4/27/26 | 79 | 30 | 70 | 0 | Type II Slurry Seal | $4,706 |
| 1794 | 13748 | SHELLY DR | FIELDSTON LN | BOLSA PARK LN | E | AC | 1 | 769 | 36 | 28,184 | 4/27/26 | 76 | 0 | 93 | 7 | Type II Slurry Seal | $10,710 |
| 1801 | 13698 | SHERMAN DR | VANGUARD LN | SABRE LN | E | AC | 1 | 267 | 36 | 10,612 | 4/28/26 | 80 | 36 | 64 | 0 | Type II Slurry Seal | $4,033 |
| 1804 | 13677 | SHINKLE CIR | GLENWOOD DR | END | E | AAC | 1 | 350 | 32 | 12,950 | 5/7/24 | 77 | 0 | 100 | 0 | Type II Slurry Seal | $4,921 |
| 1831 | 14531 | SKYLAB RD | ABLE LN | SPRINGDALE ST | E | AC | 1 | 1,325 | 60 | 79,500 | 4/9/26 | 72 | 82 | 18 | 0 | Type II Slurry Seal | $30,210 |
| 1831 | 14532 | SKYLAB RD | DELTA LN | ABLE LN | E | AC | 1 | 1,631 | 60 | 97,860 | 4/9/26 | 84 | 75 | 19 | 6 | Type II Slurry Seal | $37,187 |
| 1833 | 13818 | SKYLARK DR | ORIOLE LN | HUMMINGBIRD LN | E | AC | 1 | 980 | 36 | 35,780 | 3/21/22 | 76 | 41 | 59 | 0 | Type II Slurry Seal | $13,596 |
| 1836 | 13856 | SLIGO CIR | CARRIE LN | END | E | AC | 1 | 419 | 36 | 16,334 | 12/20/24 | 34 | 87 | 13 | 0 | Grind - AC Overlay | $66,969 |
| 1851 | 13659 | SPA DR | DOLLAR DR | HAMMON LN | E | AC | 1 | 1,391 | 36 | 50,076 | 4/13/26 | 76 | 46 | 54 | 0 | Type II Slurry Seal | $19,029 |
| 1851 | 13661 | SPA DR | HAMMON LN | CALNEVA LN | E | AC | 1 | 780 | 36 | 28,080 | 4/13/26 | 68 | 57 | 43 | 0 | Type II Slurry Seal | $10,670 |
| 1851 | 15286 | SPA DR | HAROLD PL | DOLLAR DR | E | AC | 1 | 776 | 36 | 27,936 | 4/8/22 | 79 | 0 | 100 | 0 | Type II Slurry Seal | $10,616 |
| 1854 | 13816 | SPARROW DR | ORIOLE LN | HUMMINGBIRD LN | E | AC | 1 | 980 | 36 | 35,280 | 3/21/22 | 53 | 81 | 14 | 5 | Grind - AC Overlay | $144,648 |
| 1875 | 15340 | STANDISH LN | HOOKER DR | EDINGER AVE | E | AC | 1 | 900 | 36 | 32,400 | 12/20/24 | 78 | 57 | 43 | 0 | Type II Slurry Seal | $12,312 |
| 1877 | 13750 | STANFORD LN | CORNELL DR | CITADEL DR | E | AC | 1 | 780 | 36 | 27,792 | 12/18/24 | 84 | 78 | 22 | 0 | Type II Slurry Seal | $10,561 |
| 1880 | 14465 | STARDUST DR | SPA DR | NEVEDA DR | E | AC | 1 | 808 | 36 | 29,088 | 4/8/22 | 84 | 0 | 100 | 0 | Type II Slurry Seal | $11,053 |
| 1880 | 15590 | STARDUST DR | NEVADA DR | HAMMON LN | E | AC | 1 | 790 | 36 | 28,440 | 4/9/22 | 83 | 43 | 57 | 0 | Type II Slurry Seal | $10,807 |
| 1923 | 13690 | SUNNYCREST LN | ROYAL OAK DR | LARKSPUR CIR | E | AC | 1 | 258 | 36 | 9,288 | 4/8/26 | 76 | 40 | 60 | 0 | Type II Slurry Seal | $3,529 |
| 1923 | 13703 | SUNNYCREST LN | LARCHWOOD DR | MAR VISTA DR | E | AC | 1 | 259 | 36 | 9,324 | 4/8/26 | 84 | 44 | 56 | 0 | Type II Slurry Seal | $3,543 |
| 1923 | 13704 | SUNNYCREST LN | MAR VISTA DR | END | E | AC | 1 | 481 | 36 | 19,316 | 4/8/26 | 78 | 56 | 44 | 0 | Type II Slurry Seal | $7,340 |
| 1923 | 15297 | SUNNYCREST LN | LARKSPUR CIR | LARCHWOOD DR | E | AC | 1 | 770 | 36 | 27,720 | 4/8/26 | 71 | 25 | 72 | 3 | Type II Slurry Seal | $10,534 |
| 1941 | 13814 | SWAN LN | DOVEWOOD DR | ROBINWOOD DR | E | AC | 1 | 1,040 | 36 | 37,440 | 3/21/22 | 60 | 69 | 31 | 0 | Grind - AC Overlay | $153,504 |
| 1945 | 13755 | SYDNEY DR | BOLSA PARK LN | END | E | AAC | 1 | 294 | 36 | 12,084 | 4/27/26 | 85 | 0 | 72 | 28 | Type II Slurry Seal | $4,592 |
| 1947 | 13824 | SYSTEM DR | CHEMICAL LN | MANUFACTURE LN | E | AC | 1 | 614 | 40 | 25,060 | 4/1/22 | 65 | 61 | 39 | 0 | Grind - AC Overlay | $102,746 |
| 1948 | 15333 | TAFT LN | RENO CIR | CROSS DR | E | AAC | 1 | 284 | 36 | 12,024 | 1/7/25 | 56 | 63 | 37 | 0 | Grind - AC Overlay | $49,298 |
| 1956 | 14466 | TANGIERS DR | SPA DR | NEVEDA DR | E | AC | 1 | 621 | 36 | 22,356 | 4/13/26 | 67 | 30 | 47 | 23 | Type II Slurry Seal | $8,495 |
| 1958 | 13708 | TASMAN DR | BAFFIN CIR | CAMBAY LN | E | AC | 1 | 260 | 36 | 9,360 | 3/21/22 | 75 | 63 | 26 | 11 | Type II Slurry Seal | $3,557 |
| 1958 | 15302 | TASMAN DR | BOLSA CHICA ST | BAFFIN CIR | E | AC | 1 | 930 | 36 | 33,480 | 3/21/22 | 68 | 66 | 27 | 7 | Type II Slurry Seal | $12,722 |
| 1975 | 13660 | THUNDERBIRD CIR | STARDUST DR | END | E | AAC | 1 | 310 | 36 | 12,410 | 5/8/24 | 72 | 44 | 56 | 0 | Type II Slurry Seal | $4,716 |
| 2015 | 13707 | TRITON LN | OCEANUS DR | ARGOSY AVE | E | AC | 1 | 563 | 40 | 22,520 | 4/8/22 | 69 | 84 | 16 | 0 | Type II Slurry Seal | $8,558 |
| 2016 | 13705 | TROJAN CIR | MAR VISTA DR | END | E | AAC | 1 | 481 | 36 | 19,116 | 5/7/24 | 69 | 28 | 68 | 4 | Type II Slurry Seal | $7,264 |
| 2019 | 13664 | TROPICANA LN | CHINOOK DR | SANDS DR | E | AC | 1 | 275 | 36 | 13,900 | 4/13/26 | 79 | 50 | 50 | 0 | Type II Slurry Seal | $5,282 |
| 2039 | 13854 | TYRONE CIR | TOWAY LN | END | E | AC | 1 | 419 | 36 | 16,334 | 1/3/25 | 31 | 91 | 4 | 5 | Grind - AC Overlay | $66,969 |
| 2054 | 13829 | VANE CIR | AULNAY LN | END | E | AC | 1 | 397 | 36 | 15,542 | 1/3/25 | 47 | 82 | 18 | 0 | Grind - AC Overlay | $63,722 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Maint. / Rehab Recommendations | Total $ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2055 | 13697 | VANGUARD LN | CORTEZ DR | SHEMAN DR | E | AC | 1 | 272 | 36 | 12,292 | 4/28/26 | 80 | 52 | 48 | 0 | Type II Slurry Seal | $4,671 |
| 2080 | 13791 | VICTORIA LN | MELBOURNE DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/8/26 | 71 | 33 | 67 | 0 | Type II Slurry Seal | $6,293 |
| 2085 | 13692 | VIKING CIR | SUNNYCREST LN | END | E | AAC | 1 | 352 | 32 | 13,064 | 5/7/24 | 76 | 0 | 100 | 0 | Type II Slurry Seal | $4,964 |
| 2166 | 14953 | WILLOW LN | CHINOOK AVE | END | E | AC | 1 | 397 | 36 | 14,292 | 4/8/22 | 82 | 26 | 74 | 0 | Type II Slurry Seal | $5,431 |
| 2175 | 13830 | WINSLOW DR | AULNAY LN | END | E | AC | 1 | 397 | 36 | 15,542 | 1/3/25 | 38 | 93 | 7 | 0 | Grind - AC Overlay | $63,722 |
| 2197 | 13797 | YORKSHIRE LN | OXFORD DR | CANTERBURY DR | E | AC | 1 | 276 | 36 | 9,936 | 1/6/25 | 76 | 56 | 44 | 0 | Type II Slurry Seal | $3,776 |
| 2197 | 13798 | YORKSHIRE LN | CANTERBURY DR | CUMBERLAND DR | E | AC | 1 | 276 | 36 | 9,936 | 1/6/25 | 79 | 26 | 38 | 36 | Type II Slurry Seal | $3,776 |
| 2199 | 13689 | YUCCA CIR | ROYAL OAK DR | END | E | AC | 1 | 334 | 32 | 12,488 | 4/29/26 | 73 | 66 | 34 | 0 | Type II Slurry Seal | $4,745 |
| 2203 | 13687 | ZANE CIR | ROYAL OAK DR | END | E | AC | 1 | 350 | 32 | 13,200 | 5/6/26 | 86 | 37 | 63 | 0 | Type II Slurry Seal | $5,016 |
| | | | | | | | | | | | | | | | | | **$8,252,652** |

# XII. APPENDIX B – COMPLETE STREET LISTING CURRENT CONDITIONS

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | ***Arterials / Collector (MPAH)*** | | | | | | | | | | | | | | | |
| 9 | 13120 | ADAMS AVE | DERBYSHIRE LN | BUSHARD ST | A | AC | ~ | 818 | 40 | 32,720 | 4/23/26 | 77 | 28 | 70 | 2 | New Construction - Initial | 1/1/80 |
| 9 | 13122 | ADAMS AVE | SUTTON LN | BROOKHURST ST | A | AC | ~ | 1,161 | 40 | 46,440 | 4/24/26 | 74 | 38 | 52 | 10 | New Construction - Initial | 1/1/80 |
| 9 | 280 | ADAMS AVE | LAWSON LN | CITY LIMIT | A | AAC | ~ | 1,229 | 40 | 49,160 | 4/27/26 | 76 | 29 | 66 | 5 | Overlay - AC Structural | 9/11/07 |
| 9 | 281 | ADAMS AVE | BROOKHURST ST | LAWSON LN | A | AAC | ~ | 1,115 | 40 | 44,600 | 4/27/26 | 64 | 36 | 54 | 10 | Overlay - AC Structural | 9/11/07 |
| 9 | 282 | ADAMS AVE | MAGNOLIA ST | HARBOR ISLE LN | A | AAC | ~ | 1,116 | 40 | 44,640 | 4/24/26 | 71 | 33 | 61 | 6 | Overlay - AC Structural | 9/11/07 |
| 9 | 283 | ADAMS AVE | CROWN REEF LN | MAGNOLIA ST | A | AAC | ~ | 1,608 | 40 | 64,320 | 4/27/26 | 64 | 38 | 62 | 0 | Overlay - AC Structural | 8/1/17 |
| 9 | 289 | ADAMS AVE | HARBOR ISLE LN | BUSHARD ST | A | AAC | ~ | 1,527 | 40 | 65,960 | 4/24/26 | 76 | 39 | 56 | 5 | Overlay - AC Structural | 9/11/07 |
| 9 | 305 | ADAMS AVE | DELAWARE ST | BEACH BL | A | AC | ~ | 1,320 | 33 | 43,560 | 4/27/26 | 58 | 30 | 63 | 7 | New Construction - Initial | 1/1/80 |
| 9 | 306 | ADAMS AVE | BEACH BLVD | ROTHERT LN | A | AAC | ~ | 1,562 | 40 | 62,480 | 4/27/26 | 97 | 0 | 68 | 32 | Overlay - AC Structural | 6/21/16 |
| 9 | 313 | ADAMS AVE | LAKE ST | DELAWARE ST | A | AC | ~ | 1,517 | 32 | 48,544 | 4/27/26 | 56 | 28 | 68 | 4 | New Construction - Initial | 1/1/80 |
| 9 | 500 | ADAMS AVE | NEWLAND ST | ROTHERT LN | A | AAC | ~ | 1,083 | 40 | 43,320 | 4/21/26 | 99 | 0 | 100 | 0 | Overlay - AC Structural | 8/1/17 |
| 9 | 501 | ADAMS AVE | CROWN REEF LN | NEWLAND ST | A | AAC | ~ | 1,037 | 40 | 41,480 | 4/28/26 | 67 | 31 | 65 | 4 | Overlay - AC Structural | 8/1/17 |
| 9 | 502 | ADAMS AVE | SUTTON LN (N) | DERBYSHIRE LN | A | AAC | ~ | 663 | 40 | 26,520 | 4/23/26 | 79 | 20 | 80 | 0 | Overlay - AC Structural | 9/11/07 |
| 9 | 504 | ADAMS AVE | BROOKHURST ST | SUTTON LN | A | AAC | ~ | 1,161 | 40 | 46,440 | 4/23/26 | 65 | 34 | 51 | 15 | Overlay - AC Structural | 9/11/07 |
| 9 | 58 | ADAMS AVE | ROTHERT LN | NEWLAND ST | A | AAC | ~ | 1,083 | 40 | 43,320 | 4/27/26 | 97 | 0 | 75 | 25 | Overlay - AC Structural | 6/21/16 |
| 9 | 59 | ADAMS AVE | NEWLAND ST | CROWN REEF LN | A | AAC | ~ | 1,037 | 40 | 41,480 | 4/27/26 | 70 | 29 | 71 | 0 | Overlay - AC Structural | 8/1/17 |
| 9 | 60 | ADAMS AVE | DERBYSHIRE LN | SUTTON LN | A | AC | ~ | 663 | 40 | 26,520 | 4/24/26 | 74 | 20 | 80 | 0 | New Construction - Initial | 1/1/80 |
| 9 | 61 | ADAMS AVE | BUSHARD ST | DERBYSHIRE LN | A | AAC | ~ | 818 | 40 | 32,720 | 4/24/26 | 73 | 38 | 62 | 0 | Overlay - AC Structural | 10/29/07 |
| 9 | 722 | ADAMS AVE | CITY LIMIT | LAWSON LN | A | AAC | ~ | 1,229 | 40 | 49,160 | 4/14/26 | 70 | 48 | 43 | 9 | Overlay - AC Structural | 9/11/07 |
| 9 | 723 | ADAMS AVE | LAWSON LN | BROOKHURST ST | A | AAC | ~ | 1,115 | 40 | 44,600 | 4/14/26 | 70 | 62 | 29 | 9 | Overlay - AC Structural | 9/11/07 |
| 9 | 724 | ADAMS AVE | HARBOR ISLE LN | MAGNOLIA ST | A | AAC | ~ | 1,116 | 40 | 44,640 | 4/23/26 | 70 | 20 | 79 | 1 | Overlay - AC Structural | 9/11/07 |
| 9 | 725 | ADAMS AVE | MAGNOLIA ST | CROWN REEF LN | A | AAC | ~ | 1,608 | 40 | 64,320 | 4/28/26 | 58 | 24 | 74 | 2 | Overlay - AC Structural | 8/1/17 |
| 9 | 731 | ADAMS AVE | BUSHARD ST | HARBOR ISLE LN | A | AAC | ~ | 1,527 | 40 | 61,080 | 4/23/26 | 77 | 18 | 81 | 1 | Overlay - AC Structural | 9/11/07 |
| 9 | 747 | ADAMS AVE | BEACH BLVD | DELAWARE ST | A | AC | ~ | 1,320 | 33 | 43,560 | 4/24/26 | 65 | 23 | 76 | 1 | New Construction - Initial | 1/1/80 |
| 9 | 748 | ADAMS AVE | ROTHERT LN | BEACH BLVD | A | AAC | ~ | 1,562 | 40 | 62,480 | 4/21/26 | 96 | 0 | 42 | 58 | Overlay - AC Structural | 8/1/17 |
| 9 | 755 | ADAMS AVE | DELAWARE ST | LAKE ST | A | AC | ~ | 1,517 | 32 | 48,544 | 4/24/26 | 63 | 23 | 69 | 8 | New Construction - Initial | 1/1/80 |
| 27 | 659 | ALGONQUIN ST | WARNER AVE | PEARCE DR | C | AC | ~ | 1,575 | 60 | 94,500 | 4/20/26 | 98 | 0 | 91 | 9 | Overlay-Rubber Hot Mix | 12/2/19 |
| 27 | 842 | ALGONQUIN ST | PEARCE DR | HEIL AVE | C | AC | ~ | 1,321 | 60 | 79,260 | 4/20/26 | 98 | 0 | 67 | 33 | Overlay-Rubber Hot Mix | 12/2/19 |
| 70 | 2 | ARGOSY AVE | NEWSBOY CIR | GRAHAM ST | C | AAC | ~ | 1,621 | 60 | 97,260 | 4/7/26 | 66 | 23 | 74 | 3 | Overlay - AC Structural | 7/22/14 |
| 70 | 408 | ARGOSY AVE | BOLSA CHICA ST | NEWSBOY CIR | C | AAC | ~ | 1,096 | 60 | 65,760 | 4/7/26 | 72 | 26 | 73 | 1 | Overlay - AC Structural | 7/22/14 |
| 85 | 327 | ATLANTA AVE | ORANGE AVE | HUNTINGTON ST | A | AC | ~ | 726 | 19 | 13,794 | 4/9/26 | 74 | 12 | 77 | 11 | New Construction - Initial | 1/1/80 |
| 85 | 328 | ATLANTA AVE | HUNTINGTON ST | DELAWARE ST | A | AC | ~ | 701 | 21 | 14,721 | 4/9/26 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 329 | ATLANTA AVE | DELAWARE ST | BEACH BL | A | AC | ~ | 1,285 | 33 | 42,405 | 4/9/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 330 | ATLANTA AVE | BEACH BL | SCHOONER LN | A | AAC | ~ | 1,145 | 33 | 37,785 | 4/9/26 | 91 | 0 | 47 | 53 | Overlay - AC Structural | 6/21/16 |
| 85 | 331 | ATLANTA AVE | SCHOONER LN | NEWLAND ST | A | AAC | ~ | 1,497 | 33 | 49,401 | 4/9/26 | 90 | 0 | 67 | 33 | Overlay - AC Structural | 6/21/16 |
| 85 | 332 | ATLANTA AVE | STRATHMOOR LN | BROOKHURST ST | A | AC | ~ | 1,190 | 33 | 39,270 | 4/9/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 333 | ATLANTA AVE | BUSHARD ST | STRATHMOOR LN | A | AC | ~ | 1,450 | 33 | 47,850 | 4/9/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 509 | ATLANTA AVE | MIRAMAR LN | NEWLAND ST | A | AAC | ~ | 929 | 33 | 30,657 | 4/6/26 | 92 | 34 | 66 | 0 | Overlay - AC Structural | 10/1/17 |
| 85 | 510 | ATLANTA AVE | LEASURE LN | MIRAMAR LN | A | AAC | ~ | 849 | 33 | 28,017 | 4/6/26 | 93 | 37 | 63 | 0 | Overlay - AC Structural | 10/1/17 |
| 85 | 511 | ATLANTA AVE | MAGNOLIA ST | LEASURE LN | A | AAC | ~ | 863 | 33 | 28,479 | 4/6/26 | 97 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/17 |
| 85 | 512 | ATLANTA AVE | BEACHWOOD LN | MAGNOLIA ST | A | AC | ~ | 868 | 33 | 28,644 | 4/6/26 | 93 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 85 | 513 | ATLANTA AVE | KIMBERWICK LN | BEACHWOOD LN | A | AC | ~ | 978 | 33 | 32,274 | 4/6/26 | 87 | 0 | 14 | 86 | Overlay-Rubber Hot Mix | 7/1/19 |
| 85 | 514 | ATLANTA AVE | BUSHARD ST | KIMBERWICK LN | A | AC | ~ | 797 | 33 | 26,301 | 4/6/26 | 98 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 85 | 67 | ATLANTA AVE | NEWLAND ST | MIRAMAR LN | A | AAC | ~ | 929 | 33 | 30,657 | 4/9/26 | 99 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/17 |
| 85 | 68 | ATLANTA AVE | MIRAMAR LN | LEASURE LN | A | AAC | ~ | 849 | 33 | 28,017 | 4/9/26 | 100 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/17 |
| 85 | 69 | ATLANTA AVE | LEASURE LN | MAGNOLIA ST | A | AAC | ~ | 863 | 33 | 28,479 | 4/9/26 | 99 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/17 |
| 85 | 70 | ATLANTA AVE | MAGNOLIA ST | BEACHWOOD LN | A | AC | ~ | 868 | 33 | 28,644 | 4/9/26 | 91 | 0 | 57 | 43 | Overlay-Rubber Hot Mix | 7/1/19 |
| 85 | 71 | ATLANTA AVE | BEACHWOOD LN | KIMBERWICK LN | A | AC | ~ | 978 | 33 | 32,274 | 4/9/26 | 88 | 0 | 40 | 60 | Overlay-Rubber Hot Mix | 7/1/19 |
| 85 | 72 | ATLANTA AVE | KIMBERWICK LN | BUSHARD ST | A | AC | ~ | 797 | 33 | 26,301 | 4/9/26 | 94 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 85 | 769 | ATLANTA AVE | HUNTINGTON ST | ORANGE AVE | A | AC | ~ | 726 | 19 | 13,794 | 4/27/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 770 | ATLANTA AVE | DELAWARE ST | HUNTINGTON ST | A | AC | ~ | 701 | 40 | 28,040 | 4/9/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 771 | ATLANTA AVE | BEACH BL | DELAWARE ST | A | AC | ~ | 1,285 | 33 | 42,405 | 4/9/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 772 | ATLANTA AVE | SCHOONER LN | BEACH BLVD | A | AAC | ~ | 1,145 | 33 | 37,785 | 4/9/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/16 |
| 85 | 773 | ATLANTA AVE | NEWLAND ST | SCHOONER LN | A | AAC | ~ | 1,497 | 33 | 49,401 | 4/9/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/16 |
| 85 | 774 | ATLANTA AVE | BROOKHUST ST | STRATHMOOR LN | A | AC | ~ | 1,190 | 33 | 39,270 | 4/6/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 775 | ATLANTA AVE | STRATHMOOR LN | BUSHARD LN | A | AC | ~ | 1,450 | 33 | 47,850 | 4/6/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 111 | 342 | BANNING AVE | MALIBU LN | BUSHARD ST | C | AC | ~ | 1,086 | 61 | 66,246 | 4/22/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 111 | 343 | BANNING AVE | MAGNOLIA ST | MALIBU LN | C | AC | ~ | 1,658 | 61 | 101,138 | 4/22/26 | 97 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 111 | 440 | BANNING AVE | BUSHARD ST | TIDE LN | C | AC | ~ | 569 | 61 | 34,709 | 4/22/26 | 97 | 0 | 0 | 100 | New Construction - Initial | 1/1/80 |
| 111 | 76 | BANNING AVE | TIDE LN | BROOKHURST LN | C | AC | ~ | 1,086 | 61 | 66,246 | 4/22/26 | 100 | 0 | 0 | 100 | New Construction - Initial | 1/1/80 |
| 194 | 12 | BOLSA AVE | BOLSA CHICA ST | GRAHAM ST | A | AC | ~ | 2,718 | 38 | 103,284 | 4/24/26 | 72 | 26 | 67 | 7 | New Construction - Initial | 1/1/80 |
| 194 | 15 | BOLSA AVE | GRAHAM ST | TRAVELWAY | A | AC | ~ | 648 | 38 | 24,624 | 4/28/26 | 19 | 52 | 33 | 15 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 194 | 16 | BOLSA AVE | TRAVELWAY | DAN LN | A | AC | ~ | 609 | 38 | 23,142 | 4/28/26 | 26 | 46 | 38 | 16 | New Construction - Initial | 1/1/80 |
| 194 | 17 | BOLSA AVE | DAN LN | SPRINGDALE ST | A | AC | ~ | 1,325 | 38 | 50,350 | 4/24/26 | 35 | 85 | 15 | 0 | New Construction - Initial | 1/1/80 |
| 194 | 17009 | BOLSA AVE | DAN LN | TRAVELWAY | A | AC | ~ | 609 | 38 | 23,142 | 4/24/26 | 65 | 90 | 10 | 0 | New Construction - Initial | 1/1/80 |
| 194 | 17010 | BOLSA AVE | EDWARDS ST | DRAKE LN | A | AC | ~ | 1,165 | 34 | 39,610 | 4/24/26 | 27 | 66 | 24 | 10 | New Construction - Initial | 1/1/80 |
| 194 | 173 | BOLSA AVE | SPRINGDALE ST | DRAKE LN | A | AC | ~ | 1,481 | 34 | 50,354 | 4/24/26 | 40 | 72 | 28 | 0 | New Construction - Initial | 1/1/80 |
| 194 | 20 | BOLSA AVE | DRAKE LN | EDWARDS ST | A | AC | ~ | 1,165 | 34 | 39,610 | 4/24/26 | 28 | 81 | 12 | 7 | New Construction - Initial | 1/1/80 |
| 194 | 24 | BOLSA AVE | EDWARDS ST | VICTORIA LN | A | AAC | ~ | 1,316 | 34 | 44,744 | 4/24/26 | 54 | 87 | 13 | 0 | Overlay - AC Structural | 7/1/11 |
| 194 | 25 | BOLSA AVE | VICTORIA LN | GOLDENWEST ST | A | AAC | ~ | 1,330 | 36 | 47,880 | 4/24/26 | 81 | 32 | 68 | 0 | Overlay - AC Structural | 7/1/11 |
| 194 | 454 | BOLSA AVE | GRAHAM ST | BOLSA CHICA ST | A | AC | ~ | 2,718 | 38 | 103,284 | 4/24/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 194 | 457 | BOLSA AVE | TRAVELWAY | GRAHAM ST | A | AC | ~ | 648 | 38 | 24,624 | 4/24/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 194 | 459 | BOLSA AVE | SPRINGDALE ST | DAN LN | A | AC | ~ | 1,325 | 38 | 50,350 | 4/24/26 | 55 | 66 | 23 | 11 | New Construction - Initial | 1/1/80 |
| 194 | 466 | BOLSA AVE | VICTORIA LN | EDWARDS ST | A | AAC | ~ | 1,316 | 46 | 60,536 | 4/21/26 | 51 | 70 | 27 | 3 | Overlay - AC Structural | 7/1/11 |
| 194 | 467 | BOLSA AVE | GOLDENWEST ST | VICTORIA LN | A | AAC | ~ | 1,330 | 46 | 61,180 | 4/21/26 | 73 | 71 | 29 | 0 | Overlay - AC Structural | 7/1/11 |
| 194 | 615 | BOLSA AVE | DRAKE LN | SPRINGDALE ST | A | AC | ~ | 1,481 | 34 | 50,354 | 4/24/26 | 30 | 64 | 32 | 4 | New Construction - Initial | 1/1/80 |
| 195 | 11 | BOLSA CHICA ST | BOLSA AVE | ARGOSY AVE | A | AAC | ~ | 1,200 | 36 | 43,200 | 4/24/26 | 91 | 17 | 83 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 13 | BOLSA CHICA ST | ARGOSY AVE | TASMAN AVE | A | AAC | ~ | 587 | 36 | 21,132 | 4/24/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 14 | BOLSA CHICA ST | TASMAN DR | MCFADDEN AVE | A | AAC | ~ | 854 | 36 | 30,744 | 4/24/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 209 | BOLSA CHICA ST | OAHU DR | HEIL AVE | A | AAC | ~ | 1,098 | 38 | 41,724 | 4/28/26 | 73 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 29 | BOLSA CHICA ST | DOVEWOOD DR | ROBINWOOD DR | A | AAC | ~ | 1,040 | 36 | 37,440 | 4/24/26 | 90 | 0 | 96 | 4 | Overlay - AC Structural | 9/11/07 |
| 195 | 30 | BOLSA CHICA ST | ROBINWOOD DR | EDINGER AVE | A | AAC | ~ | 780 | 36 | 28,080 | 4/24/26 | 88 | 0 | 96 | 4 | Overlay - AC Structural | 9/11/07 |
| 195 | 401 | BOLSA CHICA ST | EDINGER AVE | OAHU DR | A | AAC | ~ | 1,543 | 41 | 63,263 | 4/28/26 | 64 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 405 | BOLSA CHICA ST | PEARCE ST | WARNER AVE | A | AAC | ~ | 1,321 | 38 | 50,198 | 4/28/26 | 59 | 17 | 68 | 15 | Overlay - AC Structural | 9/11/07 |
| 195 | 407 | BOLSA CHICA ST | MCFADDEN AVE | DOVEWOOD DR | A | AAC | ~ | 822 | 36 | 29,592 | 4/24/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 453 | BOLSA CHICA ST | ARGOSY AVE | BOLSA AVE | A | AAC | ~ | 1,200 | 36 | 43,200 | 4/24/26 | 82 | 46 | 54 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 455 | BOLSA CHICA ST | TASMAN DR | ARGOSY AVE | A | AAC | ~ | 587 | 36 | 21,132 | 4/24/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 456 | BOLSA CHICA ST | MCFADDEN AVE | TASMAN DR | A | AAC | ~ | 854 | 36 | 30,744 | 4/24/26 | 88 | 22 | 78 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 471 | BOLSA CHICA ST | ROBINWOOD DR | DOVEWOOD DR | A | AAC | ~ | 1,040 | 36 | 37,440 | 4/24/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 472 | BOLSA CHICA ST | EDINGER AVE | ROBINWOOD DR | A | AAC | ~ | 780 | 36 | 28,080 | 4/24/26 | 66 | 40 | 60 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 522 | BOLSA CHICA ST | SKYLAB WEST | RANCHO RD | A | AAC | ~ | 702 | 36 | 25,272 | 4/24/26 | 92 | 28 | 72 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 523 | BOLSA CHICA ST | BOLSA AVE | SKYLAB WEST | A | AAC | ~ | 1,432 | 36 | 51,552 | 4/24/26 | 89 | 33 | 38 | 29 | Overlay - AC Structural | 9/11/07 |
| 195 | 531 | BOLSA CHICA ST | PEARCE ST | HEIL AVE | A | AAC | ~ | 1,321 | 38 | 50,198 | 5/5/26 | 62 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 651 | BOLSA CHICA ST | HEIL AVE | OAHU DR | A | AAC | ~ | 1,098 | 38 | 41,724 | 4/28/26 | 60 | 0 | 93 | 7 | Overlay - AC Structural | 9/11/07 |
| 195 | 80 | BOLSA CHICA ST | RANCHO RD | SKYLAB WEST | A | AAC | ~ | 702 | 36 | 25,272 | 4/24/26 | 87 | 45 | 55 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 81 | BOLSA CHICA ST | SKYLAB WEST | BOLSA AVE | A | AAC | ~ | 1,432 | 36 | 51,552 | 4/24/26 | 77 | 80 | 20 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 843 | BOLSA CHICA ST | OAHU DR | EDINGER AVE | A | AAC | ~ | 1,543 | 37 | 57,091 | 4/28/26 | 62 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 847 | BOLSA CHICA ST | WARNER AVE | PEARCE ST | A | AAC | ~ | 1,321 | 38 | 50,198 | 5/5/26 | 73 | 5 | 95 | 0 | Overlay - AC Structural | 3/1/07 |
| 195 | 849 | BOLSA CHICA ST | DOVEWOOD DR | MCFADDEN AVE | A | AAC | ~ | 822 | 36 | 29,592 | 4/24/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/07 |
| 195 | 89 | BOLSA CHICA ST | HEIL AVE | PEARCE ST | A | AC | ~ | 1,321 | 38 | 50,198 | 4/28/26 | 63 | 22 | 68 | 10 | New Construction - Initial | 1/1/80 |
| 240 | 101 | BROOKHURST ST | YORKTOWN AVE | CONSTITUTION DR | A | AC | ~ | 950 | 39 | 39,050 | 4/24/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 286 | BROOKHURST ST | GARFIELD AVE | TRAVELWAY | A | AC | ~ | 1,336 | 39 | 53,354 | 4/24/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 287 | BROOKHURST ST | TRAVELWAY | YORKTOWN AVE | A | AC | ~ | 1,300 | 39 | 53,200 | 4/24/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 295 | BROOKHURST ST | ADAMS AVE | PECK AVE | A | AC | ~ | 1,649 | 39 | 66,811 | 4/8/26 | 68 | 29 | 58 | 13 | New Construction - Initial | 1/1/80 |
| 240 | 296 | BROOKHURST ST | PECK DR | INDIANAPOLIS AVE | A | AC | ~ | 1,000 | 39 | 40,250 | 4/8/26 | 72 | 26 | 66 | 8 | New Construction - Initial | 1/1/80 |
| 240 | 338 | BROOKHURST ST | HAMILTON AVE | TRAVELWAY | A | AC | ~ | 1,316 | 39 | 54,824 | 5/6/26 | 74 | 25 | 59 | 16 | New Construction - Initial | 1/1/80 |
| 240 | 339 | BROOKHURST ST | TRAVELWAY | BANNING AVE | A | AC | ~ | 1,578 | 43 | 69,854 | 4/22/26 | 70 | 32 | 56 | 12 | New Construction - Initial | 1/1/80 |
| 240 | 344 | BROOKHURST ST | EFFINGHAM DR | HAMILTON AVE | A | AC | ~ | 1,446 | 39 | 56,394 | 4/27/26 | 59 | 29 | 53 | 18 | New Construction - Initial | 1/1/80 |
| 240 | 348 | BROOKHURST ST | INDIANAPOLIS AVE | CLIFF DR | A | AC | ~ | 1,295 | 39 | 53,005 | 4/14/26 | 84 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 349 | BROOKHURST ST | CLIFF DR | ATLANTA AVE | A | AC | ~ | 1,348 | 39 | 55,072 | 4/14/26 | 84 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 439 | BROOKHURST ST | ATLANTA AVE | EFFINGHAM DR | A | AC | ~ | 1,196 | 39 | 49,644 | 4/27/26 | 66 | 37 | 63 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 505 | BROOKHURST ST | CONTINENTAL DR | CONSTITUTION DR | A | AC | ~ | 768 | 39 | 32,952 | 4/9/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 50510 | BROOKHURST ST | TRAVELWAY | HAMILTON AVE | A | AC | ~ | 1,316 | 41 | 56,956 | 5/6/26 | 70 | 21 | 67 | 12 | New Construction - Initial | 1/1/80 |
| 240 | 506 | BROOKHURST ST | ADAMS AVE | CONTINENTAL DR | A | AC | ~ | 917 | 39 | 36,763 | 4/9/26 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 519 | BROOKHURST ST | BUSHARD ST | BANNING AVE | A | AC | ~ | 2,434 | 43 | 106,662 | 4/22/26 | 73 | 30 | 70 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 520 | BROOKHURST ST | PCH | BUSHARD ST | A | AC | ~ | 1,235 | 45 | 55,575 | 4/22/26 | 86 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 543 | BROOKHURST ST | CONSTITUTION DR | YORKTOWN DR | A | AC | ~ | 950 | 39 | 39,300 | 4/9/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 63 | BROOKHURST ST | CONSTITUTION DR | CONTINENTAL DR | A | AC | ~ | 768 | 39 | 29,952 | 4/24/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 64 | BROOKHURST ST | CONTINENTAL DR | ADAMS AVE | A | AC | ~ | 917 | 39 | 38,763 | 4/24/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 728 | BROOKHURST ST | TRAVELWAY | GARFIELD AVE | A | AC | ~ | 1,336 | 39 | 55,104 | 4/9/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 729 | BROOKHURST ST | YORKTOWN AVE | TRAVELWAY | A | AC | ~ | 1,300 | 39 | 51,700 | 4/9/26 | 97 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 737 | BROOKHURST ST | PECK DR | ADAMS AVE | A | AC | ~ | 1,649 | 39 | 64,311 | 4/27/26 | 59 | 39 | 43 | 18 | New Construction - Initial | 1/1/80 |
| 240 | 738 | BROOKHURST ST | INDIANAPOLIS AVE | PECK DR | A | AC | ~ | 1,000 | 39 | 39,000 | 4/27/26 | 60 | 29 | 61 | 10 | New Construction - Initial | 1/1/80 |
| 240 | 77 | BROOKHURST ST | BANNING AVE | BUSHARD ST | A | AC | ~ | 2,434 | 43 | 108,412 | 4/22/26 | 78 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 78 | BROOKHURST ST | BUSHARD ST | PCH | A | AC | ~ | 1,235 | 45 | 55,575 | 4/22/26 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 240 | 781 | BROOKHURST ST | BANNING AVE | TRAVELWAY | A | AC | ~ | 1,578 | 43 | 69,854 | 4/22/26 | 66 | 56 | 44 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 786 | BROOKHURST ST | HAMILTON AVE | EFFINGHAM DR | A | AC | ~ | 1,446 | 41 | 61,786 | 5/5/26 | 81 | 0 | 87 | 13 | New Construction - Initial | 1/1/80 |
| 240 | 790 | BROOKHURST ST | CLIFF DR | INDIANAPOLIS AVE | A | AC | ~ | 1,295 | 39 | 53,005 | 4/14/26 | 68 | 50 | 50 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 791 | BROOKHURST ST | ATLANTA AVE | CLIFF DR | A | AC | ~ | 1,345 | 39 | 52,455 | 4/14/26 | 74 | 24 | 76 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 881 | BROOKHURST ST | EFFINGHAM DR | ATLANTA AVE | A | AC | ~ | 1,196 | 41 | 51,036 | 5/5/26 | 82 | 0 | 90 | 10 | New Construction - Initial | 1/1/80 |
| 258 | 284 | BUSHARD ST | GARFIELD AVE | FLOUNDER DR | C | AAC | ~ | 1,450 | 60 | 87,000 | 4/9/26 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/1/07 |
| 258 | 285 | BUSHARD ST | FLOUNDER DR | YORKTOWN AVE | C | AAC | ~ | 1,190 | 60 | 71,400 | 4/9/26 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/1/07 |
| 258 | 293 | BUSHARD ST | WOODLAWN DR | PETTSWOOD DR | C | AAC | ~ | 1,025 | 60 | 61,500 | 4/14/26 | 81 | 13 | 58 | 29 | Overlay - AC Structural | 2/1/07 |
| 258 | 294 | BUSHARD ST | PETTSWOOD DR | ADAMS AVE | C | AAC | ~ | 903 | 60 | 54,180 | 4/14/26 | 80 | 17 | 64 | 19 | Overlay - AC Structural | 2/1/07 |
| 258 | 297 | BUSHARD ST | ADAMS AVE | YELLOWSTONE DR | C | AAC | ~ | 1,354 | 60 | 81,240 | 4/14/26 | 58 | 53 | 40 | 7 | Overlay - AC Structural | 9/1/06 |
| 258 | 298 | BUSHARD ST | YELLOWSTONE DR | INDIANAPOLIS AVE | C | AAC | ~ | 1,288 | 60 | 77,280 | 4/14/26 | 55 | 47 | 45 | 8 | Overlay - AC Structural | 9/1/06 |
| 258 | 340 | BUSHARD ST | BANNING AVE | BROOKHURST ST | C | AC | ~ | 1,968 | 60 | 118,080 | 4/22/26 | 77 | 7 | 92 | 1 | New Construction - Initial | 1/1/80 |
| 258 | 341 | BUSHARD ST | MOKIHANA DR | BANNING AVE | C | AC | ~ | 1,450 | 60 | 87,000 | 4/22/26 | 82 | 48 | 51 | 1 | New Construction - Initial | 1/1/80 |
| 258 | 345 | BUSHARD ST | ATLANTA AVE | PANACEA DR | C | AAC | ~ | 1,190 | 60 | 71,400 | 4/16/26 | 75 | 36 | 61 | 3 | Overlay - AC Structural | 9/1/06 |
| 258 | 346 | BUSHARD ST | PANACEA DR | HAMILTON AVE | C | AC | ~ | 1,450 | 60 | 87,000 | 4/16/26 | 76 | 33 | 60 | 7 | New Construction - Initial | 1/1/80 |
| 258 | 350 | BUSHARD ST | INDIANAPOLIS AVE | ERSKINE DR | C | AAC | ~ | 1,182 | 60 | 70,920 | 4/14/26 | 72 | 45 | 41 | 14 | Overlay - AC Structural | 9/1/06 |
| 258 | 351 | BUSHARD ST | ERSKINE DR | ATLANTA AVE | C | AAC | ~ | 1,460 | 60 | 87,600 | 4/14/26 | 82 | 15 | 85 | 0 | Overlay - AC Structural | 9/1/06 |
| 258 | 438 | BUSHARD ST | HAMILTON AVE | MOKIHANA DR | C | AC | ~ | 1,190 | 60 | 71,400 | 4/22/26 | 84 | 51 | 49 | 0 | New Construction - Initial | 1/1/80 |
| 258 | 441 | BUSHARD ST | YORKTOWN AVE | WOODLAWN DR | C | AAC | ~ | 712 | 60 | 42,720 | 4/14/26 | 81 | 31 | 42 | 27 | Overlay - AC Structural | 2/1/07 |
| 330 | 145 | CENTER AVE | GOTHARD ST | HUNTINGTON VILLAGE | C | AAC | ~ | 1,355 | 61 | 82,655 | 4/9/26 | 80 | 9 | 89 | 2 | Overlay - AC Structural | 6/21/16 |
| 330 | 146 | CENTER AVE | FITNESS CENTER ENTRANCE | BEACH BLVD | C | AAC | ~ | 1,322 | 61 | 80,642 | 4/9/26 | 84 | 0 | 100 | 0 | Overlay - AC Structural | 4/1/12 |
| 330 | 181 | CENTER AVE | HUNTINGTON VILLAGE | ONE PACIFIC PLAZA | C | AAC | ~ | 667 | 61 | 40,687 | 4/9/26 | 75 | 22 | 76 | 2 | Overlay - AC Structural | 4/1/12 |
| 330 | 50490 | CENTER AVE | ONE PACIFIC PLAZA | FITNESS CENTER ENTRANCE | C | AAC | ~ | 333 | 60 | 19,980 | 4/9/26 | 78 | 38 | 61 | 1 | Overlay - AC Structural | 4/1/12 |
| 500 | 14998 | DELAWARE ST | ATLANTA AVE | END | C | AC | ~ | 874 | 30 | 26,220 | 4/9/26 | 73 | 7 | 53 | 40 | New Construction | 1/1/80 |
| 500 | 160 | DELAWARE ST | UTICA AVE | YORKTOWN AVE | C | AC | ~ | 1,321 | 60 | 79,260 | 4/29/26 | 64 | 22 | 71 | 7 | New Construction - Initial | 1/1/80 |
| 500 | 318 | DELAWARE ST | INDIANAPOLIS AVE | MEMPHIS AVE | C | AC | ~ | 1,319 | 51 | 67,269 | 4/29/26 | 46 | 51 | 38 | 11 | New Construction - Initial | 1/1/80 |
| 500 | 319 | DELAWARE ST | FRANKFORT AVE | INDIANAPOLIS AVE | C | AC | ~ | 991 | 51 | 50,541 | 4/29/26 | 48 | 32 | 49 | 19 | New Construction - Initial | 1/1/80 |
| 500 | 320 | DELAWARE ST | ATLANTA AVE | FRANKFORT AVE | C | AC | ~ | 1,671 | 60 | 100,260 | 4/29/26 | 61 | 39 | 54 | 7 | New Construction - Initial | 1/1/80 |
| 500 | 355 | DELAWARE ST | ADAMS AVE | UTICA AVE | C | AC | ~ | 1,320 | 60 | 79,200 | 4/29/26 | 65 | 21 | 78 | 1 | New Construction - Initial | 1/1/80 |
| 500 | 383 | DELAWARE ST | GARFIELD AVE | CLAY AVE | C | AAC | ~ | 1,320 | 60 | 79,200 | 4/13/26 | 69 | 27 | 62 | 11 | Overlay - AC Structural | 7/1/11 |
| 500 | 384 | DELAWARE ST | YORKTOWN AVE | CLAY AVE | C | AAC | ~ | 1,320 | 60 | 79,200 | 4/30/26 | 61 | 29 | 69 | 2 | Overlay - AC Structural | 7/1/11 |
| 500 | 385 | DELAWARE ST | MAIN ST | GARFIELD AVE | C | AAC | ~ | 1,405 | 60 | 84,300 | 4/20/26 | 67 | 19 | 74 | 7 | Overlay - AC Structural | 7/1/11 |
| 500 | 431 | DELAWARE ST | MEMPHIS AVE | ADAMS AVE | C | AC | ~ | 1,321 | 60 | 79,260 | 4/29/26 | 64 | 26 | 73 | 1 | New Construction - Initial | 1/1/80 |
| 500 | 50240 | DELAWARE ST | ELLIS AVE | MAIN ST | C | AC | ~ | 1,240 | 60 | 74,400 | 4/13/26 | 89 | 0 | 75 | 25 | Overlay-Rubber Hot Mix | 12/2/19 |
| 566 | 100 | EDINGER AVE | BEACH BL | NEWLAND ST | A | AC | ~ | 2,638 | 31 | 81,778 | 4/16/26 | 97 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 182 | EDINGER AVE | SHER LN | BEACH BL | A | AC | ~ | 1,590 | 31 | 49,290 | 4/22/26 | 63 | 24 | 47 | 29 | New Construction - Initial | 1/1/80 |
| 566 | 183 | EDINGER AVE | GOTHARD ST | SHER LN | A | AC | ~ | 1,711 | 31 | 53,041 | 4/16/26 | 71 | 31 | 58 | 11 | New Construction - Initial | 1/1/80 |
| 566 | 193 | EDINGER AVE | SPRINGDALE ST | BALLANTINE LN | A | AC | ~ | 1,444 | 39 | 56,316 | 4/7/26 | 92 | 0 | 68 | 32 | Overlay-Rubber Hot Mix | 7/1/19 |
| 566 | 194 | EDINGER AVE | BALLANTINE LN | EDWARDS ST | A | AC | ~ | 1,201 | 39 | 46,839 | 4/7/26 | 91 | 38 | 62 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 566 | 195 | EDINGER AVE | EDWARDS ST | SHERBECK LN | A | AC | ~ | 1,452 | 39 | 56,628 | 4/27/26 | 68 | 0 | 98 | 2 | New Construction - Initial | 1/1/80 |
| 566 | 196 | EDINGER AVE | SHERBECK LN | GOLDENWEST ST | A | AC | ~ | 1,192 | 39 | 46,488 | 4/27/26 | 66 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 566 | 202 | EDINGER AVE | WARREN LN | GRAHAM ST | A | AC | ~ | 1,523 | 62 | 94,426 | 4/7/26 | 95 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 12/2/19 |
| 566 | 205 | EDINGER AVE | SAYBROOK LN | FANTASIA LN | A | AC | ~ | 1,491 | 72 | 107,352 | 4/28/26 | 76 | 27 | 55 | 18 | New Construction - Initial | 1/1/80 |
| 566 | 206 | EDINGER AVE | MELODY LN | BOLSA CHICA ST | A | AC | ~ | 1,451 | 60 | 87,060 | 4/28/26 | 73 | 78 | 17 | 5 | New Construction - Initial | 1/1/80 |
| 566 | 210 | EDINGER AVE | BONAIRE CIR | SAYBROOK LN | A | AC | ~ | 1,417 | 72 | 102,024 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 211 | EDINGER AVE | TRINIDAD LN | BONAIRE CIR | A | AC | ~ | 1,644 | 44 | 72,336 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 212 | EDINGER AVE | TRINIDAD LN | END | A | AC | ~ | 1,801 | 44 | 79,244 | 4/20/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 533 | EDINGER AVE | GOTHARD ST | GOLDENWEST ST | A | AC | ~ | 1,982 | 39 | 77,298 | 4/16/26 | 90 | 42 | 44 | 14 | New Construction - Initial | 1/1/80 |
| 566 | 542 | EDINGER AVE | NEWLAND ST | BEACH BLVD | A | AC | ~ | 2,638 | 31 | 81,778 | 4/16/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 624 | EDINGER AVE | BEACH BLVD | SHER LN | A | AC | ~ | 1,590 | 31 | 49,290 | 4/16/26 | 91 | 40 | 60 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 625 | EDINGER AVE | SHER LN | GOTHARD ST | A | AC | ~ | 1,711 | 31 | 53,041 | 4/16/26 | 68 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 635 | EDINGER AVE | BALLANTINE LN | SPRINGDALE ST | A | AC | ~ | 1,444 | 39 | 56,316 | 4/27/24 | 97 | 27 | 73 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 566 | 636 | EDINGER AVE | EDWARDS ST | BALLANTINE LN | A | AC | ~ | 1,201 | 39 | 46,839 | 4/7/26 | 96 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 566 | 637 | EDINGER AVE | SHERBECK LN | EDWARDS ST | A | AC | ~ | 1,452 | 39 | 56,628 | 4/27/26 | 67 | 0 | 96 | 4 | New Construction - Initial | 1/1/80 |
| 566 | 638 | EDINGER AVE | GOLDENWEST ST | SHERBECK LN | A | AC | ~ | 1,192 | 39 | 46,488 | 5/8/26 | 60 | 29 | 65 | 6 | New Construction - Initial | 1/1/80 |
| 566 | 85 | EDINGER AVE | CLUBHOUSE LN | SPRINGDALE ST | A | AAC | ~ | 1,371 | 64 | 87,744 | 4/7/26 | 85 | 14 | 86 | 0 | Overlay - AC Structural | 6/21/16 |
| 566 | 86 | EDINGER AVE | GRAHAM ST | CLUBHOUSE LN | A | AAC | ~ | 1,210 | 65 | 78,650 | 4/7/26 | 88 | 0 | 98 | 2 | Overlay - AC Structural | 6/21/16 |
| 566 | 87 | EDINGER AVE | BOLSA CHICA ST | WARREN LN | A | AC | ~ | 1,194 | 62 | 74,028 | 4/7/26 | 93 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 12/2/19 |
| 566 | 88 | EDINGER AVE | FANTASIA LN | MELODY AVE | A | AC | ~ | 1,060 | 60 | 63,600 | 4/28/26 | 74 | 46 | 45 | 9 | New Construction - Initial | 1/1/80 |
| 566 | 91 | EDINGER AVE | GOLDENWEST ST | GOTHARD ST | A | AC | ~ | 1,982 | 39 | 77,298 | 4/16/26 | 88 | 19 | 81 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 159 | EDWARDS ST | TALBERT AVE | ELLIS AVE | A | AC | ~ | 1,576 | 25 | 39,400 | 5/1/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 200 | EDWARDS ST | MCFADDEN AVE | DOWN DR | A | AC | ~ | 1,210 | 60 | 72,600 | 4/27/26 | 69 | 48 | 49 | 3 | New Construction - Initial | 1/1/80 |
| 569 | 201 | EDWARDS ST | DOWN DR | EDINGER AVE | A | AC | ~ | 1,431 | 60 | 85,860 | 4/27/26 | 67 | 58 | 42 | 0 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 569 | 21 | EDWARDS ST | BOLSA AVE | ALEXANDRIA DR | A | AC | ~ | 569 | 60 | 35,390 | 4/29/26 | 74 | 58 | 41 | 1 | New Construction - Initial | 1/1/80 |
| 569 | 22 | EDWARDS ST | ALEXANDRA DR | CORNELL DR | A | AC | ~ | 781 | 60 | 46,860 | 4/29/26 | 71 | 74 | 22 | 4 | New Construction - Initial | 1/1/80 |
| 569 | 227 | EDWARDS ST | SHIELDS DR | WARNER DR | A | AC | ~ | 917 | 60 | 55,020 | 5/4/26 | 93 | 22 | 78 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 228 | EDWARDS ST | CRANDALL DR | SHIELDS DR | A | AC | ~ | 863 | 28 | 24,164 | 5/4/26 | 70 | 37 | 51 | 12 | New Construction - Initial | 1/1/80 |
| 569 | 229 | EDWARDS ST | HEIL AVE | CRANDALL DR | A | AC | ~ | 859 | 28 | 24,052 | 5/4/26 | 54 | 36 | 53 | 11 | New Construction - Initial | 1/1/80 |
| 569 | 23 | EDWARDS ST | CORNELL DR | HALIFAX DR | A | AC | ~ | 520 | 60 | 31,200 | 4/29/26 | 70 | 65 | 35 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 235 | EDWARDS ST | WARNER AVE | WRENFIELD DR | A | AAC | ~ | 1,197 | 30 | 35,910 | 5/6/26 | 69 | 20 | 66 | 14 | Overlay - AC Structural | 7/1/11 |
| 569 | 236 | EDWARDS ST | FREEBORN DR | SLATER AVE | A | AAC | ~ | 1,444 | 30 | 43,320 | 5/6/26 | 75 | 11 | 89 | 0 | Overlay - AC Structural | 7/1/11 |
| 569 | 250 | EDWARDS ST | CENTRAL PARK DR | TALBERT AVE | A | AAC | ~ | 1,070 | 30 | 32,100 | 5/6/26 | 71 | 29 | 66 | 5 | Overlay - AC Structural | 7/1/11 |
| 569 | 375 | EDWARDS ST | ELLIS AVE | OVERLOOK DR | A | AC | ~ | 691 | 30 | 20,730 | 5/6/26 | 69 | 6 | 53 | 41 | New Construction - Initial | 1/1/80 |
| 569 | 376 | EDWARDS ST | CROSSWIND DR | GARFIELD AVE | A | AC | ~ | 1,068 | 30 | 32,040 | 5/6/26 | 80 | 0 | 81 | 19 | New Construction - Initial | 1/1/80 |
| 569 | 377 | EDWARDS ST | OVERLOOK DR | CROSSWIND DR | A | AC | ~ | 880 | 30 | 26,400 | 5/6/26 | 73 | 16 | 66 | 18 | New Construction - Initial | 1/1/80 |
| 569 | 396 | EDWARDS ST | ARMADA DR | CENTRAL PARK DR | A | AAC | ~ | 1,657 | 30 | 49,710 | 5/6/26 | 76 | 16 | 82 | 2 | Overlay - AC Structural | 7/1/11 |
| 569 | 414 | EDWARDS ST | EDINGER AVE | LENNOX DR | A | AC | ~ | 892 | 28 | 26,476 | 4/22/26 | 57 | 40 | 57 | 3 | New Construction - Initial | 1/1/80 |
| 569 | 448 | EDWARDS ST | EDGEMONT DR | LENNOX DR | A | AC | ~ | 1,058 | 28 | 30,624 | 4/22/26 | 52 | 57 | 43 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 449 | EDWARDS ST | HEIL AVE | EDGEMONT DR | A | AC | ~ | 690 | 28 | 19,320 | 4/22/26 | 49 | 51 | 47 | 2 | New Construction - Initial | 1/1/80 |
| 569 | 538 | EDWARDS ST | ARMADA DR | SLATER AVE | A | AAC | ~ | 990 | 30 | 29,700 | 5/7/26 | 70 | 24 | 76 | 0 | Overlay - AC Structural | 7/1/11 |
| 569 | 6 | EDWARDS ST | LENNOX DR | EDGEMONT DR | A | AC | ~ | 1,058 | 28 | 29,624 | 5/1/26 | 59 | 53 | 46 | 1 | New Construction - Initial | 1/1/80 |
| 569 | 601 | EDWARDS ST | ELLIS AVE | TALBERT AVE | A | AC | ~ | 1,576 | 25 | 39,400 | 5/7/26 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 670 | EDWARDS ST | SHIELDS DR | CRANDALL DR | A | AC | ~ | 863 | 28 | 24,164 | 5/4/26 | 57 | 30 | 60 | 10 | New Construction - Initial | 1/1/80 |
| 569 | 671 | EDWARDS ST | CRANDALL DR | HEIL AVE | A | AC | ~ | 859 | 28 | 30,552 | 5/4/26 | 74 | 35 | 65 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 677 | EDWARDS ST | FREEBORN DR | WARNER DR | A | AAC | ~ | 1,197 | 30 | 35,910 | 5/7/26 | 63 | 24 | 70 | 6 | Overlay - AC Structural | 7/1/11 |
| 569 | 678 | EDWARDS ST | SLATER AVE | FREEBORN DR | A | AAC | ~ | 1,444 | 30 | 43,320 | 5/7/26 | 73 | 12 | 84 | 4 | Overlay - AC Structural | 7/1/11 |
| 569 | 692 | EDWARDS ST | TALBERT AVE | CENTRAL PARK DR | A | AAC | ~ | 1,070 | 30 | 32,100 | 5/7/26 | 66 | 21 | 79 | 0 | Overlay - AC Structural | 7/1/11 |
| 569 | 7 | EDWARDS ST | EDGEMONT DR | HEIL AVE | A | AC | ~ | 690 | 28 | 25,820 | 5/1/26 | 68 | 40 | 59 | 1 | New Construction - Initial | 1/1/80 |
| 569 | 817 | EDWARDS ST | OVERLOOK DR | ELLIS AVE | A | AC | ~ | 691 | 30 | 20,730 | 5/6/26 | 80 | 0 | 58 | 42 | New Construction - Initial | 1/1/80 |
| 569 | 818 | EDWARDS ST | GARFIELD AVE | CROSSWIND DR | A | AC | ~ | 1,068 | 30 | 32,040 | 5/6/26 | 85 | 14 | 62 | 24 | New Construction - Initial | 1/1/80 |
| 569 | 819 | EDWARDS ST | CROSSWIND DR | OVERLOOK DR | A | AC | ~ | 880 | 30 | 26,400 | 5/6/26 | 82 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 82 | EDWARDS ST | CITY LIMIT NORTH | ROYAL OAK DR | A | AAC | ~ | 394 | 13 | 5,122 | 4/29/26 | 48 | 94 | 6 | 0 | Overlay - AC Structural | 7/1/11 |
| 569 | 83 | EDWARDS ST | ROYAL OAK DR | MAR VISTA DR | A | AAC | ~ | 1,287 | 13 | 16,731 | 4/29/26 | 61 | 53 | 47 | 0 | Overlay - AC Structural | 7/1/11 |
| 569 | 838 | EDWARDS ST | CENTRAL PARK DR | ARMADA DR | A | AAC | ~ | 1,657 | 30 | 49,710 | 5/7/26 | 67 | 21 | 73 | 6 | Overlay - AC Structural | 7/1/11 |
| 569 | 84 | EDWARDS ST | MAR VISTA DR | BOLSA AVE | A | AAC | ~ | 631 | 13 | 8,203 | 4/29/26 | 52 | 32 | 68 | 0 | Overlay - AC Structural | 7/1/11 |
| 569 | 853 | EDWARDS ST | MC FADDEN AVE | HALIFAX DR | A | AC | ~ | 772 | 60 | 46,320 | 4/29/26 | 76 | 42 | 58 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 856 | EDWARDS ST | LENNOX DR | EDINGER AVE | A | AC | ~ | 892 | 28 | 27,226 | 4/22/26 | 50 | 57 | 42 | 1 | New Construction - Initial | 1/1/80 |
| 569 | 96 | EDWARDS ST | SLATER AVE | ARMADA DR | A | AAC | ~ | 990 | 30 | 29,700 | 5/6/26 | 74 | 12 | 83 | 5 | Overlay - AC Structural | 7/1/11 |
| 589 | 10 | ELLIS AVE | ASHLEY DR | REPAIR LN | A | AC | ~ | 674 | 36 | 24,264 | 5/6/26 | 73 | 11 | 89 | 0 | New Construction - Initial | 1/1/80 |
| 589 | 259 | ELLIS AVE | DELAWARE ST | MAIN ST | A | AAC | ~ | 1,109 | 60 | 66,540 | 4/13/26 | 58 | 54 | 46 | 0 | Overlay - AC Thin | 7/1/06 |
| 589 | 260 | ELLIS AVE | GOTHARD ST | HUNTINGTON ST | A | AAC | ~ | 1,346 | 36 | 48,456 | 5/6/26 | 78 | 32 | 68 | 0 | Overlay - AC Structural | 7/1/06 |
| 589 | 261 | ELLIS AVE | HUNTINGTON ST | DELAWARE ST | A | AAC | ~ | 699 | 60 | 41,940 | 5/5/26 | 61 | 64 | 35 | 1 | Overlay - AC Structural | 7/1/06 |
| 589 | 265 | ELLIS AVE | MAIN ST | CHAPEL LN | A | AC | ~ | 1,321 | 47 | 62,087 | 5/6/26 | 73 | 26 | 64 | 10 | New Construction - Initial | 1/1/80 |
| 589 | 266 | ELLIS AVE | CHAPEL LN | NEWLAND ST | A | AC | ~ | 1,321 | 47 | 62,087 | 5/5/26 | 68 | 28 | 70 | 2 | New Construction - Initial | 1/1/80 |
| 589 | 386 | ELLIS AVE | GOLDENWEST ST | ASHLEY DR | A | AC | ~ | 763 | 36 | 27,468 | 5/6/26 | 72 | 13 | 79 | 8 | New Construction - Initial | 1/1/80 |
| 589 | 387 | ELLIS AVE | REPAIR LN | GOTHARD ST | A | AC | ~ | 545 | 36 | 19,620 | 5/6/26 | 80 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 589 | 39 | ELLIS AVE | EDWARDS ST | GOLDENWEST ST | A | AC | ~ | 2,640 | 40 | 105,600 | 5/6/26 | 85 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 589 | 452 | ELLIS AVE | REPAIR LN | ASHLEY DR | A | AC | ~ | 674 | 36 | 24,264 | 5/6/26 | 74 | 24 | 76 | 0 | New Construction - Initial | 1/1/80 |
| 589 | 702 | ELLIS AVE | HUNTINGTON ST | GOTHARD ST | A | AAC | ~ | 1,346 | 36 | 48,456 | 5/5/26 | 72 | 36 | 54 | 10 | Overlay - AC Structural | 7/1/06 |
| 589 | 828 | ELLIS AVE | ASHLEY DR | GOLDENWEST ST | A | AC | ~ | 763 | 36 | 27,468 | 5/6/26 | 72 | 9 | 78 | 13 | New Construction - Initial | 1/1/80 |
| 589 | 829 | ELLIS AVE | GOTHARD ST | REPAIR LN | A | AC | ~ | 545 | 36 | 19,620 | 5/6/26 | 72 | 15 | 43 | 42 | New Construction - Initial | 1/1/80 |
| 653 | 434 | FIRST ST | PCH | ORANGE AVE | A | AAC | ~ | 1,132 | 36 | 40,752 | 5/1/26 | 91 | 23 | 77 | 0 | Overlay - AC Structural | 3/1/10 |
| 653 | 876 | FIRST ST | ORANGE AVE | PCH | A | AC | ~ | 1,132 | 36 | 43,252 | 5/1/26 | 69 | 53 | 46 | 1 | New Construction - Initial | 1/1/80 |
| 703 | 104 | GARFIELD AVE | EDWARDS ST(S) | SADDLEBACK LN | A | AC | ~ | 1,320 | 40 | 52,800 | 5/4/26 | 75 | 31 | 65 | 4 | New Construction - Initial | 1/1/80 |
| 703 | 105 | GARFIELD AVE | SADDLEBACK LN | GOLDENWEST ST | A | AC | ~ | 1,320 | 40 | 52,800 | 5/4/26 | 74 | 32 | 57 | 11 | New Construction - Initial | 1/1/80 |
| 703 | 106 | GARFIELD AVE | SEAPOINT AVE | EDWARDS ST | A | AC | ~ | 1,261 | 40 | 50,440 | 4/9/26 | 87 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 703 | 155 | GARFIELD AVE | BUSHARD ST (N) | BLUEFIN LN | A | AC | ~ | 585 | 33 | 19,305 | 4/9/26 | 71 | 30 | 70 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 156 | GARFIELD AVE | BROOKHURST ST | KIPAHULU DR | A | AC | ~ | 681 | 33 | 22,473 | 4/21/26 | 68 | 22 | 63 | 15 | New Construction - Initial | 1/1/80 |
| 703 | 158 | GARFIELD AVE | WARD ST | END | A | AC | ~ | 1,505 | 22 | 33,110 | 4/21/26 | 52 | 40 | 35 | 25 | New Construction - Initial | 1/1/80 |
| 703 | 270 | GARFIELD AVE | GOLDENWEST ST | GOTHARD ST | A | AC | ~ | 1,320 | 38 | 50,160 | 5/4/26 | 65 | 32 | 65 | 3 | New Construction - Initial | 1/1/80 |
| 703 | 271 | GARFIELD AVE | GOTHARD ST | MAIN ST | A | AC | ~ | 1,238 | 45 | 55,710 | 5/8/26 | 55 | 36 | 57 | 7 | New Construction - Initial | 1/1/80 |
| 703 | 272 | GARFIELD AVE | MAIN ST | DELAWARE ST | A | AC | ~ | 1,403 | 45 | 63,135 | 4/6/26 | 91 | 48 | 42 | 10 | New Construction - Initial | 1/1/80 |
| 703 | 273 | GARFIELD AVE | DELAWARE ST | BEACH BL | A | AAC | ~ | 1,321 | 40 | 52,840 | 4/6/26 | 82 | 0 | 65 | 35 | Overlay - AC Structural | 6/12/12 |
| 703 | 274 | GARFIELD AVE | BEACH BL | LISTER LN | A | AC | ~ | 1,363 | 38 | 51,794 | 4/28/26 | 58 | 24 | 75 | 1 | New Construction - Initial | 1/1/80 |
| 703 | 275 | GARFIELD AVE | LISTER LN | NEWLAND ST | A | AC | ~ | 1,281 | 39 | 49,959 | 4/28/26 | 59 | 30 | 69 | 1 | New Construction - Initial | 1/1/80 |
| 703 | 43 | GARFIELD AVE | NEWLAND ST | PLUM TREE LN | A | AAC | ~ | 532 | 33 | 17,556 | 4/9/26 | 80 | 17 | 83 | 0 | Overlay - AC Structural | 7/1/10 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 703 | 44 | GARFIELD AVE | PLUM TREE LN | LINDSAY LN | A | AAC | ~ | 1,335 | 33 | 44,055 | 4/9/26 | 85 | 17 | 83 | 0 | Overlay - AC Structural | 7/1/10 |
| 703 | 45 | GARFIELD AVE | LINDSAY LN | MAGNOLIA ST | A | AAC | ~ | 778 | 33 | 25,674 | 4/9/26 | 83 | 14 | 71 | 15 | Overlay - AC Structural | 7/1/10 |
| 703 | 46 | GARFIELD AVE | MAGNOLIA ST | RANDI LN | A | AAC | ~ | 820 | 33 | 27,060 | 4/9/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 703 | 47 | GARFIELD AVE | RANDI LN | PAULINE LN | A | AAC | ~ | 935 | 33 | 30,855 | 4/9/26 | 86 | 0 | 97 | 3 | Overlay - AC Structural | 6/21/13 |
| 703 | 48 | GARFIELD AVE | PAULINE LN | BUSHARD ST | A | AAC | ~ | 890 | 33 | 29,370 | 4/9/26 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 703 | 485 | GARFIELD AVE | PLUM TREE LN | NEWLAND ST | A | AAC | ~ | 532 | 15 | 7,980 | 4/20/26 | 79 | 12 | 88 | 0 | Overlay - AC Structural | 7/1/10 |
| 703 | 486 | GARFIELD AVE | LINDSAY LN | PLUM TREE LN | A | AAC | ~ | 1,335 | 15 | 20,025 | 4/20/26 | 76 | 44 | 56 | 0 | Overlay - AC Structural | 7/1/10 |
| 703 | 487 | GARFIELD AVE | MAGNOLIA ST | LINDSAY LN | A | AAC | ~ | 778 | 15 | 11,670 | 4/20/26 | 63 | 51 | 49 | 0 | Overlay - AC Structural | 7/1/10 |
| 703 | 488 | GARFIELD AVE | RANDI LN (S) | MAGNOLIA ST | A | AAC | ~ | 820 | 21 | 17,220 | 4/20/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 703 | 489 | GARFIELD AVE | PAULINE LN | RANDI LN | A | AAC | ~ | 935 | 21 | 19,635 | 4/20/26 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 703 | 490 | GARFIELD AVE | BUSHARD ST | PAULINE LN | A | AAC | ~ | 890 | 21 | 18,690 | 4/20/26 | 87 | 0 | 51 | 49 | Overlay - AC Structural | 6/21/13 |
| 703 | 493 | GARFIELD AVE | BROOKFIELD MANOR | BLUEFIN LN | A | AC | ~ | 1,213 | 33 | 40,029 | 4/20/26 | 66 | 22 | 78 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 494 | GARFIELD AVE | BROOKHURST ST | BROOKFIELD MANOR | A | AC | ~ | 839 | 33 | 27,687 | 4/20/26 | 66 | 53 | 47 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 496 | GARFIELD AVE | SUVA LN | KIPAHULU DR | A | AC | ~ | 1,118 | 33 | 36,894 | 4/21/26 | 73 | 23 | 74 | 3 | New Construction - Initial | 1/1/80 |
| 703 | 497 | GARFIELD AVE | WARD ST | SUVA LN | A | AC | ~ | 844 | 33 | 27,852 | 4/21/26 | 77 | 15 | 85 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 51 | GARFIELD AVE | BLUEFIN LN | BROOKFIELD MANOR | A | AC | ~ | 1,213 | 33 | 40,029 | 4/9/26 | 62 | 33 | 60 | 7 | New Construction - Initial | 1/1/80 |
| 703 | 52 | GARFIELD AVE | BROOKFIELD MANOR | BROOKHURST ST | A | AC | ~ | 839 | 33 | 27,687 | 4/9/26 | 58 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 54 | GARFIELD AVE | KIPAHULU DR | SUVA LN | A | AC | ~ | 1,118 | 33 | 36,894 | 4/21/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 546 | GARFIELD AVE | SADDLEBACK LN | EDWARDS ST | A | AC | ~ | 1,320 | 40 | 52,800 | 5/7/26 | 79 | 16 | 80 | 4 | New Construction - Initial | 1/1/80 |
| 703 | 547 | GARFIELD AVE | GOLDENWEST ST | SADDLEBACK LN | A | AC | ~ | 1,320 | 40 | 52,800 | 5/7/26 | 78 | 33 | 67 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 548 | GARFIELD AVE | EDWARDS ST | SEAPOINT AVE | A | AC | ~ | 1,261 | 40 | 50,440 | 4/9/26 | 89 | 0 | 81 | 19 | New Construction - Initial | 1/1/80 |
| 703 | 55 | GARFIELD AVE | SUVA LN | WARD ST | A | AC | ~ | 844 | 33 | 27,852 | 4/21/26 | 81 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 597 | GARFIELD AVE | BLUEFIN LN | BUSHARD ST | A | AC | ~ | 585 | 33 | 19,305 | 4/20/26 | 67 | 42 | 57 | 1 | New Construction - Initial | 1/1/80 |
| 703 | 598 | GARFIELD AVE | KIPAHULU DR | BROOKHURST ST | A | AC | ~ | 681 | 33 | 22,473 | 4/21/26 | 78 | 13 | 87 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 712 | GARFIELD AVE | GOTHARD ST | GOLDENWEST ST | A | AC | ~ | 1,320 | 43 | 56,760 | 5/8/26 | 65 | 36 | 54 | 10 | New Construction - Initial | 1/1/80 |
| 703 | 713 | GARFIELD AVE | MAIN ST | GOTHARD ST | A | AC | ~ | 1,238 | 45 | 55,710 | 5/4/26 | 48 | 33 | 61 | 6 | New Construction - Initial | 1/1/80 |
| 703 | 714 | GARFIELD AVE | DELAWARE ST | MAIN ST | A | AC | ~ | 1,403 | 45 | 63,135 | 4/6/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 715 | GARFIELD AVE | BEACH BL | DELWARE ST | A | AAC | ~ | 1,321 | 39 | 51,519 | 4/6/26 | 84 | 0 | 100 | 0 | Overlay - AC Structural | 6/12/12 |
| 703 | 716 | GARFIELD AVE | LISTER LN | BEACH BL | A | AC | ~ | 1,363 | 38 | 51,794 | 4/28/26 | 60 | 27 | 72 | 1 | New Construction - Initial | 1/1/80 |
| 703 | 717 | GARFIELD AVE | NEWLAND ST | LISTER LN | A | AC | ~ | 1,281 | 38 | 48,678 | 4/28/26 | 70 | 24 | 76 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 103 | GOLDENWEST ST | SUMMIT DR | YORKTOWN AVE | A | AC | ~ | 1,424 | 42 | 66,308 | 4/23/26 | 46 | 41 | 38 | 21 | New Construction - Initial | 1/1/80 |
| 743 | 138 | GOLDENWEST ST | RIO VISTA DR | CENTRAL PARK | A | AC | ~ | 1,478 | 40 | 62,870 | 5/5/26 | 74 | 0 | 74 | 26 | New Construction - Initial | 1/1/80 |
| 743 | 139 | GOLDENWEST ST | CENTRAL PARK | EQUESTRIAN CENTER | A | AC | ~ | 1,959 | 40 | 82,360 | 5/5/26 | 75 | 18 | 58 | 24 | New Construction - Initial | 1/1/80 |
| 743 | 141 | GOLDENWEST ST | GARFIELD AVE | SUMMIT DR | A | AC | ~ | 1,236 | 41 | 52,676 | 4/23/26 | 50 | 23 | 65 | 12 | New Construction - Initial | 1/1/80 |
| 743 | 239 | GOLDENWEST ST | BETTY DR | SLATER AVE | A | AC | ~ | 1,193 | 39 | 46,527 | 5/5/26 | 82 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 26 | GOLDENWEST ST | BOLSA AVE | OXFORD DR | A | AC | ~ | 797 | 40 | 31,880 | 4/27/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 27 | GOLDENWEST ST | OXFORD DR | BRUNSWICK DR | A | AC | ~ | 1,104 | 40 | 44,160 | 4/27/26 | 68 | 52 | 48 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 28 | GOLDENWEST ST | BRUNSWICK DR | MCFADDEN AVE | A | AC | ~ | 740 | 40 | 29,600 | 4/27/26 | 77 | 41 | 59 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 35 | GOLDENWEST ST | MCFADDEN AVE | BLUEBONNET DR | A | AAC | ~ | 828 | 40 | 33,120 | 4/27/26 | 91 | 0 | 94 | 6 | Overlay - AC Structural | 10/29/07 |
| 743 | 36 | GOLDENWEST ST | BLUEBONNET DR | BREELAND DR | A | AAC | ~ | 1,170 | 40 | 46,800 | 4/27/26 | 86 | 0 | 97 | 3 | Overlay - AC Structural | 10/29/07 |
| 743 | 361 | GOLDENWEST ST | PCH | ORANGE AVE | A | AAC | ~ | 1,239 | 44 | 58,516 | 4/13/26 | 89 | 20 | 75 | 5 | Overlay - AC Structural | 6/21/13 |
| 743 | 366 | GOLDENWEST ST | ORANGE AVE | PALM AVE | A | AAC | ~ | 1,236 | 44 | 57,884 | 4/13/26 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 743 | 37 | GOLDENWEST ST | BREELAND DR | EDINGER AVE | A | AAC | ~ | 643 | 40 | 25,720 | 4/27/26 | 80 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 743 | 381 | GOLDENWEST ST | YORKTOWN AVE | DEEP HARBOR LN | A | AAC | ~ | 1,393 | 42 | 60,756 | 4/23/26 | 94 | 0 | 76 | 24 | Overlay - AC Structural | 6/21/13 |
| 743 | 382 | GOLDENWEST ST | DEEP HARBOR LN | PALM AVE | A | AAC | ~ | 1,360 | 42 | 59,370 | 4/23/26 | 94 | 0 | 85 | 15 | Overlay - AC Structural | 6/21/13 |
| 743 | 391 | GOLDENWEST ST | WARNER AVE | BETTY DR | A | AC | ~ | 1,452 | 40 | 58,080 | 5/5/26 | 65 | 61 | 3 | 36 | New Construction - Initial | 1/1/80 |
| 743 | 41 | GOLDENWEST ST | ELLIS AVE | ERNEST AVE | A | AC | ~ | 1,585 | 40 | 65,650 | 5/5/26 | 79 | 12 | 73 | 15 | New Construction - Initial | 1/1/80 |
| 743 | 416 | GOLDENWEST ST | EDINGER AVE | LAURELHURST DR | A | AAC | ~ | 1,190 | 40 | 47,600 | 5/4/26 | 74 | 7 | 88 | 5 | Overlay - AC Structural | 9/11/07 |
| 743 | 417 | GOLDENWEST ST | LAURELHURST DR | HEIL AVE | A | AAC | ~ | 1,450 | 40 | 58,000 | 5/4/26 | 76 | 0 | 97 | 3 | Overlay - AC Structural | 9/11/07 |
| 743 | 42 | GOLDENWEST ST | ERNEST AVE | GARFIELD AVE | A | AC | ~ | 1,055 | 38 | 46,390 | 5/5/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 421 | GOLDENWEST ST | NORMA DR | WARNER AVE | A | AAC | ~ | 1,316 | 40 | 52,640 | 5/8/26 | 70 | 30 | 50 | 20 | Overlay - AC Structural | 9/11/07 |
| 743 | 450 | GOLDENWEST ST | RIO VISTA DR | SLATER AVE | A | AC | ~ | 1,166 | 40 | 46,640 | 5/6/26 | 65 | 29 | 61 | 10 | New Construction - Initial | 1/1/80 |
| 743 | 451 | GOLDENWEST ST | ELLIS AVE | EQUESTRIAN CENTER | A | AC | ~ | 681 | 40 | 27,240 | 5/5/26 | 83 | 28 | 67 | 5 | New Construction - Initial | 1/1/80 |
| 743 | 468 | GOLDENWEST ST | OXFORD DR | BOLSA AVE | A | AC | ~ | 797 | 40 | 36,880 | 4/27/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 469 | GOLDENWEST ST | BRUNSWICK DR | OXFORD DR | A | AC | ~ | 1,104 | 40 | 44,160 | 4/27/26 | 83 | 50 | 50 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 470 | GOLDENWEST ST | MC FADDEN AVE | BRUNSWICK DR | A | AC | ~ | 740 | 40 | 28,750 | 4/27/26 | 74 | 61 | 39 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 477 | GOLDENWEST ST | BLUEBONNET DR | MC FADDEN AVE | A | AAC | ~ | 828 | 40 | 33,120 | 4/27/26 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 743 | 478 | GOLDENWEST ST | BREELAND DR | BLUEBONNET DR | A | AAC | ~ | 1,170 | 40 | 46,800 | 4/27/26 | 85 | 13 | 87 | 0 | Overlay - AC Structural | 9/11/07 |
| 743 | 483 | GOLDENWEST ST | ERNEST AVE | ELLIS AVE | A | AC | ~ | 1,585 | 40 | 65,900 | 5/5/26 | 91 | 0 | 85 | 15 | New Construction - Initial | 1/1/80 |
| 743 | 484 | GOLDENWEST ST | GARFIELD AVE | ERNEST AVE | A | AC | ~ | 1,055 | 38 | 40,090 | 5/5/26 | 90 | 0 | 88 | 12 | New Construction - Initial | 1/1/80 |
| 743 | 534 | GOLDENWEST ST | NORMA DR | MADDOX DR | A | AAC | ~ | 787 | 40 | 31,480 | 5/6/26 | 71 | 34 | 66 | 0 | Overlay - AC Structural | 9/11/07 |
| 743 | 545 | GOLDENWEST ST | YORKTOWN AVE | SUMMIT DR | A | AC | ~ | 1,424 | 42 | 61,808 | 5/5/26 | 80 | 51 | 49 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 580 | GOLDENWEST ST | CENTRAL PARK | RIO VISTA DR | A | AC | ~ | 1,478 | 40 | 62,620 | 5/6/26 | 56 | 37 | 53 | 10 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 743 | 581 | GOLDENWEST ST | EQUESTRIAN CENTER | CENTRAL PARK | A | AC | ~ | 1,959 | 40 | 81,860 | 5/6/26 | 57 | 35 | 61 | 4 | New Construction - Initial | 1/1/80 |
| 743 | 583 | GOLDENWEST ST | SUMMIT DR | GARFIELD AVE | A | AC | ~ | 1,236 | 42 | 59,012 | 5/5/26 | 80 | 6 | 94 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 681 | GOLDENWEST ST | SLATER AVE | BETTY DR | A | AC | ~ | 1,193 | 39 | 46,527 | 5/6/26 | 75 | 41 | 56 | 3 | New Construction - Initial | 1/1/80 |
| 743 | 7000 | GOLDENWEST ST | MADDOX DR | HEIL AVE | A | AAC | ~ | 533 | 40 | 21,320 | 5/6/26 | 67 | 13 | 80 | 7 | Overlay - AC Structural | 9/11/07 |
| 743 | 7001 | GOLDENWEST ST | EDINGER AVE | BREELAND DR | A | AAC | ~ | 643 | 40 | 25,720 | 4/27/26 | 79 | 13 | 87 | 0 | Overlay - AC Structural | 9/11/07 |
| 743 | 803 | GOLDENWEST ST | ORANGE AVE | PCH | A | AAC | ~ | 1,239 | 42 | 55,038 | 4/23/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 743 | 808 | GOLDENWEST ST | PALM AVE | ORANGE AVE | A | AAC | ~ | 1,236 | 42 | 54,412 | 4/23/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 743 | 823 | GOLDENWEST ST | DEEP HARBOR LN | YORKTOWN AVE | A | AAC | ~ | 1,393 | 42 | 60,756 | 4/13/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 743 | 824 | GOLDENWEST ST | PALM AVE | DEEP HARBOR LN | A | AAC | ~ | 1,360 | 44 | 62,840 | 4/13/26 | 91 | 0 | 95 | 5 | Overlay - AC Structural | 6/21/13 |
| 743 | 833 | GOLDENWEST ST | BETTY DR | WARNER AVE | A | AC | ~ | 1,452 | 40 | 60,330 | 5/6/26 | 60 | 44 | 43 | 13 | New Construction - Initial | 1/1/80 |
| 743 | 858 | GOLDENWEST ST | LAURELHURST DR | EDINGER AVE | A | AAC | ~ | 1,190 | 40 | 47,600 | 5/4/26 | 76 | 15 | 74 | 11 | Overlay - AC Structural | 9/11/07 |
| 743 | 859 | GOLDENWEST ST | HEIL AVE | LAURELHURST DR | A | AAC | ~ | 1,450 | 40 | 58,000 | 5/6/26 | 73 | 32 | 68 | 0 | Overlay - AC Structural | 9/11/07 |
| 743 | 863 | GOLDENWEST ST | WARNER AVE | NORMA DR | A | AAC | ~ | 1,316 | 40 | 52,640 | 5/6/26 | 69 | 27 | 53 | 20 | Overlay - AC Structural | 9/11/07 |
| 743 | 90 | GOLDENWEST ST | HEIL AVE | MADDOX DR | A | AAC | ~ | 533 | 40 | 21,320 | 5/4/26 | 62 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 743 | 92 | GOLDENWEST ST | MADDOX DR | NORMA DR | A | AAC | ~ | 787 | 40 | 31,480 | 5/4/26 | 85 | 0 | 93 | 7 | Overlay - AC Structural | 9/11/07 |
| 743 | 9908 | GOLDENWEST ST | SLATER AVE | RIO VISTA DR | A | AC | ~ | 1,168 | 40 | 46,720 | 5/5/26 | 65 | 26 | 65 | 9 | New Construction - Initial | 1/1/80 |
| 743 | 9909 | GOLDENWEST ST | EQUESTRIAN CENTER | ELLIS AVE | A | AC | ~ | 681 | 40 | 30,740 | 5/5/26 | 76 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 746 | 150 | GOTHARD ST | PROMENADE PARKWAY DR | ERNEST DR | A | AC | ~ | 819 | 27 | 22,113 | 5/5/26 | 84 | 15 | 85 | 0 | New Construction - Initial | 1/1/80 |
| 746 | 151 | GOTHARD ST | ERNEST AVE | GARFIELD AVE | A | AC | ~ | 1,053 | 32 | 33,696 | 5/5/26 | 77 | 17 | 56 | 27 | New Construction - Initial | 1/1/80 |
| 746 | 161 | GOTHARD ST | SLATER AVE | BELVA DR | A | AC | ~ | 1,320 | 30 | 39,600 | 5/5/26 | 55 | 41 | 56 | 3 | New Construction - Initial | 1/1/80 |
| 746 | 162 | GOTHARD ST | BELVA DR | TALBERT AVE | A | AC | ~ | 1,320 | 30 | 39,600 | 5/5/26 | 50 | 26 | 72 | 2 | New Construction - Initial | 1/1/80 |
| 746 | 163 | GOTHARD ST | ELLIS AVE | PROMENADE PARKWAY DR | A | AC | ~ | 949 | 27 | 27,123 | 5/5/26 | 67 | 43 | 50 | 7 | New Construction - Initial | 1/1/80 |
| 746 | 240 | GOTHARD ST | CEDAR AVE | SLATER AVE | A | AC | ~ | 1,652 | 30 | 49,560 | 5/5/26 | 42 | 32 | 58 | 10 | New Construction - Initial | 1/1/80 |
| 746 | 241 | GOTHARD ST | WARNER AVE | CEDAR AVE | A | AC | ~ | 990 | 30 | 31,700 | 5/5/26 | 45 | 40 | 49 | 11 | New Construction - Initial | 1/1/80 |
| 746 | 262 | GOTHARD ST | TALBERT AVE | PRODAN DR | A | AC | ~ | 1,020 | 30 | 30,600 | 5/5/26 | 49 | 38 | 60 | 2 | New Construction - Initial | 1/1/80 |
| 746 | 263 | GOTHARD ST | PRODAN DR | MOUNTJOY DR | A | AC | ~ | 1,054 | 30 | 31,620 | 5/5/26 | 56 | 41 | 48 | 11 | New Construction - Initial | 1/1/80 |
| 746 | 264 | GOTHARD ST | MOUNTJOY DR | ELLIS AVE | A | AC | ~ | 561 | 30 | 16,830 | 5/5/26 | 56 | 41 | 54 | 5 | New Construction - Initial | 1/1/80 |
| 746 | 371 | GOTHARD ST | GARFIELD AVE | MAIN ST | A | AC | ~ | 1,320 | 32 | 42,240 | 5/5/26 | 77 | 30 | 68 | 2 | New Construction - Initial | 1/1/80 |
| 746 | 443 | GOTHARD ST | CENTER AVE | MC FADDEN AVE | A | AAC | ~ | 1,425 | 60 | 85,500 | 4/9/26 | 91 | 22 | 74 | 4 | Overlay - AC Structural | 3/21/16 |
| 746 | 586 | GOTHARD ST | EDINGER AVE | CENTER AVE | A | AAC | ~ | 1,321 | 60 | 79,260 | 4/9/26 | 91 | 21 | 79 | 0 | Overlay - AC Structural | 3/21/16 |
| 746 | 592 | GOTHARD ST | ERNEST AVE | PROMENADE PARKWAY DR | A | AC | ~ | 819 | 27 | 23,863 | 5/4/26 | 78 | 17 | 83 | 0 | New Construction - Initial | 1/1/80 |
| 746 | 593 | GOTHARD ST | GARFIELD AVE | ERNEST AVE | A | AC | ~ | 1,053 | 32 | 33,696 | 5/4/26 | 75 | 39 | 36 | 25 | New Construction - Initial | 1/1/80 |
| 746 | 603 | GOTHARD ST | BELVA DR | SLATER AVE | A | AC | ~ | 1,320 | 30 | 39,600 | 5/5/26 | 46 | 30 | 57 | 13 | New Construction - Initial | 1/1/80 |
| 746 | 604 | GOTHARD ST | TABLERT AVE | BELVA DR | A | AC | ~ | 1,320 | 30 | 39,600 | 5/5/26 | 51 | 44 | 53 | 3 | New Construction - Initial | 1/1/80 |
| 746 | 605 | GOTHARD ST | PROMENADE PARKWAY DR | ELLIS AVE | A | AC | ~ | 949 | 27 | 27,873 | 5/4/26 | 83 | 15 | 85 | 0 | New Construction - Initial | 1/1/80 |
| 746 | 626 | GOTHARD ST | HEIL AVE | 390' S/O MURDY | A | AAC | ~ | 1,085 | 60 | 65,100 | 4/22/26 | 69 | 26 | 69 | 5 | Overlay - AC Structural | 7/1/10 |
| 746 | 682 | GOTHARD ST | SLATER AVE | CEDAR AVE | A | AC | ~ | 1,652 | 30 | 49,560 | 5/5/26 | 50 | 35 | 53 | 12 | New Construction - Initial | 1/1/80 |
| 746 | 683 | GOTHARD ST | CEDAR AVE | WARNER AVE | A | AC | ~ | 990 | 30 | 29,700 | 5/5/26 | 42 | 35 | 56 | 9 | New Construction - Initial | 1/1/80 |
| 746 | 704 | GOTHARD ST | PRODAN DR | TALBERT AVE | A | AC | ~ | 1,020 | 30 | 30,600 | 5/5/26 | 44 | 47 | 42 | 11 | New Construction - Initial | 1/1/80 |
| 746 | 705 | GOTHARD ST | MOUNTJOY DR | PRODAN DR | A | AC | ~ | 1,054 | 30 | 31,620 | 5/5/26 | 49 | 33 | 49 | 18 | New Construction - Initial | 1/1/80 |
| 746 | 706 | GOTHARD ST | ELLIS AVE | MOUNTJOY DR | A | AC | ~ | 561 | 30 | 16,830 | 5/5/26 | 51 | 32 | 56 | 12 | New Construction - Initial | 1/1/80 |
| 746 | 813 | GOTHARD ST | MAIN ST | GARFIELD AVE | A | AC | ~ | 1,320 | 32 | 42,240 | 5/4/26 | 77 | 0 | 61 | 39 | New Construction - Initial | 1/1/80 |
| 746 | 857 | GOTHARD ST | 390' S/O MURDY | EDINGER AVE | A | AAC | ~ | 1,556 | 60 | 93,360 | 4/22/26 | 74 | 38 | 57 | 5 | Overlay - AC Structural | 7/1/10 |
| 746 | 860 | GOTHARD ST | PRINCE DR | HEIL AVE | A | AC | ~ | 1,330 | 60 | 79,800 | 4/22/26 | 52 | 45 | 53 | 2 | New Construction - Initial | 1/1/80 |
| 746 | 861 | GOTHARD ST | WARNER AVE | PRINCE DR | A | AC | ~ | 1,310 | 60 | 78,600 | 5/4/26 | 64 | 28 | 68 | 4 | New Construction - Initial | 1/1/80 |
| 751 | 175 | GRAHAM ST | BOLSA AVE | ARGOSY AVE | A | AC | ~ | 1,200 | 60 | 72,000 | 4/28/26 | 79 | 9 | 74 | 17 | New Construction - Initial | 1/1/80 |
| 751 | 176 | GRAHAM ST | ARGOSY AVE | MC FADDEN AVE | A | AC | ~ | 1,441 | 60 | 86,460 | 4/28/26 | 79 | 20 | 59 | 21 | New Construction - Initial | 1/1/80 |
| 751 | 199 | GRAHAM ST | RESEARCH DR | EDINGER AVE | A | AC | ~ | 1,525 | 28 | 47,700 | 5/7/26 | 79 | 9 | 65 | 26 | New Construction - Initial | 1/1/80 |
| 751 | 221 | GRAHAM ST | WARNER AVE | KENILWORTH DR | A | AC | ~ | 1,190 | 30 | 35,700 | 5/1/26 | 97 | 0 | 85 | 15 | New Construction - Initial | 1/1/80 |
| 751 | 222 | GRAHAM ST | KENILWORTH DR | SLATER AVE | A | AC | ~ | 1,450 | 30 | 43,500 | 5/1/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 31 | GRAHAM ST | MC FADDEN AVE | RESEARCH DR | A | AC | ~ | 1,116 | 28 | 35,248 | 5/7/26 | 79 | 0 | 71 | 29 | New Construction - Initial | 1/1/80 |
| 751 | 402 | GRAHAM ST | EDINGER AVE | MEADOWLARK DR | A | AC | ~ | 1,485 | 60 | 89,100 | 4/28/26 | 52 | 38 | 56 | 6 | New Construction - Initial | 1/1/80 |
| 751 | 403 | GRAHAM ST | MEADOWLARK DR | HEIL AVE | A | AC | ~ | 1,161 | 60 | 69,660 | 4/28/26 | 68 | 29 | 71 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 404 | GRAHAM ST | HEIL AVE | OLD PIRATE LN | A | AC | ~ | 1,178 | 60 | 55,680 | 4/2/26 | 80 | 28 | 44 | 28 | New Construction - Initial | 1/1/80 |
| 751 | 406 | GRAHAM ST | OLD PIRATE LN | WARNER AVE | A | AC | ~ | 1,466 | 60 | 61,960 | 4/2/26 | 67 | 74 | 14 | 12 | New Construction - Initial | 1/1/80 |
| 751 | 473 | GRAHAM ST | RESEARCH DR | MCFADDEN AVE | A | AC | ~ | 1,116 | 28 | 34,248 | 4/28/26 | 80 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 641 | GRAHAM ST | EDINGER AVE | RESEARCH DR | A | AC | ~ | 1,525 | 28 | 43,950 | 4/7/26 | 81 | 44 | 56 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 663 | GRAHAM ST | KENILWORTH DR | WARNER AVE | A | AC | ~ | 1,190 | 30 | 35,700 | 4/2/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 664 | GRAHAM ST | SLATER AVE | KENILWORTH DR | A | AC | ~ | 1,450 | 30 | 43,500 | 4/2/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 789 | 102 | HAMILTON AVE | SURVEYOR CIR | MAGNOLIA ST | C | AC | ~ | 1,570 | 50 | 78,500 | 4/15/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 789 | 334 | HAMILTON AVE | NEWLAND ST | SURVEYOR CIR | C | AC | ~ | 1,070 | 40 | 42,800 | 4/15/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 789 | 336 | HAMILTON AVE | BUSHARD ST | VIA STRAITS LN | C | AC | ~ | 1,067 | 31 | 33,077 | 5/6/26 | 70 | 32 | 67 | 1 | New Construction - Initial | 1/1/80 |
| 789 | 337 | HAMILTON AVE | VIA STRAITS LN | BROOKHURST ST | C | AC | ~ | 1,573 | 31 | 48,763 | 5/6/26 | 67 | 38 | 62 | 0 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 789 | 437 | HAMILTON AVE | NORTHSHORE LN | BUSHARD ST | C | AC | ~ | 714 | 31 | 22,134 | 5/6/26 | 64 | 15 | 33 | 52 | New Construction - Initial | 1/1/80 |
| 789 | 515 | HAMILTON AVE | NORTHSHORE LN | POLYNESIAN LN | C | AC | ~ | 1,338 | 31 | 41,478 | 4/27/26 | 63 | 35 | 59 | 6 | New Construction - Initial | 1/1/80 |
| 789 | 516 | HAMILTON AVE | POLYNESIAN LN | MAGNOLIA ST | C | AC | ~ | 590 | 31 | 18,290 | 4/27/26 | 42 | 44 | 49 | 7 | New Construction - Initial | 1/1/80 |
| 789 | 60890 | HAMILTON AVE | BROOKHURST ST | BRIDGE | C | AC | ~ | 345 | 31 | 10,695 | 5/6/26 | 61 | 30 | 70 | 0 | New Construction - AC | 1/1/80 |
| 789 | 60900 | HAMILTON AVE | BRIDGE | BROOKHURST ST | C | AC | ~ | 345 | 32 | 11,040 | 5/6/26 | 67 | 59 | 41 | 0 | New Construction - AC | 1/1/80 |
| 789 | 73 | HAMILTON AVE | POLYNESIAN LN | NORTHSHORE LN | A | AC | ~ | 1,338 | 31 | 41,478 | 5/6/26 | 66 | 48 | 27 | 25 | New Construction - Initial | 1/1/80 |
| 789 | 74 | HAMILTON AVE | MAGNOLIA ST | POLYNESIAN LN | C | AC | ~ | 590 | 31 | 18,290 | 5/6/26 | 69 | 62 | 38 | 0 | New Construction - Initial | 1/1/80 |
| 789 | 776 | HAMILTON AVE | SURVEYOR CIR | NEWLAND ST | C | AC | ~ | 1,070 | 27 | 28,890 | 4/15/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 789 | 778 | HAMILTON AVE | VIA STRAITS LN | BUSHARD ST | C | AC | ~ | 1,067 | 31 | 33,077 | 4/16/26 | 64 | 28 | 72 | 0 | New Construction - Initial | 1/1/80 |
| 789 | 779 | HAMILTON AVE | BROOKHURST ST | VIA STRAITS LN | C | AC | ~ | 1,573 | 31 | 48,763 | 4/27/26 | 44 | 45 | 52 | 3 | New Construction - Initial | 1/1/80 |
| 789 | 879 | HAMILTON AVE | BUSHARD ST | NORTHSHORE LN | C | AC | ~ | 714 | 31 | 22,134 | 4/27/26 | 71 | 34 | 66 | 0 | New Construction - Initial | 1/1/80 |
| 825 | 17013 | HEIL AVE | SEAVIEW LN | SAYBROOK LN | A | AC | ~ | 1,321 | 61 | 80,581 | 4/28/26 | 84 | 30 | 46 | 24 | New Construction - Initial | 1/1/80 |
| 825 | 17014 | HEIL AVE | BLACKBEARD LN | SEAVIEW LN | A | AC | ~ | 1,358 | 61 | 82,838 | 4/23/26 | 88 | 0 | 70 | 30 | New Construction - Initial | 1/1/80 |
| 825 | 17015 | HEIL AVE | BOLSA CHICA ST | BLACKBEARD LN | A | AC | ~ | 1,282 | 61 | 78,202 | 4/23/26 | 82 | 69 | 29 | 2 | New Construction - Initial | 1/1/80 |
| 825 | 446 | HEIL AVE | CLUBHOUSE LN | GRAHAM ST | A | AC | ~ | 1,257 | 61 | 76,677 | 4/6/26 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/14/19 |
| 825 | 447 | HEIL AVE | SABOT LN | GOLDENWEST ST | A | AC | ~ | 828 | 61 | 50,508 | 5/4/26 | 62 | 51 | 30 | 19 | New Construction - Initial | 1/1/80 |
| 825 | 627 | HEIL AVE | RHONE LN | GOTHARD ST | A | AC | ~ | 815 | 61 | 49,715 | 4/22/26 | 71 | 42 | 56 | 2 | New Construction - Initial | 1/1/80 |
| 825 | 628 | HEIL AVE | BEACH BLVD | SILVER LN | A | AAC | ~ | 1,320 | 61 | 80,520 | 4/22/26 | 71 | 40 | 58 | 2 | Overlay - AC Structural | 9/11/07 |
| 825 | 629 | HEIL AVE | LANDAU LN | NEWLAND ST | C | AC | ~ | 1,332 | 34 | 45,288 | 4/22/26 | 78 | 43 | 54 | 3 | New Construction - Initial | 1/1/80 |
| 825 | 630 | HEIL AVE | NEWLAND ST | MONROE LN | A | AC | ~ | 1,397 | 60 | 83,820 | 4/22/26 | 76 | 29 | 62 | 9 | New Construction - Initial | 1/1/80 |
| 825 | 631 | HEIL AVE | MONROE LN | BEACH BL | A | AC | ~ | 1,240 | 60 | 74,400 | 4/22/26 | 72 | 38 | 39 | 23 | New Construction - Initial | 1/1/80 |
| 825 | 632 | HEIL AVE | GOLDENWEST ST | FOUNTAIN LN | A | AAC | ~ | 1,452 | 61 | 88,572 | 4/22/26 | 80 | 14 | 86 | 0 | Overlay - AC Structural | 6/21/16 |
| 825 | 633 | HEIL AVE | EDWARDS ST | TRUDY LN | A | AC | ~ | 1,310 | 61 | 79,910 | 4/6/26 | 97 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 825 | 634 | HEIL AVE | TRUDY LN | SPRINGDALE ST | A | AC | ~ | 1,334 | 61 | 81,374 | 4/6/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 825 | 645 | HEIL AVE | GRAHAM ST | DEL MAR LN | A | AC | ~ | 997 | 61 | 60,817 | 4/20/26 | 86 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 2/14/19 |
| 825 | 646 | HEIL AVE | SPRINGDALE ST | CLUBHOUSE LN | A | AC | ~ | 1,391 | 61 | 84,851 | 4/6/26 | 88 | 0 | 81 | 19 | Surface Treatment - Slurry Seal | 2/14/19 |
| 825 | 658 | HEIL AVE | DEL MAR LN | BOLSA CHICA ST | A | AC | ~ | 1,654 | 61 | 100,894 | 4/20/26 | 83 | 0 | 96 | 4 | Overlay-Rubber Hot Mix | 2/14/19 |
| 825 | 862 | HEIL AVE | FOUNTAIN LN | EDWARDS ST | A | AAC | ~ | 1,191 | 61 | 72,651 | 4/22/26 | 80 | 37 | 59 | 4 | Overlay - AC Structural | 6/21/16 |
| 825 | 864 | HEIL AVE | GOTHARD ST | SABOT LN | A | AC | ~ | 1,154 | 61 | 70,394 | 5/4/26 | 49 | 57 | 35 | 8 | New Construction - Initial | 1/1/80 |
| 825 | 865 | HEIL AVE | SILVER LN | RHONE LN | A | AC | ~ | 1,165 | 61 | 71,065 | 4/22/26 | 76 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 154 | INDIANAPOLIS AVE | NEWLAND ST | IVES LN | C | AAC | ~ | 1,362 | 24 | 32,688 | 4/14/26 | 97 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/17 |
| 887 | 299 | INDIANAPOLIS AVE | TITAN LN | BUSHARD ST | C | AC | ~ | 988 | 24 | 23,712 | 4/14/26 | 81 | 16 | 84 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 300 | INDIANAPOLIS AVE | BUSHARD ST | EVERGLADES LN | C | AC | ~ | 1,451 | 24 | 34,824 | 4/14/26 | 84 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 301 | INDIANAPOLIS AVE | EVERGLADES LN | BROOKHURST LN | A | AC | ~ | 1,190 | 24 | 28,560 | 4/14/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 309 | INDIANAPOLIS AVE | DELAWARE ST | BEACH BLVD | C | AC | ~ | 1,320 | 33 | 43,560 | 4/15/26 | 92 | 0 | 93 | 7 | New Construction - Initial | 1/1/80 |
| 887 | 310 | INDIANAPOLIS AVE | BEACH BLVD | FARNSWORTH LN | C | AC | ~ | 1,325 | 24 | 31,800 | 4/30/26 | 85 | 17 | 83 | 0 | Overlay-Rubber Hot Mix | 2/14/19 |
| 887 | 311 | INDIANAPOLIS AVE | FARNSWORTH LN | NEWLAND ST | C | AC | ~ | 1,325 | 24 | 31,800 | 4/30/26 | 86 | 18 | 82 | 0 | Overlay-Rubber Hot Mix | 2/14/19 |
| 887 | 312 | INDIANAPOLIS AVE | LAKE ST | DELAWARE ST | C | AC | ~ | 1,517 | 19 | 28,823 | 4/15/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 436 | INDIANAPOLIS AVE | KELVINGROVE LN | TITAN LN | C | AC | ~ | 775 | 24 | 18,600 | 4/14/26 | 82 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 507 | INDIANAPOLIS AVE | MAGNOLIA ST | IVES LN | A | AAC | ~ | 1,281 | 24 | 30,744 | 4/8/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/17 |
| 887 | 508 | INDIANAPOLIS AVE | KELVINGROVE LN | MAGNOLIA ST | A | AC | ~ | 880 | 24 | 21,120 | 4/8/26 | 86 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 596 | INDIANAPOLIS AVE | IVES LN | NEWLAND ST | C | AAC | ~ | 1,362 | 24 | 32,688 | 4/8/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/17 |
| 887 | 65 | INDIANAPOLIS AVE | IVES LN | MAGNOLIA ST | A | AAC | ~ | 1,281 | 24 | 30,744 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/17 |
| 887 | 66 | INDIANAPOLIS AVE | MAGNOLIA ST | KELVINGROVE LN | C | AC | ~ | 880 | 24 | 21,120 | 4/14/26 | 86 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 741 | INDIANAPOLIS AVE | BUSHARD ST | TITAN LN | A | AC | ~ | 988 | 24 | 23,712 | 4/8/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 742 | INDIANAPOLIS AVE | EVERGLADES LN | BUSHARD ST | C | AC | ~ | 1,451 | 24 | 34,824 | 4/8/26 | 88 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 743 | INDIANAPOLIS AVE | BROOKHURST ST | EVERGLADES LN | A | AC | ~ | 1,190 | 24 | 28,560 | 4/8/26 | 93 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 752 | INDIANAPOLIS AVE | FARNSWORTH LN | BEACH BLVD | C | AC | ~ | 1,325 | 24 | 31,800 | 4/8/26 | 92 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 2/14/19 |
| 887 | 753 | INDIANAPOLIS AVE | NEWLAND ST | FARNSWORTH LN | C | AC | ~ | 1,325 | 24 | 31,800 | 4/8/26 | 86 | 18 | 82 | 0 | Overlay-Rubber Hot Mix | 2/14/19 |
| 887 | 754 | INDIANAPOLIS AVE | DELAWARE ST | LAKE ST | C | AC | ~ | 1,517 | 19 | 28,823 | 4/15/26 | 100 | 0 | 0 | 100 | New Construction - Initial | 1/1/80 |
| 887 | 878 | INDIANAPOLIS AVE | TITAN LN | KELVINGROVE LN | C | AC | ~ | 775 | 24 | 18,600 | 4/8/26 | 82 | 0 | 74 | 26 | New Construction - Initial | 1/1/80 |
| 1017 | 307 | LAKE ST | UTICA AVE | YORKTOWN AVE | A | AC | ~ | 1,012 | 29 | 29,348 | 4/8/26 | 72 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 7/22/14 |
| 1017 | 308 | LAKE ST | ADAMS AVE | UTICA AVE | A | AC | ~ | 1,321 | 29 | 38,309 | 4/8/26 | 81 | 13 | 87 | 0 | New Construction - Initial | 1/1/80 |
| 1017 | 317 | LAKE ST | ELEVENTH ST | ADAMS AVE | A | AAC | ~ | 1,320 | 29 | 38,280 | 4/9/26 | 98 | 0 | 89 | 11 | Overlay - AC Structural | 7/22/14 |
| 1017 | 322 | LAKE ST | SIXTH ST | INDIANAPOLIS AVE | A | AC | ~ | 1,107 | 29 | 32,103 | 4/15/26 | 81 | 32 | 68 | 0 | New Construction - Initial | 1/1/80 |
| 1017 | 323 | LAKE ST | ALLEY ORANGE AVE | SIXTH ST | A | AC | ~ | 1,015 | 29 | 29,435 | 4/15/26 | 79 | 32 | 56 | 12 | New Construction - Initial | 1/1/80 |
| 1017 | 430 | LAKE ST | INDIANAPOLIS AVE | ELEVENTH ST | A | AAC | ~ | 1,320 | 29 | 38,280 | 4/9/26 | 99 | 0 | 62 | 38 | Overlay - AC Structural | 7/22/14 |
| 1017 | 50420 | LAKE ST | ORANGE AVE | ALLEY ORANGE AVE | A | AC | ~ | 322 | 40 | 12,880 | 4/15/26 | 90 | 22 | 65 | 13 | New Construction - Initial | 1/1/80 |
| 1017 | 749 | LAKE ST | YORKTOWN AVE | UTICA AVE | A | AC | ~ | 1,012 | 29 | 29,348 | 4/8/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1017 | 750 | LAKE ST | UTICA AVE | ADAMS AVE | A | AC | ~ | 1,321 | 29 | 38,309 | 4/8/26 | 89 | 24 | 76 | 0 | Surface Treatment - Slurry Seal | 7/22/14 |
| 1017 | 759 | LAKE ST | ADAMS AVE | ELEVENTH ST | A | AAC | ~ | 1,320 | 29 | 38,280 | 4/15/26 | 97 | 0 | 100 | 0 | Overlay - AC Structural | 7/22/14 |
| 1017 | 764 | LAKE ST | INDIANAPOLIS AVE | SIXTH ST | A | AC | ~ | 1,107 | 29 | 32,103 | 4/15/26 | 69 | 31 | 56 | 13 | New Construction - Initial | 1/1/80 |
| 1017 | 765 | LAKE ST | SIXTH ST | ALLEY ORANGE AVE | A | AAC | ~ | 1,015 | 29 | 29,435 | 4/15/26 | 69 | 42 | 58 | 0 | Overlay - AC Structural | 11/1/06 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1017 | 872 | LAKE ST | ELEVENTH ST | INDIANAPOLIS AVE | A | AAC | ~ | 1,320 | 29 | 38,280 | 4/15/26 | 98 | 0 | 100 | 0 | Overlay - AC Structural | 7/22/14 |
| 1127 | 108 | MAGNOLIA ST | GARFIELD AVE | HYDE PARK DR | A | AC | ~ | 970 | 40 | 38,800 | 4/15/26 | 79 | 9 | 64 | 27 | New Construction - Initial | 1/1/80 |
| 1127 | 109 | MAGNOLIA ST | HYDE PARK DR | SEAHURST DR | A | AC | ~ | 825 | 40 | 33,000 | 4/15/26 | 77 | 26 | 73 | 1 | New Construction - Initial | 1/1/80 |
| 1127 | 110 | MAGNOLIA ST | SEAHURST DR | YORKTOWN AVE | A | AC | ~ | 845 | 40 | 33,800 | 4/15/26 | 70 | 57 | 43 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 111 | MAGNOLIA ST | YORKTOWN AVE | MADELINE DR | A | AC | ~ | 998 | 40 | 39,920 | 4/15/26 | 81 | 11 | 89 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 112 | MAGNOLIA ST | MADELINE DR | PIONEER DR | A | AC | ~ | 763 | 40 | 30,520 | 4/15/26 | 84 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 113 | MAGNOLIA ST | ADAMS AVE | MEDITERRANEAN DR | A | AAC | ~ | 895 | 33 | 31,535 | 4/8/26 | 83 | 49 | 51 | 0 | Overlay - AC Structural | 6/13/12 |
| 1127 | 114 | MAGNOLIA ST | BEDEL DR | INDIANAPOLIS AVE | A | AAC | ~ | 794 | 33 | 29,952 | 4/14/26 | 86 | 33 | 67 | 0 | Overlay - AC Structural | 6/13/12 |
| 1127 | 115 | MAGNOLIA ST | ATLANTA AVE | STILWELL DR | A | AC | ~ | 1,346 | 33 | 49,668 | 5/6/26 | 70 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 116 | MAGNOLIA ST | HAMILTION AVE | BERMUDA DR | A | AC | ~ | 1,447 | 32 | 46,304 | 5/6/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 117 | MAGNOLIA ST | BERMUDA DR | BANNING AVE | A | AC | ~ | 1,150 | 32 | 38,550 | 4/22/26 | 76 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 118 | MAGNOLIA ST | BANNING AVE | PCH | C | AC | ~ | 1,468 | 33 | 48,444 | 4/22/26 | 80 | 34 | 66 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 147 | MAGNOLIA ST | MEDITERRANEAN DR | BEDEL DR | A | AAC | ~ | 955 | 33 | 33,515 | 4/8/26 | 70 | 55 | 40 | 5 | Overlay - AC Structural | 6/13/12 |
| 1127 | 292 | MAGNOLIA ST | PIONEER DR | ADAMS AVE | A | AC | ~ | 880 | 40 | 35,200 | 4/15/26 | 81 | 0 | 81 | 19 | New Construction - Initial | 1/1/80 |
| 1127 | 347 | MAGNOLIA ST | STILWELL DR | HAMILTON AVE | A | AC | ~ | 1,293 | 40 | 51,720 | 5/6/26 | 81 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 352 | MAGNOLIA ST | INDIANAPOLIS AVE | CARROLTOWN DR | A | AC | ~ | 1,524 | 40 | 60,960 | 5/6/26 | 69 | 56 | 44 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 353 | MAGNOLIA ST | CARROLLTOWN DR | ATLANTA DR | A | AC | ~ | 1,117 | 40 | 44,680 | 5/6/26 | 71 | 42 | 58 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 50550 | MAGNOLIA ST | WARNER AVE | BRIDGE | A | AC | ~ | 1,280 | 60 | 86,600 | 4/13/26 | 100 | 0 | 0 | 0 | New Construction - AC | 1/1/80 |
| 1127 | 550 | MAGNOLIA ST | HYDE PARK DR | GARFIELD AVE | A | AC | ~ | 970 | 40 | 38,800 | 4/14/26 | 87 | 19 | 78 | 3 | New Construction - Initial | 1/1/80 |
| 1127 | 551 | MAGNOLIA ST | SEAHURST DR | HYDE PARK DR | A | AC | ~ | 825 | 40 | 33,000 | 4/14/26 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 552 | MAGNOLIA ST | YORKTOWN AVE | SEAHURST DR | A | AC | ~ | 845 | 40 | 33,800 | 4/14/26 | 88 | 0 | 70 | 30 | New Construction - Initial | 1/1/80 |
| 1127 | 553 | MAGNOLIA ST | MADELINE DR | YORKTOWN AVE | A | AC | ~ | 998 | 40 | 39,920 | 4/14/26 | 77 | 71 | 28 | 1 | New Construction - Initial | 1/1/80 |
| 1127 | 554 | MAGNOLIA ST | PIONEER DR | MADELINE DR | A | AC | ~ | 763 | 40 | 30,520 | 4/14/26 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 555 | MAGNOLIA ST | MEDITERRANEAN DR | ADAMS DR | A | AAC | ~ | 895 | 33 | 31,785 | 4/8/26 | 84 | 37 | 63 | 0 | Overlay - AC Structural | 6/13/12 |
| 1127 | 556 | MAGNOLIA ST | INDIANAPOLIS AVE | BEDEL DR | A | AC | ~ | 794 | 33 | 28,202 | 4/8/26 | 64 | 68 | 32 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 557 | MAGNOLIA ST | STILWELL DR | ATLANTA AVE | A | AC | ~ | 1,346 | 40 | 53,840 | 4/16/26 | 65 | 38 | 61 | 1 | New Construction - Initial | 1/1/80 |
| 1127 | 558 | MAGNOLIA ST | BERMUDA DR | HAMILTON AVE | A | AC | ~ | 1,447 | 33 | 47,751 | 4/15/26 | 74 | 17 | 82 | 1 | New Construction - Initial | 1/1/80 |
| 1127 | 559 | MAGNOLIA ST | BANNING  AVE | BERMUDA DR | A | AC | ~ | 1,150 | 33 | 39,950 | 4/22/26 | 85 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 560 | MAGNOLIA ST | PCH | BANNING AVE | C | AC | ~ | 1,468 | 33 | 48,444 | 4/22/26 | 88 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 589 | MAGNOLIA ST | BEDEL DR | MEDITERRANEAN DR | A | AAC | ~ | 955 | 33 | 33,015 | 4/8/26 | 78 | 59 | 41 | 0 | Overlay - AC Structural | 6/13/12 |
| 1127 | 734 | MAGNOLIA ST | ADAMS AVE | PIONEER DR | A | AC | ~ | 880 | 40 | 35,200 | 4/14/26 | 93 | 0 | 69 | 31 | New Construction - Initial | 1/1/80 |
| 1127 | 789 | MAGNOLIA ST | HAMILTON AVE | STILWELL DR | A | AC | ~ | 1,293 | 40 | 51,720 | 4/16/26 | 62 | 26 | 73 | 1 | New Construction - Initial | 1/1/80 |
| 1127 | 794 | MAGNOLIA ST | CARROLLTOWN DR | INDIANAPOLIS AVE | A | AC | ~ | 1,524 | 40 | 60,960 | 4/14/26 | 30 | 53 | 40 | 7 | New Construction - Initial | 1/1/80 |
| 1127 | 795 | MAGNOLIA ST | ATLANTA AVE | CARROLLTOWN DR | A | AC | ~ | 1,117 | 40 | 44,680 | 4/14/26 | 55 | 26 | 66 | 8 | New Construction - Initial | 1/1/80 |
| 1130 | 143 | MAIN ST | HOLLY ST | CLAY AVE | A | AAC | ~ | 834 | 40 | 35,610 | 4/8/26 | 85 | 18 | 82 | 0 | Overlay - AC Structural | 7/11/14 |
| 1130 | 268 | MAIN ST | ELLIS AVE | DELAWARE ST | A | AAC | ~ | 1,824 | 44 | 83,256 | 4/8/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 8/6/18 |
| 1130 | 269 | MAIN ST | DELAWARE ST | PROMENADE PKWY | A | AC | ~ | 1,243 | 40 | 49,720 | 4/6/26 | 88 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1130 | 358 | MAIN ST | PROMENADE PKWY | GARFIELD AVE | A | AAC | ~ | 742 | 39 | 31,188 | 4/6/26 | 88 | 22 | 78 | 0 | Overlay - AC Structural | 6/21/16 |
| 1130 | 359 | MAIN ST | GARFIELD AVE | HOLLY ST | A | AC | ~ | 819 | 40 | 33,510 | 4/8/26 | 83 | 23 | 55 | 22 | New Construction - Initial | 1/1/80 |
| 1130 | 372 | MAIN ST | SEVENTEENTH ST | YORKTOWN AVE | A | AAC | ~ | 1,445 | 33 | 50,185 | 4/23/26 | 68 | 46 | 54 | 0 | Overlay - AC Structural | 6/13/12 |
| 1130 | 379 | MAIN ST | YORKTOWN AVE | CLAY AVE | A | AAC | ~ | 1,370 | 33 | 49,210 | 4/13/26 | 92 | 0 | 69 | 31 | Overlay - AC Structural | 6/1/15 |
| 1130 | 50230 | MAIN ST | ELLIS AVE | BEACH BLVD | A | AAC | ~ | 251 | 60 | 15,060 | 4/24/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 8/6/18 |
| 1130 | 585 | MAIN ST | CLAY AVE | HOLLY ST | A | AAC | ~ | 834 | 39 | 32,526 | 4/13/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 7/21/14 |
| 1130 | 710 | MAIN ST | DELAWARE ST | ELLIS AVE | A | AAC | ~ | 1,824 | 38 | 69,312 | 4/6/26 | 96 | 0 | 71 | 29 | Overlay - AC Structural | 8/6/18 |
| 1130 | 711 | MAIN ST | PROMENADE PKWY | DELAWARE ST | A | AAC | ~ | 1,243 | 40 | 51,220 | 4/6/26 | 89 | 21 | 79 | 0 | Overlay - AC Structural | 6/21/16 |
| 1130 | 800 | MAIN ST | GARFIELD AVE | PROMENADE PKWY | A | AAC | ~ | 742 | 37 | 27,454 | 4/6/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/16 |
| 1130 | 801 | MAIN ST | HOLLY ST | GARFIELD AVE | A | AAC | ~ | 819 | 41 | 36,579 | 4/13/26 | 95 | 0 | 82 | 18 | Overlay - AC Structural | 7/22/14 |
| 1130 | 814 | MAIN ST | YORKTOWN AVE | SEVENTEENTH ST | A | AAC | ~ | 1,445 | 33 | 49,185 | 4/30/26 | 87 | 16 | 81 | 3 | Overlay - AC Structural | 6/13/12 |
| 1130 | 821 | MAIN ST | CLAY AVE | YORKTOWN AVE | A | AAC | ~ | 1,370 | 33 | 48,360 | 4/8/26 | 67 | 19 | 74 | 7 | Overlay - AC Structural | 7/22/14 |
| 1185 | 177 | MC FADDEN AVE | GRAHAM ST | COMPUTER LN | A | AAC | ~ | 925 | 60 | 55,500 | 4/29/26 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 1185 | 178 | MC FADDEN AVE | COMPUTER LN | ELECTRONIC LN | A | AAC | ~ | 923 | 60 | 55,380 | 4/29/26 | 92 | 0 | 89 | 11 | Overlay - AC Structural | 9/11/07 |
| 1185 | 179 | MC FADDEN AVE | ELECTRONIC LN | SPRINGDALE ST | A | AAC | ~ | 734 | 60 | 44,040 | 4/29/26 | 87 | 29 | 43 | 28 | Overlay - AC Structural | 9/11/07 |
| 1185 | 180 | MC FADDEN AVE | SPRINGDALE ST | LA SALLE LN | A | AAC | ~ | 1,481 | 60 | 88,860 | 4/29/26 | 91 | 24 | 75 | 1 | Overlay - AC Structural | 9/11/07 |
| 1185 | 409 | MC FADDEN AVE | LA SALLE LN | EDWARDS ST | A | AAC | ~ | 1,165 | 60 | 69,900 | 4/29/26 | 85 | 85 | 15 | 0 | Overlay - AC Structural | 9/11/07 |
| 1185 | 410 | MC FADDEN AVE | EDWARDS ST | SALISBURY LN | A | AC | ~ | 1,835 | 60 | 110,100 | 5/4/26 | 76 | 57 | 33 | 10 | New Construction - Initial | 1/1/80 |
| 1185 | 412 | MC FADDEN AVE | SALISBURY LN | GOLDENWEST ST | A | AC | ~ | 810 | 60 | 48,600 | 5/4/26 | 66 | 41 | 46 | 13 | New Construction - Initial | 1/1/80 |
| 1185 | 413 | MC FADDEN AVE | GOTHARD ST | SUGAR AVE | A | AC | ~ | 1,787 | 40 | 71,480 | 4/9/26 | 83 | 73 | 20 | 7 | New Construction - Initial | 1/1/80 |
| 1185 | 99 | MC FADDEN AVE | GOLDENWEST ST | GOTHARD ST | A | AC | ~ | 2,341 | 60 | 140,460 | 4/29/26 | 77 | 63 | 32 | 5 | New Construction - Initial | 1/1/80 |
| 1290 | 120 | NEWLAND ST | TALBERT AVE | SPRINGHURST AVE | A | AC | ~ | 900 | 30 | 27,000 | 4/9/26 | 100 | 0 | 0 | 100 | New Construction - Initial | 1/1/80 |
| 1290 | 121 | NEWLAND ST | SPRINGHURST AVE | NEWGATE DR | A | AC | ~ | 1,207 | 30 | 36,210 | 4/9/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 122 | NEWLAND ST | NEWGATE DR | ELLIS AVE | A | AC | ~ | 534 | 30 | 16,020 | 4/9/26 | 100 | 0 | 4 | 96 | New Construction - Initial | 1/1/80 |
| 1290 | 123 | NEWLAND ST | FRIESLAND DR.(W) | SLATER AVE | A | AC | ~ | 1,175 | 30 | 35,250 | 4/30/26 | 58 | 35 | 37 | 28 | New Construction - Initial | 1/1/80 |
| 1290 | 124 | NEWLAND ST | MODALE DR | KINGSPORT DR | A | AAC | ~ | 937 | 30 | 28,110 | 4/24/26 | 62 | 30 | 67 | 3 | Overlay - AC Structural | 7/1/11 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1290 | 125 | NEWLAND ST | KINGSPORT DR | GARFIELD AVE | A | AAC | ~ | 385 | 30 | 11,550 | 4/24/26 | 66 | 12 | 87 | 1 | Overlay - AC Structural | 7/1/11 |
| 1290 | 126 | NEWLAND ST | BRIDGEPORT DR | YORKTOWN AVE | A | AC | ~ | 1,156 | 60 | 69,360 | 4/21/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 127 | NEWLAND ST | DEEPVIEW DR | ADAMS AVE | A | AAC | ~ | 1,193 | 60 | 71,580 | 4/21/26 | 64 | 19 | 81 | 0 | Overlay - AC Structural | 9/11/07 |
| 1290 | 128 | NEWLAND ST | ADAMS AVE | KELSO DR | A | AAC | ~ | 959 | 60 | 57,540 | 4/30/26 | 63 | 29 | 70 | 1 | Overlay - AC Structural | 9/11/07 |
| 1290 | 129 | NEWLAND ST | INDIANAPOLIS AVE | PUERTO DR | A | AAC | ~ | 1,931 | 60 | 115,860 | 4/29/26 | 62 | 23 | 75 | 2 | Overlay - AC Structural | 9/11/07 |
| 1290 | 130 | NEWLAND ST | PUERTO DR | ATLANTA AVE | A | AAC | ~ | 720 | 60 | 43,200 | 4/29/26 | 61 | 22 | 78 | 0 | Overlay - AC Structural | 9/11/07 |
| 1290 | 131 | NEWLAND ST | EDINGER AVE | END | A | AC | ~ | 1,321 | 60 | 79,260 | 4/16/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 152 | NEWLAND ST | HAMILTON AVE | EDISON AVE | A | AAC | ~ | 848 | 48 | 40,704 | 4/15/26 | 76 | 37 | 62 | 1 | Overlay - AC Structural | 9/11/07 |
| 1290 | 255 | NEWLAND ST | WARNER AVE | FRIESLAND DR | A | AC | ~ | 1,466 | 30 | 43,980 | 4/30/26 | 55 | 44 | 45 | 11 | New Construction - Initial | 1/1/80 |
| 1290 | 256 | NEWLAND ST | SLATER AVE | PASEO CIR | A | AC | ~ | 1,346 | 30 | 40,380 | 4/9/26 | 99 | 0 | 23 | 77 | New Construction - Initial | 1/1/80 |
| 1290 | 257 | NEWLAND ST | PASEO CIR | TALBERT AVE | A | AC | ~ | 1,287 | 30 | 38,610 | 4/30/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 267 | NEWLAND ST | ELLIS AVE | MODALE DR | A | AAC | ~ | 1,322 | 30 | 39,660 | 4/24/26 | 65 | 35 | 65 | 0 | Overlay - AC Structural | 7/1/11 |
| 1290 | 290 | NEWLAND ST | YORKTOWN AVE | DEEPVIEW DR | A | AAC | ~ | 1,447 | 60 | 86,820 | 4/21/26 | 67 | 23 | 77 | 0 | Overlay - AC Structural | 9/11/07 |
| 1290 | 335 | NEWLAND ST | EDISON AVE | PCH | A | AAC | ~ | 1,524 | 42 | 54,008 | 4/15/26 | 62 | 65 | 35 | 0 | Overlay - AC Structural | 9/11/07 |
| 1290 | 354 | NEWLAND ST | KELSO DR | INDIANAPOLIS AVE | A | AAC | ~ | 1,683 | 60 | 100,980 | 4/30/26 | 66 | 26 | 73 | 1 | Overlay - AC Structural | 9/11/07 |
| 1290 | 398 | NEWLAND ST | GARFIELD AVE | BRIDGEPORT DR | A | AC | ~ | 1,485 | 60 | 89,100 | 4/21/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 424 | NEWLAND ST | HEIL AVE | LAMAR DR | A | AC | ~ | 931 | 60 | 55,860 | 5/1/26 | 55 | 50 | 44 | 6 | New Construction - Initial | 1/1/80 |
| 1290 | 425 | NEWLAND ST | ARNETT DR | WARNER AVE | A | AC | ~ | 866 | 60 | 51,960 | 5/1/26 | 51 | 49 | 39 | 12 | New Construction - Initial | 1/1/80 |
| 1290 | 429 | NEWLAND ST | LAMAR DR | ARNETT DR | A | AC | ~ | 844 | 60 | 50,640 | 5/1/26 | 57 | 45 | 48 | 7 | New Construction - Initial | 1/1/80 |
| 1290 | 432 | NEWLAND ST | ATLANTA AVE | ST AUGUSTINE DR | A | AC | ~ | 1,454 | 60 | 87,240 | 4/15/26 | 79 | 34 | 55 | 11 | New Construction - Initial | 1/1/80 |
| 1290 | 435 | NEWLAND ST | ST AUGUSTINE DR | HAMILTON AVE | A | AC | ~ | 1,185 | 60 | 71,100 | 4/15/26 | 75 | 28 | 62 | 10 | New Construction - Initial | 1/1/80 |
| 1290 | 562 | NEWLAND ST | SPRINGHURST AVE | TALBERT AVE | A | AC | ~ | 900 | 27 | 24,300 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 563 | NEWLAND ST | NEWGATE DR | SPRINGHURST AVE | A | AC | ~ | 1,207 | 27 | 32,589 | 4/20/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 564 | NEWLAND ST | ELLIS AVE | NEWGATE DR | A | AC | ~ | 534 | 27 | 14,418 | 4/20/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 565 | NEWLAND ST | SLATER AVE | FRIESLAND DR | A | AC | ~ | 1,175 | 27 | 31,725 | 4/30/26 | 60 | 36 | 55 | 9 | New Construction - Initial | 1/1/80 |
| 1290 | 566 | NEWLAND ST | KINGSPORT DR | MODALE DR | A | AAC | ~ | 937 | 27 | 25,299 | 4/24/26 | 61 | 23 | 77 | 0 | Overlay - AC Structural | 7/1/11 |
| 1290 | 567 | NEWLAND ST | GARFIELD AVE | KINGSPORT DR | A | AAC | ~ | 385 | 27 | 10,395 | 4/24/26 | 60 | 29 | 60 | 11 | Overlay - AC Structural | 7/1/11 |
| 1290 | 697 | NEWLAND ST | FRIESLAND DR | WARNER AVE | A | AC | ~ | 1,466 | 27 | 39,582 | 4/30/26 | 59 | 37 | 52 | 11 | New Construction - Initial | 1/1/80 |
| 1290 | 698 | NEWLAND ST | PASEO CIR | SLATER AVE | A | AC | ~ | 1,346 | 27 | 36,342 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 699 | NEWLAND ST | TALBERT AVE | PASEO CIR | A | AC | ~ | 1,287 | 27 | 34,749 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 709 | NEWLAND ST | MODALE DR | ELLIS AVE | A | AAC | ~ | 1,322 | 27 | 35,694 | 4/24/26 | 62 | 21 | 71 | 8 | Overlay - AC Structural | 7/1/11 |
| 1351 | 314 | ORANGE AVE | NINTH ST | THIRTEENTH ST | C | AC | ~ | 1,302 | 25 | 32,550 | 4/27/26 | 68 | 27 | 40 | 33 | New Construction - Initial | 1/1/80 |
| 1351 | 315 | ORANGE AVE | SIXTH ST | NINTH ST | C | AC | ~ | 974 | 25 | 24,350 | 4/27/26 | 70 | 33 | 40 | 27 | New Construction - Initial | 1/1/80 |
| 1351 | 316 | ORANGE AVE | THIRTEENTH ST | SEVENTEENTH ST | C | AC | ~ | 1,307 | 25 | 32,675 | 4/27/26 | 77 | 48 | 52 | 0 | New Construction - Initial | 1/1/80 |
| 1351 | 325 | ORANGE AVE | THIRD ST | SIXTH ST | C | AC | ~ | 952 | 25 | 23,800 | 4/27/26 | 80 | 18 | 51 | 31 | New Construction - Initial | 1/1/80 |
| 1351 | 326 | ORANGE AVE | ATLANTA AVE | THIRD ST | C | AC | ~ | 657 | 25 | 16,425 | 4/27/26 | 53 | 72 | 27 | 1 | New Construction - Initial | 1/1/80 |
| 1351 | 362 | ORANGE AVE | SEVENTEENTH ST | GOLDENWEST ST | C | AC | ~ | 1,965 | 25 | 49,125 | 4/13/26 | 55 | 36 | 52 | 12 | New Construction - Initial | 1/1/80 |
| 1351 | 756 | ORANGE AVE | THIRTEENTH ST | NINTH ST | C | AC | ~ | 1,302 | 25 | 32,550 | 4/27/26 | 68 | 23 | 57 | 20 | New Construction - Initial | 1/1/80 |
| 1351 | 757 | ORANGE AVE | NINTH ST | SIXTH ST | C | AC | ~ | 974 | 25 | 24,350 | 4/27/26 | 73 | 21 | 40 | 39 | New Construction - Initial | 1/1/80 |
| 1351 | 758 | ORANGE AVE | SEVENTEENTH ST | THIRTEENTH ST | C | AC | ~ | 1,307 | 25 | 32,675 | 4/27/26 | 66 | 42 | 47 | 11 | New Construction - Initial | 1/1/80 |
| 1351 | 767 | ORANGE AVE | SIXTH ST | THIRD ST | C | AAC | ~ | 952 | 25 | 22,390 | 4/27/26 | 88 | 20 | 80 | 0 | Overlay - AC Structural | 9/11/07 |
| 1351 | 768 | ORANGE AVE | THIRD ST | ATLANTA AVE | C | AC | ~ | 657 | 25 | 16,425 | 4/27/26 | 76 | 39 | 61 | 0 | New Construction - Initial | 1/1/80 |
| 1351 | 804 | ORANGE AVE | GOLDENWEST ST | SEVENTEENTH ST | C | AC | ~ | 1,965 | 25 | 49,125 | 4/13/26 | 56 | 28 | 56 | 16 | New Construction - Initial | 1/1/80 |
| 1472 | 14610 | PACIFIC VIEW | TWIN DOLPHIN DR | BEACH BLVD | A | AC | ~ | 1,262 | 30 | 37,860 | 5/1/26 | 83 | 16 | 84 | 0 | New Construction | 1/1/80 |
| 1472 | 17003 | PACIFIC VIEW | HUNTINGTON ST | TWIN DOLPHIN DR | A | AC | ~ | 972 | 30 | 29,160 | 5/1/26 | 83 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1472 | 50530 | PACIFIC VIEW | TWIN DOLPHIN DR (W) | HUNTINGTON ST | A | AC | ~ | 972 | 30 | 29,160 | 5/1/26 | 83 | 33 | 67 | 0 | New Construction - Initial | 1/1/80 |
| 1472 | 50540 | PACIFIC VIEW | BEACH BLVD | TWIN DOLPHIN DR | A | AC | ~ | 1,262 | 30 | 37,860 | 5/1/26 | 82 | 13 | 62 | 25 | New Construction - Initial | 1/1/80 |
| 1472 | 60830 | PACIFIC VIEW | HUNTINGTON ST | FIRST ST | C | AC | ~ | 1,334 | 22 | 34,400 | 5/1/26 | 95 | 0 | 100 | 0 | New Construction - AC | 1/1/16 |
| 1472 | 60840 | PACIFIC VIEW | FIRST ST | HUNTINGTON ST | C | AC | ~ | 1,334 | 15 | 27,150 | 5/1/26 | 98 | 0 | 100 | 0 | New Construction - AC | 1/1/16 |
| 1385 | 140 | PALM AVE | SURF DR | CHERRYHILL LN | C | AC | ~ | 2,090 | 22 | 47,480 | 4/9/26 | 85 | 66 | 34 | 0 | New Construction - Initial | 1/1/80 |
| 1385 | 363 | PALM AVE | SEVENTEENTH ST | GOLDENWEST ST | C | AC | ~ | 1,965 | 24 | 47,160 | 4/23/26 | 57 | 47 | 49 | 4 | New Construction - Initial | 1/1/80 |
| 1385 | 367 | PALM AVE | OFELIA LN | GOLDENWEST ST | C | AC | ~ | 1,476 | 29 | 48,804 | 4/23/26 | 74 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 1385 | 368 | PALM AVE | CHERRYHILL LN (N) | OFELIA LN | C | AC | ~ | 2,210 | 29 | 66,840 | 4/9/26 | 81 | 26 | 74 | 0 | New Construction - Initial | 1/1/80 |
| 1385 | 399 | PALM AVE | SEAPOINT DR | SURF DR | C | AC | ~ | 665 | 28 | 19,370 | 4/9/26 | 84 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 1385 | 582 | PALM AVE | CHERRYHILL LN | SURF DR | C | AC | ~ | 2,090 | 22 | 48,480 | 4/9/26 | 81 | 23 | 77 | 0 | New Construction - Initial | 1/1/80 |
| 1385 | 805 | PALM AVE | GOLDENWEST ST | SEVENTEENTH ST | C | AC | ~ | 1,965 | 24 | 47,160 | 4/23/26 | 64 | 24 | 75 | 1 | New Construction - Initial | 1/1/80 |
| 1385 | 809 | PALM AVE | GOLDENWEST ST | OFELIA LN | A | AC | ~ | 1,476 | 31 | 45,756 | 4/23/26 | 62 | 60 | 39 | 1 | New Construction - Initial | 1/1/80 |
| 1385 | 810 | PALM AVE | OFELIA LN | CHERRYHILL LN | C | AC | ~ | 2,210 | 31 | 68,510 | 4/9/26 | 85 | 21 | 79 | 0 | New Construction - Initial | 1/1/80 |
| 1385 | 841 | PALM AVE | SURF DR | SEAPOINT DR | C | AC | ~ | 665 | 31 | 22,865 | 4/9/26 | 80 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 1503 | 133 | RANCHO RD | ASTRONAUTICS LN | BOLSA CHICA ST | C | AC | ~ | 1,220 | 18 | 21,960 | 4/7/26 | 65 | 48 | 52 | 0 | New Construction - Initial | 1/1/80 |
| 1503 | 360 | RANCHO RD | SPA DR | ASTRONAUTICS LN | C | AC | ~ | 1,445 | 18 | 26,010 | 4/7/26 | 72 | 57 | 43 | 0 | New Construction - Initial | 1/1/80 |
| 1503 | 521 | RANCHO RD | SPA DR | GRAHAM ST | C | AC | ~ | 777 | 26 | 20,202 | 4/7/26 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1503 | 575 | RANCHO RD | BOLSA CHICA ST | ASTRONAUTICS LN | C | AC | ~ | 1,220 | 22 | 26,840 | 4/7/26 | 83 | 11 | 86 | 3 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1503 | 79 | RANCHO RD | GRAHAM ST | SPA DR | C | AC | ~ | 777 | 16 | 12,432 | 4/7/26 | 29 | 75 | 25 | 0 | New Construction - Initial | 1/1/80 |
| 1503 | 802 | RANCHO RD | ASTRONAUTICS LN | SPA DR | C | AC | ~ | 1,445 | 22 | 31,790 | 4/7/26 | 72 | 24 | 76 | 0 | New Construction - Initial | 1/1/80 |
| 1631 | 17011 | SAYBROOK LN | HEIL AVE | SANTA BARBARA LN | A | AC | ~ | 1,317 | 60 | 79,020 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1631 | 17012 | SAYBROOK LN | SANTA BARBARA LN | EDINGER AVE | A | AC | ~ | 1,326 | 60 | 79,560 | 4/20/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1655 | 148 | SEAPOINT AVE | DORAL DR | CHERRHILL LN | A | AC | ~ | 830 | 32 | 28,060 | 4/9/26 | 92 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 1655 | 149 | SEAPOINT AVE | CHERRHILL LN | PALM AVE | A | AC | ~ | 1,218 | 32 | 41,476 | 4/9/26 | 83 | 88 | 12 | 0 | New Construction - Initial | 1/1/80 |
| 1655 | 369 | SEAPOINT AVE | PALM AVE | PCH | A | AC | ~ | 1,206 | 33 | 42,798 | 4/9/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1655 | 370 | SEAPOINT AVE | GARFIELD AVE | DORAL DR | A | AC | ~ | 1,637 | 32 | 54,384 | 4/9/26 | 83 | 78 | 20 | 2 | New Construction - Initial | 1/1/80 |
| 1655 | 590 | SEAPOINT AVE | CHERRHILL LN | DORAL DR | A | AC | ~ | 830 | 32 | 26,560 | 4/9/26 | 86 | 95 | 0 | 5 | New Construction - Initial | 1/1/80 |
| 1655 | 591 | SEAPOINT AVE | PALM AVE | CHERRHILL LN | A | AC | ~ | 1,218 | 32 | 38,976 | 4/9/26 | 72 | 73 | 10 | 17 | New Construction - Initial | 1/1/80 |
| 1655 | 811 | SEAPOINT AVE | PCH | PALM AVE | A | AC | ~ | 1,206 | 33 | 42,048 | 4/9/26 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1655 | 812 | SEAPOINT AVE | DORAL DR | GARFIELD AVE | A | AC | ~ | 1,637 | 32 | 54,134 | 4/9/26 | 87 | 76 | 18 | 6 | New Construction - Initial | 1/1/80 |
| 1670 | 364 | SEVENTEENTH ST | PCH | ORANGE AVE | A | AC | ~ | 1,239 | 28 | 34,692 | 4/23/26 | 61 | 21 | 79 | 0 | New Construction - Initial | 1/1/80 |
| 1670 | 365 | SEVENTEENTH ST | ORANGE AVE | PALM AVE | A | AC | ~ | 1,237 | 28 | 34,636 | 4/23/26 | 57 | 24 | 75 | 1 | New Construction - Initial | 1/1/80 |
| 1670 | 373 | SEVENTEENTH ST | ADAMS AVE | MAIN ST | A | AC | ~ | 976 | 26 | 25,376 | 4/13/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1670 | 374 | SEVENTEENTH ST | PALM AVE | ADAMS AVE | A | AC | ~ | 1,625 | 27 | 43,875 | 4/13/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1670 | 806 | SEVENTEENTH ST | ORANGE AVE | PCH | A | AC | ~ | 1,239 | 28 | 34,692 | 4/13/26 | 66 | 39 | 61 | 0 | New Construction - Initial | 1/1/80 |
| 1670 | 807 | SEVENTEENTH ST | PALM AVE | ORANGE AVE | A | AC | ~ | 1,237 | 28 | 34,636 | 4/13/26 | 49 | 37 | 63 | 0 | New Construction - Initial | 1/1/80 |
| 1670 | 815 | SEVENTEENTH ST | MAIN ST | ADAMS AVE | A | AC | ~ | 976 | 38 | 37,088 | 4/13/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1670 | 816 | SEVENTEENTH ST | ADAMS AVE | PALM AVE | A | AC | ~ | 1,625 | 35 | 56,875 | 4/13/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1716 | 321 | SIXTH ST | ORANGE AVE | LAKE ST | C | AC | ~ | 1,068 | 25 | 26,100 | 5/1/26 | 75 | 27 | 68 | 5 | New Construction - Initial | 1/1/80 |
| 1716 | 324 | SIXTH ST | PCH | ORANGE AVE | C | AC | ~ | 1,260 | 25 | 32,400 | 5/1/26 | 82 | 20 | 80 | 0 | New Construction - Initial | 1/1/80 |
| 1716 | 763 | SIXTH ST | LAKE ST | ORANGE AVE | C | AC | ~ | 1,068 | 25 | 26,100 | 5/1/26 | 71 | 20 | 67 | 13 | New Construction - Initial | 1/1/80 |
| 1716 | 766 | SIXTH ST | ORANGE AVE | PCH | C | AC | ~ | 1,260 | 25 | 31,500 | 5/1/26 | 74 | 35 | 65 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 166 | SLATER AVE | GRAHAM ST | WOODFERN LN | A | AAC | ~ | 646 | 30 | 19,380 | 5/1/26 | 72 | 14 | 86 | 0 | Overlay - AC Structural | 7/1/10 |
| 1724 | 167 | SLATER AVE | WOODFERN LN | MISTY LN | A | AAC | ~ | 807 | 30 | 24,210 | 5/1/26 | 75 | 23 | 77 | 0 | Overlay - AC Structural | 7/1/10 |
| 1724 | 17006 | SLATER AVE | GOLDENWEST ST | FLOWER LN | A | AC | ~ | 1,149 | 30 | 34,470 | 4/20/26 | 95 | 0 | 55 | 45 | New Construction - Initial | 1/1/80 |
| 1724 | 17007 | SLATER AVE | FLOWER LN | GOTHARD ST | A | AC | ~ | 834 | 30 | 25,020 | 4/20/26 | 98 | 0 | 65 | 35 | New Construction - Initial | 1/1/80 |
| 1724 | 17008 | SLATER AVE | GOTHARD ST | FLOWER LN | A | AC | ~ | 834 | 30 | 25,020 | 4/20/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 242 | SLATER AVE | CORONADO LN | EDWARDS ST | A | AAC | ~ | 1,466 | 30 | 43,980 | 5/4/26 | 77 | 17 | 83 | 0 | Overlay - AC Structural | 7/1/10 |
| 1724 | 243 | SLATER AVE | EDWARDS ST | MAYOR LN | A | AAC | ~ | 1,293 | 30 | 38,790 | 5/4/26 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/10 |
| 1724 | 244 | SLATER AVE | MAYOR LN | GOLDENWEST ST | A | AAC | ~ | 1,345 | 30 | 40,350 | 5/4/26 | 78 | 6 | 94 | 0 | Overlay - AC Structural | 7/1/10 |
| 1724 | 253 | SLATER AVE | GOTHARD ST | NICHOLS ST | A | AC | ~ | 1,320 | 30 | 39,600 | 4/20/26 | 93 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 1724 | 254 | SLATER AVE | NICHOLS ST | QUEENS LN | A | AC | ~ | 1,155 | 30 | 34,650 | 4/13/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 390 | SLATER AVE | BEACH BLVD | JEFFERSON LN | A | AC | ~ | 1,550 | 30 | 46,500 | 4/29/26 | 78 | 13 | 87 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 394 | SLATER AVE | QUEENS LN | BEACH BLVD | A | AC | ~ | 825 | 30 | 24,750 | 4/29/26 | 95 | 0 | 36 | 64 | New Construction - Initial | 1/1/80 |
| 1724 | 395 | SLATER AVE | JEFFERSON LN | NEWLAND ST | A | AC | ~ | 1,088 | 30 | 32,640 | 4/29/26 | 77 | 26 | 74 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 535 | SLATER AVE | SPRINGDALE ST | MISTY LN | A | AAC | ~ | 1,193 | 24 | 28,632 | 5/4/26 | 80 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/10 |
| 1724 | 536 | SLATER AVE | CORONADO LN | SPRINGDALE ST | A | AAC | ~ | 1,173 | 30 | 35,190 | 5/4/26 | 75 | 34 | 64 | 2 | Overlay - AC Structural | 7/1/10 |
| 1724 | 609 | SLATER AVE | MISTY LN | WOODFERN LN | A | AAC | ~ | 807 | 24 | 19,368 | 5/4/26 | 79 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/10 |
| 1724 | 684 | SLATER AVE | EDWARDS ST | CORONADO LN | A | AAC | ~ | 1,466 | 30 | 43,980 | 5/4/26 | 76 | 44 | 56 | 0 | Overlay - AC Structural | 7/1/10 |
| 1724 | 685 | SLATER AVE | MAYOR LN | EDWARDS ST | A | AAC | ~ | 1,293 | 30 | 38,790 | 5/4/26 | 88 | 14 | 86 | 0 | Overlay - AC Structural | 7/1/10 |
| 1724 | 686 | SLATER AVE | GOLDENWEST ST | MAYOR LN | A | AAC | ~ | 1,345 | 30 | 40,350 | 5/4/26 | 80 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/10 |
| 1724 | 687 | SLATER AVE | FLOWER LN | GOLDENWEST ST | A | AC | ~ | 1,149 | 30 | 34,470 | 4/20/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 695 | SLATER AVE | NICHOLS ST | GOTHARD ST | A | AC | ~ | 1,320 | 30 | 39,600 | 4/20/26 | 97 | 0 | 48 | 52 | New Construction - Initial | 1/1/80 |
| 1724 | 696 | SLATER AVE | QUEENS LN | NICHOLS ST | A | AC | ~ | 1,155 | 30 | 34,650 | 4/13/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 7003 | SLATER AVE | WOODFERN LN | GRAHAM ST | A | AAC | ~ | 646 | 24 | 15,504 | 5/4/26 | 79 | 12 | 88 | 0 | Overlay - AC Structural | 7/1/10 |
| 1724 | 832 | SLATER AVE | JEFFERSON LN | BEACH BLVD | A | AC | ~ | 1,550 | 30 | 46,500 | 4/29/26 | 79 | 11 | 89 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 836 | SLATER AVE | BEACH BLVD | QUEENS LN | A | AC | ~ | 825 | 30 | 24,750 | 4/29/26 | 96 | 0 | 80 | 20 | New Construction - Initial | 1/1/80 |
| 1724 | 837 | SLATER AVE | NEWLAND ST | JEFFERSON LN | A | AC | ~ | 1,088 | 30 | 32,640 | 4/29/26 | 78 | 18 | 81 | 1 | New Construction - Initial | 1/1/80 |
| 1724 | 93 | SLATER AVE | MISTY LN | SPRINGDALE ST | A | AAC | ~ | 1,193 | 30 | 35,790 | 5/1/26 | 79 | 20 | 78 | 2 | Overlay - AC Structural | 7/1/10 |
| 1724 | 94 | SLATER AVE | SPRINGDALE ST | CORONADO LN | A | AAC | ~ | 1,173 | 30 | 35,190 | 5/1/26 | 76 | 13 | 87 | 0 | Overlay - AC Structural | 7/1/10 |
| 1751 | 170 | SPRINGDALE ST | SKYLAB RD | BOLSA AVE | A | AAC | ~ | 1,435 | 33 | 54,855 | 4/24/26 | 62 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 171 | SPRINGDALE ST | BRIARCLIFF DR | SKYLAB RD | A | AAC | ~ | 1,084 | 33 | 35,772 | 4/24/26 | 61 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 172 | SPRINGDALE ST | CHINOOK DR | BRIARCLIFF DR | A | AAC | ~ | 1,048 | 42 | 44,016 | 4/13/26 | 71 | 0 | 99 | 1 | Overlay - AC Structural | 6/21/12 |
| 1751 | 174 | SPRINGDALE ST | BOLSA AVE | ENGINEER DR | A | AAC | ~ | 685 | 39 | 26,715 | 4/28/26 | 90 | 25 | 75 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 18 | SPRINGDALE ST | ENGINEER DR | MACHINE DR | A | AAC | ~ | 1,142 | 39 | 44,538 | 4/28/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 19 | SPRINGDALE ST | MACHINE DR | MC FADDEN AVE | A | AAC | ~ | 817 | 39 | 31,863 | 4/28/26 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 197 | SPRINGDALE ST | EDINGER AVE | MEADOWLARK DR | A | AAC | ~ | 1,455 | 39 | 56,745 | 4/28/26 | 72 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 1751 | 198 | SPRINGDALE ST | MEADOWLARK DR | HEIL AVE | A | AAC | ~ | 1,185 | 39 | 46,215 | 4/28/26 | 73 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 1751 | 225 | SPRINGDALE ST | HEIL AVE | DOYLE DR | A | AAC | ~ | 1,450 | 33 | 49,100 | 4/28/26 | 69 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 1751 | 226 | SPRINGDALE ST | DOYLE DR | WARNER AVE | A | AAC | ~ | 1,191 | 40 | 53,140 | 4/15/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 1751 | 237 | SPRINGDALE ST | WARNER AVE | PALO ALTO DR | A | AC | ~ | 1,450 | 40 | 58,000 | 4/14/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1751 | 238 | SPRINGDALE ST | PALO ALTO DR | SLATER AVE | A | AC | ~ | 1,190 | 40 | 47,600 | 4/14/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1751 | 247 | SPRINGDALE ST | SLATER AVE | FRITCH DR | A | AC | ~ | 1,462 | 40 | 58,480 | 5/4/26 | 40 | 45 | 49 | 6 | New Construction - Initial | 1/1/80 |
| 1751 | 248 | SPRINGDALE ST | FRITCH DR | TALBERT AVE | A | AC | ~ | 1,185 | 40 | 47,400 | 5/4/26 | 41 | 43 | 45 | 12 | New Construction - Initial | 1/1/80 |
| 1751 | 32 | SPRINGDALE ST | MC FADDEN AVE | PRISCILLA DR | A | AAC | ~ | 961 | 38 | 36,518 | 4/28/26 | 59 | 100 | 0 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 33 | SPRINGDALE ST | PRISCILLA DR | ROYALIST DR | A | AAC | ~ | 1,040 | 38 | 39,520 | 4/28/26 | 65 | 100 | 0 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 34 | SPRINGDALE ST | ROYALIST DR (E) | EDINGER AVE | A | AAC | ~ | 641 | 39 | 24,999 | 4/28/26 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 1751 | 460 | SPRINGDALE ST | MACHINE DR | ENGINEER DR | A | AAC | ~ | 1,142 | 39 | 44,538 | 4/28/26 | 82 | 29 | 71 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 461 | SPRINGDALE ST | MC FADDEN AVE | MACHINE DR | A | AAC | ~ | 817 | 39 | 31,863 | 4/28/26 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 474 | SPRINGDALE ST | PRISCILLA (E) | MC FADDEN AVE | A | AAC | ~ | 961 | 38 | 36,518 | 4/28/26 | 81 | 68 | 32 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 475 | SPRINGDALE ST | ROYALIST DR | PRISCILLA DR | A | AAC | ~ | 1,040 | 38 | 39,520 | 4/28/26 | 69 | 83 | 0 | 17 | Overlay - AC Structural | 6/21/13 |
| 1751 | 476 | SPRINGDALE ST | EDINGER AVE | ROYALIST DR | A | AAC | ~ | 641 | 39 | 24,999 | 4/28/26 | 72 | 71 | 29 | 0 | Overlay - AC Structural | 6/21/13 |
| 1751 | 612 | SPRINGDALE ST | BOLSA AVE | SKYLAB RD | A | AAC | ~ | 1,435 | 33 | 50,855 | 4/24/26 | 76 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 613 | SPRINGDALE ST | SKYLAB RD | BRIARCLIFF DR | A | AAC | ~ | 1,084 | 33 | 35,772 | 4/24/26 | 61 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 614 | SPRINGDALE ST | BRIARCLIFF DR (W) | CHINOOK DR | A | AAC | ~ | 1,048 | 42 | 44,016 | 4/13/26 | 70 | 0 | 100 | 0 | Overlay - AC Structural | 6/12/12 |
| 1751 | 616 | SPRINGDALE ST | ENGINEER DR | BOLSA AVE | A | AAC | ~ | 685 | 39 | 26,715 | 4/28/26 | 82 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1751 | 639 | SPRINGDALE ST | MEADOWLARK DR | EDINGER AVE | A | AAC | ~ | 1,455 | 39 | 56,745 | 4/28/26 | 80 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 1751 | 640 | SPRINGDALE ST | HEIL AVE | MEADOWLARK DR | A | AAC | ~ | 1,185 | 39 | 46,215 | 4/28/26 | 69 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 1751 | 667 | SPRINGDALE ST | DOYLE DR | HEIL AVE | A | AAC | ~ | 1,450 | 33 | 51,350 | 4/28/26 | 71 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 1751 | 668 | SPRINGDALE ST | WARNER AVE | DOYLE DR | A | AAC | ~ | 1,191 | 40 | 47,640 | 4/15/26 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 6/21/13 |
| 1751 | 679 | SPRINGDALE ST | PALO ALTO DR | WARNER AVE | A | AC | ~ | 1,450 | 40 | 58,000 | 4/14/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1751 | 680 | SPRINGDALE ST | SLATER AVE | PALO ALTO DR | A | AC | ~ | 1,190 | 40 | 47,600 | 4/14/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1751 | 689 | SPRINGDALE ST | FRITCH DR | SLATER AVE | A | AC | ~ | 1,462 | 40 | 58,480 | 5/4/26 | 61 | 21 | 77 | 2 | New Construction - Initial | 1/1/80 |
| 1751 | 690 | SPRINGDALE ST | TALBERT AVE | FRITCH DR | A | AC | ~ | 1,185 | 40 | 47,400 | 5/4/26 | 49 | 35 | 53 | 12 | New Construction - Initial | 1/1/80 |
| 1838 | 153 | TALBERT AVE | BEACH BLVD | CEMETERY | A | AAC | ~ | 1,411 | 33 | 46,563 | 4/20/26 | 76 | 39 | 61 | 0 | Overlay - AC Structural | 11/1/16 |
| 1838 | 249 | TALBERT AVE | SPRINGDALE ST | END | A | AC | ~ | 1,566 | 30 | 46,980 | 3/30/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 258 | TALBERT AVE | CEMETERY | NEWLAND ST | A | AAC | ~ | 1,228 | 33 | 40,524 | 4/20/26 | 82 | 19 | 81 | 0 | Overlay - AC Structural | 11/1/16 |
| 1838 | 388 | TALBERT AVE | GOTHARD ST | KOVACS LN | A | AAC | ~ | 1,663 | 40 | 66,520 | 4/20/26 | 76 | 46 | 54 | 0 | Overlay - AC Structural | 6/21/16 |
| 1838 | 389 | TALBERT AVE | KOVACS LN | BEACH BLVD | A | AAC | ~ | 1,637 | 40 | 65,480 | 4/20/26 | 78 | 41 | 52 | 7 | Overlay - AC Structural | 6/21/16 |
| 1838 | 537 | TALBERT AVE | IVORYCREST LN | SPRINGDALE ST | A | AC | ~ | 1,036 | 30 | 31,080 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 539 | TALBERT AVE | FIELDBURY LN | IVORYCREST LN | A | AC | ~ | 1,106 | 30 | 33,180 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 540 | TALBERT AVE | EDWARDS ST | FIELDBURY LN | A | AC | ~ | 770 | 30 | 23,100 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 595 | TALBERT AVE | CEMETERY | BEACH BLVD | A | AAC | ~ | 1,411 | 29 | 40,919 | 4/20/26 | 74 | 31 | 59 | 10 | Overlay - AC Structural | 11/1/16 |
| 1838 | 691 | TALBERT AVE | SPRINGDALE ST | END | A | AC | ~ | 1,566 | 30 | 46,980 | 4/4/22 | 60 | 77 | 23 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 700 | TALBERT AVE | NEWLAND ST | CEMETERY | A | AAC | ~ | 1,228 | 33 | 40,524 | 4/20/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/1/16 |
| 1838 | 830 | TALBERT AVE | KOVACS LN | GOTHARD ST | A | AAC | ~ | 1,663 | 40 | 66,520 | 4/20/26 | 81 | 17 | 83 | 0 | Overlay - AC Structural | 6/21/16 |
| 1838 | 831 | TALBERT AVE | BEACH BLVD | KOVACS LN | A | AAC | ~ | 1,637 | 40 | 65,480 | 4/20/26 | 78 | 39 | 61 | 0 | Overlay - AC Structural | 6/21/16 |
| 1838 | 95 | TALBERT AVE | SPRINGDALE ST | IVORYCREST LN | A | AC | ~ | 1,036 | 30 | 31,080 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 97 | TALBERT AVE | IVORYCREST LN | FIELDBURY LN | A | AC | ~ | 1,106 | 30 | 33,180 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 98 | TALBERT AVE | FIELDBURY LN | EDWARDS ST | A | AC | ~ | 770 | 30 | 23,100 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 4060 | 50400 | TWIN DOLPHIN DR | PCH | PACIFIC VIEW AVE | C | AC | ~ | 490 | 65 | 24,500 | 5/1/26 | 76 | 9 | 91 | 0 | New Construction - Initial | 1/1/80 |
| 1994 | 433 | WALNUT AVE | SIXTH ST | FIRST ST | C | AC | ~ | 1,654 | 18 | 34,552 | 5/1/26 | 87 | 19 | 58 | 23 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1994 | 875 | WALNUT AVE | FIRST ST | SIXTH ST | C | AC | ~ | 1,654 | 18 | 34,820 | 5/1/26 | 84 | 14 | 75 | 11 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1995 | 157 | WARD ST | GARFIELD AVE | TANA DR | C | AC | ~ | 703 | 16 | 11,248 | 4/21/26 | 43 | 57 | 43 | 0 | New Construction - Initial | 1/1/80 |
| 1995 | 276 | WARD ST | SUNDAY DR | YORKTOWN AVE | C | AC | ~ | 935 | 25 | 23,375 | 4/21/26 | 71 | 38 | 62 | 0 | New Construction - Initial | 1/1/80 |
| 1995 | 499 | WARD ST | SUNDAY DR | TANA DR | C | AC | ~ | 1,002 | 16 | 16,032 | 4/21/26 | 66 | 27 | 70 | 3 | New Construction - Initial | 1/1/80 |
| 1995 | 57 | WARD ST | TANA DR | SUNDAY DR | C | AC | ~ | 1,002 | 16 | 16,032 | 4/21/26 | 53 | 51 | 49 | 0 | New Construction - Initial | 1/1/80 |
| 1995 | 599 | WARD ST | TANA DR | GARFIELD AVE | C | AC | ~ | 703 | 16 | 11,248 | 4/21/26 | 64 | 31 | 58 | 11 | New Construction - Initial | 1/1/80 |
| 1995 | 718 | WARD ST | YORKTOWN AVE | SUNDAY DR | C | AC | ~ | 935 | 25 | 23,375 | 4/21/26 | 84 | 16 | 84 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 134 | WARNER AVE | GOLDENWEST ST | SCULPIN LN | A | AC | ~ | 1,123 | 43 | 56,763 | 4/29/26 | 74 | 53 | 47 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 135 | WARNER AVE | BEACH BLVD | ASH ST | A | AC | ~ | 874 | 43 | 41,522 | 4/30/26 | 64 | 39 | 61 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 136 | WARNER AVE | LARK LN | SPRINGDALE ST | A | AC | ~ | 1,173 | 42 | 51,516 | 4/29/26 | 81 | 21 | 79 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 137 | WARNER AVE | GOLDENWEST ST | GOTHARD ST | A | AC | ~ | 1,982 | 43 | 99,988 | 5/8/26 | 53 | 44 | 51 | 5 | New Construction - Initial | 1/1/80 |
| 1997 | 164 | WARNER AVE | LOS PATOS AVE | SANDRA LEE LN | A | AC | ~ | 1,238 | 40 | 55,384 | 4/23/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 165 | WARNER AVE | SCEPTRE LN | LOS PATOS AVE | A | AC | ~ | 1,714 | 67 | 114,838 | 4/23/26 | 79 | 85 | 15 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 218 | WARNER AVE | LYNN ST | BOLSA CHICA ST | A | AC | ~ | 1,320 | 42 | 59,940 | 4/29/26 | 53 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 219 | WARNER AVE | PLAZA LN | BOLSA CHICA ST | A | AC | ~ | 1,454 | 42 | 64,068 | 4/29/26 | 80 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 1997 | 220 | WARNER AVE | PLAZA LN | GRAHAM ST | A | AC | ~ | 1,202 | 42 | 52,984 | 4/29/26 | 83 | 37 | 63 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 224 | WARNER AVE | GRAHAM ST | LARK LN | A | AC | ~ | 1,473 | 42 | 63,366 | 4/29/26 | 94 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 230 | WARNER AVE | SANDRA LEE LN | LYNN ST | A | AC | ~ | 1,185 | 42 | 52,770 | 4/23/26 | 71 | 27 | 73 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 231 | WARNER AVE | PCH | SCEPTRE LN | A | AC | ~ | 1,807 | 67 | 121,069 | 4/23/26 | 75 | 71 | 22 | 7 | New Construction - Initial | 1/1/80 |
| 1997 | 232 | WARNER AVE | SPRINGDALE ST | SEA AIRA | A | AC | ~ | 1,351 | 42 | 60,376 | 4/29/26 | 84 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 233 | WARNER AVE | SCULPIN LN | EDWARDS ST | A | AC | ~ | 1,290 | 42 | 61,914 | 5/4/26 | 76 | 44 | 56 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 234 | WARNER AVE | EDWARDS ST | SCULPIN LN | A | AC | ~ | 1,518 | 43 | 71,606 | 5/4/26 | 76 | 0 | 98 | 2 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1997 | 251 | WARNER AVE | NICHOLS ST | ASH ST | A | AC | ~ | 1,106 | 50 | 49,192 | 5/4/26 | 82 | 36 | 64 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 252 | WARNER AVE | GOTHARD ST | NICHOLS ST | A | AC | ~ | 1,321 | 50 | 60,492 | 5/4/26 | 70 | 38 | 62 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 392 | WARNER AVE | BEACH BLVD | ROTTERDAM LN | A | AAC | ~ | 1,449 | 37 | 59,771 | 4/30/26 | 75 | 45 | 55 | 0 | Overlay - AC Structural | 6/21/16 |
| 1997 | 393 | WARNER AVE | ROTTERDAM LN | NEWLAND ST | A | AAC | ~ | 1,188 | 37 | 49,516 | 4/30/26 | 83 | 26 | 74 | 0 | Overlay - AC Structural | 6/21/16 |
| 1997 | 40200 | WARNER AVE | SEA AIRA | EDWARDS ST | A | AC | ~ | 1,351 | 42 | 56,742 | 4/29/26 | 82 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 426 | WARNER AVE | MAGNOLIA ST | ROSS LN | A | AC | ~ | 1,450 | 37 | 62,282 | 4/13/26 | 52 | 52 | 44 | 4 | New Construction - Initial | 1/1/80 |
| 1997 | 427 | WARNER AVE | ROSS LN | NEWLAND ST | A | AC | ~ | 1,189 | 37 | 49,641 | 4/13/26 | 63 | 57 | 35 | 8 | New Construction - Initial | 1/1/80 |
| 1997 | 576 | WARNER AVE | SCULPIN LN | GOLDENWEST ST | A | AC | ~ | 1,123 | 43 | 48,289 | 5/4/26 | 78 | 0 | 84 | 16 | New Construction - Initial | 1/1/80 |
| 1997 | 577 | WARNER AVE | ASH ST | BEACH BLVD | A | AC | ~ | 874 | 38 | 33,212 | 4/30/26 | 65 | 42 | 58 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 578 | WARNER AVE | SPRINGDALE ST | LARK LN | A | AC | ~ | 1,173 | 42 | 49,266 | 4/29/26 | 93 | 42 | 58 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 579 | WARNER AVE | GOTHARD ST | GOLDENWEST ST | A | AC | ~ | 1,982 | 43 | 85,226 | 5/4/26 | 78 | 47 | 51 | 2 | New Construction - Initial | 1/1/80 |
| 1997 | 606 | WARNER AVE | SANDRA LEE LN | LOS PATOS AVE | A | AC | ~ | 1,238 | 36 | 44,568 | 4/23/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 60920 | WARNER AVE | LOOP | LOOP | A | AC | ~ | 275 | 28 | 11,300 | 5/13/24 | 93 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 1997 | 660 | WARNER AVE | BOLSA CHICA ST | LYNN ST | A | AC | ~ | 1,320 | 42 | 55,440 | 4/29/26 | 65 | 18 | 82 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 661 | WARNER AVE | BOLSA CHICA ST | PLAZA LN | A | AC | ~ | 1,454 | 42 | 61,068 | 4/29/26 | 75 | 39 | 41 | 20 | New Construction - Initial | 1/1/80 |
| 1997 | 662 | WARNER AVE | GRAHAM ST | PLAZA LN | A | AC | ~ | 1,202 | 42 | 50,484 | 4/29/26 | 80 | 45 | 45 | 10 | New Construction - Initial | 1/1/80 |
| 1997 | 666 | WARNER AVE | LARK LN | GRAHAM ST | A | AC | ~ | 1,473 | 42 | 61,866 | 4/29/26 | 92 | 58 | 42 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 672 | WARNER AVE | LYNN ST | SANDRA LEE LN | A | AAC | ~ | 1,185 | 42 | 49,770 | 4/23/26 | 71 | 15 | 83 | 2 | Overlay - AC Structural | 9/1/06 |
| 1997 | 674 | WARNER AVE | SEA AIRA | SPRINGDALE ST | A | AC | ~ | 1,351 | 42 | 56,742 | 4/29/26 | 84 | 14 | 86 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 675 | WARNER AVE | EDWARDS ST | SEA AIRA | A | AC | ~ | 1,290 | 42 | 54,180 | 4/29/26 | 84 | 40 | 60 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 693 | WARNER AVE | ASH ST | NICHOLS ST | A | AC | ~ | 1,106 | 50 | 55,300 | 5/4/26 | 77 | 31 | 67 | 2 | New Construction - Initial | 1/1/80 |
| 1997 | 694 | WARNER AVE | NICHOLS ST | GOTHARD ST | A | AC | ~ | 1,321 | 50 | 66,050 | 5/4/26 | 65 | 38 | 62 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 70000 | WARNER AVE | PCH | LOOP | A | AC | ~ | 375 | 40 | 13,500 | 5/13/24 | 69 | 91 | 9 | 0 | New Construction - AC | 1/1/80 |
| 1997 | 834 | WARNER AVE | ROTTERDAM LN | BEACH BLVD | A | AAC | ~ | 1,449 | 37 | 53,613 | 4/30/26 | 77 | 31 | 69 | 0 | Overlay - AC Structural | 6/21/16 |
| 1997 | 835 | WARNER AVE | NEWLAND ST | ROTTERDAM LN | A | AAC | ~ | 1,188 | 37 | 43,956 | 4/22/26 | 75 | 29 | 66 | 5 | Overlay - AC Structural | 6/21/16 |
| 1997 | 868 | WARNER AVE | ROSS LN | MAGNOLIA ST | A | AC | ~ | 1,450 | 37 | 53,650 | 4/29/26 | 54 | 54 | 37 | 9 | New Construction - Initial | 1/1/80 |
| 1997 | 869 | WARNER AVE | NEWLAND ST | ROSS LN | A | AC | ~ | 1,189 | 37 | 43,993 | 4/29/26 | 56 | 39 | 49 | 12 | New Construction - Initial | 1/1/80 |
| 2082 | 142 | YORKTOWN AVE | GOLDENWEST ST | MAIN ST | C | AAC | ~ | 1,417 | 40 | 56,680 | 4/13/26 | 73 | 9 | 89 | 2 | Overlay - AC Structural | 7/22/14 |
| 2082 | 277 | YORKTOWN AVE | CANBERRA LN | WARD ST | C | AC | ~ | 1,414 | 33 | 46,662 | 4/21/26 | 85 | 15 | 85 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 278 | YORKTOWN AVE | BROOKHURST ST (S) | CANBERRA LN | C | AC | ~ | 1,236 | 33 | 40,788 | 4/21/26 | 81 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 279 | YORKTOWN AVE | SALMON LN (N) | BROOKHURST ST | C | AC | ~ | 1,450 | 33 | 47,850 | 4/23/26 | 58 | 37 | 63 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 288 | YORKTOWN AVE | MAGNOLIA ST (S) | WATERBURY LN | A | AC | ~ | 1,521 | 33 | 50,193 | 4/23/26 | 82 | 16 | 84 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 291 | YORKTOWN AVE | HARDING LN (S) | NEWLAND ST | C | AAC | ~ | 782 | 33 | 25,806 | 4/29/26 | 82 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 302 | YORKTOWN AVE | DELAWARE ST | BEACH BLVD | C | AC | ~ | 1,321 | 33 | 43,593 | 4/29/26 | 85 | 19 | 81 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 303 | YORKTOWN AVE | NEWLAND ST (S) | WINDWARD LN | C | AAC | ~ | 1,452 | 33 | 47,916 | 4/29/26 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 304 | YORKTOWN AVE | WINDWARD LN (S) | MAGNOLIA ST | C | AAC | ~ | 1,192 | 33 | 39,336 | 4/29/26 | 81 | 12 | 88 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 356 | YORKTOWN AVE | BEACH BLVD (S) | VASILE CIR | C | AAC | ~ | 927 | 33 | 30,591 | 4/29/26 | 79 | 10 | 64 | 26 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 357 | YORKTOWN AVE | VASILE CIR (S) | HARDING LN | C | AAC | ~ | 936 | 33 | 30,888 | 4/29/26 | 79 | 10 | 90 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 380 | YORKTOWN AVE | MAIN ST | LAKE ST | A | AC | ~ | 1,174 | 31 | 36,394 | 4/30/26 | 80 | 11 | 73 | 16 | New Construction - Initial | 1/1/80 |
| 2082 | 397 | YORKTOWN AVE | LAKE ST | DELAWARE ST | C | AC | ~ | 1,601 | 31 | 49,631 | 4/8/26 | 72 | 24 | 75 | 1 | New Construction - Initial | 1/1/80 |
| 2082 | 442 | YORKTOWN AVE | BUSHARD ST | SALMON LN | C | AC | ~ | 1,190 | 33 | 39,270 | 4/23/26 | 76 | 36 | 64 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 492 | YORKTOWN AVE | BUSHARD ST (N) | WATERBURY LN | C | AC | ~ | 1,123 | 33 | 37,059 | 4/24/26 | 73 | 38 | 62 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 50 | YORKTOWN AVE | WATERBURY LN (S) | BUSHARD ST | C | AC | ~ | 1,123 | 33 | 37,059 | 4/23/26 | 80 | 12 | 88 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 584 | YORKTOWN AVE | MAIN ST | GOLDENWEST ST | C | AC | ~ | 1,417 | 40 | 56,680 | 4/30/26 | 75 | 28 | 64 | 8 | Surface Treatment - Slurry Seal | 7/22/14 |
| 2082 | 7002 | YORKTOWN AVE | WINDWARD LN | NEWLAND ST | A | AAC | ~ | 1,452 | 33 | 47,916 | 4/24/26 | 77 | 37 | 63 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 719 | YORKTOWN AVE | WARD ST | CANBERRA LN | C | AC | ~ | 1,414 | 33 | 46,662 | 4/21/26 | 85 | 0 | 98 | 2 | New Construction - Initial | 1/1/80 |
| 2082 | 720 | YORKTOWN AVE | CANBERRA LN | BROOKHURST ST | C | AC | ~ | 1,236 | 33 | 40,788 | 4/21/26 | 76 | 50 | 50 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 721 | YORKTOWN AVE | BROOKHURST ST | SALMON LN | C | AC | ~ | 1,450 | 33 | 47,850 | 4/24/26 | 43 | 47 | 46 | 7 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 730 | YORKTOWN AVE | WATERBURY LN | MAGNOLIA ST | C | AC | ~ | 1,521 | 33 | 50,193 | 4/24/26 | 77 | 37 | 63 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 733 | YORKTOWN AVE | NEWLAND ST | HARDING LN | C | AAC | ~ | 782 | 33 | 25,806 | 4/28/26 | 76 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 744 | YORKTOWN AVE | BEACH BLVD | DELAWARE ST | C | AC | ~ | 1,321 | 33 | 43,593 | 4/28/26 | 77 | 54 | 27 | 19 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 746 | YORKTOWN AVE | MAGNOLIA ST | WINDWARD LN | C | AAC | ~ | 1,192 | 33 | 39,336 | 4/24/26 | 75 | 37 | 63 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 798 | YORKTOWN AVE | VASILE CIR | BEACH BLVD | C | AAC | ~ | 927 | 33 | 30,591 | 4/28/26 | 75 | 15 | 63 | 22 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 799 | YORKTOWN AVE | HARDING LN | VASILE CIR | C | AAC | ~ | 936 | 33 | 30,888 | 4/28/26 | 76 | 24 | 66 | 10 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 822 | YORKTOWN AVE | LAKE ST | MAIN ST | C | AC | ~ | 1,174 | 31 | 36,394 | 4/28/26 | 66 | 56 | 28 | 16 | New Construction - Initial | 1/1/80 |
| 2082 | 839 | YORKTOWN AVE | DELAWARE ST | LAKE ST | C | AC | ~ | 1,601 | 31 | 49,631 | 4/28/26 | 62 | 19 | 61 | 20 | New Construction - Initial | 1/1/80 |
| 2082 | 884 | YORKTOWN AVE | SALMON LN | BUSHARD ST | C | AC | ~ | 1,190 | 33 | 39,270 | 4/24/26 | 39 | 52 | 44 | 4 | Surface Treatment - Slurry Seal | 7/1/11 |
| | | | | | | | | **168.2** | | ######### | | | | | | | |
| | | ***Locals*** | | | | | | | | | | | | | | | |
| 5290 | 60440 | 10TH ST | PCH | END | E | AC | 2 | 403 | 25 | 10,075 | 4/23/26 | 86 | 0 | 43 | 57 | New Construction - Initial | 1/1/80 |
| 5300 | 60455 | 11TH ST | PACIFIC N | PCH | E | AC | 2 | 167 | 20 | 3,340 | 4/23/26 | 92 | 0 | 47 | 53 | New Construction - Initial | 1/1/80 |
| 5300 | 60460 | 11TH ST | PACIFIC S | END | E | AC | 2 | 64 | 31 | 1,984 | 4/23/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5310 | 60470 | 12TH ST | PCH | PACIFIC N | E | AC | 2 | 207 | 25 | 5,175 | 4/23/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 5310 | 60480 | 12TH ST | PACIFIC S | END | E | AC | 2 | 46 | 30 | 1,380 | 4/23/26 | 85 | 0 | 30 | 70 | New Construction - Initial | 1/1/80 |
| 5330 | 60500 | 14TH ST | PCH | PACIFIC N | E | AC | 2 | 156 | 28 | 4,368 | 4/23/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5330 | 60510 | 14TH ST | PACIFIC S | END | E | AC | 2 | 90 | 30 | 2,700 | 4/23/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5340 | 60520 | 15TH ST | PCH | PACIFIC N | E | AC | 2 | 160 | 29 | 4,640 | 4/23/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5340 | 60530 | 15TH ST | PACIFIC S | END | E | AC | 2 | 80 | 22 | 1,760 | 4/23/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5350 | 60540 | 16TH ST | PCH | PACIFIC AVE N | E | AC | 2 | 158 | 22 | 3,476 | 4/23/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5350 | 60545 | 16TH ST | PACIFIC AVE N | END | E | AC | 2 | 188 | 24 | 4,950 | 5/21/20 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5350 | 60990 | 16TH ST | END N | PCH | E | AC | 2 | 77 | 26 | 2,002 | 5/6/24 | 48 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 5350 | 61000 | 16TH ST | BAYVIEW DR | END | E | AC | 2 | 78 | 30 | 2,340 | 5/6/24 | 78 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 5360 | 60550 | 17TH ST | PCH | PACIFIC N | E | AC | 2 | 156 | 28 | 4,368 | 4/23/26 | 93 | 0 | 60 | 40 | New Construction - Initial | 1/1/80 |
| 5360 | 60560 | 17TH ST | PACIFIC S | END | E | AC | 2 | 90 | 30 | 2,700 | 4/23/26 | 81 | 0 | 54 | 46 | New Construction - Initial | 1/1/80 |
| 5370 | 60570 | 18TH ST | PCH | PACIFIC N | E | AC | 2 | 106 | 29 | 3,074 | 4/23/26 | 88 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5370 | 60580 | 18TH ST | PACIFIC S | END | E | AC | 2 | 54 | 26 | 1,404 | 4/23/26 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5380 | 60590 | 19TH ST | PCH | END | E | AC | 2 | 330 | 26 | 8,580 | 4/23/26 | 86 | 0 | 58 | 42 | New Construction - Initial | 1/1/80 |
| 5390 | 60600 | 20TH ST | PCH | PACIFIC N | E | AC | 2 | 87 | 23 | 2,001 | 4/23/26 | 83 | 0 | 68 | 32 | New Construction - Initial | 1/1/80 |
| 5390 | 60610 | 20TH ST | PACIFIC S | END | E | AC | 2 | 81 | 26 | 2,106 | 4/23/26 | 86 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5400 | 60620 | 21ST ST | PCH | PACIFIC N | E | AC | 2 | 106 | 25 | 2,650 | 4/23/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 5410 | 60630 | 22ND ST | PCH | END | E | AC | 2 | 363 | 30 | 10,890 | 4/23/26 | 87 | 0 | 53 | 47 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5420 | 60640 | 23RD ST | PCH | PACIFIC N | E | AC | 2 | 207 | 30 | 6,210 | 4/23/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5420 | 60650 | 23RD ST | PACIFIC S | END | E | AC | 2 | 27 | 22 | 594 | 4/23/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 5430 | 60660 | 24TH ST | PCH | PACIFIC N | E | AC | 2 | 228 | 29 | 6,612 | 4/23/26 | 91 | 24 | 64 | 12 | New Construction - Initial | 1/1/80 |
| 5430 | 60670 | 24TH ST | PACIFIC S | END | E | AC | 2 | 58 | 27 | 1,566 | 4/23/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5440 | 60680 | 25TH ST | PCH | PACIFIC AVE N | E | AC | 2 | 215 | 22 | 4,730 | 4/23/26 | 96 | 55 | 0 | 45 | New Construction - Initial | 1/1/80 |
| 5440 | 60685 | 25TH ST | PACIFIC AVE N | END | E | AC | 2 | 215 | 22 | 4,730 | 5/21/20 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5450 | 60690 | 26TH ST | PCH | PACIFIC N | E | AC | 2 | 207 | 30 | 6,210 | 4/23/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5450 | 60700 | 26TH ST | PACIFIC S | END | E | AC | 2 | 28 | 30 | 840 | 4/23/26 | 77 | 0 | 46 | 54 | New Construction - Initial | 1/1/80 |
| 5200 | 60350 | 2ND ST | NORTH PACIFIC | SOUTH PACIFIC | E | AC | 2 | 200 | 25 | 5,000 | 4/23/26 | 82 | 37 | 41 | 22 | New Construction - Initial | 1/1/80 |
| 5210 | 60360 | 3RD ST | PACIFIC S | END | E | AC | 2 | 24 | 15 | 360 | 4/23/26 | 88 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5220 | 60370 | 4TH ST | PACIFIC N | PCH | E | AC | 2 | 182 | 23 | 4,186 | 4/23/26 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5230 | 60380 | 5TH ST | PCH | PACIFIC S | E | AC | 2 | 276 | 23 | 6,348 | 5/6/20 | 58 | 76 | 24 | 0 | New Construction - Initial | 1/1/80 |
| 5250 | 60400 | 6TH ST | PACIFIC N | PCH | E | AC | 2 | 197 | 25 | 4,925 | 4/23/26 | 87 | 23 | 77 | 0 | New Construction - Initial | 1/1/80 |
| 5250 | 60415 | 6TH ST | PACIFIC S | END | E | AC | 2 | 34 | 37 | 1,258 | 4/23/26 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5260 | 60410 | 7TH ST | PCH | END | E | AC | 2 | 264 | 23 | 6,072 | 4/23/26 | 86 | 28 | 21 | 51 | New Construction - Initial | 1/1/80 |
| 5270 | 60420 | 8TH ST | PACIFIC N | PCH | E | AC | 2 | 180 | 21 | 3,780 | 4/23/26 | 84 | 71 | 6 | 23 | New Construction - Initial | 1/1/80 |
| 5270 | 60430 | 8TH ST | PACIFIC S | END | E | AC | 2 | 23 | 27 | 621 | 4/23/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5280 | 60445 | 9TH ST | PACIFIC N | PCH | E | AC | 2 | 211 | 21 | 4,431 | 4/23/26 | 79 | 26 | 74 | 0 | New Construction - Initial | 1/1/80 |
| 5280 | 60450 | 9TH ST | PACIFIC S | END | E | AC | 2 | 66 | 30 | 1,980 | 4/23/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1 | 14829 | A ST | ROBIDOUX DR | WARNER AVE | E | AC | 4 | 644 | 36 | 23,184 | 3/31/22 | 82 | 0 | 39 | 61 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1 | 14830 | A ST | WARNER AVE | BLAYLOCK DR | E | AC | 4 | 660 | 34 | 22,440 | 3/31/22 | 90 | 46 | 54 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2 | 15132 | ABBOTT DR | CDS | END | E | AC | 3 | 475 | 36 | 18,452 | 3/18/22 | 90 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 3 | 14587 | ABERDEEN DR | INVERNESS LN | KINGSWOOD LN | E | AAC | 8 | 170 | 24 | 4,080 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 3 | 15643 | ABERDEEN DR | KESWICK LN | COVENTRY LN | E | AAC | 8 | 258 | 24 | 6,012 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 3 | 15644 | ABERDEEN DR | CLAREMONT LN | CAMBRIDGE LN | E | AAC | 8 | 204 | 24 | 4,716 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 4 | 14533 | ABLE LN | SKYLAB RD | BOLSA AVE | E | AC | 1 | 1,434 | 60 | 86,040 | 4/7/26 | 74 | 43 | 47 | 10 | New Construction | 1/1/80 |
| 5 | 12873 | ACACIA AVE | ELEVENTH ST | FOURTEENTH ST | E | AC | 6 | 865 | 36 | 31,140 | 6/23/21 | 81 | 40 | 16 | 44 | Surface Treatment - Slurry Seal | 5/3/21 |
| 5 | 12879 | ACACIA AVE | EIGHTH ST | ELEVENTH ST | E | AC | 6 | 930 | 36 | 33,480 | 6/23/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5 | 12882 | ACACIA AVE | PECAN AVE | SEVENTH ST | E | AAC | 6 | 315 | 35 | 11,025 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 5 | 13102 | ACACIA AVE | TWENTIETH ST | GOLDENWEST ST | E | AC | 6 | 781 | 36 | 28,116 | 6/23/21 | 92 | 0 | 51 | 49 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5 | 13103 | ACACIA AVE | SEVENTEENTH ST | TWENTIETH ST | E | AC | 6 | 828 | 36 | 29,808 | 6/23/21 | 93 | 0 | 81 | 19 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5 | 13111 | ACACIA AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AC | 6 | 880 | 36 | 31,680 | 6/23/21 | 92 | 0 | 71 | 29 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5 | 15842 | ACACIA AVE | LAKE ST | ALABAMA ST | E | AC | 9 | 372 | 36 | 13,392 | 8/24/23 | 61 | 77 | 8 | 15 | New Construction | 1/1/80 |
| 5 | 15843 | ACACIA AVE | MAIN ST | LAKE ST | E | AC | 6 | 270 | 36 | 9,720 | 7/8/21 | 91 | 0 | 76 | 24 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5 | 16030 | ACACIA AVE | SEVENTH ST. | EIGHTH ST | E | AAC | 6 | 280 | 38 | 10,640 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 6 | 13946 | ACAPULCO CIR | SAUSALITO LN | CDS | E | AC | 7 | 654 | 34 | 23,486 | 4/15/26 | 85 | 47 | 48 | 5 | Surface Treatment - Slurry Seal | 7/15/21 |
| 7 | 14072 | ACCESSWAY | BUSHARD ST | BUSHARD ST FRONTAGE | E | AC | 7 | 54 | 55 | 2,970 | 4/6/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 7 | 14445 | ACCESSWAY | SHOREWOOD CIR | ADAMS AVE | E | AC | 7 | 77 | 45 | 3,465 | 4/6/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 7 | 14456 | ACCESSWAY | BEACH BLVD | BEACH BLVD | E | AC | 9 | 102 | 28 | 2,856 | 8/24/23 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 8 | 13246 | ACE LN | VENTURI DR | MARSHALL DR | E | AC | 3 | 257 | 36 | 9,502 | 3/23/22 | 51 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 9 | 13061 | ADAMS AVE | MAIN ST | SEVENTEENTH ST | E | AC | 6 | 745 | 46 | 36,075 | 6/30/21 | 86 | 0 | 54 | 46 | Surface Treatment - Slurry Seal | 7/27/22 |
| 9 | 13117 | ADAMS AVE | PARK ST | MAIN ST | E | AAC | 0 | 365 | 37 | 13,505 | 4/3/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/27/22 |
| 9 | 13118 | ADAMS AVE | LAKE ST | PARK ST | E | AAC | 0 | 650 | 37 | 24,050 | 4/3/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/27/22 |
| 2288 | 17018 | ADAMS AVE FRONTAGE | LOTUS LN | WEST END | E | AC | 7 | 398 | 32 | 14,236 | 4/20/26 | 87 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2288 | 17019 | ADAMS AVE FRONTAGE | MARINA LN | BUSHARD ST FRONTAGE | E | AAC | 7 | 1,050 | 28 | 29,400 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2288 | 17020 | ADAMS AVE FRONTAGE | DERBYSHIRE LN | SIDCUP LN | E | AC | 8 | 672 | 28 | 18,816 | 3/11/22 | 57 | 70 | 30 | 0 | New Construction - Initial | 1/1/80 |
| 2288 | 17021 | ADAMS AVE FRONTAGE | SUTTON LN | DERBYSHIRE LN | E | AAC | 8 | 663 | 28 | 18,564 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 2288 | 17022 | ADAMS AVE FRONTAGE | SUTTON LN | EAST END | E | AC | 8 | 120 | 28 | 3,360 | 3/11/22 | 77 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 2288 | 17023 | ADAMS AVE FRONTAGE | SHOREWOOD CIR | HAPPY ISLE LN | E | AAC | 7 | 260 | 28 | 7,280 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2288 | 50300 | ADAMS AVE FRONTAGE | CARMANIA LN | END | E | AC | 8 | 123 | 25 | 3,075 | 3/3/22 | 85 | 0 | 81 | 19 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2288 | 50310 | ADAMS AVE FRONTAGE | CARMANIA LN (N) | RANGER LN | E | AC | 8 | 520 | 25 | 13,000 | 3/3/22 | 71 | 50 | 29 | 21 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2288 | 50320 | ADAMS AVE FRONTAGE | RANGER LN | PICCADILLY LN | E | AC | 8 | 479 | 25 | 11,975 | 3/3/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2288 | 50330 | ADAMS AVE FRONTAGE | PICCADILLY LN | END | E | AC | 8 | 348 | 25 | 8,700 | 3/3/22 | 67 | 44 | 49 | 7 | New Construction - Initial | 1/1/80 |
| 2288 | 50340 | ADAMS AVE FRONTAGE | BUSHARD ST FRONTAGE | GLOUCESTER LN | E | AAC | 7 | 506 | 30 | 15,180 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2288 | 50350 | ADAMS AVE FRONTAGE | GLOUCESTER LN | CHESAPEAKE LN | E | AAC | 7 | 530 | 30 | 15,900 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2288 | 50360 | ADAMS AVE FRONTAGE | ISTHMUS LN | FELCLIFF LN | E | AAC | 7 | 674 | 30 | 20,220 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2288 | 50370 | ADAMS AVE FRONTAGE | VINTAGE LN | CROWN REEF LN | E | AC | 7 | 505 | 30 | 15,150 | 4/20/26 | 91 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2288 | 50380 | ADAMS AVE FRONTAGE | CROWN REEF LN | MAYPORT LN | E | AC | 7 | 683 | 30 | 20,490 | 4/20/26 | 97 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 10 | 14372 | ADELIA CIR | CDS | POLYNESIAN LN | E | AC | 9 | 480 | 36 | 18,780 | 3/26/24 | 72 | 59 | 41 | 0 | New Construction | 1/1/80 |
| 11 | 13190 | ADMIRRALTY DR | CHANNEL LN | CDS | E | AC | 2 | 299 | 32 | 11,068 | 4/9/22 | 91 | 0 | 65 | 35 | New Construction | 1/1/80 |
| 11 | 14959 | ADMIRRALTY DR | PCH | CHANNEL LN | E | AC | 2 | 796 | 60 | 40,240 | 4/9/22 | 86 | 31 | 66 | 3 | New Construction | 1/1/80 |
| 12 | 14164 | ADRIAN CIR | END | HAZELBROOK DR | E | AC | 7 | 496 | 36 | 19,356 | 4/16/26 | 83 | 72 | 25 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 13 | 14120 | AFTON CIR | CDS | VINTAGE LN | E | AAC | 7 | 435 | 32 | 15,720 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 14 | 15859 | AHSANTE DR | DELAWARE ST | ALSUNA LN | E | AAC | 6 | 285 | 36 | 11,517 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 15 | 14534 | AIRPORT CIR | CDS | WARNER AVE | E | AC | 2 | 664 | 36 | 25,154 | 4/2/26 | 82 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 16 | 14624 | ALABAMA ST | ALLEY FRANKFORT AVE. | FRANKFORT AVE | E | AC | 9 | 167 | 37 | 6,179 | 8/14/23 | 56 | 47 | 22 | 31 | New Construction | 1/1/80 |
| 16 | 14625 | ALABAMA ST | ATLANTA AVE | ALLEY BALTIMORE AVE | E | AC | 9 | 166 | 36 | 5,976 | 8/14/23 | 76 | 62 | 28 | 10 | New Construction | 1/1/80 |
| 16 | 14653 | ALABAMA ST | ALLEY ADAMS AVE | ADAMS AVE | E | AC | 6 | 190 | 36 | 6,840 | 8/15/23 | 80 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 16 | 14654 | ALABAMA ST | MEMPHIS AVE | NASHVILLE AVE | E | AC | 6 | 329 | 37 | 12,173 | 8/14/23 | 63 | 54 | 27 | 19 | New Construction | 1/1/80 |
| 16 | 14655 | ALABAMA ST | ALLEY MEMPHIS AVE | MEMPHIS AVE | E | AC | 6 | 165 | 37 | 6,105 | 8/14/23 | 65 | 59 | 36 | 5 | New Construction | 1/1/80 |
| 16 | 15659 | ALABAMA ST | HARTFORD AVE | INDIANAPOLIS AVE | E | AC | 9 | 330 | 38 | 12,540 | 8/14/23 | 53 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 16 | 15660 | ALABAMA ST | GENEVA AVE | HARTFORD AVE | E | AC | 9 | 330 | 36 | 11,880 | 8/15/23 | 70 | 59 | 24 | 17 | New Construction | 1/1/80 |
| 16 | 15661 | ALABAMA ST | FRANKFORT AVE | GENEVA AVE | E | AC | 9 | 328 | 37 | 12,136 | 8/14/23 | 74 | 40 | 30 | 30 | New Construction | 1/1/80 |
| 16 | 15662 | ALABAMA ST | PECAN AVE | ALLEY FRANKFORT AVE | E | AC | 9 | 246 | 37 | 9,102 | 8/14/23 | 67 | 72 | 21 | 7 | New Construction | 1/1/80 |
| 16 | 15663 | ALABAMA ST | DETROIT AVE | PECAN AVE | E | AC | 9 | 250 | 37 | 9,250 | 8/14/23 | 77 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 16 | 15664 | ALABAMA ST | CHICAGO AVE | DETROIT AVE | E | AC | 9 | 329 | 37 | 12,173 | 8/14/23 | 69 | 67 | 18 | 15 | New Construction | 1/1/80 |
| 16 | 15665 | ALABAMA ST | ALLEY BALTIMORE AVE | CHICAGO AVE | E | AC | 9 | 494 | 37 | 18,278 | 8/14/23 | 54 | 64 | 8 | 28 | New Construction | 1/1/80 |
| 16 | 15674 | ALABAMA ST | UTICA AVE. | WITCHITA AVE | E | AC | 6 | 650 | 36 | 23,400 | 6/29/21 | 78 | 70 | 20 | 10 | Surface Treatment - Slurry Seal | 7/27/22 |
| 16 | 15675 | ALABAMA ST | SPRINGFIELD AVE | UTICA AVE | E | AAC | 6 | 660 | 36 | 23,625 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 16 | 15676 | ALABAMA ST | ADAMS AVE | SPRINGFIELD AVE | E | AAC | 6 | 618 | 35 | 22,355 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 16 | 15677 | ALABAMA ST | OSWEGO AVE | ALLEY ADAMS AVE | E | AC | 6 | 470 | 36 | 16,920 | 8/15/23 | 65 | 83 | 16 | 1 | Surface Treatment - Slurry Seal | 3/1/11 |
| 16 | 15678 | ALABAMA ST | NASHVILLE AVE | OSWEGO AVE | E | AC | 6 | 330 | 36 | 11,880 | 8/15/23 | 58 | 59 | 15 | 26 | Surface Treatment - Slurry Seal | 3/1/11 |
| 16 | 15679 | ALABAMA ST | ALLEY LINCOLN AVE | ALLEY MEMPHIS AVE | E | AC | 6 | 330 | 37 | 12,210 | 8/14/23 | 74 | 51 | 40 | 9 | New Construction | 1/1/80 |
| 16 | 15680 | ALABAMA ST | ALLEY KNOXVILLE AVE | ALLEY LINCOLN AVE | E | AC | 6 | 330 | 37 | 12,210 | 8/14/23 | 72 | 42 | 41 | 17 | Surface Treatment - Slurry Seal | 3/1/11 |
| 16 | 15681 | ALABAMA ST | INDIANAPOLIS AVE | ALLEY KNOXVILLE AVE | E | AC | 6 | 495 | 37 | 18,315 | 8/14/23 | 57 | 63 | 29 | 8 | Surface Treatment - Slurry Seal | 3/1/11 |
| 17 | 13620 | ALADDIN DR | WEATHERLY LN | SCEPTRE LN | E | AC | 2 | 720 | 36 | 25,920 | 4/9/22 | 76 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 18 | 15393 | ALBACORE DR | CDS | STINGRAY LN | E | AC | 8 | 784 | 36 | 29,474 | 3/7/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 19 | 14253 | ALBANY CIR | HOPETOWN LN | CDS | E | AAC | 9 | 244 | 32 | 9,608 | 5/9/24 | 77 | 9 | 50 | 41 | Overlay - AC Structural | 5/11/18 |
| 20 | 14043 | ALBATROSS DR | WINDWARD LN | WESTWINDS LN | E | AC | 7 | 1,012 | 36 | 36,432 | 4/20/26 | 78 | 88 | 5 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 21 | 14765 | ALBERTA DR | HUNTINGTON ST | MANITOBA LN | E | AAC | 4 | 574 | 36 | 20,076 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 22 | 13843 | ALBION DR | PLYMOUTH LN | ALDEN LN | E | AC | 1 | 780 | 36 | 28,080 | 12/20/24 | 35 | 78 | 13 | 9 | New Construction | 1/1/80 |
| 23 | 13840 | ALDEN LN | END | WINSLOW DR | E | AC | 1 | 339 | 36 | 13,454 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 23 | 13842 | ALDEN LN | WINSLOW DR | ALBION DR | E | AC | 1 | 260 | 36 | 9,860 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 24 | 13494 | ALDRICH ST | PARKSIDE LN | BEACH BLVD | E | AAC | 4 | 665 | 36 | 23,940 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 25 | 13775 | ALEXANDRIA DR | EDWARDS ST | HANOVER LN | E | AC | 1 | 536 | 36 | 19,008 | 4/8/26 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 25 | 15310 | ALEXANDRIA DR | DRAKE LN | COLUMBIA LN | E | AC | 1 | 520 | 36 | 19,220 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 25 | 15311 | ALEXANDRIA DR | COLUMBIA LN | EDWARDS ST | E | AC | 1 | 645 | 36 | 22,644 | 12/20/24 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 25 | 15320 | ALEXANDRIA DR | VICTORIA LN. | SUSSEX CIR | E | AC | 1 | 536 | 36 | 19,796 | 4/8/26 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 25 | 15931 | ALEXANDRIA DR | HANOVER LN | VICTORIA LN | E | AC | 1 | 781 | 36 | 28,116 | 4/8/26 | 88 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 26 | 14948 | ALFAWN CIR | SELKIRK DR | END | E | AC | 5 | 102 | 36 | 5,172 | 3/30/26 | 84 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 28 | 13492 | ALHAMBRA AVE | SILVER LN | BEACH BLVD | E | AC | 4 | 1,320 | 36 | 47,520 | 3/18/22 | 92 | 0 | 43 | 57 | Surface Treatment - Slurry Seal | 7/29/20 |
| 28 | 15226 | ALHAMBRA AVE | RHONE LN | SILVER LN | E | AC | 4 | 1,154 | 36 | 41,544 | 3/18/22 | 87 | 67 | 33 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 29 | 14237 | ALICANTE LN | KINGFISHER DR | ALVARADO DR. | E | AC | 9 | 482 | 36 | 17,352 | 8/23/23 | 72 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 30 | 14392 | ALII CIR | ZAMORA LN | CDS | E | AC | 9 | 235 | 32 | 9,020 | 5/20/24 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 31 | 14191 | ALISA LN | BAY MEADOW DR | INDIANAPOLIS AVE | E | AAC | 8 | 534 | 36 | 18,936 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 31 | 14278 | ALISA LN | INDIANAPOLIS AVE | CAITHNESS DR | E | AC | 8 | 166 | 36 | 5,976 | 3/19/24 | 89 | 0 | 63 | 37 | Surface Treatment - Slurry Seal | 5/11/18 |
| 106 | 14523 | ALLISON CIR | JONESPORT LN | CDS | E | AC | 9 | 215 | 32 | 8,680 | 4/24/24 | 75 | 48 | 52 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 107 | 15887 | ALLPORT LN | MARVALE DR | CDS | E | AAC | 7 | 798 | 36 | 30,978 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 108 | 15977 | ALLSTONE DR | RAINGLEN LN | END | E | AC | 5 | 587 | 36 | 21,132 | 3/31/26 | 76 | 0 | 92 | 8 | New Construction | 1/1/80 |
| 109 | 14915 | ALMELO LN | GHENT DR | NORDINA DR | E | AC | 5 | 1,125 | 36 | 40,500 | 4/1/26 | 82 | 57 | 43 | 0 | New Construction | 1/1/80 |
| 110 | 15570 | ALOHA DR | KIOWA LN | KANEHOE LN | E | AC | 9 | 930 | 36 | 34,980 | 3/27/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 112 | 15704 | ALSUNA LN | ARIANA CIR | AHSANTE DR | E | AAC | 6 | 500 | 36 | 18,250 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 112 | 15858 | ALSUNA LN | AHSANTE DR | UTICA AVE | E | AAC | 6 | 565 | 36 | 20,340 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 113 | 13360 | ALTA VISTA CIR | SANTA YNEZ DR | END | E | AC | 5 | 350 | 36 | 13,950 | 5/28/24 | 27 | 90 | 10 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 114 | 15860 | ALTAMAR DR | ALSUNA LN | FLORIDA ST | E | AAC | 6 | 293 | 36 | 11,348 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 115 | 15187 | ALTAMIRANO LN | VILLA NUEVA DR | CADIZ CIR | E | AC | 5 | 1,101 | 36 | 41,136 | 5/23/24 | 79 | 78 | 20 | 2 | Surface Treatment - Slurry Seal | 10/1/12 |
| 116 | 15885 | ALVARADO DR | COLIMA LN | MISSION LN | E | AC | 9 | 906 | 36 | 32,616 | 8/23/23 | 68 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 117 | 13487 | AMAZON DR | ALLEY GANGES LN | SHER LN | E | AC | 4 | 818 | 36 | 29,948 | 3/18/22 | 77 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 118 | 14759 | AMBERLEAF CIR | DELAWARE ST | CDS | E | AC | 4 | 514 | 36 | 18,504 | 5/7/24 | 78 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 119 | 15806 | AMBERTON LN | HELMSIDE DR | MARYPORT DR | E | AC | 5 | 551 | 36 | 20,836 | 3/30/26 | 83 | 43 | 49 | 8 | New Construction | 1/1/80 |
| 120 | 15559 | AMBERWICK LN | EFFINGHAM DR | CDS | E | AC | 8 | 1,021 | 36 | 38,256 | 4/10/24 | 88 | 64 | 32 | 4 | New Construction | 1/1/80 |
| 121 | 14147 | AMBY DR | BRENTSTONE LN | MANSARD LN | E | AAC | 7 | 254 | 36 | 9,144 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 122 | 14822 | AMSTERDAM DR | HAGUE LN | VAN DYKE LN | E | AAC | 4 | 358 | 36 | 13,388 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 122 | 15741 | AMSTERDAM DR | ROTTERDAM LN | HAGUE LN | E | AAC | 4 | 353 | 36 | 12,708 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 123 | 15292 | ANACAPA DR | CHATEAU LN | FAIRVIEW LN | E | AAC | 1 | 780 | 36 | 30,580 | 5/7/24 | 74 | 27 | 73 | 0 | Overlay - AC Fabric | 10/1/16 |
| 124 | 14171 | ANCHOR CIR | CLOUDHAVEN DR | CDS | E | AC | 7 | 164 | 32 | 6,748 | 4/21/26 | 82 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 125 | 15973 | ANCHORAGE DR | TOPEKA LN | TRIDENT LN | E | AC | 7 | 1,275 | 36 | 46,650 | 4/20/26 | 78 | 82 | 16 | 2 | Surface Treatment - Slurry Seal | 7/15/21 |
| 126 | 13712 | ANDAMAN LN | CASPIAN CIR | ALLEY MCFADDEN AVE | E | AC | 1 | 147 | 36 | 5,292 | 3/21/22 | 45 | 93 | 7 | 0 | New Construction | 1/1/80 |
| 126 | 13713 | ANDAMAN LN | ALLEY MCFADDEN AVE | MCFADDEN AVE | E | AC | 1 | 159 | 36 | 5,724 | 3/21/22 | 74 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 126 | 15304 | ANDAMAN LN | TASMAN DR | CASPIAN CIR | E | AC | 1 | 548 | 36 | 19,728 | 3/21/22 | 83 | 53 | 24 | 23 | New Construction | 1/1/80 |
| 127 | 14538 | ANDERSON ST | COAST CIR | PCH | E | AC | 2 | 220 | 31 | 6,820 | 4/9/22 | 59 | 0 | 87 | 13 | New Construction | 1/1/80 |
| 127 | 60710 | ANDERSON ST | PCH | END | E | AC | 2 | 358 | 32 | 11,456 | 4/9/22 | 93 | 39 | 61 | 0 | New Construction - Initial | 1/1/80 |
| 128 | 13252 | ANGLER LN | PALISADE DR | ORLANDO DR | E | AC | 3 | 620 | 36 | 22,320 | 4/7/26 | 72 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 128 | 15095 | ANGLER LN | SOFTWIND DR | PALISADE DR | E | AC | 3 | 534 | 36 | 19,224 | 4/7/26 | 74 | 14 | 86 | 0 | New Construction | 1/1/80 |
| 129 | 15223 | ANITA LN | SHER LN | NANCY DR | E | AC | 4 | 1,054 | 36 | 37,944 | 3/18/22 | 84 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 130 | 13324 | ANNETTE CIR | LOVELL LN | CDS | E | AC | 3 | 351 | 36 | 13,986 | 4/6/26 | 70 | 36 | 64 | 0 | New Construction | 1/1/80 |
| 131 | 15583 | ANNIK DR | MC LAREN LN. | HICKORY LN | E | AC | 8 | 940 | 36 | 35,340 | 5/5/26 | 71 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 132 | 15547 | ANTIGUA LN | ST AUGUSTINE DR | SANDY HOOK DR | E | AC | 9 | 1,013 | 36 | 37,218 | 8/30/23 | 84 | 47 | 49 | 4 | New Construction | 1/1/80 |
| 133 | 13853 | ANTRIM CIR | TOWAY LN | END | E | AC | 1 | 419 | 36 | 16,334 | 1/3/25 | 35 | 81 | 4 | 15 | New Construction | 1/1/80 |
| 134 | 14903 | APEL LN | TILBURG DR | FRANS LN | E | AC | 5 | 421 | 36 | 15,156 | 4/1/26 | 73 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 134 | 15787 | APEL LN | BRANNED DR | TILBURG DR | E | AC | 5 | 1,279 | 36 | 46,294 | 5/8/26 | 50 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 135 | 13727 | APOLLO LN | ATLAS DR | THOR DR | E | AC | 1 | 267 | 36 | 10,362 | 4/8/26 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 136 | 15720 | APPLEBY DR | CARNABY LN | HUNTINGTON ST | E | AAC | 4 | 519 | 36 | 19,684 | 4/14/26 | 94 | 0 | 85 | 15 | Overlay - AC Structural | 11/28/19 |
| 137 | 13144 | AQUARIUS DR | WALRUS LN | SPARTAN CIR | E | AAC | 2 | 248 | 36 | 9,678 | 5/7/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 137 | 13158 | AQUARIUS DR | RASCAL LN | SUNDANCER LN | E | AAC | 2 | 245 | 36 | 8,820 | 5/7/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 137 | 15042 | AQUARIUS DR | SPARTAN CIR | VIM LN | E | AAC | 2 | 407 | 36 | 14,652 | 5/7/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 137 | 15043 | AQUARIUS DR | VIM LN | RASCAL LN | E | AAC | 2 | 731 | 36 | 26,316 | 5/7/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 138 | 15950 | AQUATIC LN | CLIFF DR | EL CAPITAN DR | E | AAC | 8 | 730 | 36 | 27,530 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 139 | 13426 | ARACENA DR | CARRANZA LN | SAN DOVAL LN | E | AAC | 5 | 256 | 36 | 9,966 | 5/24/24 | 71 | 50 | 48 | 2 | Overlay - AC Structural | 10/1/12 |
| 140 | 14100 | ARAGON CIR | SHANGRI LA DR | CDS | E | AAC | 8 | 346 | 36 | 15,456 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 141 | 14332 | ARCEL CIR | KROLL LN | END | E | AC | 9 | 167 | 32 | 7,844 | 8/30/23 | 42 | 91 | 6 | 3 | New Construction | 1/1/80 |
| 142 | 14480 | ARCHER CIR | CLEARBROOK DR | CDS | E | AAC | 9 | 415 | 36 | 16,440 | 4/21/26 | 82 | 31 | 56 | 13 | Overlay - AC Structural | 5/11/19 |
| 143 | 13176 | ARDSLEY CIR | HUMBOLDT DR | CDS | E | AC | 2 | 406 | 32 | 14,492 | 4/7/22 | 60 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 144 | 13377 | ARGO CIR | CAPSTONE DR | END | E | AAC | 3 | 320 | 36 | 13,020 | 5/22/24 | 63 | 48 | 52 | 0 | Overlay - AC Structural | 10/1/12 |
| 145 | 14576 | ARGYLE DR | KESWICK LN | COVENTRY LN | E | AAC | 8 | 204 | 24 | 4,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 145 | 14577 | ARGYLE DR | CLAREMONT LN | CAMBRIDGE LN | E | AAC | 8 | 204 | 24 | 4,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 145 | 14578 | ARGYLE DR | INVERNESS LN | KINGSWOOD LN | E | AAC | 8 | 170 | 24 | 4,080 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 146 | 13131 | ARIA CIR | PRELUDE DR | CDS | E | AC | 2 | 412 | 36 | 16,332 | 3/24/22 | 91 | 0 | 58 | 42 | New Construction | 1/1/80 |
| 147 | 14729 | ARIANA CIR | ALSUNA LN | CDS (W) | E | AAC | 6 | 180 | 32 | 8,015 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 147 | 14730 | ARIANA CIR | ALSUNA LN | CDS (E) | E | AC | 6 | 140 | 32 | 6,840 | 6/29/21 | 27 | 73 | 8 | 19 | New Construction | 1/1/80 |
| 148 | 13182 | ARLINGTON LN | MEADOWLARD DR | CALIENTE DR | E | AAC | 2 | 863 | 36 | 31,068 | 5/21/24 | 90 | 20 | 57 | 23 | Overlay - AC Fabric | 10/1/16 |
| 149 | 13409 | ARMADA DR | COLLINS CIR | EDWARDS ST | E | AC | 5 | 308 | 36 | 11,088 | 5/13/24 | 48 | 74 | 16 | 10 | New Construction | 1/1/80 |
| 149 | 15980 | ARMADA DR | FLINTSTONE LN | COLLINS CIR | E | AC | 5 | 1,013 | 36 | 36,468 | 5/20/24 | 59 | 71 | 16 | 13 | New Construction | 1/1/80 |
| 150 | 14835 | ARNETT DR | ALLEY NEWLAND ST | NEWLAND ST | E | AAC | 4 | 160 | 36 | 5,760 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 150 | 14836 | ARNETT DR | NEWLAND ST | LUCIA LN | E | AAC | 4 | 522 | 36 | 19,292 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 150 | 15752 | ARNETT DR | GLENHAVEN LN | ALLEY NEWLAND ST | E | AAC | 4 | 621 | 36 | 22,606 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 151 | 15172 | ARROWHEAD DR | STILL HARBOR LN | CDS | E | AC | 5 | 336 | 36 | 13,596 | 5/21/24 | 55 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 152 | 13576 | ASH ST | SYCAMORE AVE | CYPRESS AVE | E | AC | 4 | 424 | 36 | 15,264 | 5/30/24 | 63 | 27 | 59 | 14 | New Construction | 1/1/80 |
| 152 | 15266 | ASH ST | CYPRESS AVE | MANDRELL DR | E | AC | 4 | 675 | 36 | 24,300 | 5/30/24 | 53 | 76 | 19 | 5 | New Construction | 1/1/80 |
| 152 | 15267 | ASH ST | WARNER AVE | SYCAMORE AVE | E | AC | 4 | 398 | 36 | 14,328 | 5/30/24 | 61 | 45 | 39 | 16 | New Construction | 1/1/80 |
| 155 | 14593 | ASHWORTH CIR | CONSTITUTION DR | CDS | E | AC | 8 | 238 | 36 | 10,368 | 3/7/22 | 81 | 0 | 88 | 12 | Surface Treatment - Slurry Seal | 2/8/23 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 156 | 13686 | ASPEN CIR | ROYAL OAK DR | END | E | AC | 1 | 350 | 32 | 13,000 | 5/6/26 | 88 | 23 | 77 | 0 | New Construction | 1/1/80 |
| 157 | 13040 | ASPENWOOD LN | ADAMS AVE | SHIPLEY ST | E | PCC | 6 | 190 | 20 | 4,780 | 7/8/21 | 85 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 158 | 13720 | ASSEMBLY LN | MACHINE DR | MC FADDEN AVE | E | AC | 1 | 818 | 40 | 32,720 | 4/8/26 | 82 | 45 | 28 | 27 | New Construction | 1/1/80 |
| 159 | 14141 | ASTOR LN | MIDBURY DR | GALLANT DR | E | AAC | 7 | 252 | 36 | 9,822 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2291 | 17026 | ASTRONAUTICS LN | SKYLAB RD | DELTA LN | E | AC | 1 | 2,052 | 36 | 77,872 | 4/7/26 | 81 | 11 | 58 | 31 | New Construction - Initial | 1/1/00 |
| 2291 | 17027 | ASTRONAUTICS LN | DELTA LN | RANCHO RD | E | AC | 1 | 1,592 | 36 | 61,512 | 4/7/26 | 79 | 10 | 73 | 17 | New Construction - Initial | 1/1/00 |
| 160 | 13364 | ATHENA DR | MADERA LN | EDWARDS ST | E | AAC | 5 | 170 | 36 | 6,120 | 5/22/24 | 81 | 0 | 99 | 1 | Overlay - AC Structural | 10/1/12 |
| 160 | 15151 | ATHENA DR | LIDO LN | MADERA LN | E | AAC | 5 | 1,020 | 36 | 36,720 | 5/22/24 | 81 | 0 | 99 | 1 | Overlay - AC Structural | 10/1/12 |
| 85 | 14246 | ATLANTA AVE | END | BASTIA LN | E | AC | 9 | 350 | 26 | 9,100 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 85 | 14247 | ATLANTA AVE | BASTIA LN | END | E | AC | 9 | 527 | 26 | 13,702 | 8/30/23 | 88 | 0 | 35 | 65 | New Construction | 1/1/80 |
| 85 | 780 | ATLANTA AVE | BROOKHURST ST | END | E | AC | 8 | 532 | 40 | 21,280 | 2/25/22 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 85 | 785 | ATLANTA AVE | END | BROOKHURST | E | AC | 8 | 532 | 40 | 21,280 | 2/25/22 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 161 | 13726 | ATLAS DR | APOLLO LN | SABRE LN | E | AC | 1 | 150 | 36 | 7,400 | 12/26/24 | 90 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 163 | 15109 | AUBURN DR | REDLANDS LN | WHITTIER LN | E | AC | 3 | 1,245 | 36 | 45,570 | 1/6/25 | 58 | 69 | 31 | 0 | New Construction | 1/1/80 |
| 164 | 15029 | AUDREY DR | TOMAS LN | WARREN LN | E | AC | 2 | 1,005 | 36 | 36,180 | 3/24/22 | 82 | 11 | 89 | 0 | New Construction | 1/1/80 |
| 165 | 14362 | AUGUSTA CIR | PEPPERTREE DR | CDS | E | AAC | 8 | 334 | 32 | 12,188 | 5/20/24 | 89 | 0 | 77 | 23 | Overlay - AC Structural | 5/11/18 |
| 166 | 15334 | AULNAY LN | MC FADDEN AVE | WINSLOW DR | E | AC | 1 | 441 | 36 | 15,876 | 12/18/24 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 166 | 15335 | AULNAY LN | WINSLOW DR | PRISCILLA DR | E | AC | 1 | 520 | 36 | 18,720 | 12/18/24 | 91 | 0 | 88 | 12 | New Construction | 1/1/80 |
| 166 | 15920 | AULNAY LN | PRISCILLA DR | ROYALIST DR | E | AC | 1 | 1,040 | 36 | 37,440 | 12/18/24 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 167 | 14041 | AUSTIN DR | PHOENIX LN | TOPEKA LN | E | AC | 7 | 252 | 36 | 9,072 | 4/20/26 | 55 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 168 | 14952 | AUTOPARK DR | REPAIR LN | GOTHARD ST | E | AC | 4 | 353 | 40 | 13,800 | 5/9/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 169 | 13350 | AUTUMN CIR | CDS | ROSEMONT DR | E | AC | 5 | 320 | 36 | 13,020 | 5/28/24 | 46 | 78 | 21 | 1 | New Construction | 1/1/80 |
| 170 | 13352 | AVALON LN | PALO ALTO DR | POINT LOMA DR | E | AC | 5 | 1,025 | 36 | 36,900 | 5/21/24 | 48 | 69 | 31 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 171 | 15985 | AVILLA LN | CRISTA PALMA DR | JARDINES DR | E | AAC | 5 | 971 | 36 | 34,668 | 5/22/24 | 81 | 10 | 90 | 0 | Overlay - AC Structural | 10/1/12 |
| 172 | 14831 | B ST | ROBIDOUX DR | WARNER AVE | E | AC | 4 | 651 | 34 | 22,134 | 3/31/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 172 | 15748 | B ST | WARNER AVE | BLAYLOCK DR | E | AC | 4 | 670 | 35 | 23,450 | 3/31/22 | 89 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 173 | 14707 | BACKBAY CIR | OCEANHILL DR | CDS | E | AC | 6 | 266 | 32 | 10,012 | 8/15/23 | 59 | 79 | 10 | 11 | Surface Treatment - Slurry Seal | 3/1/11 |
| 174 | 13709 | BAFFIN CIR | TASMAN DR | END | E | AC | 1 | 545 | 36 | 20,870 | 3/21/22 | 59 | 88 | 12 | 0 | New Construction | 1/1/80 |
| 175 | 14378 | BAHAMA LN | HAITI DR | RHODESIA DR | E | AAC | 9 | 752 | 36 | 28,072 | 3/26/24 | 86 | 16 | 52 | 32 | Overlay - AC Structural | 5/11/18 |
| 176 | 15469 | BAINFORD DR | MANSARD LN | CDS | E | AAC | 7 | 446 | 32 | 16,272 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 177 | 14408 | BAKER DR | MARGARITA LN | ROB ROY CIR | E | AAC | 3 | 249 | 36 | 9,714 | 5/28/24 | 81 | 19 | 79 | 2 | Overlay - AC Structural | 10/1/12 |
| 178 | 14511 | BALBOA CIR | MOLOKAI DR | CDS | E | AAC | 9 | 313 | 32 | 11,516 | 4/22/26 | 83 | 40 | 56 | 4 | Overlay - AC Structural | 5/11/19 |
| 179 | 14288 | BALGAIR CIR | SCOTSTOUN DR | CDS | E | AC | 8 | 452 | 32 | 16,132 | 3/19/24 | 84 | 0 | 97 | 3 | Surface Treatment - Slurry Seal | 5/11/18 |
| 180 | 13133 | BALLAD LN | PRELUDE DR | CDS | E | AC | 2 | 412 | 36 | 16,132 | 3/24/22 | 91 | 24 | 76 | 0 | New Construction | 1/1/80 |
| 180 | 15034 | BALLAD LN | MINUET DR | PRELUDE DR | E | AC | 2 | 520 | 36 | 19,020 | 3/24/22 | 79 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 181 | 13264 | BALLANTINE LN | EDINGER AVE | BELLINGER DR | E | AC | 3 | 179 | 36 | 6,444 | 4/27/26 | 78 | 58 | 42 | 0 | New Construction | 1/1/80 |
| 181 | 15102 | BALLANTINE LN | BELLINGER DR | SILVERWOOD DR | E | AC | 3 | 1,010 | 36 | 36,360 | 5/7/26 | 62 | 65 | 31 | 4 | New Construction | 1/1/80 |
| 182 | 15981 | BALMORAL DR | EDWARDS ST | END | E | AC | 5 | 1,200 | 36 | 44,700 | 5/20/24 | 99 | 0 | 34 | 66 | New Construction | 1/1/80 |
| 183 | 14626 | BALTIMORE AVE | ALABAMA ST | ALLEY ALABAMA ST | E | AC | 9 | 322 | 37 | 11,914 | 8/14/23 | 75 | 9 | 88 | 3 | New Construction | 1/1/80 |
| 183 | 14627 | BALTIMORE AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 161 | 37 | 5,957 | 8/24/23 | 72 | 39 | 54 | 7 | New Construction | 1/1/80 |
| 183 | 14628 | BALTIMORE AVE | HUNTINGTON ST | ALLEY HUNTINGTON ST | E | AC | 9 | 156 | 37 | 5,772 | 8/14/23 | 63 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 184 | 14165 | BANCROFT CIR | HAZELBROOK DR | CDS | E | AC | 7 | 496 | 36 | 19,356 | 4/16/26 | 87 | 51 | 49 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 185 | 15533 | BANFF LN | CREW DR | CDS | E | AC | 9 | 997 | 36 | 39,096 | 8/30/23 | 78 | 48 | 37 | 15 | New Construction | 1/1/80 |
| 186 | 14946 | BANKTON DR | END | GAINSFORD LN | E | AC | 5 | 146 | 36 | 5,256 | 3/31/26 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 186 | 15805 | BANKTON DR | GAINSFORD LN | END | E | AC | 5 | 424 | 36 | 17,264 | 5/8/26 | 78 | 56 | 38 | 6 | New Construction | 1/1/80 |
| 2293 | 14399 | BANNING AVE FRONTAGE | STARFIRE LN | CDS | E | AC | 9 | 370 | 27 | 11,790 | 4/17/24 | 81 | 71 | 25 | 4 | New Construction - Initial | 1/1/80 |
| 187 | 12858 | BAR HARBOR LN | QUIET BAY LN | SCENIC BAY LN | E | AAC | 5 | 348 | 36 | 13,108 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 188 | 14320 | BARBADOS CIR | DORSETT DR | CDS | E | AC | 9 | 570 | 36 | 22,020 | 8/30/23 | 24 | 94 | 6 | 0 | New Construction | 1/1/80 |
| 189 | 15744 | BARCELONA LN | BLAYLOCK DR | VALENCIA DR | E | AC | 4 | 520 | 36 | 18,970 | 3/31/22 | 90 | 12 | 68 | 20 | Surface Treatment - Slurry Seal | 7/29/20 |
| 190 | 13619 | BARDON LN | LA MANCHA CIR | CORSICAN DR | E | AC | 3 | 269 | 36 | 10,434 | 4/7/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 191 | 13186 | BARNSTABLE CIR | HUMBOLDT DR | CDS | E | AC | 2 | 375 | 32 | 13,500 | 4/7/22 | 76 | 69 | 31 | 0 | New Construction | 1/1/80 |
| 192 | 14793 | BARON CIR | TALBERT AVE | CDS | E | AAC | 4 | 603 | 36 | 23,208 | 4/20/26 | 84 | 16 | 84 | 0 | Overlay - AC Structural | 11/28/19 |
| 193 | 13502 | BARTLETT LN | MADDOX DR | ALLEY NORMA DR | E | AAC | 3 | 682 | 36 | 24,552 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 193 | 13503 | BARTLETT LN | ALLEY NORMA DR | NORMA DR | E | AAC | 3 | 105 | 36 | 3,780 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 196 | 14425 | BARTON DR | KOLEDO LN | QUEENS LN | E | AAC | 4 | 298 | 36 | 10,728 | 5/30/24 | 85 | 0 | 81 | 19 | Overlay - AC Structural | 10/1/12 |
| 197 | 13206 | BARUNA LN | NALU CIR | SEA WITCH LN | E | AC | 2 | 412 | 36 | 14,832 | 4/7/22 | 82 | 61 | 39 | 0 | New Construction | 1/1/80 |
| 197 | 13225 | BARUNA LN | KITTEN CIR | SIRUS DR | E | AC | 2 | 268 | 36 | 10,398 | 5/10/24 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 197 | 15068 | BARUNA LN | SEA WITCH LN | DAVENPORT DR | E | AC | 2 | 886 | 36 | 31,896 | 4/7/22 | 88 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 197 | 15071 | BARUNA LN | DAVENPORT DR | KITTEN CIR | E | AC | 2 | 607 | 36 | 21,852 | 4/7/22 | 82 | 72 | 28 | 0 | New Construction | 1/1/80 |
| 198 | 15976 | BARWOOD DR | RAINGLEN LN | BECKWALL LN | E | AC | 5 | 652 | 36 | 23,184 | 3/31/26 | 85 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 199 | 15820 | BASS DR | BUSHARD ST | WALLEYE LN | E | AC | 8 | 322 | 36 | 12,592 | 3/7/22 | 93 | 0 | 72 | 28 | New Construction | 1/1/80 |
| 200 | 14245 | BASTIA LN | SNOWBIRD DR | ATLANTA AVE | E | AC | 9 | 246 | 36 | 8,856 | 8/30/23 | 74 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 200 | 14248 | BASTIA LN | ATLANTA AVE | ATLANTA AVE | E | AC | 9 | 72 | 36 | 2,592 | 5/20/24 | 67 | 59 | 41 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 201 | 14921 | BATES CIR | ALLSTONE DR | END | E | AC | 5 | 217 | 36 | 9,612 | 3/31/26 | 77 | 28 | 69 | 3 | New Construction | 1/1/80 |
| 202 | 13402 | BAXTER CIR | AMADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/21/24 | 58 | 91 | 8 | 1 | New Construction | 1/1/80 |
| 203 | 15948 | BAY MEADOW DR | BUSHARD ST | GRAYSTONE LN | E | AAC | 8 | 1,195 | 36 | 43,020 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 204 | 14536 | BAY VIEW DR | ALLEY BAY VIEW 1 | BROADWAY | E | AC | 2 | 122 | 27 | 3,294 | 4/9/22 | 90 | 0 | 22 | 78 | New Construction | 1/1/80 |
| 204 | 14537 | BAY VIEW DR | ALLEY BAY VIEW 2 | ALLEY BAY VIEW 1 | E | AC | 2 | 233 | 27 | 6,291 | 4/9/22 | 95 | 0 | 50 | 50 | New Construction | 1/1/80 |
| 204 | 15620 | BAY VIEW DR | BROADWAY | END | E | AC | 2 | 420 | 27 | 11,340 | 4/9/22 | 83 | 78 | 15 | 7 | New Construction | 1/1/80 |
| 204 | 15621 | BAY VIEW DR | REMORA DR | ALLEY BAY VIEW 2 | E | AC | 2 | 602 | 27 | 16,254 | 4/9/22 | 94 | 0 | 71 | 29 | New Construction | 1/1/80 |
| 205 | 14498 | BAYBREEZE DR | SUMMERWIND LN | BROOKHURST ST | E | AAC | 9 | 237 | 44 | 9,628 | 5/5/26 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 206 | 13741 | BAYLOR CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 207 | 13955 | BAYONNE DR | CDS | LOMBARDY LN | E | AAC | 7 | 586 | 34 | 21,174 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 207 | 13957 | BAYONNE DR | LOMBARDY LN | CDS | E | AAC | 7 | 220 | 32 | 8,540 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 208 | 13183 | BAYSHORE LN | MEADOWLARK DR | CALIENTE DR | E | AAC | 2 | 863 | 36 | 31,068 | 5/21/24 | 85 | 16 | 84 | 0 | Overlay - AC Fabric | 10/1/16 |
| 209 | 13766 | BAYSIDE LN | SYDNEY DR | MEDFORD DR | E | AC | 1 | 274 | 36 | 11,364 | 4/27/26 | 71 | 17 | 60 | 23 | New Construction | 1/1/80 |
| 210 | 15380 | BAYWATER LN | SUNCORAL DR | CLIFFSIDE DR | E | AC | 7 | 646 | 36 | 23,506 | 4/15/26 | 94 | 0 | 69 | 31 | Surface Treatment - Slurry Seal | 7/15/21 |
| 211 | 15384 | BAYWOOD DR | PISMO LN | CORALWOOD LN | E | AAC | 7 | 1,130 | 36 | 40,930 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 212 | 17000 | BEACH BLVD FRONTAGE | DRIFTWOOD DR | TRAVELWAY | E | AC | 9 | 1,352 | 28 | 37,856 | 8/24/23 | 85 | 0 | 98 | 2 | New Construction | 1/1/80 |
| 212 | 17002 | BEACH BLVD FRONTAGE | TRAVELWAY | WEST END | E | AC | 9 | 1,032 | 36 | 37,152 | 8/30/23 | 92 | 0 | 41 | 59 | New Construction | 1/1/80 |
| 212 | 17029 | BEACH BLVD FRONTAGE | STERLING | TAYLOR | E | AAC | 4 | 665 | 28 | 18,620 | 5/9/24 | 98 | 0 | 100 | 0 | Overlay - AC Structural | 4/1/17 |
| 213 | 14487 | BEACHSIDE DR | SEACREST LN | SEASIDE LN | E | AAC | 9 | 257 | 36 | 10,252 | 4/21/26 | 79 | 34 | 66 | 0 | Overlay - AC Structural | 5/11/19 |
| 214 | 15955 | BEACHWOOD LN | FIVE HARBORS DR | CAMEL LN | E | AC | 9 | 868 | 36 | 31,248 | 5/6/24 | 76 | 57 | 43 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 215 | 13890 | BEACON HILL LN | SUMMIT DR | LAWN HAVEN DR | E | AAC | 5 | 219 | 36 | 6,684 | 4/30/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 216 | 14111 | BEAM CIR | SEAPORT DR | END | E | AAC | 9 | 155 | 32 | 4,960 | 8/21/23 | 65 | 54 | 46 | 0 | Overlay - AC Structural | 3/1/11 |
| 217 | 14250 | BEARSDEN CIR | COLBREGGAN DR | CDS | E | AAC | 9 | 210 | 32 | 8,520 | 5/10/24 | 76 | 42 | 58 | 0 | Overlay - AC Structural | 5/11/18 |
| 218 | 14201 | BEAUMONT CIR | NIAGARA DR | CDS | E | AAC | 8 | 356 | 32 | 13,392 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 219 | 14941 | BECK CIR | GAINSFORD LN | END | E | AC | 5 | 154 | 36 | 5,544 | 3/31/26 | 68 | 60 | 34 | 6 | New Construction | 1/1/80 |
| 220 | 15798 | BECKWALL LN | NEARGATE DR | END | E | AC | 5 | 542 | 36 | 21,512 | 3/31/26 | 87 | 16 | 78 | 6 | New Construction | 1/1/80 |
| 221 | 14354 | BECKWOURTH CIR | CORNERBROOK DR | CDS | E | AC | 8 | 341 | 36 | 13,776 | 5/20/24 | 81 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 222 | 15467 | BEDEL DR | MANSARD LN | VILLAGE DR | E | AC | 7 | 408 | 36 | 14,688 | 4/16/26 | 77 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 223 | 15075 | BEDFORD LN | DAVENPORT DR | WESTPORT DR | E | AC | 2 | 573 | 36 | 20,628 | 4/7/22 | 52 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 224 | 13874 | BELFAST LN | CARLOW DR | EDINGER AVE | E | AC | 3 | 549 | 36 | 19,764 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 224 | 15347 | BELFAST LN | GLEN DR | CARLOW DR | E | AC | 3 | 900 | 36 | 32,400 | 1/3/25 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 225 | 15725 | BELL CIR | TALBERT AVE | CDS | E | AC | 4 | 562 | 36 | 21,732 | 5/13/24 | 78 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 226 | 13436 | BELLFIELD LN | MIDWAY DR | GRIMSBY DR | E | AC | 5 | 203 | 36 | 7,308 | 3/31/26 | 79 | 38 | 53 | 9 | New Construction | 1/1/80 |
| 226 | 15191 | BELLFIELD LN | GRIMSBY DR | CDS | E | AC | 5 | 1,048 | 34 | 35,632 | 3/31/26 | 77 | 35 | 65 | 0 | New Construction | 1/1/80 |
| 227 | 15103 | BELLINGER DR | BALLANTINE LN | CDS | E | AC | 3 | 880 | 36 | 32,930 | 4/7/26 | 45 | 76 | 8 | 16 | New Construction | 1/1/80 |
| 228 | 14058 | BELLMEAD DR | BRIARLY LN | FELCLIFF LN | E | AC | 7 | 1,027 | 36 | 36,972 | 4/20/26 | 82 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 229 | 14916 | BELLPORT CIR | GLENSTONE DR | CDS | E | AC | 2 | 229 | 36 | 9,594 | 4/1/26 | 74 | 33 | 67 | 0 | New Construction | 1/1/80 |
| 230 | 16022 | BELLSHIRE DR | MAYPORT LN | SWANSEA LN | E | AC | 7 | 758 | 36 | 27,288 | 4/21/26 | 91 | 0 | 33 | 67 | Surface Treatment - Slurry Seal | 7/15/21 |
| 231 | 13678 | BELMAR CIR | ROYAL OAK DR | END | E | AAC | 1 | 350 | 32 | 13,000 | 5/7/24 | 81 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 233 | 14792 | BELVA DR | GOTHARD ST | METZLER LN | E | AC | 4 | 437 | 40 | 17,480 | 5/9/24 | 84 | 21 | 60 | 19 | Surface Treatment - Slurry Seal | 11/1/19 |
| 234 | 14606 | BENJAMIN DR | BRITTANY LN | NEWLAND ST | E | AAC | 4 | 483 | 36 | 17,388 | 4/9/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 12/5/19 |
| 235 | 14592 | BERKSHIRE DR | DEVONSHIRE DR | CORNWALL DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 236 | 14926 | BERLARK CIR | SERENE DR | END | E | AC | 5 | 424 | 36 | 17,064 | 3/30/26 | 78 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 237 | 15777 | BERLIN LN | ROGERS DR | KERN DR | E | AC | 5 | 1,238 | 36 | 44,818 | 5/8/26 | 31 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 238 | 15564 | BERMUDA DR | MAGNOLIA ST | KANEHOE LN | E | AC | 9 | 1,110 | 36 | 39,672 | 3/27/24 | 84 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 239 | 15163 | BERSHIRE DR | SHOREHAM LN | STAMONT LN | E | AC | 5 | 782 | 36 | 27,504 | 3/30/26 | 59 | 92 | 8 | 0 | New Construction | 1/1/80 |
| 241 | 13934 | BETHEL CIR | BRIDGEPORT DR | CDS | E | AAC | 7 | 315 | 32 | 13,728 | 4/15/26 | 88 | 0 | 43 | 57 | Overlay - AC Structural | 11/28/19 |
| 242 | 15254 | BETTY DR | GOLDENWEST ST | CDS | E | AC | 3 | 957 | 36 | 35,952 | 5/28/24 | 66 | 56 | 40 | 4 | New Construction | 1/1/80 |
| 243 | 14299 | BEVERLY DR | SUBURBIA LN | LAVONNE LN | E | AAC | 8 | 1,027 | 36 | 36,972 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 244 | 14450 | BICKLEY DR | BUSHARD ST FRONTAGE | BROMLEY LN | E | AC | 8 | 1,128 | 36 | 41,358 | 3/9/22 | 89 | 44 | 53 | 3 | Surface Treatment - Slurry Seal | 2/8/23 |
| 245 | 14181 | BIG BEND LN | LASSEN CIR | YELLOWSTONE DR | E | AC | 8 | 252 | 36 | 9,072 | 3/1/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 245 | 15481 | BIG BEND LN | OLYMPIC DR | LASSEN CIR | E | AC | 8 | 915 | 36 | 33,690 | 3/1/22 | 91 | 0 | 83 | 17 | Surface Treatment - Slurry Seal | 2/13/23 |
| 246 | 15486 | BIG SUR DR | WIND CAVE LN | RUNNING SPRINGS LN | E | AC | 8 | 754 | 32 | 24,378 | 3/1/22 | 82 | 15 | 85 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 247 | 15401 | BIKINI LN | SAMOA DR | KUKUI DR | E | AC | 8 | 802 | 36 | 30,372 | 3/3/22 | 44 | 86 | 9 | 5 | New Construction | 1/1/80 |
| 248 | 14355 | BINGHAMPTON CIR | EFFINGHAM DR | CDS | E | AC | 8 | 495 | 36 | 19,320 | 4/10/24 | 78 | 68 | 13 | 19 | New Construction | 1/1/80 |
| 249 | 14213 | BIRCHWOOD DR | BROOKHURST ST | CRAIMER LN | E | AAC | 8 | 1,176 | 36 | 42,336 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 250 | 13236 | BIRDIE LN | MANGUM DR | LITTLER DR | E | AAC | 3 | 260 | 36 | 9,360 | 5/21/24 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 250 | 13245 | BIRDIE LN | VENTURI DR | MIDDLECOFF DR | E | AAC | 3 | 520 | 36 | 18,720 | 5/21/24 | 79 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 250 | 15084 | BIRDIE LN | LITTLER DR | VENTURI DR | E | AAC | 3 | 1,014 | 36 | 36,504 | 5/21/24 | 83 | 23 | 72 | 5 | Overlay - AC Structural | 10/1/16 |
| 251 | 13331 | BISHOP DR | EDWARDS ST | COOPER LN | E | AC | 3 | 531 | 36 | 19,116 | 3/18/22 | 87 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 252 | 14093 | BISMARK DR | BROOKHURST ST | MATSONIA LN | E | AC | 8 | 886 | 36 | 31,896 | 3/3/22 | 71 | 37 | 59 | 4 | Surface Treatment - Slurry Seal | 2/8/23 |
| 254 | 14350 | BLACKFIN CIR | CHUBASCO LN | CDS | E | AC | 8 | 228 | 36 | 9,708 | 4/1/24 | 67 | 31 | 69 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 255 | 13223 | BLAIR LN | WESTPORT DR | ROUNDHILL DR | E | AC | 2 | 163 | 36 | 5,868 | 4/7/22 | 65 | 52 | 48 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 256 | 13981 | BLANE CIR | JOICE LN | CDS | E | AAC | 8 | 245 | 32 | 9,640 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 257 | 13290 | BLANTON ST | PRAIRE DR | PEARCE ST | E | AC | 2 | 660 | 36 | 23,760 | 3/29/22 | 90 | 0 | 42 | 58 | New Construction | 1/1/80 |
| 257 | 13610 | BLANTON ST | PEARCE ST | MILO ST | E | AC | 2 | 660 | 36 | 23,120 | 3/22/22 | 84 | 61 | 20 | 19 | New Construction | 1/1/80 |
| 259 | 15746 | BLAYLOCK DR | BEACH BLVD | A ST | E | AC | 4 | 300 | 35 | 10,500 | 4/6/22 | 89 | 0 | 57 | 43 | Surface Treatment - Slurry Seal | 7/29/20 |
| 259 | 15747 | BLAYLOCK DR | A ST | BARCELONA LN | E | AC | 4 | 887 | 36 | 32,182 | 3/31/22 | 88 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 260 | 13627 | BLUE FOX CIR | CAPSTONE DR | END | E | AC | 3 | 321 | 36 | 14,056 | 5/28/24 | 29 | 88 | 12 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 261 | 13812 | BLUE JAY CIR | BLUEBIRD LN | END | E | AC | 1 | 530 | 36 | 20,330 | 3/21/22 | 88 | 46 | 50 | 4 | New Construction | 1/1/80 |
| 262 | 13813 | BLUEBIRD LN | DOVEWOOD DR | QUAIL CIR | E | AC | 1 | 260 | 36 | 9,360 | 3/21/22 | 86 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 262 | 15326 | BLUEBIRD LN | QUAIL CIR | ROBINWOOD DR | E | AC | 1 | 780 | 36 | 28,080 | 3/21/22 | 75 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 263 | 13883 | BLUEBONNET DR | SUNBURST LN | GOLDENWEST ST | E | AC | 3 | 182 | 36 | 6,552 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 264 | 14348 | BLUEFIELD DR | COCOBANA LN | STRATHMOOR LN | E | AAC | 8 | 250 | 36 | 9,000 | 4/1/24 | 83 | 23 | 33 | 44 | Overlay - AC Structural | 5/11/18 |
| 265 | 13986 | BLUEFIN LN | GARFIELD AVE | ALBACORE DR | E | AC | 8 | 180 | 47 | 7,810 | 3/7/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 266 | 15176 | BLUEGATE LN | HAMSHIRE DR | CDS | E | AC | 5 | 453 | 36 | 18,108 | 5/21/24 | 89 | 20 | 80 | 0 | New Construction | 1/1/80 |
| 267 | 13993 | BLUEGILL CIR | TARPON DR | CDS | E | AC | 8 | 310 | 32 | 11,420 | 3/7/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 268 | 13602 | BLUESAILS DR | BRIDGE LN | MOONGLOW LN | E | AAC | 3 | 995 | 36 | 37,320 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 270 | 14172 | BLUFFWATER CIR | COASTLAND DR | CDS | E | AAC | 7 | 226 | 32 | 8,732 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 271 | 14988 | BOARDWALK DR | SAYBROOK LN | ALGONQUIN ST | E | AC | 2 | 834 | 36 | 30,024 | 4/5/22 | 92 | 28 | 72 | 0 | New Construction - Initial | 1/1/80 |
| 272 | 14370 | BOBBIE CIR | POLYNESIAN LN | CDS | E | AAC | 9 | 480 | 36 | 18,780 | 3/26/24 | 86 | 32 | 68 | 0 | Overlay - AC Structural | 5/11/18 |
| 273 | 14040 | BOISE DR | SACRAMENTO LN | PHOENIX LN | E | AAC | 7 | 253 | 36 | 9,608 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 274 | 13217 | BOLERO LN | NALU CIR | FINISTERRE DR | E | AC | 2 | 1,864 | 36 | 67,104 | 4/7/22 | 89 | 0 | 53 | 47 | New Construction - Initial | 1/1/80 |
| 274 | 13228 | BOLERO LN | FINISTERRE DR | SIRIUS DR | E | AC | 2 | 800 | 36 | 29,550 | 4/7/22 | 88 | 52 | 48 | 0 | New Construction - Initial | 1/1/80 |
| 275 | 14321 | BOLIN CIR | LEASURE LN | END | E | AC | 9 | 176 | 32 | 7,132 | 8/30/23 | 53 | 67 | 31 | 2 | New Construction - Initial | 1/1/80 |
| 195 | 15765 | BOLSA CHICA ST | WARNER AVE | LOS PATOS AVE | E | AC | 2 | 1,326 | 100 | 97,600 | 4/1/26 | 65 | 94 | 6 | 0 | New Construction - Initial | 1/1/80 |
| 195 | 60850 | BOLSA CHICA ST | LOS PATOS AVE | BRIGHTWATER DR | E | AC | 2 | 860 | 49 | 34,940 | 4/1/26 | 96 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 276 | 13729 | BOLSA PARK LN | KIMBERLY DR | DUNDEE DR | E | AC | 1 | 276 | 36 | 9,936 | 12/18/24 | 93 | 40 | 60 | 0 | New Construction - Initial | 1/1/80 |
| 276 | 13736 | BOLSA PARK LN | DUNDEE DR | CORNELL DR | E | AC | 1 | 274 | 36 | 9,864 | 12/18/24 | 91 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 276 | 13737 | BOLSA PARK LN | CORNELL DR. | TYNDALL DR | E | AC | 1 | 274 | 36 | 9,864 | 12/18/24 | 94 | 39 | 61 | 0 | New Construction - Initial | 1/1/80 |
| 276 | 13747 | BOLSA PARK LN | TYNDALL DR | SHELLY DR | E | AC | 1 | 274 | 36 | 9,576 | 12/18/24 | 93 | 0 | 59 | 41 | New Construction - Initial | 1/1/80 |
| 276 | 13754 | BOLSA PARK LN | SHELLY DR | SYDNEY DR | E | AC | 1 | 274 | 36 | 9,576 | 4/27/26 | 87 | 69 | 31 | 0 | New Construction - Initial | 1/1/80 |
| 276 | 13756 | BOLSA PARK LN | SYDNEY DR | MEDFORD DR | E | AC | 1 | 274 | 36 | 9,576 | 12/18/24 | 88 | 71 | 29 | 0 | New Construction - Initial | 1/1/80 |
| 277 | 13386 | BOLTON CIR | WOODBORO DR | END | E | AC | 5 | 136 | 36 | 6,396 | 3/31/26 | 81 | 0 | 67 | 33 | New Construction - Initial | 1/1/80 |
| 279 | 14084 | BOND CIR | EDUCATION LN | CDS | E | AC | 8 | 472 | 36 | 18,792 | 3/9/22 | 84 | 53 | 41 | 6 | Surface Treatment - Slurry Seal | 2/8/23 |
| 280 | 13267 | BONDURANT CIR | FLINT DR | CDS | E | AC | 3 | 99 | 32 | 4,418 | 4/7/26 | 74 | 65 | 35 | 0 | New Construction - Initial | 1/1/80 |
| 281 | 13342 | BONNIE DR | PATRICIA LN | KETTLER LN | E | AC | 3 | 521 | 36 | 18,756 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 282 | 14619 | BOOTHBAY CIR | PORT GREENWICH LN | END | E | AC | 9 | 453 | 34 | 15,402 | 8/21/23 | 72 | 83 | 17 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 283 | 14473 | BORBA CIR | DAKAR LN | CDS | E | AC | 9 | 276 | 32 | 11,332 | 4/25/24 | 73 | 0 | 32 | 68 | Surface Treatment - Slurry Seal | 5/11/19 |
| 284 | 14049 | BOSUN CIR | WESTWINDS LN | CDS | E | AAC | 7 | 232 | 36 | 9,602 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 285 | 14439 | BOUNTY CIR | CHANNEL LN | CDS | E | AC | 2 | 288 | 32 | 10,716 | 4/9/22 | 90 | 0 | 51 | 49 | New Construction - Initial | 1/1/80 |
| 286 | 13604 | BOUQUET DR | SERENADE LN | MAGELLAN LN | E | AAC | 3 | 260 | 36 | 10,110 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 287 | 14027 | BOWMAN LN | HURSTWELL DR | DRYBANK DR | E | AAC | 7 | 536 | 36 | 19,296 | 8/17/23 | 86 | 0 | 91 | 9 | Overlay - AC Structural | 3/1/11 |
| 288 | 15554 | BOWSPRIT LN | WATERFRONT DR | PIER DR | E | AAC | 9 | 460 | 36 | 17,310 | 3/20/24 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 289 | 13973 | BRABHAM DR | MC LAREN LN | HICKORY LN | E | AC | 8 | 940 | 36 | 33,840 | 4/15/26 | 70 | 84 | 16 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 290 | 13334 | BRAD DR | EDWARDS ST | COOPER LN | E | AAC | 3 | 530 | 36 | 19,080 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 291 | 13253 | BRADBURY LN | PALISADE DR | DAGNY CIR | E | AC | 3 | 367 | 36 | 13,212 | 4/7/26 | 86 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 291 | 15096 | BRADBURY LN | DAGNY CIR | HEIL AVE | E | AC | 3 | 963 | 36 | 34,668 | 5/7/26 | 61 | 51 | 47 | 2 | New Construction | 1/1/80 |
| 292 | 15179 | BRAEMAR DR | ORKNEY CIR | SKYE LN | E | AC | 5 | 580 | 36 | 22,130 | 5/20/24 | 100 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 293 | 15059 | BRANFORD DR | EDGEWATER LN | SAYBROOK LN | E | AC | 2 | 814 | 36 | 29,304 | 3/24/22 | 52 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 294 | 15776 | BRANNEN DR | APEL LN | SPRINGDALE ST | E | AC | 5 | 940 | 36 | 33,840 | 5/8/26 | 65 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 295 | 14478 | BRANTA CIR | LANDFALL DR | CDS | E | AAC | 9 | 472 | 36 | 19,492 | 4/21/26 | 72 | 17 | 69 | 14 | Overlay - AC Structural | 5/11/19 |
| 296 | 13242 | BRASSIE CIR | SPRINGDALE ST | END | E | AAC | 3 | 270 | 32 | 9,890 | 5/9/24 | 88 | 0 | 45 | 55 | Overlay - AC Fabric | 10/1/16 |
| 297 | 14047 | BREAKERS DR | TRIDENT LN | WESTWINDS LN | E | AAC | 7 | 492 | 36 | 17,712 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 298 | 14340 | BREAKWATER CIR | BOWSPIRIT LN | CDS | E | AAC | 9 | 350 | 32 | 12,700 | 4/1/24 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 299 | 14914 | BREDA LN | GHENT DR | NORDINA DR | E | AC | 5 | 1,120 | 36 | 40,570 | 4/1/26 | 87 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 300 | 13127 | BREELAND DR | SHERBECK LN | GOLDENWEST ST | E | AC | 3 | 1,196 | 36 | 42,768 | 4/7/26 | 81 | 10 | 90 | 0 | New Construction | 1/1/80 |
| 301 | 13261 | BRENT CIR | SILVERWOOD DR | CDS | E | AC | 3 | 140 | 32 | 5,730 | 4/6/26 | 67 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 302 | 15891 | BRENTSTONE LN | BURLCREST DR | CHARFORD DR | E | AC | 7 | 1,183 | 36 | 42,588 | 4/16/26 | 83 | 59 | 37 | 4 | Surface Treatment - Slurry Seal | 7/15/21 |
| 303 | 13460 | BRENTWELL CIR | GLENFOX DR | END | E | AAC | 5 | 472 | 36 | 18,492 | 5/29/24 | 54 | 58 | 42 | 0 | Overlay - AC Structural | 10/1/12 |
| 304 | 15248 | BRESSEL LN | MERLE CIR | WARNER AVE | E | AC | 4 | 486 | 36 | 17,746 | 4/6/22 | 84 | 74 | 26 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 305 | 14328 | BRETON LN | ST AUGUSTINE DR | HATTERAS DR | E | AC | 9 | 833 | 36 | 30,738 | 8/30/23 | 70 | 14 | 86 | 0 | New Construction | 1/1/80 |
| 305 | 15540 | BRETON LN | ST AUGUSTINE DR | CDS | E | AC | 9 | 584 | 32 | 20,188 | 8/30/23 | 59 | 72 | 28 | 0 | New Construction | 1/1/80 |
| 306 | 13674 | BRIARCLIFF DR | SPRINGDALE ST | CHATEAU LN | E | AC | 1 | 180 | 36 | 6,480 | 5/6/26 | 82 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 306 | 13675 | BRIARCLIFF DR | FAIRVIEW LN | END | E | AC | 1 | 551 | 32 | 19,382 | 5/6/26 | 74 | 75 | 22 | 3 | New Construction | 1/1/80 |
| 306 | 15293 | BRIARCLIFF DR | CHATEAU LN | FAIRVIEW LN | E | AC | 1 | 780 | 36 | 28,080 | 4/8/22 | 75 | 55 | 34 | 11 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 307 | 15959 | BRIARLY LN | DOREMERE DR | LOWMEAD DR | E | AC | 7 | 1,007 | 36 | 37,002 | 4/20/26 | 81 | 86 | 14 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 308 | 13879 | BRIARWOOD DR | DAWSON LN | SUNFLOWER LN | E | AC | 3 | 257 | 36 | 8,676 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 309 | 13601 | BRIDGE LN | BLUESAILS DR | STONEWOOD DR | E | AAC | 3 | 260 | 36 | 10,110 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 310 | 15968 | BRIDGEPORT DR | NEWHAVEN LN | NEWLAND ST | E | AAC | 7 | 517 | 36 | 18,612 | 4/15/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 311 | 15111 | BRIDGEWATER DR | REDLANDS LN | WHITTIER LN | E | AC | 3 | 1,348 | 36 | 49,278 | 12/19/24 | 69 | 54 | 43 | 3 | New Construction | 1/1/80 |
| 312 | 13947 | BRIDGEWAY LN | GARFIELD AVE | BROOKSIDE DR | E | AC | 7 | 410 | 36 | 14,760 | 4/15/26 | 48 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 313 | 13996 | BRIGANTINE LN | FAIR TIDE CR | YORKTOWN AVE | E | AAC | 8 | 148 | 36 | 5,040 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 314 | 15810 | BRIGHTON DR | CRESTMOOR LN | WHITFORD LN | E | AC | 5 | 670 | 36 | 25,120 | 3/31/26 | 62 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 315 | 15101 | BRIMHALL LN | REUBENS DR | MYRTLE DR | E | AC | 3 | 660 | 36 | 24,260 | 5/7/26 | 58 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 316 | 14607 | BRITTANY LN | BENJAMIN DR | EL ARROYO DR | E | AAC | 4 | 251 | 36 | 9,036 | 4/9/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 317 | 13925 | BRIXHAM CIR | WEYMOUTH LN | CDS | E | AAC | 7 | 142 | 32 | 7,956 | 4/14/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 318 | 15942 | BROADWAY | INTREPID LN | PCH | E | AAC | 2 | 351 | 28 | 6,328 | 5/13/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 318 | 60490 | BROADWAY | PCH | PACIFIC S | E | AC | 2 | 304 | 44 | 13,376 | 4/23/26 | 88 | 19 | 42 | 39 | New Construction - Initial | 1/1/80 |
| 319 | 14080 | BROMLEY LN | BICKLEY DR | PETTSWOOD DR | E | AAC | 8 | 259 | 36 | 10,824 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 320 | 15506 | BROOKDALE LN | CASTLEGATE DR | SUNRIDGE DR | E | AC | 9 | 579 | 36 | 20,844 | 5/6/24 | 54 | 70 | 30 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 240 | 14088 | BROOKHURST ST | CUTTY SARK DR | FORRESTAL DR | E | AC | 8 | 1,444 | 28 | 40,432 | 2/25/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 240 | 14204 | BROOKHURST ST | END | MEREDITH DR | E | AAC | 8 | 242 | 27 | 6,534 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 240 | 14209 | BROOKHURST ST | MEREDITH DR | JON DAY DR | E | AAC | 8 | 270 | 27 | 7,290 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 240 | 14430 | BROOKHURST ST | KAMUELA DR. | YORKTOWN AVE | E | AC | 8 | 1,121 | 26 | 29,146 | 2/25/22 | 81 | 0 | 41 | 59 | Surface Treatment - Slurry Seal | 2/8/23 |
| 240 | 14616 | BROOKHURST ST | CUTTY SARK DR | END | E | AC | 8 | 116 | 26 | 3,016 | 2/25/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 240 | 15491 | BROOKHURST ST | JON DAY DR | CRAILET DR | E | AAC | 8 | 790 | 27 | 21,330 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 321 | 14075 | BROOKLINE CIR | INNSBRUCK DR | CDS | E | AC | 8 | 365 | 32 | 13,180 | 3/9/22 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 322 | 14783 | BROOKSHIRE LN | WINDFIELD DR | TALBERT AVE | E | AC | 4 | 344 | 46 | 15,324 | 5/13/24 | 71 | 31 | 33 | 36 | Surface Treatment - Slurry Seal | 11/1/19 |
| 323 | 13948 | BROOKSIDE DR | BRIDGEWAY LN | HOMESTEAD LN | E | AC | 7 | 306 | 36 | 11,016 | 4/15/26 | 57 | 98 | 0 | 2 | Surface Treatment - Slurry Seal | 7/15/21 |
| 324 | 13761 | BROWN CIR | COLUMBIA LN | END | E | AC | 1 | 543 | 36 | 21,048 | 12/18/24 | 72 | 84 | 16 | 0 | New Construction | 1/1/80 |
| 325 | 15472 | BROWNING DR | HARBOR ISLE LN | CDS | E | AC | 7 | 557 | 32 | 20,124 | 4/21/26 | 82 | 38 | 62 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 326 | 13801 | BRUNSWICK DR | YORKSHIRE LN | GOLDENWEST ST | E | AC | 1 | 550 | 36 | 19,512 | 4/8/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 327 | 14849 | BRUSH DR | HART CIR | MONROE LN | E | AC | 4 | 262 | 36 | 9,432 | 4/6/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 327 | 14850 | BRUSH DR | IRBY LN | ALLEY NEWLAND ST | E | AC | 4 | 140 | 36 | 5,040 | 4/6/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 327 | 14851 | BRUSH DR | ALLEY NEWLAND ST | NEWLAND ST | E | AC | 4 | 152 | 36 | 5,472 | 4/6/22 | 85 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 327 | 15759 | BRUSH DR | WAITE LN | HART CIR | E | AC | 4 | 526 | 36 | 18,936 | 5/9/24 | 67 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 327 | 15760 | BRUSH DR | MONROE LN | TRIPP CIR | E | AC | 4 | 550 | 36 | 19,800 | 4/6/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 327 | 15761 | BRUSH DR | TRIPP CIR | IRBY LN | E | AC | 4 | 550 | 36 | 19,800 | 4/6/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 328 | 14847 | BRYANT DR | MONROE LN | CDS | E | AAC | 4 | 380 | 32 | 13,410 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 328 | 14848 | BRYANT DR | IRBY LN | MONROE LN | E | AAC | 4 | 1,115 | 36 | 40,140 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 329 | 14401 | BUCKINGHAM DR | GRAHAM ST | DAN LN | E | AC | 1 | 1,239 | 40 | 49,240 | 4/7/26 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 331 | 14339 | BULKHEAD CIR | WATERFRONT DR | CDS | E | AAC | 9 | 395 | 36 | 15,720 | 3/20/24 | 90 | 0 | 95 | 5 | Overlay - AC Structural | 5/11/18 |
| 332 | 13517 | BURKE LN | EARL CIR | PRINCE DR | E | AC | 3 | 361 | 40 | 14,440 | 3/31/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 332 | 15237 | BURKE LN | HEIL AVE | EARL CIR | E | AC | 3 | 1,303 | 40 | 52,120 | 3/31/22 | 84 | 61 | 37 | 2 | Surface Treatment - Slurry Seal | 7/29/20 |
| 333 | 14138 | BURLCREST DR | BRENTSTONE LN | SWANSEA LN | E | AC | 7 | 469 | 36 | 17,634 | 4/21/26 | 92 | 55 | 45 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 333 | 15464 | BURLCREST DR | MEANDER LN | BRENTSTONE LN | E | AC | 7 | 527 | 36 | 19,722 | 4/21/26 | 93 | 47 | 53 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 334 | 14999 | BURLINGTON LN | CHESTERFIELD LN | ASHBURTON CIR | E | AC | 9 | 572 | 36 | 20,336 | 8/24/23 | 80 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 335 | 15369 | BURNHAM CIR | WORCHESTER LN | CDS | E | AC | 7 | 556 | 36 | 23,166 | 4/2/24 | 89 | 23 | 61 | 16 | Surface Treatment - Slurry Seal | 11/28/19 |
| 336 | 14563 | BURNLEY LN | RALEIGH DR | KENSINGTON DR | E | AAC | 8 | 269 | 24 | 6,456 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 337 | 14788 | BURTON DR | GRIFFIN LN | SAMPSON LN | E | AC | 4 | 126 | 40 | 5,040 | 5/8/24 | 80 | 44 | 46 | 10 | Surface Treatment - Slurry Seal | 11/1/19 |
| 338 | 13325 | BUSBY LN | JEAN DR | SHIELDS DR | E | AC | 3 | 1,280 | 36 | 46,080 | 5/7/26 | 63 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 258 | 14550 | BUSHARD ST | NANTUCKET DR | HYANNIS PORT DR | E | AC | 7 | 264 | 28 | 7,392 | 4/16/26 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 258 | 14597 | BUSHARD ST | LITCHFIELD DR | VELARDO DR | E | AC | 8 | 259 | 28 | 7,252 | 4/16/26 | 88 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 258 | 15428 | BUSHARD ST | CAPE COD DR | ADAMS AVE | E | AAC | 7 | 1,334 | 28 | 37,352 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 258 | 15627 | BUSHARD ST | GREENWICH DR | NANTUCKET DR | E | AC | 7 | 528 | 28 | 14,784 | 4/16/26 | 90 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2294 | 14158 | BUSHARD ST FRONTAGE | ADAM AVE FRONTAGE | NAUTILUS DR | E | AAC | 7 | 809 | 28 | 22,652 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2294 | 14596 | BUSHARD ST FRONTAGE | VELARDO DR | BASS DR | E | AC | 8 | 449 | 28 | 12,572 | 3/7/22 | 90 | 0 | 37 | 63 | New Construction - Initial | 1/1/80 |
| 2294 | 15628 | BUSHARD ST FRONTAGE | INNSBRUCK DR | WOODLAWN DR | E | AC | 8 | 252 | 27 | 6,804 | 3/9/22 | 72 | 72 | 14 | 14 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2294 | 15629 | BUSHARD ST FRONTAGE | WOODLAWN DR | TELHAN DR | E | AC | 8 | 506 | 27 | 13,662 | 3/9/22 | 73 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2294 | 15630 | BUSHARD ST FRONTAGE | TELHAN DR | PETTSWOOD DR | E | AAC | 8 | 519 | 27 | 14,013 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 339 | 14611 | BUSHWICK DR | ASHBURTON CIR | ATTLEBORO CIR | E | AC | 9 | 235 | 36 | 8,460 | 8/24/23 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 340 | 13715 | BUSINESS DR | CHEMICAL LN | GRAHAM ST | E | AC | 1 | 1,170 | 40 | 46,800 | 3/21/22 | 57 | 76 | 23 | 1 | New Construction | 1/1/80 |
| 341 | 13837 | CABOT CIR | WINSLOW DR | END | E | AC | 1 | 339 | 36 | 13,454 | 1/3/25 | 43 | 64 | 13 | 23 | New Construction | 1/1/80 |
| 342 | 14024 | CADE CIR | DRYBROOK LN | END | E | AAC | 7 | 294 | 32 | 9,408 | 8/17/23 | 86 | 24 | 59 | 17 | Overlay - AC Structural | 3/1/11 |
| 343 | 13425 | CADIZ CIR | ALTAMIRANO LN | END | E | AAC | 5 | 100 | 50 | 5,750 | 5/29/24 | 61 | 42 | 45 | 13 | Overlay - AC Structural | 10/1/12 |
| 344 | 13563 | CAIN AVE | GOTHARD ST | PALMDALE ST | E | AC | 3 | 345 | 36 | 12,420 | 5/30/24 | 44 | 91 | 8 | 1 | New Construction | 1/1/80 |
| 344 | 13564 | CAIN AVE | PALMDALE ST | END | E | AC | 3 | 199 | 26 | 5,174 | 5/30/24 | 29 | 82 | 11 | 7 | New Construction | 1/1/80 |
| 345 | 15511 | CAITHNESS DR | PAISLET LN | QUEENS PARK LN | E | AAC | 8 | 1,026 | 36 | 39,288 | 3/18/24 | 85 | 48 | 48 | 4 | Overlay - AC Structural | 5/11/18 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 346 | 13412 | CALEDONIA CIR | BALMORAL DR | CDS | E | AC | 5 | 350 | 36 | 14,100 | 5/20/24 | 99 | 0 | 35 | 65 | New Construction | 1/1/80 |
| 347 | 13203 | CALHOUN DR | PHELPS LN | SAYBROOK LN | E | AC | 2 | 621 | 36 | 22,356 | 3/24/22 | 46 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 348 | 13181 | CALIENTE DR | SANTA ANITA LN | DEL MAR LN | E | AAC | 2 | 260 | 36 | 9,360 | 5/21/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 348 | 13588 | CALIENTE DR | BAYSHORE LN | HOLLYWOOD LN | E | AAC | 2 | 265 | 36 | 10,040 | 5/21/24 | 90 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 348 | 15052 | CALIENTE DR | SARATOGA LN | SANTA ANITA LN | E | AAC | 2 | 520 | 36 | 19,220 | 5/21/24 | 83 | 59 | 41 | 0 | Overlay - AC Fabric | 10/1/16 |
| 348 | 15053 | CALIENTE DR | DEL MAR LN | BAYSHORE LN | E | AAC | 2 | 532 | 36 | 19,152 | 5/21/24 | 90 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 349 | 14640 | CALIFORNIA ST | GENEVA AVE | HARTFORD AVE | E | AC | 9 | 331 | 37 | 12,247 | 8/24/23 | 83 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 349 | 14641 | CALIFORNIA ST | FRANKFORT AVE | GENEVA AVE | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 65 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 349 | 14642 | CALIFORNIA ST | ELMIRA AVE | FRANKFORT AVE | E | AC | 9 | 329 | 40 | 13,160 | 8/24/23 | 71 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 349 | 14643 | CALIFORNIA ST | DETROIT AVE | ELMIRA AVE | E | AC | 9 | 330 | 38 | 12,540 | 8/24/23 | 87 | 0 | 80 | 20 | New Construction | 1/1/80 |
| 349 | 14644 | CALIFORNIA ST | CHICAGO AVE | DETROIT AVE | E | AC | 9 | 328 | 36 | 11,808 | 8/24/23 | 72 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 349 | 14663 | CALIFORNIA ST | NASHVILLE AVE | OSWEGO AVE | E | AC | 6 | 330 | 36 | 11,880 | 8/15/23 | 32 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 349 | 14664 | CALIFORNIA ST | LINCOLN AVE | MEMPHIS AVE | E | AAC | 6 | 330 | 37 | 11,803 | 8/14/23 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 349 | 14665 | CALIFORNIA ST | KNOXVILLE AVE | LINCOLN AVE | E | AAC | 6 | 330 | 37 | 11,877 | 8/14/23 | 76 | 61 | 31 | 8 | Overlay - AC Structural | 3/1/11 |
| 349 | 14666 | CALIFORNIA ST | JOILET AVE | KNOXVILLE AVE | E | AAC | 6 | 330 | 37 | 11,988 | 8/14/23 | 70 | 41 | 59 | 0 | Overlay - AC Structural | 3/1/11 |
| 349 | 14667 | CALIFORNIA ST | INDIANAPOLIS AVE | JOILET AVE | E | AC | 6 | 330 | 37 | 11,988 | 8/14/23 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 349 | 14668 | CALIFORNIA ST | HARTFORD AVE | INDIANAPOLIS AVE | E | AC | 9 | 329 | 37 | 12,173 | 8/14/23 | 72 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 349 | 14724 | CALIFORNIA ST | UTICA AVE | CDS | E | AAC | 6 | 305 | 36 | 13,845 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 349 | 14725 | CALIFORNIA ST | TORONTO AVE | UTICA AVE | E | AAC | 6 | 310 | 36 | 11,160 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 349 | 14726 | CALIFORNIA ST | SPRINGFIELD AVE | TORONTO AVE | E | AAC | 6 | 330 | 36 | 11,880 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 349 | 14727 | CALIFORNIA ST | ROCHESTER AVE | SPRINGFIELD AVE | E | AAC | 6 | 330 | 36 | 11,880 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 349 | 14728 | CALIFORNIA ST | ADAMS AVE | ROCHESTER AVE | E | AAC | 6 | 285 | 36 | 10,260 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 350 | 14249 | CALLIEBURN CIR | COLBREGGAN DR | CDS | E | AAC | 9 | 206 | 32 | 9,392 | 5/10/24 | 83 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/18 |
| 351 | 13665 | CALNEVA LN | CHINOOK DR | SAN SOUCI CIR | E | AC | 1 | 260 | 36 | 9,360 | 4/8/22 | 80 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 351 | 15290 | CALNEVA LN | SAN SOUCI CIR | SPA DR | E | AC | 1 | 792 | 36 | 28,512 | 4/9/22 | 84 | 49 | 51 | 0 | New Construction | 1/1/80 |
| 352 | 13432 | CALPE CIR | SAN LEANDRO LN | END | E | AAC | 5 | 100 | 50 | 6,000 | 5/29/24 | 68 | 40 | 59 | 1 | Overlay - AC Structural | 1/23/14 |
| 353 | 13833 | CALVIN CIR | AULNAY LN | END | E | AC | 1 | 396 | 36 | 15,506 | 12/18/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 354 | 13714 | CAMBAY LN | ALLEY MC FADDEN AVE | MC FADDEN AVE | E | AC | 1 | 159 | 36 | 5,724 | 3/21/22 | 72 | 0 | 80 | 20 | New Construction | 1/1/80 |
| 354 | 15303 | CAMBAY LN | ALLEY MC FADDEN AVE | END | E | AC | 1 | 826 | 36 | 29,736 | 3/21/22 | 64 | 80 | 20 | 0 | New Construction | 1/1/80 |
| 355 | 13905 | CAMBRIA COVE CIR | GOLDENWEST ST | CDS | E | AC | 5 | 205 | 36 | 8,973 | 6/30/21 | 100 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 356 | 14581 | CAMBRIDGE LN | DEVONSHIRE DR | CORNWALL DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 356 | 14582 | CAMBRIDGE LN | ARGYLE DR | ABERDEEN DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 356 | 14583 | CAMBRIDGE LN | CONTINENTAL DR | ABERDEEN DR | E | AAC | 8 | 116 | 24 | 2,784 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 356 | 14584 | CAMBRIDGE LN | CONTINENTAL DR | DEVONSHIRE DR | E | AAC | 8 | 116 | 24 | 2,784 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 357 | 13545 | CAMEL CIR | ROSS LN | END | E | AC | 4 | 199 | 32 | 7,618 | 3/31/22 | 86 | 63 | 33 | 4 | Surface Treatment - Slurry Seal | 7/29/20 |
| 358 | 14881 | CAMELOT CIR | GLENROY DR | CDS | E | AC | 2 | 472 | 36 | 18,342 | 4/1/26 | 78 | 0 | 95 | 5 | New Construction | 1/1/80 |
| 359 | 14479 | CAMEO LN | CLEARBROOK DR | LANDFALL DR | E | AC | 9 | 267 | 36 | 9,612 | 4/25/24 | 75 | 80 | 20 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 360 | 14794 | CAMERON ST | SLATER AVE | NEWMAN AVE | E | AAC | 4 | 1,322 | 36 | 43,592 | 4/13/26 | 86 | 51 | 38 | 11 | Overlay - AC Structural | 11/28/19 |
| 361 | 15888 | CAMFIELD LN | LARTHORN DR | CHARFORD DR | E | AAC | 7 | 867 | 36 | 31,212 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 362 | 13327 | CAMILLE DR | MYTINGER LN | SUMMERCLOUD LN | E | AC | 3 | 358 | 36 | 12,888 | 4/6/26 | 88 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 5460 | 61010 | CANAL ST | PCH | END N | E | PCC | 2 | 56 | 24 | 1,344 | 5/13/24 | 91 | 0 | 34 | 66 | New Construction - PCC | 1/1/80 |
| 5460 | 61020 | CANAL ST | BAYVIEW DR | END | E | AC | 2 | 78 | 26 | 2,028 | 5/6/24 | 77 | 53 | 47 | 0 | New Construction - AC | 1/1/80 |
| 363 | 14091 | CANBERRA LN | YORKTOWN AVE | MONITOR DR | E | AAC | 8 | 170 | 36 | 6,120 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 363 | 14092 | CANBERRA LN | CONSTITUTION DR | LURLINE DR | E | AAC | 8 | 260 | 36 | 9,360 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 363 | 15436 | CANBERRA LN | MONITOR DR | CONSTITUTION DR | E | AAC | 8 | 780 | 36 | 28,080 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 364 | 14937 | CANDLE CIR | GAINSFORD LN | END | E | AC | 5 | 94 | 36 | 3,384 | 3/31/26 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 365 | 13477 | CANDLELIGHT CIR | WISHINGWELL LN | CDS | E | AAC | 3 | 486 | 36 | 19,296 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 366 | 15476 | CANDLEWOOD DR | RAMONA LN | DEERVALE LN | E | AAC | 7 | 960 | 36 | 34,560 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 367 | 13373 | CANIS CIR | TAURUS LN | END | E | AC | 3 | 222 | 28 | 6,216 | 5/28/24 | 56 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 368 | 13554 | CANNA CIR | FORD DR | END | E | AAC | 3 | 350 | 32 | 12,700 | 5/28/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 369 | 13795 | CANTERBURY DR | VICTORIA LN | YORKSHIRE LN | E | AC | 1 | 782 | 36 | 27,864 | 5/8/26 | 89 | 50 | 39 | 11 | New Construction | 1/1/80 |
| 369 | 13804 | CANTERBURY DR | YORKSHIRE LN | END | E | AC | 1 | 440 | 36 | 17,340 | 4/7/26 | 81 | 73 | 22 | 5 | New Construction | 1/1/80 |
| 370 | 15965 | CAPE COD DR | WATERBURY LN | BUSHARD ST | E | AAC | 7 | 1,066 | 36 | 39,126 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 371 | 15654 | CAPE COTTAGE LN | NORTHPORT DR | SOUTHPORT DR | E | AC | 9 | 1,245 | 36 | 44,820 | 8/21/23 | 68 | 90 | 10 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 372 | 14541 | CAPE MAY LN | JONESPORT LN | CDS | E | AC | 9 | 171 | 36 | 7,956 | 4/24/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 372 | 15622 | CAPE MAY LN | PORT CYLDE DR | STONINGTON CIR | E | AC | 9 | 373 | 36 | 14,678 | 4/24/24 | 86 | 0 | 49 | 51 | Surface Treatment - Slurry Seal | 5/11/19 |
| 372 | 15623 | CAPE MAY LN | STONINGTON CIR | JONESPORT LN | E | AAC | 9 | 546 | 36 | 19,656 | 5/5/26 | 86 | 0 | 91 | 9 | Overlay - AC Structural | 5/11/19 |
| 373 | 15446 | CAPE NEWBURY DR | CAPE COTTAGE LN | END | E | AC | 9 | 733 | 36 | 26,388 | 8/21/23 | 93 | 0 | 60 | 40 | Surface Treatment - Slurry Seal | 3/1/11 |
| 374 | 14527 | CAPE SPLIT CIR | CAPE MAY LN | CDS | E | AC | 9 | 131 | 32 | 5,992 | 4/24/24 | 86 | 14 | 50 | 36 | Surface Treatment - Slurry Seal | 5/11/19 |
| 375 | 15307 | CAPETOWN LN | BOLSA AVE | KIMBERLY DR | E | AC | 1 | 819 | 36 | 29,196 | 12/26/24 | 85 | 0 | 25 | 75 | New Construction | 1/1/80 |
| 376 | 14506 | CAPISTRANO LN | BANNING AVE | CHRISTINE DR | E | AC | 9 | 1,001 | 36 | 36,036 | 4/17/24 | 73 | 81 | 17 | 2 | Surface Treatment - Slurry Seal | 5/11/19 |
| 377 | 13919 | CAPITOL CIR | GRANT DR | CDS | E | AAC | 7 | 107 | 31 | 6,467 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 378 | 13789 | CAPRI CIR | MELBOURNE DR | END | E | AC | 1 | 410 | 36 | 16,560 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 379 | 15990 | CAPSTONE DR | BLUE FOX CIR | WHETMORE LN | E | AC | 3 | 893 | 36 | 34,648 | 5/28/24 | 58 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 380 | 13437 | CARBECK DR | BELLFIELD LN | FOSS LN | E | AC | 5 | 863 | 36 | 31,068 | 3/31/26 | 67 | 42 | 39 | 19 | New Construction | 1/1/80 |
| 381 | 13379 | CARDIFF CIR | MARYPORT DR | END | E | AC | 5 | 75 | 36 | 3,950 | 3/31/26 | 37 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 382 | 13346 | CARLA CIR | MARIE LN | CDS | E | AAC | 3 | 229 | 36 | 11,544 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 383 | 13875 | CARLOW DR | BELFAST LN | DUNDALK LN | E | AC | 3 | 264 | 36 | 9,216 | 12/12/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 384 | 16017 | CARLSBAD LN | YELLOWSTONE DR | BAY MEADOW DR | E | AC | 8 | 765 | 36 | 26,952 | 2/23/22 | 91 | 0 | 48 | 52 | Surface Treatment - Slurry Seal | 2/13/23 |
| 385 | 14099 | CARMANIA LN | ORONSAY CR | ADAMS AVE | E | AC | 8 | 729 | 36 | 26,244 | 2/28/22 | 71 | 60 | 25 | 15 | Surface Treatment - Slurry Seal | 2/8/23 |
| 385 | 15444 | CARMANIA LN | SHALOM DR | ORONSAY CR | E | AC | 8 | 517 | 36 | 18,612 | 2/28/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 387 | 14770 | CARNABY LN | DANTON CIR | APPLEBY DR | E | AAC | 4 | 722 | 36 | 26,992 | 4/14/26 | 91 | 0 | 92 | 8 | Overlay - AC Structural | 11/28/19 |
| 387 | 15721 | CARNABY LN | TAYLOR DR | DANTON CIR | E | AAC | 4 | 529 | 36 | 19,044 | 4/14/26 | 87 | 25 | 75 | 0 | Overlay - AC Structural | 11/28/19 |
| 388 | 13910 | CAROLYN LN | KATHERINE DR | CDS | E | AAC | 7 | 382 | 36 | 14,732 | 4/14/26 | 92 | 23 | 77 | 0 | Overlay - AC Structural | 11/21/19 |
| 389 | 13200 | CAROUSEL LN | WANDERER LN | WANDERER LN | E | AC | 2 | 1,011 | 36 | 39,396 | 4/7/22 | 86 | 38 | 19 | 43 | New Construction | 1/1/80 |
| 390 | 13988 | CARP CIR | VERLARDO DR | CDS | E | AC | 8 | 449 | 36 | 18,164 | 3/7/22 | 83 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 391 | 13430 | CARRANZA LN | COLON CIR | SALAMANCA LN | E | AAC | 5 | 207 | 36 | 7,452 | 5/29/24 | 71 | 7 | 75 | 18 | Overlay - AC Structural | 10/1/12 |
| 391 | 15188 | CARRANZA LN | VILLA NUEVA DR | COLON CIR | E | AAC | 5 | 813 | 36 | 29,268 | 5/24/24 | 56 | 64 | 36 | 0 | Overlay - AC Structural | 10/1/12 |
| 392 | 15921 | CARRIE LN | SLIGO CIR | EDINGER AVE | E | AC | 1 | 1,169 | 36 | 42,084 | 12/20/24 | 34 | 85 | 8 | 7 | New Construction | 1/1/80 |
| 393 | 14260 | CARROLLTOWN DR | HOPETOWN LN | CDS | E | AAC | 9 | 245 | 32 | 9,340 | 5/6/24 | 77 | 30 | 51 | 19 | Overlay - AC Structural | 5/11/18 |
| 393 | 14261 | CARROLLTOWN DR | MAGNOLIA ST | KELVIN LN | E | AC | 9 | 176 | 36 | 6,336 | 5/9/24 | 71 | 49 | 45 | 6 | Surface Treatment - Slurry Seal | 5/11/18 |
| 393 | 15504 | CARROLLTOWN DR | KELVIN LN | HOPETOWN LN | E | AC | 9 | 760 | 36 | 27,360 | 5/8/24 | 75 | 27 | 64 | 9 | Surface Treatment - Slurry Seal | 5/11/18 |
| 394 | 14038 | CARSON DR | NEWLAND AVE | SACRAMENTO LN | E | AC | 7 | 167 | 36 | 6,012 | 5/5/26 | 74 | 29 | 71 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 395 | 15209 | CASCADE LN | SHASTA LN | END | E | AAC | 4 | 1,373 | 36 | 49,284 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 396 | 14951 | CASCADE ST | NORTH CITY LIMIT | ANACAPA DR | E | AAC | 1 | 131 | 36 | 4,716 | 5/7/24 | 70 | 59 | 41 | 0 | Overlay - AC Fabric | 10/1/16 |
| 397 | 13371 | CASPERS CIR | CORY DR | END | E | AAC | 3 | 369 | 36 | 15,084 | 5/22/24 | 82 | 0 | 98 | 2 | Overlay - AC Structural | 10/1/12 |
| 398 | 13711 | CASPIAN CIR | ANDAMAN LN | END | E | AC | 1 | 532 | 36 | 20,402 | 3/21/22 | 75 | 83 | 15 | 2 | New Construction | 1/1/80 |
| 399 | 14243 | CASTILIAN DR | COLIMA LN. | MISSION LN | E | AC | 9 | 902 | 36 | 32,472 | 8/23/23 | 64 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 400 | 15618 | CASTINE DR | WOOD ISLAND LN | CDS | E | AC | 9 | 325 | 32 | 12,900 | 4/17/24 | 85 | 40 | 50 | 10 | Surface Treatment - Slurry Seal | 5/11/19 |
| 401 | 13233 | CASTLE DR | EAGLE LN | CLUBHOUSE LN | E | AAC | 3 | 1,039 | 36 | 37,404 | 5/9/24 | 86 | 0 | 94 | 6 | Overlay - AC Structural | 10/1/16 |
| 401 | 13234 | CASTLE DR | CLUBHOUSE LN | END | E | AAC | 3 | 285 | 36 | 10,260 | 5/9/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 402 | 14194 | CASTLE ROCK CIR | BAY MEADOW DR | END | E | AAC | 8 | 426 | 34 | 16,284 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 403 | 15507 | CASTLEGATE DR | LANTERN LN | BUSHARD ST | E | AC | 9 | 548 | 36 | 19,506 | 5/8/24 | 51 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 404 | 14510 | CATALINA CIR | MOLOKAI DR | CDS | E | AC | 9 | 313 | 32 | 11,516 | 4/17/24 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 405 | 14227 | CATAMARAN LN | KINGFISHER DR | SNOWBIRD DR | E | AC | 9 | 1,044 | 36 | 37,584 | 8/23/23 | 62 | 84 | 16 | 0 | New Construction | 1/1/80 |
| 406 | 13994 | CATFISH CIR | TARPON DR | CDS | E | AC | 8 | 310 | 32 | 11,420 | 3/7/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 407 | 14176 | CATHAY CIR | INTERIOR LN | CDS | E | AC | 8 | 379 | 32 | 13,628 | 2/23/22 | 73 | 57 | 43 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 408 | 14035 | CATO CIR | FLAXMAN DR | END | E | AAC | 7 | 347 | 32 | 11,104 | 8/21/23 | 88 | 34 | 66 | 0 | Overlay - AC Structural | 3/1/11 |
| 409 | 13859 | CAVAN CIR | CARRIE LN | END | E | AC | 1 | 419 | 36 | 16,334 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 410 | 15257 | CEDAR AVE | GOTHARD ST | END | E | AC | 3 | 545 | 36 | 19,620 | 5/30/24 | 54 | 10 | 86 | 4 | New Construction | 1/1/80 |
| 411 | 15581 | CENTRAL PARK DR | EDWARDS ST | CLIFFVIEW LN | E | AC | 5 | 1,310 | 80 | 104,800 | 5/23/24 | 78 | 38 | 37 | 25 | New Construction | 1/1/80 |
| 412 | 13680 | CHALET LN | GLENWOOD DR | ROYAL OAK DR | E | AAC | 1 | 280 | 36 | 13,080 | 5/7/24 | 81 | 0 | 97 | 3 | Overlay - AC Structural | 10/1/16 |
| 413 | 14294 | CHANCE CIR | NATIONAL LN | CDS | E | AAC | 8 | 491 | 36 | 20,716 | 3/18/24 | 78 | 40 | 60 | 0 | Overlay - AC Structural | 5/11/18 |
| 414 | 13194 | CHANNEL LN | ADMIRALTY DR | DEVON CIR | E | AC | 2 | 401 | 36 | 14,436 | 4/9/22 | 86 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 414 | 14438 | CHANNEL LN | BOUNTY CIR | ADMIRALTY DR | E | AC | 2 | 376 | 32 | 11,832 | 4/9/22 | 95 | 0 | 82 | 18 | New Construction | 1/1/80 |
| 414 | 15060 | CHANNEL LN | DEVON CIR | GILBERT DR | E | AC | 2 | 1,236 | 36 | 44,296 | 4/9/22 | 85 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 415 | 14968 | CHAPEL LN | ELLIS AVE | MODALE DR | E | AAC | 7 | 1,288 | 36 | 46,848 | 4/14/26 | 93 | 32 | 68 | 0 | Overlay - AC Structural | 11/28/19 |
| 416 | 14912 | CHAPPARAL LN | LIEGE DR | NORDINA DR | E | AC | 5 | 1,409 | 36 | 50,724 | 5/8/26 | 66 | 69 | 31 | 0 | New Construction | 1/1/80 |
| 417 | 14146 | CHARFORD DR | IVES LN | BRENTSTONE LN | E | AAC | 7 | 391 | 36 | 14,826 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 417 | 15462 | CHARFORD DR | CAMFIELD LN | IVES LN | E | AC | 7 | 409 | 36 | 14,724 | 4/21/26 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 418 | 15637 | CHARING CROSS DR | KESWICK LN | COVERNTRY LN | E | AAC | 8 | 185 | 24 | 4,240 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 419 | 13296 | CHARLENE CIR | GREEN ST | CDS | E | AAC | 2 | 273 | 36 | 11,078 | 5/21/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 420 | 13522 | CHARLES LN | DON DR | RHINE DR | E | AC | 4 | 503 | 36 | 18,858 | 3/31/22 | 88 | 0 | 69 | 31 | Surface Treatment - Slurry Seal | 7/29/20 |
| 421 | 13309 | CHARLEYVILLE CIR | MEADOWBROOK DR | END | E | AC | 3 | 219 | 32 | 8,808 | 4/2/26 | 68 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 422 | 15956 | CHARWOOD LN | SUNRIDGE DR | FIRESIDE DR | E | AC | 9 | 1,262 | 36 | 46,932 | 5/7/24 | 62 | 74 | 26 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 423 | 13670 | CHATEAU LN | ANACAPA DR | BRIARCLIFF DR | E | AAC | 1 | 785 | 36 | 29,760 | 5/7/24 | 77 | 0 | 97 | 3 | Overlay - AC Structural | 10/1/16 |
| 424 | 14257 | CHAUCER LN | ELLSWORTH DR | CARROLLTOWN DR | E | AAC | 9 | 902 | 36 | 32,472 | 5/8/24 | 73 | 37 | 62 | 1 | Overlay - AC Structural | 5/11/18 |
| 425 | 13281 | CHELE CIR | LAKEMONT LN | CDS | E | AC | 3 | 143 | 36 | 6,948 | 12/19/24 | 61 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 426 | 14324 | CHELSEA LN | SABLE DR | ST AUGUSTINE DR | E | AC | 9 | 253 | 36 | 9,108 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 427 | 13718 | CHEMICAL LN | MC FADDEN AVE. | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 3/21/22 | 38 | 84 | 8 | 8 | New Construction | 1/1/80 |
| 427 | 13822 | CHEMICAL LN | PRODUCTION DR | SYSTEM DR | E | AC | 1 | 339 | 40 | 13,560 | 4/1/22 | 63 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 427 | 15305 | CHEMICAL LN | BUSINESS DR | MC FADDEN AVE | E | AAC | 1 | 796 | 40 | 31,840 | 5/3/24 | 89 | 0 | 84 | 16 | Overlay - AC Structural | 10/1/16 |
| 427 | 15328 | CHEMICAL LN | RESEARCH DR | PRODUCTION DR | E | AC | 1 | 834 | 40 | 33,360 | 4/1/22 | 54 | 61 | 27 | 12 | New Construction | 1/1/80 |
| 429 | 13585 | CHERYL DR | TOMAS LN | SANDRA LN | E | AAC | 2 | 740 | 36 | 27,390 | 5/21/24 | 86 | 0 | 69 | 31 | Overlay - AC Fabric | 10/1/16 |
| 430 | 14071 | CHESAPEAKE LN | GRODON DDR | ADAMS AVE | E | AC | 7 | 1,063 | 36 | 39,268 | 4/16/26 | 79 | 74 | 26 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 431 | 15000 | CHESTERFIELD LN | BURLINGTON LN | ATTLEBORO CIR | E | AC | 9 | 542 | 36 | 19,512 | 8/24/23 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 432 | 13880 | CHESTNUT DR | SUNFLOWER LN | SUNBURST LN | E | AC | 3 | 254 | 36 | 10,144 | 4/27/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 433 | 14358 | CHEVY CHASE DR | PINETREE LN | LEMONTREE LN | E | AC | 8 | 727 | 36 | 26,672 | 5/20/24 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 434 | 15869 | CHICAGO AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 329 | 36 | 11,844 | 8/24/23 | 79 | 35 | 60 | 5 | New Construction | 1/1/80 |
| 434 | 15870 | CHICAGO AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 36 | 17,460 | 8/24/23 | 81 | 12 | 40 | 48 | New Construction | 1/1/80 |
| 435 | 14954 | CHINOOK AVE | CADCADE ST | WILLOW LN | E | AC | 1 | 833 | 32 | 26,656 | 4/8/22 | 88 | 0 | 33 | 67 | New Construction | 1/1/80 |
| 435 | 14955 | CHINOOK AVE | SPRINGDALE ST | CADCADE ST | E | AC | 1 | 827 | 32 | 26,464 | 4/8/22 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 436 | 15926 | CHINOOK DR | TROPICANA LN | SPRINGDALE ST | E | AC | 1 | 900 | 36 | 32,400 | 4/8/22 | 77 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 437 | 13592 | CHIPPER LN | SNEAD DR | MEADOWLARK DR | E | AC | 3 | 674 | 36 | 24,264 | 3/23/22 | 81 | 42 | 48 | 10 | New Construction | 1/1/80 |
| 438 | 14501 | CHRISTINE DR | HULA CIR | SUSAN LN | E | AC | 9 | 249 | 36 | 9,964 | 4/17/24 | 86 | 19 | 69 | 12 | Surface Treatment - Slurry Seal | 5/11/19 |
| 438 | 15606 | CHRISTINE DR | SUSAN LN | ISLANDER LN | E | AAC | 9 | 532 | 36 | 19,152 | 4/22/26 | 80 | 28 | 62 | 10 | Overlay - AC Structural | 5/11/19 |
| 438 | 15607 | CHRISTINE DR | ISLANDER LN | CDS | E | AAC | 9 | 760 | 36 | 28,860 | 4/22/26 | 82 | 57 | 43 | 0 | Overlay - AC Structural | 5/11/19 |
| 439 | 15904 | CHRISTMAS DR | PITCAIRN LN | END | E | AAC | 8 | 878 | 32 | 29,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 440 | 15099 | CHRISTY DR | BRADBURY LN | WOODSTOCK LN | E | AC | 3 | 524 | 36 | 19,114 | 5/7/26 | 48 | 65 | 29 | 6 | New Construction | 1/1/80 |
| 441 | 14605 | CHRYSLER CIR | VIEWPORT LN | BEACH BLVD | E | AAC | 4 | 530 | 60 | 31,800 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 442 | 16014 | CHUBASCO LN | ORIENT DR | PANACEA DR | E | AC | 8 | 1,016 | 36 | 37,326 | 4/1/24 | 78 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 443 | 13900 | CHURCH CIR | SURFDALE LN | CDS | E | AC | 5 | 311 | 36 | 13,196 | 5/6/24 | 89 | 47 | 53 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 444 | 14760 | CHURCHILL DR | ROCKINGHORSE LN | QUARTERHORSE LN | E | AC | 5 | 393 | 36 | 14,148 | 5/7/24 | 87 | 0 | 52 | 48 | Surface Treatment - Slurry Seal | 11/28/19 |
| 445 | 13979 | CINDY LN | KNEEP DR | GRAND DR | E | AC | 8 | 1,020 | 36 | 36,720 | 4/15/26 | 80 | 55 | 45 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 446 | 13752 | CITADEL DR | LA SALLE LN | STANFORD LN | E | AC | 1 | 260 | 36 | 9,072 | 4/27/26 | 87 | 39 | 45 | 16 | New Construction | 1/1/80 |
| 446 | 13753 | CITADEL DR | STANFORD LN | COLUMBIA LN | E | AC | 1 | 260 | 36 | 8,784 | 4/27/26 | 89 | 32 | 54 | 14 | New Construction | 1/1/80 |
| 446 | 15316 | CITADEL DR | COLUMBIA LN | EDWARDS ST | E | AC | 1 | 645 | 36 | 23,220 | 1/3/25 | 68 | 82 | 17 | 1 | New Construction | 1/1/80 |
| 447 | 15646 | CLANCY LN | GARRETT CIR | CDS | E | AC | 8 | 402 | 36 | 16,822 | 3/7/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 448 | 13869 | CLARE DR | EDWARDS ST | TULLOW LN | E | AC | 3 | 406 | 36 | 14,328 | 12/19/24 | 89 | 38 | 53 | 9 | New Construction | 1/1/80 |
| 449 | 14579 | CLAREMONT LN | DEVONSHIRE DR | CORWALL DR | E | AAC | 8 | 263 | 24 | 6,312 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 449 | 14580 | CLAREMONT LN | ARGYLE DR | ABERDEEN DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 450 | 15085 | CLARK DR | BIRDIE LN | NASSAU LN | E | AC | 3 | 1,223 | 36 | 44,028 | 3/23/22 | 86 | 23 | 65 | 12 | New Construction | 1/1/80 |
| 451 | 15408 | CLARKDALE DR | EDGEWOOD LN | END | E | AC | 7 | 720 | 34 | 24,480 | 8/21/23 | 23 | 77 | 5 | 18 | Surface Treatment - Slurry Seal | 3/1/11 |
| 452 | 14745 | CLAY AVE | STEWARD ST | CDS | E | AC | 7 | 830 | 28 | 24,740 | 5/6/24 | 88 | 0 | 66 | 34 | New Construction | 1/1/80 |
| 452 | 14747 | CLAY AVE | MAIN ST | HOLLY ST | E | AC | 7 | 368 | 30 | 11,040 | 3/12/24 | 86 | 0 | 58 | 42 | Surface Treatment - Slurry Seal | 11/28/19 |
| 452 | 14748 | CLAY AVE | HUNTINGTON ST | DELAWARE ST | E | AAC | 7 | 660 | 36 | 23,760 | 4/9/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 4/1/17 |
| 452 | 14749 | CLAY AVE | DELAWARE ST | SEVENTEENTH ST | E | AAC | 7 | 242 | 36 | 8,712 | 4/9/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 4/1/17 |
| 452 | 14750 | CLAY AVE | SEVENTEENTH ST | FLORIDA ST | E | AAC | 7 | 418 | 36 | 15,048 | 4/9/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 4/1/17 |
| 452 | 15024 | CLAY AVE | HOLLY ST | RANCH LN | E | AAC | 7 | 1,321 | 36 | 47,556 | 4/6/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 452 | 15712 | CLAY AVE | FLORIDA ST | BEACH BLVD | E | AC | 7 | 661 | 36 | 23,796 | 4/9/24 | 83 | 0 | 65 | 35 | Surface Treatment - Slurry Seal | 4/1/17 |
| 453 | 14482 | CLEARBROOK DR | ARCHER CIR | ST JOHN LN | E | AC | 9 | 250 | 36 | 9,750 | 4/25/24 | 89 | 0 | 71 | 29 | Surface Treatment - Slurry Seal | 5/11/19 |
| 453 | 15597 | CLEARBROOK DR | ARCHER CIR | CDS | E | AAC | 9 | 593 | 36 | 23,148 | 4/21/26 | 81 | 10 | 68 | 22 | Overlay - AC Structural | 5/11/19 |
| 454 | 13464 | CLEARWATER CIR | INLET DR | END | E | AC | 5 | 481 | 36 | 18,816 | 5/29/24 | 76 | 8 | 85 | 7 | Surface Treatment - Slurry Seal | 10/1/12 |
| 455 | 14193 | CLEARWOOD CIR | BAY MEADOW DR | CDS | E | AC | 8 | 426 | 34 | 16,284 | 2/23/22 | 92 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 456 | 14738 | CLEVELAND DR | HUNTINGTON ST | CDS | E | AAC | 7 | 330 | 32 | 10,560 | 4/6/26 | 82 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 457 | 14302 | CLIFF DR | OYSTER BED LN | SPINDRIFT LN | E | AAC | 8 | 311 | 36 | 11,196 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 457 | 15528 | CLIFF DR | BROOKHURST ST | OYSTER BED LN | E | AAC | 8 | 708 | 36 | 25,488 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 458 | 15381 | CLIFFSIDE DR | BAYWATER LN | NORTHSTAR LN | E | AAC | 7 | 1,126 | 36 | 41,036 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 459 | 14419 | CLIFFVIEW LN | CENTRAL PARK DR | LAKEVIEW DR | E | AC | 5 | 273 | 30 | 8,190 | 5/29/24 | 69 | 36 | 42 | 22 | Surface Treatment - Slurry Seal | 10/1/12 |
| 460 | 50520 | CLIFFWOOD DR | TIDELAND LN | CDS | E | AC | 7 | 238 | 32 | 9,416 | 4/21/26 | 86 | 24 | 76 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 461 | 14056 | CLIPPER DR | WESTWINDS LN | MAGNOLIA ST | E | AAC | 7 | 180 | 36 | 6,480 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 461 | 15419 | CLIPPER DR | ISTHMUS LN | WESTWINDS LN | E | AAC | 7 | 752 | 36 | 27,072 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 462 | 15894 | CLOUDHAVEN DR | MOONCREST CIR | TIDELAND LN | E | AC | 7 | 721 | 36 | 27,456 | 4/16/26 | 84 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 463 | 13589 | CLUBHOUSE LN | EDINGER AVE | ALLEY EDINGER AVE | E | AAC | 3 | 161 | 36 | 5,796 | 5/9/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 463 | 13590 | CLUBHOUSE LN | ALLEY EDINGER AVE | CASTLE DR | E | AAC | 3 | 140 | 36 | 5,040 | 5/9/24 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 463 | 13591 | CLUBHOUSE LN | CASTLE DR | MANGRUM DR | E | AC | 3 | 260 | 36 | 9,360 | 4/9/22 | 54 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 463 | 13593 | CLUBHOUSE LN | MARSHALL DR | MIDDLECOFF DR | E | AC | 3 | 260 | 36 | 9,360 | 3/23/22 | 92 | 0 | 72 | 28 | New Construction | 1/1/80 |
| 463 | 13594 | CLUBHOUSE LN | MIDDLECOFF DR | ALLEY HEIL AVE | E | AC | 3 | 140 | 36 | 5,040 | 3/23/22 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 463 | 13595 | CLUBHOUSE LN | ALLEY HEIL AVE | HEIL AVE | E | AC | 3 | 152 | 45 | 6,840 | 3/23/22 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 464 | 14615 | COAST CIR | PACIFIC CIR | ANDERSON ST | E | AC | 2 | 73 | 51 | 3,723 | 4/9/22 | 63 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 465 | 15479 | COASTLAND DR | TIDELAND LN | BUSHARD ST | E | AAC | 7 | 403 | 36 | 14,508 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 466 | 13625 | COBRA LN | WRENFIELD DR | NORINO DR | E | AC | 3 | 287 | 36 | 11,332 | 5/21/24 | 86 | 55 | 45 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 467 | 14347 | COCOBANA LN | ORIENT DR | BLUEFIELD DR | E | AC | 8 | 507 | 36 | 19,002 | 4/1/24 | 83 | 0 | 58 | 42 | Surface Treatment - Slurry Seal | 5/11/18 |
| 468 | 13348 | COD CIR | SUN DR | END | E | AC | 3 | 225 | 36 | 10,100 | 4/7/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 469 | 14744 | COENSON CIR | CLAY AVE | CDS | E | AAC | 7 | 394 | 34 | 15,396 | 4/15/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 470 | 14265 | COHASSET LN | INDIANAPOLIS AVE | HINGHAM DR | E | AC | 9 | 370 | 36 | 13,320 | 5/8/24 | 68 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 471 | 15953 | COLBREGGAN DR | CALLIEBURN CIR | MINERVA LN | E | AAC | 9 | 950 | 36 | 35,200 | 5/10/24 | 84 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/18 |
| 472 | 15917 | COLCHESTER LN | GARFIELD AVE | DARTMOOR DR | E | AAC | 7 | 1,033 | 36 | 37,188 | 4/14/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 473 | 14970 | COLDWATER LN | YORKTOWN AVE | SCRIBE DR | E | AC | 7 | 364 | 36 | 13,104 | 8/21/23 | 77 | 76 | 18 | 6 | Surface Treatment - Slurry Seal | 3/1/11 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 473 | 14971 | COLDWATER LN | SCRIBE DR | DRYBANK DR | E | AC | 7 | 1,479 | 36 | 53,244 | 8/21/23 | 85 | 0 | 79 | 21 | Surface Treatment - Slurry Seal | 3/1/11 |
| 473 | 15403 | COLDWATER LN | DRYBANK DR | ADAMS AVE | E | AC | 7 | 1,074 | 36 | 38,664 | 8/21/23 | 78 | 64 | 27 | 9 | Surface Treatment - Slurry Seal | 3/1/11 |
| 474 | 14200 | COLGATE CIR | NIAGARA DR | CDS | E | AAC | 8 | 355 | 32 | 13,360 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 475 | 14242 | COLIMA LN | CASTILIAN CIR | SNOWBIRD DR | E | AC | 9 | 253 | 36 | 9,108 | 8/23/23 | 86 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 475 | 15499 | COLIMA LN | CASTILLIAN DR | END | E | AC | 9 | 535 | 36 | 19,260 | 8/23/23 | 60 | 85 | 15 | 0 | New Construction | 1/1/80 |
| 476 | 15171 | COLLIE LN | FENLEY DR | ARROWHEAD DR | E | AC | 5 | 1,125 | 36 | 40,500 | 5/24/24 | 45 | 65 | 29 | 6 | New Construction | 1/1/80 |
| 477 | 13405 | COLLINS CIR | ARNADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/29/24 | 34 | 91 | 9 | 0 | New Construction | 1/1/80 |
| 478 | 15984 | COLLINS LN | MOTION CIR | COLLINS CIR | E | AC | 5 | 774 | 36 | 28,614 | 5/20/24 | 81 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 479 | 13428 | COLON CIR | CARRANZA LN | END | E | AAC | 5 | 92 | 42 | 5,364 | 5/29/24 | 65 | 32 | 68 | 0 | Overlay - AC Structural | 1/23/14 |
| 480 | 14186 | COLONIAL CIR | MAMMOTH DR | CDS | E | AC | 8 | 579 | 32 | 20,028 | 3/1/22 | 66 | 68 | 31 | 1 | Surface Treatment - Slurry Seal | 2/13/23 |
| 481 | 13742 | COLUMBIA LN | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/27/26 | 81 | 0 | 63 | 37 | New Construction | 1/1/80 |
| 481 | 13744 | COLUMBIA LN | HARVARD CIR | CORNELL DR | E | AC | 1 | 260 | 36 | 9,360 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 481 | 13751 | COLUMBIA LN | BROWN CIR | CITADEL DR | E | AC | 1 | 260 | 36 | 9,360 | 12/18/24 | 91 | 52 | 43 | 5 | New Construction | 1/1/80 |
| 481 | 13763 | COLUMBIA LN | CITADEL DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/21/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 481 | 15312 | COLUMBIA LN | ALEXANDRIA DR | HARVARD CIR | E | AC | 1 | 520 | 36 | 18,720 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 481 | 15314 | COLUMBIA LN | CORNELL DR | BROWN CIR | E | AC | 1 | 520 | 36 | 18,720 | 12/18/24 | 87 | 40 | 27 | 33 | New Construction | 1/1/80 |
| 482 | 13825 | COMMERCE LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 54 | 86 | 10 | 4 | New Construction | 1/1/80 |
| 483 | 13716 | COMMERCIAL DR | CHEMICAL LN | GRAHAM ST | E | AAC | 1 | 1,170 | 40 | 46,800 | 5/3/24 | 85 | 43 | 50 | 7 | Overlay - AC Fabric | 10/1/16 |
| 484 | 14338 | COMPASS LN | SOUTHSHORE DR | WATERFRONT DR | E | AC | 9 | 389 | 36 | 14,504 | 4/1/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 485 | 14026 | COMPTON DR | DITMAR LN | NEWLAND AVE | E | AC | 7 | 442 | 36 | 15,912 | 8/17/23 | 89 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 486 | 13826 | COMPUTER LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 58 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 487 | 14275 | COMSTOCK DR | CHARWOOD LN | LANCELOT LN | E | AC | 9 | 701 | 36 | 25,986 | 5/6/24 | 72 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 488 | 14440 | CONCORD LN | DAVENPORT DR | WINDSOR DR | E | AC | 2 | 409 | 36 | 14,974 | 4/5/22 | 69 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 489 | 13920 | CONGRESS CIR | GRANT DR | CDS | E | AAC | 7 | 107 | 31 | 6,467 | 4/14/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 490 | 13724 | CONNECTOR LN | ENGINEER DR | MACHINE DR | E | AC | 1 | 1,141 | 40 | 45,640 | 4/8/26 | 69 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 491 | 14967 | CONSTANTINE DR | HOYT CIR | LISTER LN | E | AAC | 7 | 826 | 36 | 29,736 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 491 | 15363 | CONSTANTINE DR | BEACH BLVD | HOYT CIR | E | AAC | 7 | 660 | 36 | 23,760 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 492 | 14095 | CONSTELLATION LN | MONITOR DR | LURLINE DR | E | AC | 8 | 1,040 | 36 | 37,440 | 3/2/22 | 93 | 0 | 83 | 17 | Surface Treatment - Slurry Seal | 2/8/23 |
| 493 | 14089 | CONSTITUTION LN | BROOKHURST ST | BROOKHURST ST | E | AC | 8 | 76 | 58 | 4,408 | 3/9/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 493 | 14459 | CONSTITUTION LN | EDUCATION LN | BROOKHURST ST | E | AC | 8 | 661 | 36 | 23,796 | 3/9/22 | 89 | 25 | 75 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 493 | 15435 | CONSTITUTION LN | BROOKHURST ST | CANBERRA LN | E | AAC | 8 | 1,156 | 36 | 41,616 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 493 | 15647 | CONSTITUTION LN | CLANCY LN | EDUCATION LN | E | AC | 8 | 530 | 36 | 19,080 | 3/7/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 494 | 13717 | CONTAINER LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 4/1/22 | 69 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 495 | 13157 | CONTENT CIR | AQUARIUS DR | CDS | E | AAC | 2 | 204 | 32 | 6,528 | 5/7/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 496 | 15641 | CONTINENTAL DR | CAMBRIDGE LN | BROOKHURST ST | E | AAC | 8 | 617 | 36 | 20,712 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 496 | 15642 | CONTINENTAL DR | COVENTRY LN | CAMBRIDGE LN | E | AAC | 8 | 483 | 36 | 17,388 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 497 | 14019 | COOK CIR | TOBAGO LN | CDS | E | AAC | 8 | 358 | 32 | 13,256 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 498 | 15992 | COOPER LN | ABBOTT DR | MARILYN DR | E | AC | 3 | 1,555 | 36 | 55,732 | 3/18/22 | 88 | 0 | 96 | 4 | Surface Treatment - Slurry Seal | 7/29/20 |
| 499 | 14980 | CORAL CAY LN | PCH | BLUEWATER LN | E | AC | 2 | 415 | 36 | 15,440 | 4/9/22 | 73 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 501 | 14050 | CORAL CIR | WESTWINDS LN | CDS | E | AC | 7 | 232 | 36 | 8,352 | 4/20/26 | 81 | 39 | 58 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 502 | 13964 | CORALWOOD LN | CRESCENT DR | SEAHURST DR | E | AC | 7 | 350 | 36 | 12,850 | 4/15/26 | 90 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 502 | 15383 | CORALWOOD LN | SEAHURST DR | SAILPORT DR | E | AC | 7 | 678 | 36 | 24,658 | 4/15/26 | 90 | 0 | 69 | 31 | Surface Treatment - Slurry Seal | 7/15/21 |
| 503 | 14416 | CORDOBA LN | SLATER AVE | CRISTA PALMA DR | E | AC | 5 | 173 | 36 | 5,940 | 5/24/24 | 63 | 89 | 11 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 504 | 13873 | CORK DR | WICKLOW LN | BELFAST LN | E | AC | 3 | 260 | 36 | 9,072 | 1/3/25 | 94 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 505 | 13731 | CORNELL DR | BOLSA PARK LN | END | E | AC | 1 | 294 | 36 | 12,084 | 4/8/26 | 77 | 25 | 28 | 47 | New Construction | 1/1/80 |
| 505 | 13745 | CORNELL DR | STANFORD LN | COLUMBIA N | E | AC | 1 | 260 | 36 | 9,360 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 505 | 13759 | CORNELL DR | COLUMBIA LN | EDWARDS ST | E | AC | 1 | 645 | 36 | 22,644 | 12/18/24 | 83 | 77 | 16 | 7 | New Construction | 1/1/80 |
| 505 | 15309 | CORNELL DR | BOLSA PARK LN | STANFORD LN | E | AC | 1 | 1,298 | 36 | 46,152 | 4/8/26 | 88 | 43 | 57 | 0 | New Construction | 1/1/80 |
| 506 | 15947 | CORNERBROOK DR | STRATHMOOR LN | AMBERWICK LN | E | AC | 8 | 1,008 | 36 | 36,288 | 4/10/24 | 76 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 507 | 14564 | CORNWALL DR | CAMBRIDGE LN | INVERNESS LN | E | AAC | 8 | 204 | 24 | 4,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 507 | 14565 | CORNWALL DR | BERKSHIRE LN | KINGSWOOD LN | E | AAC | 8 | 204 | 24 | 4,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 507 | 15898 | CORNWALL DR | BUSHARD ST | DERBYSHIRE LN | E | AAC | 8 | 819 | 36 | 29,032 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 507 | 15899 | CORNWALL DR | DERBYSHIRE LN | CLAREMONT LN | E | AAC | 8 | 926 | 24 | 21,998 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 508 | 13356 | CORONADO LN | SONOMA DR | CDS | E | AC | 5 | 179 | 36 | 7,794 | 5/24/24 | 62 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 508 | 15146 | CORONADO LN | SLATER AVE | SONOMA AVE | E | AC | 5 | 682 | 36 | 24,324 | 5/24/24 | 66 | 44 | 56 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 509 | 13332 | CORRINE CIR | COOPER LN | CDS | E | AC | 3 | 423 | 36 | 18,528 | 3/18/22 | 81 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 510 | 13511 | CORSICAN DR | GOTHARD ST | ALLEY BARDON LN | E | AAC | 3 | 258 | 36 | 9,288 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 510 | 15233 | CORSICAN DR | ALLEY BARDON LN | CDS | E | AAC | 3 | 330 | 36 | 13,380 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 511 | 13696 | CORTEZ DR | SPRINGDALE ST | VANGUARD LN | E | AC | 1 | 370 | 36 | 14,070 | 4/28/26 | 79 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 512 | 15989 | CORY DR | MAYOR LN | END | E | AC | 3 | 1,127 | 36 | 42,572 | 5/22/24 | 85 | 13 | 79 | 8 | Surface Treatment - Slurry Seal | 10/1/12 |
| 513 | 13473 | COTTONWOOD CIR | ETNA CIR | END | E | AC | 4 | 570 | 36 | 25,020 | 5/13/24 | 96 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 514 | 13189 | COTUIT CIR | HUMBOLDT DR | CDS | E | AC | 2 | 345 | 32 | 12,540 | 4/7/22 | 75 | 38 | 27 | 35 | New Construction | 1/1/80 |
| 515 | 13514 | COUNT CIR | BURKE LN | END | E | AC | 3 | 130 | 32 | 5,660 | 3/31/22 | 87 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 516 | 14991 | COUNTESS DR | EDINGER AVE | PORTOFINO CIR | E | AC | 2 | 1,605 | 44 | 71,870 | 4/7/22 | 92 | 0 | 88 | 12 | New Construction | 1/1/80 |
| 517 | 13893 | COUNTRY CIR | EVENING HILL DR | CDS | E | AAC | 5 | 203 | 36 | 9,308 | 4/30/26 | 99 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 518 | 15074 | COURTNEY LN | DAVENPORT DR | WESTPORT DR | E | AC | 2 | 1,182 | 36 | 42,552 | 3/24/22 | 75 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 518 | 15080 | COURTNEY LN | WESTPORT DR | EDGEWATER LN | E | AC | 2 | 551 | 36 | 19,836 | 3/24/22 | 66 | 52 | 48 | 0 | New Construction | 1/1/80 |
| 519 | 14159 | COVE CIR | ADAMS AVE FRONTAGE | END | E | AC | 7 | 558 | 36 | 21,588 | 4/16/26 | 87 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 520 | 14573 | COVENTRY LN | CORNWALL DR | CHASING CROSS DR | E | AAC | 8 | 320 | 24 | 7,680 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 520 | 14574 | COVENTRY LN | ARGYLE DR | ABERDEEN DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 520 | 14575 | COVENTRY LN | DEVONSHIRE DR | CORNWALL DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 520 | 15638 | COVENTRY LN | ABERDEEN DR | DEVONSHIRE DR | E | AAC | 8 | 232 | 20 | 4,640 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 521 | 15734 | CRABB LN | SPEER DR | CDS | E | AC | 4 | 456 | 36 | 16,416 | 5/13/24 | 87 | 4 | 96 | 0 | Surface Treatment - Slurry Seal | 11/1/19 |
| 522 | 13272 | CRAIG LN | WALTON DR | LENNOX DR | E | AC | 3 | 712 | 36 | 25,344 | 12/19/24 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 523 | 14214 | CRAILET DR | KENWORTH CIR | CRAIMER LN | E | AC | 8 | 1,006 | 36 | 36,216 | 2/25/22 | 68 | 77 | 16 | 7 | Surface Treatment - Slurry Seal | 2/14/23 |
| 523 | 15492 | CRAILET DR | BROOKHURST ST | KENWORTH CIR | E | AAC | 8 | 205 | 36 | 7,380 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 524 | 14208 | CRAIMER LN | MEREDITH DR | JON DAY DR | E | AAC | 8 | 260 | 36 | 9,360 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 524 | 14215 | CRAIMER LN | JON DAY DR | STONEYBROOK DR | E | AAC | 8 | 262 | 36 | 9,432 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 524 | 15493 | CRAIMER LN | STONEYBROOK DR | WARWICK DR | E | AAC | 8 | 931 | 36 | 33,516 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 525 | 13330 | CRANDALL DR | MYTINGER LN | EDWARDS ST | E | AC | 3 | 530 | 36 | 19,080 | 4/6/26 | 73 | 41 | 47 | 12 | New Construction | 1/1/80 |
| 526 | 14236 | CRANE CIR | SANDPIPER LN | END | E | AC | 9 | 357 | 36 | 12,852 | 8/24/23 | 75 | 60 | 35 | 5 | New Construction | 1/1/80 |
| 527 | 14177 | CRATER CIR | ROCKY MOUNTAIN DR | CDS | E | AC | 8 | 399 | 36 | 16,164 | 2/23/22 | 84 | 0 | 41 | 59 | Surface Treatment - Slurry Seal | 2/13/23 |
| 528 | 14067 | CRAWFORD CIR | LOTUS LN | CDS | E | AAC | 7 | 382 | 36 | 15,252 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 529 | 13963 | CRESCENT DR | PISMO LN | CORALWOOD LN | E | AC | 7 | 1,116 | 36 | 40,676 | 4/15/26 | 85 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 530 | 12991 | CREST AVE | MAIN ST | ELEVENTH ST | E | AC | 6 | 612 | 43 | 27,795 | 7/8/21 | 73 | 30 | 58 | 12 | Surface Treatment - Slurry Seal | 7/27/22 |
| 530 | 12992 | CREST AVE | LAKE ST | MAIN ST | E | AC | 6 | 665 | 45 | 30,095 | 7/8/21 | 76 | 37 | 62 | 1 | Surface Treatment - Slurry Seal | 7/27/22 |
| 530 | 13085 | CREST AVE | CREST AVE | THIRTEENTH ST | E | AC | 6 | 192 | 45 | 8,940 | 7/8/21 | 86 | 26 | 74 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 530 | 13086 | CREST AVE | ELEVENTH ST | TWELTH ST | E | AC | 6 | 675 | 43 | 29,025 | 7/8/21 | 68 | 52 | 40 | 8 | Surface Treatment - Slurry Seal | 7/27/22 |
| 530 | 13124 | CREST AVE | THIRTEENTH ST | FOURTEENTH ST | E | AC | 6 | 265 | 45 | 12,175 | 7/8/21 | 75 | 9 | 41 | 50 | Surface Treatment - Slurry Seal | 7/27/22 |
| 531 | 14934 | CRESTMOOR LN | SERENE DR | WINDCROFT DR | E | AC | 5 | 246 | 36 | 8,568 | 3/30/26 | 89 | 0 | 90 | 10 | New Construction | 1/1/80 |
| 531 | 14947 | CRESTMOOR LN | BRIGHTON DR | MARYPORT DR | E | AC | 5 | 306 | 36 | 11,016 | 3/31/26 | 72 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 531 | 15807 | CRESTMOOR LN | WINDCROFT DR | BRIGHTON DR | E | AC | 5 | 661 | 36 | 23,796 | 3/31/26 | 80 | 53 | 41 | 6 | New Construction | 1/1/80 |
| 532 | 15957 | CRESTVIEW LN | FIRESIDE DR | CDS | E | AC | 9 | 1,343 | 36 | 50,498 | 5/20/24 | 68 | 53 | 36 | 11 | Surface Treatment - Slurry Seal | 5/11/18 |
| 533 | 14433 | CREW DR | BANFF LN | LOCHLEA LN | E | AC | 9 | 256 | 32 | 8,192 | 8/30/23 | 81 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 534 | 14969 | CRIMSON CIR | FLAGSTAFF LN | CDS | E | AAC | 7 | 692 | 36 | 30,112 | 4/6/26 | 93 | 0 | 93 | 7 | Overlay - AC Structural | 11/28/19 |
| 535 | 13416 | CRISTA PALMA DR | AVILLA LN. | END | E | AAC | 5 | 416 | 36 | 16,976 | 5/29/24 | 68 | 31 | 68 | 1 | Overlay - AC Structural | 10/1/12 |
| 535 | 15181 | CRISTA PALMA DR | SAN ROQUE LN | AVILLA LN | E | AC | 5 | 1,108 | 36 | 40,638 | 5/23/24 | 80 | 34 | 66 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 536 | 14143 | CROFT LN | GALLANT DR | BURLCREST DR | E | AAC | 7 | 254 | 36 | 9,144 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 537 | 15330 | CROSS DR | GRAHAM ST | ALLEY TAFT LN | E | AC | 1 | 548 | 36 | 19,728 | 1/7/25 | 45 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 539 | 15291 | CROUPIER CIR | CALNEVA LN | SPRINGDALE ST | E | AC | 1 | 640 | 36 | 24,290 | 4/13/26 | 81 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 540 | 14928 | CROWN CIR | BARWOOD DR | END | E | AC | 5 | 431 | 36 | 17,516 | 3/31/26 | 78 | 24 | 69 | 7 | New Construction | 1/1/80 |
| 541 | 15458 | CROWN REFF LN | PRINCESS CIR | MASTERS DR | E | AAC | 7 | 763 | 36 | 27,468 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 541 | 16023 | CROWN REFF LN | FELCLIFF LN | PRINCESS CIR | E | AAC | 7 | 584 | 36 | 21,024 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 542 | 13262 | CULPEPPER CIR | SILVERWOOD DR | CDS | E | AC | 3 | 140 | 32 | 5,730 | 4/6/26 | 74 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 543 | 13803 | CUMBERLAND DR | YORKSHIRE LN | END | E | AC | 1 | 440 | 36 | 17,340 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 543 | 15322 | CUMBERLAND DR | VICTORIA LN | YORKSHIRE LN | E | AC | 1 | 780 | 36 | 27,792 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 544 | 15532 | CUPAR LN | CDS | CDS | E | AC | 9 | 944 | 36 | 38,718 | 8/30/23 | 67 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 545 | 14885 | CURTIS CIR | GREEN ST | CDS | E | AC | 2 | 407 | 36 | 14,652 | 3/22/22 | 83 | 21 | 45 | 34 | New Construction | 1/1/80 |
| 546 | 14055 | CUTTER DR | ESTUARY LN | ISTHMUS LN | E | AC | 7 | 260 | 36 | 9,860 | 4/20/26 | 75 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 547 | 14094 | CUTTY SARK DR | RANGER LN | LEXINGTON LN | E | AAC | 8 | 260 | 36 | 9,134 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 547 | 15439 | CUTTY SARK DR | BROOKHURST ST | RANGER LN | E | AAC | 8 | 1,370 | 36 | 49,320 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 548 | 14306 | CYNTHIA DR | SUBURBIA LN | LAVONNE LN | E | AAC | 8 | 1,063 | 36 | 38,268 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 549 | 13567 | CYPRESS AVE | OAK LN | ASH ST | E | AC | 4 | 447 | 36 | 16,092 | 5/30/24 | 80 | 0 | 93 | 7 | New Construction | 1/1/80 |
| 549 | 13579 | CYPRESS AVE | ASH ST. | ELM ST | E | AC | 4 | 436 | 36 | 15,696 | 5/30/24 | 65 | 17 | 67 | 16 | New Construction | 1/1/80 |
| 549 | 13580 | CYPRESS AVE | ELM ST | BEACH BLVD | E | AC | 4 | 439 | 36 | 15,804 | 5/30/24 | 58 | 28 | 54 | 18 | New Construction | 1/1/80 |
| 549 | 15262 | CYPRESS AVE | EMERALD LN | OAK LN | E | AC | 4 | 317 | 36 | 11,412 | 5/30/24 | 59 | 63 | 25 | 12 | New Construction | 1/1/80 |
| 550 | 13251 | DAGNY CIR | NATIONAL LN | CDS | E | AAC | 3 | 343 | 36 | 13,598 | 4/7/26 | 69 | 67 | 33 | 0 | Overlay - AC Structural | 5/11/18 |
| 551 | 15258 | DAIRYVIEW CIR | END | END | E | AAC | 4 | 511 | 36 | 21,396 | 5/28/24 | 82 | 39 | 37 | 24 | Overlay - AC Structural | 10/1/12 |
| 552 | 14472 | DAKAR LN | DRUMBEAT DR | BORBA CIR | E | AC | 9 | 202 | 32 | 6,964 | 4/25/24 | 86 | 0 | 50 | 50 | Surface Treatment - Slurry Seal | 5/11/19 |
| 553 | 13582 | DALE DR | EDGEWATER LN | PHELPS LN | E | AAC | 2 | 260 | 36 | 9,360 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 554 | 15135 | DALE VISTA LN | MASON DR | MARILYN DR | E | AC | 3 | 1,290 | 36 | 46,440 | 3/18/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 555 | 13939 | DALEHURST CIR | MANDEVILLE DR | CDS | E | AAC | 7 | 145 | 36 | 10,326 | 4/15/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 556 | 14031 | DALLAS CIR | FLAGSTONE LN | END | E | AC | 7 | 466 | 34 | 15,844 | 8/21/23 | 72 | 67 | 25 | 8 | Surface Treatment - Slurry Seal | 3/1/11 |
| 557 | 14957 | DAMASK DR | VIEWPOINT LN | BEACH BLVD | E | AAC | 4 | 537 | 36 | 19,832 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 558 | 14402 | DAN LN | BOLSA AVE | BUCKINGHAM DR | E | AC | 1 | 314 | 40 | 12,560 | 4/7/26 | 46 | 63 | 30 | 7 | New Construction | 1/1/80 |
| 559 | 15563 | DANA DR | BROOKHURST ST | GALBAR CR | E | AAC | 8 | 555 | 36 | 21,230 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 560 | 13935 | DANBURY CIR | NEWHAVEN LN | CDS | E | AC | 7 | 408 | 36 | 18,648 | 4/2/24 | 78 | 49 | 37 | 14 | Surface Treatment - Slurry Seal | 11/28/19 |
| 561 | 13655 | DANCY CIR | SPRINGTIME LN | CDS | E | AC | 4 | 223 | 32 | 8,636 | 4/8/24 | 64 | 69 | 31 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 562 | 13672 | DANES CIR | BRIARCLIFF DR | END | E | AC | 1 | 504 | 36 | 19,394 | 5/6/26 | 86 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 563 | 14775 | DANTON CIR | CARNABY LN | CDS | E | AAC | 4 | 122 | 32 | 5,404 | 4/14/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 564 | 13524 | DANUBE DR | RHONE LN | THAMES LN | E | AC | 4 | 1,043 | 36 | 37,548 | 3/31/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 565 | 13933 | DAREN CIR | HAMDEN LN | CDS | E | AAC | 7 | 198 | 32 | 10,197 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 567 | 15729 | DARSY DR | FOREST LN | CDS | E | AC | 4 | 398 | 34 | 15,832 | 5/13/24 | 85 | 32 | 63 | 5 | Surface Treatment - Slurry Seal | 11/28/19 |
| 568 | 15366 | DARTMOOR DR | SHERBORNE LN | CDS | E | AAC | 7 | 540 | 36 | 23,749 | 4/14/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 570 | 13215 | DAVENPORT DR | BARUNA LN | EDGEWATER LN | E | AC | 2 | 679 | 60 | 37,140 | 4/5/22 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 570 | 13218 | DAVENPORT DR | BEDFORD LN | SAYBROOK LN | E | AAC | 2 | 537 | 60 | 32,220 | 5/10/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 570 | 15073 | DAVENPORT DR | SAYBROOK LN | ALGONQUIN ST | E | AAC | 2 | 802 | 60 | 48,120 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 570 | 15939 | DAVENPORT DR | EDGEWATER LN | BEDFORD LN | E | AAC | 2 | 871 | 60 | 52,260 | 5/10/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 571 | 13143 | DAVIS LN | HENDRICKSEN DR | SISSON DR | E | AAC | 2 | 849 | 36 | 32,064 | 5/21/24 | 92 | 0 | 93 | 7 | Overlay - AC Fabric | 10/1/16 |
| 572 | 15918 | DAWSON LN | MC FADDEN AVE | SKYVIEW DR | E | AC | 3 | 696 | 36 | 25,056 | 4/7/26 | 92 | 27 | 42 | 31 | New Construction | 1/1/80 |
| 572 | 15919 | DAWSON LN | SKYVIEW DR | SHANNON DR | E | AC | 3 | 764 | 36 | 27,216 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 573 | 14398 | DAYTONA CIR | STARFIRE LN | CDS | E | AC | 9 | 360 | 32 | 13,020 | 4/17/24 | 81 | 61 | 39 | 0 | New Construction | 1/1/80 |
| 574 | 14930 | DE LONG CIR | PRICE DR | END | E | AC | 5 | 385 | 36 | 15,360 | 3/30/26 | 85 | 40 | 60 | 0 | New Construction | 1/1/80 |
| 575 | 13551 | DE VILLE CIR | LANDAU LN | CDS | E | AC | 4 | 518 | 36 | 18,648 | 3/31/22 | 74 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 576 | 13938 | DEAUVILLE DR | COLCHESTER LN | SUMMERFIELD LN | E | AAC | 7 | 898 | 36 | 33,488 | 4/15/26 | 90 | 57 | 43 | 0 | Overlay - AC Structural | 11/28/19 |
| 577 | 13339 | DEBRA CIR | MARILYN DR | CDS | E | AAC | 3 | 316 | 36 | 12,926 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 579 | 13904 | DEEP HARBOR DR | QUIET BY LN | GOLDENWEST ST | E | AAC | 5 | 130 | 35 | 4,550 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 580 | 15404 | DEEPCLIFF DR | DRYBROOK LN | END | E | AAC | 7 | 528 | 36 | 19,008 | 8/17/23 | 82 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 581 | 14030 | DEEPVIEW DR | RUMFORD LN | DOREMERE DR | E | AC | 7 | 171 | 36 | 6,156 | 8/21/23 | 46 | 91 | 9 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 581 | 15407 | DEEPVIEW DR | EDGEWOOD LN | RUMFORD LN | E | AC | 7 | 588 | 36 | 21,168 | 8/21/23 | 35 | 82 | 10 | 8 | Surface Treatment - Slurry Seal | 3/1/11 |
| 582 | 14162 | DEERVALE LN | CANDLEWOOD DR | HAZELBROOK DR | E | AC | 7 | 743 | 36 | 26,748 | 4/16/26 | 85 | 32 | 63 | 5 | Surface Treatment - Slurry Seal | 7/15/21 |
| 583 | 15110 | DEFIANCE DR | REDLANDS LN | HOBART LN | E | AC | 3 | 1,086 | 36 | 40,096 | 12/19/24 | 78 | 32 | 68 | 0 | New Construction | 1/1/80 |
| 584 | 12862 | DEGUELLE CIR | FINDLEY CIR | CDS | E | AC | 5 | 286 | 34 | 12,785 | 7/8/21 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 585 | 13180 | DEL MAR LN | MEADOWLARK DR | CALIENTE DR | E | AC | 2 | 863 | 36 | 31,068 | 3/24/22 | 50 | 90 | 10 | 0 | New Construction | 1/1/80 |
| 585 | 13586 | DEL MAR LN | ALLEY HEIL AVE | HEIL AVE | E | AC | 2 | 154 | 36 | 5,544 | 3/24/22 | 75 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 585 | 13587 | DEL MAR LN | CALIENTE DR | ALLEY HEIL AVE | E | AC | 2 | 140 | 36 | 5,040 | 3/24/22 | 58 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 586 | 14076 | DELAFIELD CIR | ROCKLAND LN | CDS | E | AC | 8 | 309 | 32 | 11,688 | 3/9/22 | 82 | 74 | 24 | 2 | Surface Treatment - Slurry Seal | 2/8/23 |
| 500 | 14758 | DELAWARE ST | TAYLOR DR | ONTARIO DR | E | AC | 4 | 260 | 36 | 9,360 | 4/9/24 | 92 | 0 | 76 | 24 | Surface Treatment - Slurry Seal | 11/28/19 |
| 500 | 15715 | DELAWARE ST | ONTARIO DR | ELLIS AVE | E | AC | 4 | 1,083 | 36 | 38,988 | 4/9/24 | 91 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 11/28/19 |
| 587 | 13401 | DELLGLEN CIR | FOXSHIELD DR | CDS | E | AC | 5 | 360 | 36 | 14,760 | 5/21/24 | 51 | 76 | 16 | 8 | New Construction | 1/1/80 |
| 2292 | 17028 | DELTA LN | SKYLAB LN | ASTRONAUTICS LN | E | AC | 1 | 1,338 | 36 | 48,168 | 4/8/26 | 90 | 0 | 63 | 37 | New Construction - Initial | 1/1/00 |
| 588 | 13499 | DELTON CIR | ALLEY MADDOX DR | CDS | E | AC | 3 | 223 | 32 | 8,636 | 3/18/22 | 78 | 54 | 37 | 9 | Surface Treatment - Slurry Seal | 7/29/20 |
| 590 | 15914 | DEMION LN | ELLIS AVE | CDS | E | AAC | 7 | 1,216 | 36 | 47,121 | 4/14/26 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 591 | 15468 | DENSMORE LN | BEDEL DR | BAINFORD DR | E | AC | 7 | 668 | 36 | 24,048 | 4/16/26 | 91 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 592 | 13382 | DENVALE CIR | SELKIRK DR | END | E | AC | 5 | 126 | 36 | 6,036 | 3/30/26 | 75 | 54 | 39 | 7 | New Construction | 1/1/80 |
| 593 | 14036 | DENVER LN | YORKTOWN AVE | SALT LAKE DR | E | AC | 7 | 166 | 36 | 5,976 | 4/20/26 | 78 | 0 | 94 | 6 | Surface Treatment - Slurry Seal | 7/15/21 |
| 594 | 14173 | DERBYSHIRE LN | ADAMS AVE | OLYMPIC DR | E | AAC | 8 | 187 | 45 | 7,609 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 594 | 15634 | DERBYSHIRE LN | CORNWALL DR | KENSINGTON DR | E | AAC | 8 | 393 | 36 | 14,148 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 594 | 15835 | DERBYSHIRE LN | ADAMS AVE | KENSINGTON DR | E | AAC | 8 | 198 | 36 | 7,128 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 595 | 13363 | DESTRY CIR | MARCELLENA DR | CDS | E | AC | 5 | 135 | 36 | 6,300 | 5/28/24 | 40 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 596 | 15666 | DETROIT AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/24/23 | 55 | 59 | 41 | 0 | New Construction | 1/1/80 |
| 596 | 15667 | DETROIT AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 354 | 36 | 12,744 | 8/24/23 | 61 | 77 | 20 | 3 | New Construction | 1/1/80 |
| 596 | 15868 | DETROIT AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 66 | 58 | 42 | 0 | New Construction | 1/1/80 |
| 597 | 13193 | DEVON CIR | CHANNEL LN | CDS | E | AC | 2 | 335 | 32 | 12,220 | 4/9/22 | 91 | 27 | 62 | 11 | New Construction | 1/1/80 |
| 598 | 14585 | DEVONSHIRE DR | KESWICK LN | COVENTRY LN | E | AAC | 8 | 187 | 20 | 3,740 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 598 | 14586 | DEVONSHIRE DR | COVENTRY LN | CLAREMONT LN | E | AAC | 8 | 204 | 24 | 4,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 598 | 15639 | DEVONSHIRE DR | KINGSWOOD LN | BERKSHIRE LN | E | AAC | 8 | 203 | 24 | 4,872 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 598 | 15640 | DEVONSHIRE DR | CAMBRIDGE LN | INVERNESS LN | E | AAC | 8 | 206 | 24 | 4,944 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 599 | 13211 | DIABLO CIR | EDGEWATER LN | CDS | E | AAC | 2 | 350 | 36 | 14,100 | 5/10/24 | 88 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 600 | 13341 | DIANE LN | SYLVIA DR | MARILYN DR | E | AAC | 3 | 547 | 36 | 20,392 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 601 | 14477 | DIRIGO CIR | LANDFALL DR | CDS | E | AAC | 9 | 472 | 36 | 18,492 | 4/21/26 | 72 | 20 | 63 | 17 | Overlay - AC Structural | 5/11/19 |
| 602 | 15969 | DITMAR LN | DEEPCLIFF DR | HURSTWELL DR | E | AC | 7 | 986 | 36 | 35,496 | 8/17/23 | 82 | 0 | 77 | 23 | New Construction | 1/1/80 |
| 603 | 14341 | DOCKSIDE CIR | PIER DR | CDS | E | AAC | 9 | 372 | 36 | 14,892 | 4/1/24 | 59 | 83 | 16 | 1 | Overlay - AC Structural | 5/11/18 |
| 604 | 13365 | DOHRN CIR | KRISTOPHER LN | END | E | AAC | 3 | 368 | 36 | 15,248 | 5/22/24 | 77 | 45 | 55 | 0 | Overlay - AC Structural | 10/1/12 |
| 605 | 14467 | DOLLAR DR | SPA DR | NEVADA DR | E | AC | 1 | 434 | 36 | 15,624 | 4/13/26 | 76 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 606 | 13288 | DOLORES ST | PRAIRIE DR | PEARCE ST | E | AC | 2 | 663 | 36 | 26,508 | 3/29/22 | 84 | 40 | 41 | 19 | New Construction | 1/1/80 |
| 607 | 14053 | DOLPHIN DR | ESTUARY LN | TRIDENT LN | E | AAC | 7 | 520 | 36 | 19,470 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 607 | 15417 | DOLPHIN DR | TOPEKA LN | ESTUARY LN | E | AAC | 7 | 781 | 36 | 28,116 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 608 | 13454 | DOLPHINWOOD DR | OXBORO LN | END | E | AC | 5 | 186 | 36 | 6,408 | 5/29/24 | 28 | 86 | 14 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 609 | 14965 | DON DR | CHARLES LN | RHINE DR | E | AC | 4 | 649 | 36 | 24,864 | 3/31/22 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 610 | 13531 | DONALD CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 86 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 611 | 14311 | DONCASTER DR | LOCHLEA LN | NEWLAND ST | E | AC | 9 | 660 | 36 | 23,760 | 8/30/23 | 76 | 20 | 80 | 0 | New Construction | 1/1/80 |
| 612 | 13316 | DONLYN DR | GREENVIEW LN | SPRINGDALE ST | E | AC | 3 | 520 | 36 | 18,432 | 5/8/26 | 69 | 32 | 66 | 2 | New Construction | 1/1/80 |
| 615 | 13269 | DORAINE CIR | GIARC LN | CDS | E | AC | 3 | 222 | 32 | 8,904 | 12/27/24 | 76 | 48 | 51 | 1 | New Construction | 1/1/80 |
| 614 | 14057 | DOREMERE DR | GEMFALL LN | FELCLIFF LN | E | AC | 7 | 215 | 36 | 8,490 | 4/20/26 | 94 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 614 | 15420 | DOREMERE DR | NEWLAND AV | GEMFALL LN | E | AC | 7 | 981 | 36 | 35,316 | 4/20/26 | 90 | 66 | 34 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 616 | 14906 | DORITA DR | WILD ROSE LN | SPRINGDALE ST | E | AC | 5 | 177 | 36 | 6,372 | 4/2/26 | 98 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 617 | 15541 | DORSETT DR | MIRAMAR LN | POSTON LN | E | AC | 9 | 1,279 | 36 | 46,794 | 8/30/23 | 47 | 78 | 18 | 4 | New Construction | 1/1/80 |
| 618 | 13732 | DOVER DR | CAPETOWN LN | KINGSTON LN | E | AC | 1 | 270 | 36 | 10,220 | 12/26/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 619 | 13809 | DOVEWOOD DR | BOLSA CHICA ST | PELICAN LN | E | AC | 1 | 520 | 36 | 18,720 | 3/21/22 | 68 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 619 | 15325 | DOVEWOOD DR | PELICAN LN | HUMMINGBIRD LN | E | AC | 1 | 670 | 36 | 24,370 | 3/21/22 | 74 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 620 | 13855 | DOWN DR | TOWAY LN | EDWARDS ST | E | AC | 1 | 531 | 36 | 19,366 | 12/20/24 | 31 | 95 | 5 | 0 | New Construction | 1/1/80 |
| 621 | 13323 | DOYLE DR | SPRINGDALE ST | LOVELL LN | E | AC | 3 | 520 | 36 | 18,720 | 4/6/26 | 71 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 622 | 14293 | DRAGON CIR | NATIONAL LN | CDS | E | AC | 8 | 491 | 36 | 20,716 | 3/18/24 | 69 | 49 | 43 | 8 | New Construction | 1/1/80 |
| 623 | 13740 | DRAKE LN | BOLSA AVE | ALEXANDRIA DR | E | AC | 1 | 570 | 36 | 21,270 | 4/27/26 | 76 | 36 | 48 | 16 | New Construction | 1/1/80 |
| 624 | 13802 | DRESDEN CIR | YORKSHIRE LN | END | E | AC | 1 | 440 | 36 | 17,340 | 4/8/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 625 | 14136 | DREW CIR | TRUXTON DR | CDS | E | AAC | 7 | 413 | 32 | 14,716 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 626 | 13375 | DREY LN | CAPSTONE DR | MANHATTAN DR | E | AC | 3 | 697 | 36 | 25,092 | 5/22/24 | 46 | 56 | 36 | 8 | Surface Treatment - Slurry Seal | 10/1/12 |
| 627 | 15494 | DRIFTWOOD DR | BEACH BLVD | END | E | AC | 9 | 351 | 36 | 12,636 | 8/24/23 | 53 | 52 | 43 | 5 | New Construction | 1/1/80 |
| 628 | 15595 | DRUMBEAT DR | BUSHARD ST | CDS | E | AC | 9 | 365 | 32 | 13,480 | 4/25/24 | 82 | 0 | 47 | 53 | Surface Treatment - Slurry Seal | 5/11/19 |
| 629 | 15406 | DRYBANK DR | COLDWATER LN | EDGEWOOD LN | E | AC | 7 | 735 | 36 | 26,460 | 8/17/23 | 70 | 67 | 23 | 10 | Surface Treatment - Slurry Seal | 3/1/11 |
| 630 | 15970 | DRYBROOK LN | DEEPCLIFF DR | HURSTWELL DR | E | AC | 7 | 991 | 36 | 35,676 | 8/17/23 | 83 | 56 | 38 | 6 | Surface Treatment - Slurry Seal | 3/1/11 |
| 631 | 14308 | DRYMEN DR | BANFF LN | ALLEY DONCASTER DR | E | AC | 9 | 264 | 36 | 9,540 | 8/30/23 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 632 | 15450 | DUBLIN LN | SEAPORT DR | MALLOY DR | E | AC | 9 | 513 | 36 | 18,468 | 8/21/23 | 74 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 633 | 13254 | DUCHESS LN | PALISADE DR | CHRISTY DR | E | AC | 3 | 1,160 | 36 | 41,760 | 5/7/26 | 77 | 33 | 66 | 1 | New Construction | 1/1/80 |
| 634 | 13556 | DUELLO LN | NIMROD DR | SLATER AVE | E | AAC | 3 | 314 | 36 | 11,304 | 5/20/24 | 92 | 0 | 54 | 46 | Overlay - AC Structural | 10/1/12 |
| 635 | 13764 | DUKE CIR | CITADEL DR | END | E | AC | 1 | 410 | 36 | 16,560 | 1/3/25 | 75 | 79 | 14 | 7 | New Construction | 1/1/80 |
| 636 | 15512 | DUMBRECK DR | PAISLEY LN | QUEENS PARK LN | E | AC | 8 | 1,039 | 36 | 37,148 | 3/18/24 | 93 | 0 | 80 | 20 | New Construction | 1/1/80 |
| 637 | 15766 | DUNBAR AVE | BOLSA CHICA ST | HARBOR BLUFFS CIR | E | AC | 2 | 1,182 | 36 | 42,552 | 4/1/26 | 70 | 35 | 64 | 1 | New Construction | 1/1/80 |
| 638 | 15348 | DUNDALK LN | SHANNON DR | END | E | AC | 3 | 1,070 | 36 | 41,020 | 12/12/24 | 94 | 0 | 98 | 2 | New Construction | 1/1/80 |
| 639 | 13730 | DUNDEE DR | NORTH END | BOLSA PARK LN | E | AC | 1 | 294 | 36 | 12,084 | 4/8/26 | 84 | 0 | 92 | 8 | New Construction | 1/1/80 |
| 639 | 13735 | DUNDEE DR | BOLSA PARK LN | SOUTH END | E | AC | 1 | 485 | 36 | 18,960 | 4/8/26 | 80 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 640 | 13663 | DUNES LN | HACIENDA DR | CHINOOK DR | E | AC | 1 | 260 | 36 | 9,360 | 4/8/22 | 83 | 46 | 33 | 21 | New Construction | 1/1/80 |
| 641 | 13852 | DUNN DR | TOWAY LN | EDWARDS ST | E | AC | 1 | 531 | 36 | 19,116 | 12/20/24 | 38 | 94 | 6 | 0 | New Construction | 1/1/80 |
| 642 | 14558 | DURHAM DR | DERBYSHIRE LN | VERMONT LN | E | AAC | 8 | 390 | 24 | 9,360 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 643 | 13244 | EAGLE LN | MEADOWLARK DR | MIDDLECOFF DR | E | AC | 3 | 871 | 36 | 32,106 | 3/23/22 | 88 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 643 | 15082 | EAGLE LN | CASTLE DR | MEADOWLARK DR | E | AAC | 3 | 1,185 | 36 | 43,410 | 5/9/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 644 | 13515 | EARL CIR | BURKE LN | CDS | E | AC | 3 | 130 | 32 | 5,660 | 3/31/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 645 | 13198 | EASTER CIR | CHANNEL LN | CDS | E | AC | 2 | 246 | 32 | 9,372 | 4/9/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 646 | 14166 | EASTWOOD CIR | HAZELBROOK DR | CDS | E | AAC | 7 | 496 | 36 | 19,356 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 647 | 14421 | EASY LN | MIDWAY DR | CDS | E | AC | 5 | 127 | 36 | 4,572 | 3/31/26 | 89 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 648 | 14452 | EBBTIDE CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 72 | 53 | 45 | 2 | New Construction | 1/1/80 |
| 649 | 14826 | EDAM CIR | HAGUE LN | CDS | E | AC | 4 | 89 | 40 | 4,810 | 3/31/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 650 | 15997 | EDGEMONT DR | EDWARDS ST | REDLANDS LN | E | AC | 3 | 1,119 | 36 | 39,996 | 12/19/24 | 71 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 651 | 13676 | EDGEVIEW LN | GLENWOOD DR | HARDWICK CIR | E | AC | 1 | 260 | 36 | 9,360 | 4/28/26 | 80 | 31 | 69 | 0 | New Construction | 1/1/80 |
| 651 | 13681 | EDGEVIEW LN | KELSEY CIR | LARCHWOOD DR | E | AC | 1 | 260 | 36 | 9,360 | 4/28/26 | 72 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 651 | 15295 | EDGEVIEW LN | HARDWICK CIR | KELSEY CIR | E | AC | 1 | 780 | 36 | 28,080 | 4/28/26 | 68 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 652 | 13197 | EDGEWATER LN | MORNING STAR DR | BRANFORD DR | E | AAC | 2 | 260 | 36 | 9,360 | 5/10/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 652 | 13230 | EDGEWATER LN | DAVENPORT DR | WAVERLY LN | E | AC | 2 | 1,678 | 36 | 60,408 | 3/24/22 | 60 | 74 | 22 | 4 | New Construction | 1/1/80 |
| 652 | 15062 | EDGEWATER LN | BRANFORD DR | FIGARO CIR | E | AAC | 2 | 525 | 36 | 18,900 | 5/10/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 652 | 15066 | EDGEWATER LN | FIGARO CIR | DAVENPORT DR | E | AAC | 2 | 807 | 36 | 29,052 | 5/10/24 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 652 | 15081 | EDGEWATER LN | WAVERLY LN | END | E | AC | 2 | 1,061 | 36 | 38,196 | 3/24/22 | 76 | 6 | 33 | 61 | New Construction | 1/1/80 |
| 654 | 15962 | EDGEWOOD LN | DEEPVIEW DR | CLARKDALE DR | E | AC | 7 | 1,049 | 36 | 37,764 | 8/21/23 | 32 | 85 | 4 | 11 | Surface Treatment - Slurry Seal | 3/1/11 |
| 2289 | 17024 | EDISON AVE | NEWLAND AVE | SOUTH END | E | AC | 9 | 816 | 25 | 20,400 | 8/30/23 | 86 | 0 | 60 | 40 | New Construction - Initial | 1/1/80 |
| 656 | 13314 | EDMONDS CIR | GREENVIEW LN | END | E | AC | 3 | 410 | 36 | 16,560 | 4/2/26 | 72 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 657 | 14081 | EDUCATION LN | YORKTOWN AVE | FREDERICK CIR | E | AC | 8 | 410 | 36 | 14,760 | 3/7/22 | 84 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 657 | 14085 | EDUCATION LN | CONSTITUTION DR | GARRETT CIR | E | AC | 8 | 261 | 36 | 9,396 | 3/7/22 | 85 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 657 | 15431 | EDUCATION LN | FREDERICK CIR | CONSTITUTION DR | E | AC | 8 | 759 | 36 | 27,324 | 3/7/22 | 88 | 0 | 70 | 30 | New Construction | 1/1/80 |
| 569 | 14614 | EDWARDS ST | GARFIELD AVE | PENINSULA LN | E | AC | 5 | 669 | 44 | 29,436 | 3/28/22 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 4070 | 50430 | EDWARDS ST FRONTAGE | ARMADA DR | VATCHER DR | E | AC | 5 | 864 | 30 | 25,920 | 5/29/24 | 62 | 80 | 20 | 0 | New Construction - Initial | 1/1/80 |
| 4070 | 50440 | EDWARDS ST FRONTAGE | MEADOW CREST DR | FREEBORN DR | E | AC | 5 | 611 | 30 | 18,330 | 5/30/24 | 52 | 81 | 17 | 2 | Surface Treatment - Slurry Seal | 1/10/12 |
| 658 | 15527 | EDYE DR | SUBURBIA LN | LAVONNE LN | E | AAC | 8 | 897 | 36 | 34,792 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 659 | 16015 | EFFINGHAM DR | STRATHMOOR LN | BROOKHURST ST | E | AC | 8 | 1,195 | 36 | 43,020 | 4/10/24 | 57 | 67 | 14 | 19 | Surface Treatment - Slurry Seal | 5/11/18 |
| 660 | 14231 | EGRET LN | RELL DR | KINGFISHER DR | E | AC | 9 | 982 | 36 | 35,352 | 8/24/23 | 71 | 65 | 35 | 0 | New Construction | 1/1/80 |
| 661 | 13004 | EIGHTEENTH ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 390 | 46 | 17,940 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 661 | 13005 | EIGHTEENTH ST | PECAN AVE | ACACIA AVE | E | AAC | 6 | 410 | 46 | 18,860 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 661 | 13006 | EIGHTEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/22/21 | 79 | 0 | 16 | 84 | Surface Treatment - Slurry Seal | 7/27/22 |
| 661 | 13007 | EIGHTEENTH ST | PCH | WALNUT AVE | E | AAC | 6 | 375 | 50 | 17,880 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 661 | 13008 | EIGHTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/22/21 | 84 | 0 | 31 | 69 | Surface Treatment - Slurry Seal | 7/27/22 |
| 661 | 13094 | EIGHTEENTH ST | ORANGE AVE | PECAN AVE | E | AAC | 6 | 395 | 46 | 18,170 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 662 | 12954 | EIGHTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 410 | 48 | 19,680 | 6/22/21 | 76 | 52 | 32 | 16 | Surface Treatment - Slurry Seal | 7/27/22 |
| 662 | 12955 | EIGHTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 48 | 19,680 | 6/22/21 | 77 | 25 | 45 | 30 | Surface Treatment - Slurry Seal | 7/27/22 |
| 662 | 12956 | EIGHTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 390 | 47 | 18,330 | 6/22/21 | 86 | 0 | 80 | 20 | Surface Treatment - Slurry Seal | 7/27/22 |
| 662 | 13071 | EIGHTH ST | PCH | WALNUT AVE | E | AAC | 6 | 390 | 50 | 19,785 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 662 | 13072 | EIGHTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 48 | 18,960 | 6/30/21 | 79 | 12 | 47 | 41 | Surface Treatment - Slurry Seal | 7/27/22 |
| 662 | 16032 | EIGHTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 396 | 48 | 19,008 | 6/30/21 | 84 | 0 | 87 | 13 | Surface Treatment - Slurry Seal | 7/27/22 |
| 663 | 13868 | EIRE CIR | TULLOW LN | END | E | AC | 3 | 294 | 32 | 11,208 | 4/27/26 | 90 | 0 | 71 | 29 | New Construction | 1/1/80 |
| 664 | 14608 | EL ARROYO DR | BRITTANY LN | NEWLAND ST | E | AC | 4 | 496 | 36 | 17,856 | 5/13/24 | 87 | 18 | 82 | 0 | Surface Treatment - Slurry Seal | 4/1/17 |
| 665 | 15529 | EL CAPITAN DR | AQUATIC LN | SPINDRIFT LN | E | AAC | 8 | 645 | 36 | 24,470 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 666 | 14415 | EL CORTIJO DR | EDWARDS ST | ALTAMIRANO LN | E | AAC | 5 | 167 | 36 | 5,724 | 5/20/24 | 74 | 32 | 68 | 0 | Overlay - AC Structural | 10/1/12 |
| 667 | 14861 | EL DORADO DR | NEWQUIST LN | ST ANDREWS LN | E | AC | 2 | 744 | 36 | 29,064 | 4/1/26 | 80 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 668 | 15986 | EL NOPAL LN | VIA ANGELINA DR | RIO VISTA DR | E | AAC | 5 | 751 | 36 | 28,036 | 5/29/24 | 73 | 22 | 78 | 0 | Overlay - AC Structural | 10/1/12 |
| 669 | 14296 | EL TORO LN | KITE DR | ATLANTA AVE | E | AC | 8 | 179 | 36 | 6,444 | 3/18/24 | 76 | 83 | 17 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 670 | 13527 | ELBE CIR | RHINE DR | CDS | E | AC | 4 | 264 | 32 | 9,948 | 3/18/22 | 79 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 671 | 13721 | ELECTRONIC LN | MACHINE DR | MC FADDEN AVE | E | AC | 1 | 817 | 40 | 32,680 | 4/8/26 | 68 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 672 | 12970 | ELEVENTH ST | PCH | WALNUT AVE | E | AAC | 6 | 345 | 47 | 16,215 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/17/21 |
| 672 | 12971 | ELEVENTH ST | WALNUT AVE | OLIVE AVE | E | AAC | 6 | 390 | 47 | 18,330 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/17/21 |
| 672 | 12972 | ELEVENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/22/21 | 75 | 52 | 39 | 9 | New Construction | 1/1/80 |
| 672 | 12973 | ELEVENTH ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 390 | 46 | 17,940 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 672 | 13076 | ELEVENTH ST | OLIVE AVE | ORANGE AVE | E | AAC | 6 | 395 | 47 | 18,565 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 672 | 13077 | ELEVENTH ST | PALM AVE | MAIN ST | E | AC | 6 | 702 | 43 | 30,186 | 7/8/21 | 79 | 34 | 59 | 7 | Surface Treatment - Slurry Seal | 7/27/22 |
| 672 | 13084 | ELEVENTH ST | MAIN ST | LAKE ST | E | AC | 6 | 782 | 47 | 41,595 | 7/8/21 | 75 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 672 | 16029 | ELEVENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/30/21 | 53 | 44 | 32 | 24 | New Construction | 1/1/80 |
| 673 | 13953 | ELGIN CIR | LINDSAY LN | CDS | E | AAC | 7 | 419 | 36 | 16,334 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 674 | 13839 | ELIOT CIR | WINSLOW DR | END | E | AC | 1 | 339 | 36 | 13,454 | 12/20/24 | 89 | 19 | 81 | 0 | New Construction | 1/1/80 |
| 675 | 14258 | ELIZABETH LN | ELLSWORTH DR | CARROLTOWN DR | E | AAC | 9 | 902 | 36 | 32,472 | 5/20/24 | 76 | 31 | 42 | 27 | Overlay - AC Structural | 5/11/18 |
| 676 | 13512 | ELK CIR | LILAC LN | CDS | E | AAC | 3 | 237 | 32 | 9,834 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 677 | 14255 | ELLSWORTH DR | MAGNOLIA ST | KELVIN LN | E | AC | 9 | 176 | 32 | 5,632 | 5/9/24 | 83 | 37 | 60 | 3 | Surface Treatment - Slurry Seal | 5/11/18 |
| 677 | 15952 | ELLSWORTH DR | KELVIN LN | MINERVA LN | E | AAC | 9 | 944 | 36 | 34,734 | 5/9/24 | 87 | 0 | 98 | 2 | Overlay - AC Structural | 5/11/18 |
| 678 | 13578 | ELM ST | SYCAMORE AVE | CYPRESS AVE | E | AC | 4 | 424 | 36 | 15,264 | 5/30/24 | 66 | 47 | 28 | 25 | New Construction | 1/1/80 |
| 678 | 13581 | ELM ST | CYPRESS AVE | CDS | E | AC | 4 | 443 | 36 | 17,448 | 5/30/24 | 77 | 15 | 63 | 22 | New Construction | 1/1/80 |
| 679 | 14972 | ELMCREST LN | DRYBROOK LN | DRYBANK DR | E | AAC | 7 | 1,283 | 36 | 46,188 | 8/17/23 | 87 | 0 | 76 | 24 | Overlay - AC Structural | 3/1/11 |
| 680 | 13673 | ELMHURST CIR | BRIARCLIFF DR | END | E | AC | 1 | 505 | 36 | 19,930 | 5/6/26 | 80 | 21 | 79 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 681 | 14629 | ELMIRA AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/24/23 | 66 | 29 | 67 | 4 | New Construction | 1/1/80 |
| 681 | 15867 | ELMIRA AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 48 | 51 | 29 | 20 | New Construction | 1/1/80 |
| 681 | 15880 | ELMIRA AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 39 | 69 | 26 | 5 | New Construction | 1/1/80 |
| 682 | 14079 | ELMSFORD LN | WARBURTON DR | TELHAN DR | E | AAC | 8 | 239 | 36 | 9,354 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 683 | 13355 | ELSINORE CIR | SONOMA DR | CDS | E | AC | 5 | 179 | 36 | 7,994 | 5/28/24 | 39 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 684 | 14066 | ELVA CIR | RUMSEY LN | CDS | E | AAC | 7 | 161 | 36 | 8,346 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 685 | 14978 | EMERALD LN | FIR DR | CYPRESS AVE | E | AC | 4 | 669 | 36 | 24,084 | 5/30/24 | 70 | 68 | 24 | 8 | New Construction | 1/1/80 |
| 686 | 13362 | ENCINO CIR | SANTA YNEZ DR | CDS | E | AC | 5 | 350 | 36 | 13,950 | 5/28/24 | 26 | 87 | 13 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 688 | 14297 | ENDEVER DR | SKIMMER LN | BROOKHURST ST | E | AC | 8 | 187 | 36 | 6,732 | 3/19/24 | 87 | 48 | 52 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 689 | 13932 | ENFIELD CIR | HAMDEN LN | CDS | E | AC | 7 | 198 | 36 | 10,989 | 4/2/24 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 690 | 13719 | ENGINEER DR | GRAHAM ST | PIPELINE LN | E | AC | 1 | 1,347 | 40 | 53,560 | 4/8/26 | 74 | 63 | 30 | 7 | New Construction | 1/1/80 |
| 690 | 15922 | ENGINEER DR | PIPELINE LN | SPRINGDALE ST | E | AC | 1 | 1,206 | 40 | 47,760 | 4/8/26 | 86 | 16 | 29 | 55 | New Construction | 1/1/80 |
| 691 | 14669 | ENGLAND ST | LINCOLN AVE | MEMPHIS AVE | E | AAC | 6 | 331 | 36 | 11,916 | 8/15/23 | 82 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 691 | 14670 | ENGLAND ST | KNOXVILLE AVE | LINCOLN AVE | E | AC | 6 | 330 | 37 | 12,062 | 8/15/23 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 691 | 14671 | ENGLAND ST | JOILET AVE | KNOXVILLE AVE | E | AC | 6 | 330 | 37 | 11,883 | 8/15/23 | 51 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 691 | 14672 | ENGLAND ST | INDIANAPOLIS AVE | JOILET AVE | E | AAC | 6 | 330 | 37 | 11,877 | 8/15/23 | 55 | 70 | 30 | 0 | Overlay - AC Structural | 3/1/11 |
| 691 | 14741 | ENGLAND ST | YORKTOWN AVE | CDS | E | AAC | 6 | 537 | 36 | 22,365 | 7/8/21 | 33 | 64 | 26 | 10 | Overlay - AC Structural | 11/28/19 |
| 691 | 15706 | ENGLAND ST | END | YORKTOWN AVE | E | AAC | 7 | 540 | 36 | 19,440 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 692 | 14896 | ENGLEWOOD CIR | FREEBORN DR | CDS | E | AC | 5 | 364 | 36 | 16,704 | 5/30/24 | 51 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 693 | 13191 | ENSIGN CIR | HUMBOLDT DR | CDS | E | AC | 2 | 315 | 32 | 11,580 | 4/7/22 | 54 | 65 | 15 | 20 | New Construction | 1/1/80 |
| 694 | 14778 | ENTERPRISE LN | PRODAN DR | MOUNTJOY DR | E | AAC | 4 | 1,030 | 40 | 42,700 | 4/14/26 | 86 | 46 | 52 | 2 | Overlay - AC Structural | 11/28/19 |
| 695 | 15651 | ERNEST AVE | GOLDENWEST ST | GOTHARD ST | E | AC | 4 | 1,321 | 40 | 52,840 | 3/5/24 | 83 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 696 | 15518 | ERSKINE DR | BUSHARD ST | IONA LN | E | AC | 8 | 898 | 36 | 32,076 | 3/19/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 697 | 15779 | ERWIN LN | FREEBORN DR | CDS | E | AC | 5 | 592 | 36 | 22,662 | 5/30/24 | 50 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 698 | 13174 | ESCAPADE CIR | SUNDANCER LN | CDS | E | AAC | 2 | 198 | 32 | 7,836 | 5/7/24 | 82 | 32 | 68 | 0 | Overlay - AC Fabric | 12/1/17 |
| 699 | 13270 | ESTA CIR | GIARC LN | CDS | E | AC | 3 | 222 | 32 | 7,104 | 12/27/24 | 72 | 61 | 39 | 0 | New Construction | 1/1/80 |
| 700 | 15837 | ESTUARY LN | DOLPHIN DR | ADAMS AVE | E | AC | 7 | 1,451 | 36 | 52,236 | 4/20/26 | 71 | 95 | 3 | 2 | Surface Treatment - Slurry Seal | 7/15/21 |
| 701 | 13472 | ETNA CIR | RUSHMOOR LN | COTTONWOOD CIR | E | AAC | 4 | 156 | 32 | 5,892 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 702 | 13778 | ETON CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 12/26/24 | 86 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 704 | 14224 | EVELYNE CIR | FARNSWORTH LN | END | E | AC | 9 | 321 | 32 | 10,272 | 8/24/23 | 93 | 0 | 69 | 31 | New Construction | 1/1/80 |
| 705 | 13891 | EVENING HILL DR | LAWN HAVEN DR | HARBOR KEY CIR | E | AAC | 5 | 272 | 36 | 9,792 | 4/30/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 705 | 13896 | EVENING HILL DR | MANOR POINT CIR | SHADY HARBOR CIR | E | AC | 5 | 355 | 36 | 12,780 | 5/6/24 | 81 | 21 | 79 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 705 | 13898 | EVENING HILL DR | SHADY HARBOR CIR | SURFDALE LN | E | AC | 5 | 389 | 36 | 14,004 | 5/6/24 | 100 | 0 | 0 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 705 | 15355 | EVENING HILL DR | HARBOR KEY CIR | MANOR POINT CIR | E | AAC | 5 | 500 | 36 | 18,000 | 4/30/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 706 | 13471 | EVEREST CIR | RUSHMOOR LN | END | E | AAC | 4 | 368 | 32 | 15,376 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 707 | 14183 | EVERGLADES LN | KINGS CANTON DR | MAMMOTH DR | E | AC | 8 | 253 | 36 | 9,108 | 3/1/22 | 86 | 46 | 54 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 707 | 16018 | EVERGLADES LN | MAMMOTH DR | INDIANAPOLIS AVE | E | AC | 8 | 1,469 | 36 | 52,884 | 3/1/22 | 82 | 32 | 52 | 16 | Surface Treatment - Slurry Seal | 2/13/23 |
| 708 | 14873 | EVERGREEN CIR | SUMMERDALE DR | END | E | AAC | 5 | 246 | 36 | 10,584 | 5/30/24 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 709 | 15395 | FAIR TIDE CIR | END | END | E | AAC | 8 | 404 | 32 | 16,528 | 4/8/24 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 710 | 15011 | FAIRCREST DR | EDWARDS ST | ROCKINGHORSE LN | E | AC | 5 | 466 | 36 | 16,776 | 5/7/24 | 90 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 711 | 13220 | FAIRFIELD CIR | WESTPORT DR | CDS | E | AAC | 2 | 400 | 36 | 15,900 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 712 | 14395 | FAIRLANE CIR | RAMBLER DR | CDS | E | AC | 9 | 390 | 36 | 15,540 | 5/6/24 | 79 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 713 | 13671 | FAIRVIEW LN | ANACAPA DR | BRIARCLIFF DR | E | AAC | 1 | 786 | 36 | 30,046 | 5/7/24 | 71 | 39 | 61 | 0 | Overlay - AC Fabric | 10/1/16 |
| 714 | 13238 | FAIRWAY LN | SNEAD DR | MEADOWLARK DR | E | AC | 3 | 737 | 36 | 26,782 | 3/23/22 | 45 | 80 | 9 | 11 | New Construction | 1/1/80 |
| 714 | 15089 | FAIRWAY LN | MEADOWLARD DR. | MIDDLECOFF DR | E | AC | 3 | 835 | 36 | 30,310 | 3/23/22 | 52 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 715 | 15974 | FALKIRK LN | RIDGEBURY DR | END | E | AC | 5 | 1,100 | 36 | 39,024 | 3/30/26 | 70 | 85 | 0 | 15 | New Construction | 1/1/80 |
| 716 | 13205 | FALKLAND CIR | CHANNEL LN | CDS | E | AC | 2 | 200 | 32 | 7,900 | 4/9/22 | 93 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 717 | 13410 | FALLINGWATER DR | FLINTSTONE LN. | EDWARDS ST | E | AC | 5 | 1,335 | 36 | 48,060 | 5/20/24 | 51 | 81 | 9 | 10 | New Construction | 1/1/80 |
| 718 | 15367 | FALMOUTH DR | WORCHESTER LN | SHERBORNE LN | E | AAC | 7 | 530 | 36 | 21,398 | 4/14/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 719 | 15937 | FANTASIA LN | TENOR DR | SCENARIO DR | E | AC | 2 | 940 | 36 | 34,140 | 3/24/22 | 82 | 65 | 35 | 0 | New Construction | 1/1/80 |
| 719 | 15938 | FANTASIA LN | EDINGER AVE | TENOR DR | E | AC | 2 | 875 | 36 | 31,500 | 3/24/22 | 64 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 720 | 14933 | FANWOOD DR | GAINSFORD LN | RAINGLEN LN | E | AC | 5 | 389 | 36 | 14,754 | 3/31/26 | 79 | 29 | 66 | 5 | New Construction | 1/1/80 |
| 721 | 13328 | FARINELLA DR | TRUDY LN | SUMMERCLOUD LN | E | AC | 3 | 1,148 | 36 | 41,328 | 4/6/26 | 85 | 68 | 32 | 0 | New Construction | 1/1/80 |
| 721 | 13335 | FARINELLA DR | EDWARDS ST | COOPER LN | E | AC | 3 | 537 | 36 | 19,032 | 3/18/22 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 722 | 14220 | FARNSWORTH LN | INDIANAPOLIS AVE | ALLEY INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/23/23 | 75 | 44 | 39 | 17 | New Construction | 1/1/80 |
| 722 | 14221 | FARNSWORTH LN | KINGFISHER DR | MARY CIR | E | AC | 9 | 262 | 36 | 9,432 | 8/23/23 | 54 | 65 | 35 | 0 | New Construction | 1/1/80 |
| 722 | 15495 | FARNSWORTH LN | ALLEY INDIANAPOLIS AVE | KINGFISHER DR | E | AC | 9 | 1,127 | 36 | 40,572 | 8/23/23 | 79 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 722 | 15496 | FARNSWORTH LN | MARY CIR | SNOWVBIRD DR | E | AC | 9 | 782 | 36 | 28,152 | 8/23/23 | 59 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 723 | 14148 | FAUST CIR | DENSMORE LN | CDS | E | AAC | 7 | 91 | 42 | 4,822 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 724 | 14449 | FELCLIFF LN | ADAMS AVE | CROWN REEF LN | E | AC | 7 | 127 | 36 | 4,572 | 4/6/22 | 73 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 724 | 15960 | FELCLIFF LN | DOREMERE DR | ADAMS AVE | E | AC | 7 | 1,108 | 36 | 40,638 | 4/20/26 | 89 | 86 | 1 | 13 | Surface Treatment - Slurry Seal | 7/15/21 |
| 725 | 13381 | FELSON CIR | SELKIRK DR | END | E | AC | 5 | 114 | 36 | 5,904 | 3/30/26 | 77 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 726 | 15978 | FENLEY DR | STILL HARBOR LN | FLINTSTONE LN | E | AC | 5 | 1,135 | 36 | 42,360 | 5/21/24 | 59 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 727 | 14406 | FENWICK DR | GOLDEN VIEW LN | MARGARITA LN | E | AC | 3 | 126 | 36 | 5,536 | 5/28/24 | 84 | 13 | 85 | 2 | Surface Treatment - Slurry Seal | 10/1/12 |
| 728 | 13887 | FEOLA CIR | BREELAND DR | END | E | AC | 3 | 560 | 36 | 21,960 | 4/7/26 | 82 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 729 | 13544 | FERGUSON CIR | ROSS LN | CDS | E | AAC | 4 | 244 | 32 | 9,058 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 730 | 15093 | FERNHILL CIR | GRAHAM ST | END | E | AC | 3 | 552 | 36 | 21,672 | 4/2/26 | 84 | 20 | 80 | 0 | New Construction | 1/1/80 |
| 731 | 13399 | FERNPOINT CIR | HAMSHIRE DR | CDS | E | AC | 5 | 429 | 36 | 17,244 | 5/21/24 | 60 | 76 | 21 | 3 | New Construction | 1/1/80 |
| 732 | 13450 | FIELDBURY LN | TALBERT AVE | TALEGATE DR | E | AC | 5 | 162 | 48 | 7,392 | 5/29/24 | 50 | 93 | 7 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 732 | 13462 | FIELDBURY LN | GLENFOX DR | TALBERT AVE | E | AAC | 5 | 499 | 36 | 17,964 | 5/29/24 | 57 | 58 | 40 | 2 | Overlay - AC Structural | 10/1/12 |
| 732 | 15202 | FIELDBURY LN | TALEGATE DR | NORBROOK DR | E | AC | 5 | 875 | 36 | 31,212 | 5/29/24 | 43 | 90 | 10 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 733 | 13749 | FIELDSTON LN | TYNDALL DR | SHELLY DR | E | AC | 1 | 274 | 36 | 11,364 | 4/27/26 | 81 | 13 | 83 | 4 | New Construction | 1/1/80 |
| 734 | 12996 | FIFTEENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/22/21 | 88 | 0 | 94 | 6 | Surface Treatment - Slurry Seal | 7/27/22 |
| 734 | 12997 | FIFTEENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 365 | 46 | 16,790 | 6/22/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 734 | 12998 | FIFTEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 365 | 46 | 16,790 | 6/22/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 734 | 12999 | FIFTEENTH ST | PCH | WALNUT AVE | E | AC | 6 | 355 | 50 | 18,630 | 6/22/21 | 89 | 0 | 37 | 63 | Surface Treatment - Slurry Seal | 7/27/22 |
| 734 | 13000 | FIFTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 380 | 46 | 17,480 | 6/22/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 734 | 13091 | FIFTEENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 375 | 46 | 17,250 | 6/22/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 735 | 12947 | FIFTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 370 | 56 | 18,815 | 6/22/21 | 89 | 18 | 65 | 17 | New Construction | 1/1/80 |
| 735 | 13068 | FIFTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 375 | 54 | 19,015 | 6/22/21 | 88 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 735 | 16028 | FIFTH ST | PCH | WALNUT AVE | E | PCC | 6 | 365 | 34 | 9,835 | 6/22/21 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 736 | 13208 | FIGARO CIR | EDGEWATER LN | CDS | E | AAC | 2 | 350 | 36 | 14,100 | 5/10/24 | 86 | 55 | 45 | 0 | Overlay - AC Fabric | 12/1/17 |
| 737 | 14017 | FIJI LN | KAMUELA DR | CHRISTMAS SR | E | AAC | 8 | 1,019 | 36 | 36,684 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 738 | 13060 | FINDLEY CIR | GOLDENWEST ST | CDS | E | AC | 5 | 410 | 36 | 16,965 | 7/8/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 739 | 15072 | FINISTERRE DR | BOLERO LN | BARUNA LN | E | AC | 2 | 470 | 36 | 16,920 | 4/7/22 | 89 | 0 | 100 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 740 | 15261 | FIR DR | EMERALD LN | OAK LN | E | AC | 4 | 318 | 36 | 11,448 | 5/30/24 | 76 | 57 | 43 | 0 | New Construction | 1/1/80 |
| 741 | 14343 | FIREBRAND LN | ATLANTA AVE | ORIENT DR | E | AC | 8 | 173 | 36 | 6,228 | 4/1/24 | 71 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 742 | 15510 | FIRESIDE DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 954 | 36 | 35,844 | 5/7/24 | 63 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 653 | 12859 | FIRST ST | PCH | END | E | AC | 6 | 100 | 65 | 7,145 | 7/8/21 | 96 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 744 | 15624 | FISHER DR | SAYBROOK LN | DAVIS CUP | E | AAC | 2 | 322 | 36 | 11,592 | 5/10/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 745 | 15954 | FIVE HARBORS DR | CDS | CDS | E | AAC | 9 | 1,056 | 32 | 36,792 | 5/6/24 | 81 | 38 | 62 | 0 | Overlay - AC Structural | 5/11/18 |
| 747 | 15913 | FLAGSTAFF LN | MODALE DR | CDS | E | AAC | 7 | 1,269 | 36 | 48,717 | 4/6/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 748 | 15961 | FLAGSTONE LN | DEEPVIEW DR | CLARKDALE DR | E | AC | 7 | 1,041 | 36 | 37,476 | 8/21/23 | 57 | 68 | 30 | 2 | Surface Treatment - Slurry Seal | 3/1/11 |
| 749 | 13811 | FLAMINGO CIR | BLUEBIRD LN | END | E | AC | 1 | 530 | 36 | 20,330 | 3/21/22 | 54 | 92 | 8 | 0 | New Construction | 1/1/80 |
| 750 | 14128 | FLAX CIR | MASTERS DR | CDS | E | AAC | 7 | 105 | 26 | 2,730 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 752 | 15963 | FLAXMAN DR | WEEMS LN | EDGEWOOD LN | E | AAC | 7 | 771 | 36 | 27,756 | 8/21/23 | 90 | 0 | 92 | 8 | Overlay - AC Structural | 3/1/11 |
| 753 | 14335 | FLEET LN | TIDEWATER CIR | PIER DR | E | AAC | 9 | 622 | 36 | 23,142 | 3/20/24 | 63 | 76 | 24 | 0 | Overlay - AC Structural | 5/11/18 |
| 753 | 15552 | FLEET LN | TIDEWATER CIR | CDS | E | AC | 9 | 349 | 36 | 12,564 | 3/20/24 | 60 | 70 | 17 | 13 | Surface Treatment - Slurry Seal | 5/11/18 |
| 754 | 16001 | FLINT DR | BALLANTINE LN | EDWARDS ST | E | AC | 3 | 1,201 | 36 | 43,236 | 5/7/26 | 36 | 79 | 19 | 2 | New Construction | 1/1/80 |
| 755 | 13799 | FLINTRIDGE LN | CUMBERLAND DR | HALIFAX DR | E | AC | 1 | 521 | 36 | 19,256 | 4/8/26 | 92 | 0 | 94 | 6 | New Construction | 1/1/80 |
| 756 | 13397 | FLINTSTONE LN | FENLEY DR | AMADA DR | E | AC | 5 | 780 | 36 | 28,080 | 5/21/24 | 56 | 81 | 13 | 6 | New Construction | 1/1/80 |
| 756 | 15175 | FLINTSTONE LN | AMADA DR | VATCHER DR | E | AC | 5 | 866 | 36 | 31,926 | 5/28/24 | 56 | 83 | 17 | 0 | New Construction | 1/1/80 |
| 757 | 13790 | FLORENCE CIR | MELBOURNE DR | END | E | AC | 1 | 410 | 36 | 16,560 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 758 | 14673 | FLORIDA ST | INDIANAPOLIS AVE | JOILET AVE | E | AAC | 6 | 330 | 37 | 12,210 | 8/15/23 | 84 | 0 | 64 | 36 | Overlay - AC Structural | 3/1/11 |
| 758 | 14674 | FLORIDA ST | JOILET AVE | KNOXVILLE AVE | E | AAC | 6 | 330 | 37 | 11,988 | 8/15/23 | 90 | 0 | 69 | 31 | Overlay - AC Structural | 3/1/11 |
| 758 | 14742 | FLORIDA ST | YORKTOWN AVE | WILLIAMS AVE | E | AC | 7 | 660 | 36 | 23,760 | 4/9/24 | 68 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 758 | 14756 | FLORIDA ST | MAIN ST | PROFESSIONAL CIR | E | AC | 4 | 221 | 36 | 7,956 | 5/9/24 | 75 | 56 | 16 | 28 | Surface Treatment - Slurry Seal | 11/28/19 |
| 758 | 15004 | FLORIDA ST | SHAFFER CIR | GARFIELD AVE | E | AC | 4 | 478 | 36 | 17,208 | 4/8/24 | 75 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 758 | 15005 | FLORIDA ST | PROFESSIONAL CIR | SHAFFER CIR | E | AC | 4 | 1,365 | 36 | 49,140 | 4/8/24 | 80 | 53 | 26 | 21 | Surface Treatment - Slurry Seal | 11/21/19 |
| 758 | 15671 | FLORIDA ST | GENEVA AVE | INDIANAPOLIS AVE | E | AC | 9 | 292 | 36 | 10,512 | 8/15/23 | 78 | 35 | 33 | 32 | New Construction | 1/1/80 |
| 758 | 15683 | FLORIDA ST | KNOXVILLE AVE | MEMPHIS AVE | E | AC | 6 | 661 | 36 | 23,796 | 8/15/23 | 58 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 758 | 15694 | FLORIDA ST | ADAMS AVE | UTICA AVE | E | AAC | 6 | 1,260 | 36 | 45,360 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 758 | 15695 | FLORIDA ST | UTICA AVE | YORKTOWN AVE | E | AAC | 6 | 1,260 | 36 | 45,360 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 758 | 15710 | FLORIDA ST | GARFIELD AVE | CLAY AVE | E | AC | 7 | 1,320 | 40 | 52,800 | 4/9/24 | 83 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 758 | 15711 | FLORIDA ST | WILLIAMS AVE | CLAY AVE | E | AC | 7 | 660 | 36 | 23,760 | 4/9/24 | 82 | 44 | 56 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 759 | 13989 | FLOUNDER DR | SALMON LN | END | E | AAC | 8 | 130 | 36 | 4,680 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 759 | 15388 | FLOUNDER DR | BUSHARD ST | SALMON LN | E | AAC | 8 | 1,189 | 36 | 42,804 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 760 | 15818 | FLOWER LN | SUNBREEZE DR | SLATER AVE | E | AAC | 3 | 314 | 36 | 12,054 | 5/20/24 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 761 | 14519 | FOLKSTONE CIR | HARWICH LN | CDS | E | AAC | 9 | 139 | 32 | 4,448 | 4/22/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 762 | 15791 | FORBES LN | APEL LN | NORDINA DR | E | AC | 5 | 1,190 | 36 | 43,090 | 5/8/26 | 51 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 763 | 15987 | FORD DR | GOLDENWEST ST | END | E | AC | 3 | 966 | 36 | 34,776 | 5/13/24 | 82 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 764 | 14409 | FORD LN | WHETMORE LN | GOLDENWEST ST | E | AC | 3 | 177 | 36 | 5,784 | 5/28/24 | 80 | 16 | 84 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 765 | 15283 | FORELLE DR | GOODWIN LN | SPRINGTIME LN | E | AAC | 4 | 570 | 37 | 20,490 | 4/13/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 765 | 15284 | FORELLE DR | PATTERSON LN | GOODWIN LN | E | AAC | 4 | 612 | 37 | 22,348 | 4/13/26 | 91 | 26 | 74 | 0 | Overlay - AC Structural | 11/28/19 |
| 766 | 15728 | FOREST LN | DARSY DR | NEWMAN AVE | E | AC | 4 | 530 | 36 | 19,830 | 5/13/24 | 67 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 767 | 14086 | FORRESTAL DR | BROOKHURST ST | TRENTON LN | E | AC | 8 | 884 | 36 | 32,824 | 2/25/22 | 87 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 768 | 13438 | FOSS LN | MIDWAY DR | CDS | E | AC | 5 | 127 | 36 | 4,572 | 3/31/26 | 77 | 42 | 58 | 0 | New Construction | 1/1/80 |
| 768 | 15194 | FOSS LN | KENBROOK DR | MIDWAY DR | E | AC | 5 | 552 | 36 | 19,872 | 3/31/26 | 77 | 55 | 37 | 8 | New Construction | 1/1/80 |
| 769 | 15134 | FOUNTAIN LN | HEIL AVE | DALE VISTA LN | E | AC | 3 | 1,117 | 36 | 40,212 | 3/18/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 770 | 12993 | FOURTEENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 770 | 12994 | FOURTEENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/22/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 770 | 12995 | FOURTEENTH ST | CREST AVE | LOMA AVE | E | AC | 6 | 845 | 45 | 41,745 | 6/30/21 | 71 | 46 | 30 | 24 | Surface Treatment - Slurry Seal | 7/27/22 |
| 770 | 13089 | FOURTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/22/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 770 | 13090 | FOURTEENTH ST | PALM AVE | CREST AVE | E | AC | 6 | 556 | 45 | 25,020 | 6/30/21 | 84 | 48 | 44 | 8 | Surface Treatment - Slurry Seal | 7/27/22 |
| 770 | 13115 | FOURTEENTH ST | PCH | OLIVE AVE | E | AC | 6 | 775 | 46 | 36,095 | 6/22/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 770 | 16026 | FOURTEENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/22/21 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 771 | 14773 | FOX CIR | STEEP LN | CDS | E | AAC | 4 | 126 | 18 | 2,518 | 4/14/26 | 72 | 55 | 45 | 0 | Overlay - AC Structural | 11/28/19 |
| 772 | 15983 | FOXSHIELD DR | BLUEGATE LN | HALLCROFT LN | E | AC | 5 | 759 | 36 | 27,324 | 5/21/24 | 70 | 69 | 27 | 4 | New Construction | 1/1/80 |
| 773 | 13949 | FRANCISCAN CIR | HOMESTEAD LN | CDS | E | AAC | 7 | 279 | 36 | 11,294 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 774 | 14630 | FRANKFORT AVE | HILL ST | CDS | E | AC | 9 | 666 | 28 | 21,076 | 8/24/23 | 70 | 13 | 53 | 34 | New Construction | 1/1/80 |
| 774 | 15668 | FRANKFORT AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 38 | 18,430 | 8/24/23 | 76 | 0 | 61 | 39 | New Construction | 1/1/80 |
| 774 | 15669 | FRANKFORT AVE | DELAWARE ST | HILL ST | E | AC | 9 | 943 | 32 | 30,176 | 8/24/23 | 73 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 774 | 15866 | FRANKFORT AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 40 | 13,200 | 8/24/23 | 76 | 0 | 77 | 23 | New Construction | 1/1/80 |
| 774 | 15879 | FRANKFORT AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 36 | 11,880 | 8/17/23 | 70 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 774 | 50410 | FRANKFORT AVE | LAKE ST | ALABAMA ST | E | AC | 9 | 390 | 50 | 19,500 | 8/24/23 | 54 | 64 | 35 | 1 | New Construction - Initial | 1/1/80 |
| 775 | 14772 | FRANKLIN DR | DELAWARE ST | CDS | E | AAC | 4 | 507 | 36 | 18,502 | 4/14/26 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 776 | 13313 | FRANMAR CIR | GREENVIEW LN | END | E | AC | 3 | 410 | 36 | 16,260 | 4/2/26 | 73 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 777 | 14909 | FRANS LN | GLENSTONE DR | CDS | E | AC | 5 | 193 | 36 | 8,198 | 4/2/26 | 81 | 100 | 0 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 777 | 15792 | FRANS LN | APEL LN | GLENSTONE DR | E | AC | 5 | 383 | 36 | 14,038 | 4/2/26 | 71 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 778 | 14886 | FRASER LN | SUMMERDALE DR | JUNE DR | E | AAC | 5 | 239 | 36 | 9,508 | 5/30/24 | 75 | 8 | 92 | 0 | Overlay - AC Structural | 10/1/12 |
| 779 | 14082 | FREDERICK CIR | EDUCATION LN | CDS | E | AAC | 8 | 472 | 36 | 18,792 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 780 | 14894 | FREEBORN DR | LIDO LN | ERWIN LN | E | AAC | 5 | 405 | 36 | 15,720 | 5/22/24 | 76 | 0 | 97 | 3 | Overlay - AC Structural | 10/1/12 |
| 780 | 15784 | FREEBORN DR | ERWIN LN | EDWARDS ST | E | AAC | 5 | 785 | 36 | 28,590 | 5/22/24 | 79 | 0 | 94 | 6 | Overlay - AC Structural | 10/1/12 |
| 781 | 13465 | FRESHWATER CIR | INLET DR | END | E | AC | 5 | 478 | 36 | 18,708 | 5/29/24 | 74 | 24 | 65 | 11 | Surface Treatment - Slurry Seal | 10/1/12 |
| 782 | 15519 | FRIARSCOURT DR | GLENCAIRN LN | HUNTER LN | E | AC | 8 | 506 | 36 | 18,216 | 3/19/24 | 86 | 15 | 66 | 19 | Surface Treatment - Slurry Seal | 5/11/18 |
| 783 | 14812 | FRIESLAND DR | ROTTERDAM LN | ZEIDER LN | E | AAC | 4 | 898 | 36 | 32,328 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 783 | 14813 | FRIESLAND DR | MARKEN LN | ROTTERDAM LN | E | AAC | 4 | 660 | 36 | 24,010 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 783 | 15735 | FRIESLAND DR | ZEIDER LN | NEWLAND ST | E | AAC | 4 | 291 | 36 | 10,476 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 784 | 14901 | FRIML LN | ROGERS DR | KERN DR | E | AC | 5 | 1,120 | 36 | 40,320 | 4/1/26 | 81 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 785 | 14412 | FRITCH DR | SPRINGDALE ST | STILL HARBOR LN | E | AC | 5 | 180 | 36 | 6,480 | 5/28/24 | 27 | 84 | 10 | 6 | New Construction | 1/1/80 |
| 786 | 13667 | FRONTIER CIR | CALNEVA LN | END | E | AAC | 1 | 530 | 36 | 19,080 | 5/8/24 | 68 | 48 | 52 | 0 | Overlay - AC Fabric | 10/1/16 |
| 787 | 14333 | FRY CIR | KNOLL LN | END | E | AC | 9 | 168 | 32 | 6,876 | 8/30/23 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 788 | 14945 | GAINSFORD LN | BECK CIR | BANKTON DR | E | AC | 5 | 305 | 36 | 10,692 | 3/31/26 | 76 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 788 | 15804 | GAINSFORD LN | FANWOOD DR | BECK CIR | E | AC | 5 | 794 | 36 | 29,334 | 5/8/26 | 64 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 790 | 14366 | GALBAR CIR | DANA DR | END | E | AAC | 8 | 331 | 36 | 13,916 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 791 | 14417 | GALICIA LN | JARDINES DR | VILLA NUEVA DR | E | AC | 5 | 205 | 36 | 7,380 | 5/20/24 | 71 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 792 | 15174 | GALIPEAN DR | COLLIE LN | PRESCOTT LN | E | AC | 5 | 633 | 36 | 22,788 | 5/20/24 | 70 | 80 | 19 | 1 | New Construction | 1/1/80 |
| 793 | 14142 | GALLANT DR | ASTOR LN | SWANSEA LN | E | AAC | 7 | 255 | 36 | 9,180 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 793 | 15465 | GALLANT DR | TRANQUIL LN | ASTOR LN | E | AAC | 7 | 741 | 36 | 27,426 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 795 | 13710 | GALWAY CIR | ANDAMAN LN | END | E | AC | 1 | 530 | 36 | 20,330 | 3/21/22 | 66 | 91 | 7 | 2 | New Construction | 1/1/80 |
| 796 | 15221 | GANGES LN | ALLEY GANGES LN | ALLEY GANGES LN | E | AC | 4 | 348 | 36 | 13,528 | 3/18/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 797 | 15359 | GARDEN CIR | SURFDALE CIR | CDS | E | AC | 5 | 343 | 36 | 14,348 | 5/6/24 | 87 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 703 | 13950 | GARFIELD AVE | LINDSAY LN | END | E | AAC | 7 | 423 | 26 | 10,998 | 3/5/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/15/21 |
| 703 | 14601 | GARFIELD AVE | SEAPOINT AVE | END | E | AC | 5 | 788 | 26 | 20,488 | 3/28/22 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 15377 | GARFIELD AVE | PLUM TREE LN | END | E | AC | 7 | 678 | 26 | 17,628 | 3/5/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/14/21 |
| 798 | 15588 | GARRETT CIR | CLANCY LN | CDS | E | AC | 8 | 990 | 36 | 37,990 | 3/7/22 | 52 | 94 | 4 | 2 | Surface Treatment - Slurry Seal | 2/8/23 |
| 799 | 13877 | GAS LIGHT DR | OAKSHIRE LN | DAWSON LN | E | AC | 3 | 640 | 36 | 23,790 | 12/19/24 | 94 | 0 | 86 | 14 | New Construction | 1/1/80 |
| 800 | 14771 | GASPE CIR | APPLEBY DR | CDS | E | AAC | 4 | 458 | 36 | 17,988 | 4/14/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 801 | 13894 | GATE HILL CIR | EVENING HILL DR | CDS | E | AAC | 5 | 313 | 36 | 14,518 | 4/30/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 802 | 14517 | GATESHEAD DR | HARWICH LN | CDS | E | AC | 9 | 130 | 36 | 6,480 | 4/17/24 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 802 | 15612 | GATESHEAD DR | HARWICH LN | BUSHARD ST | E | AAC | 9 | 721 | 36 | 25,956 | 4/22/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 803 | 13301 | GELDING CIR | ROOSEVELT LN | CDS | E | AC | 2 | 275 | 36 | 11,150 | 4/2/26 | 76 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 804 | 14054 | GEMFALL LN | DOLPHIN DR | DOREMERE DR | E | AAC | 7 | 258 | 36 | 9,288 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 805 | 13508 | GEMINI LN | MARS DR | SATURN DR | E | AC | 3 | 575 | 40 | 24,500 | 4/7/22 | 89 | 0 | 63 | 37 | Surface Treatment - Slurry Seal | 7/29/20 |
| 806 | 14631 | GENEVA AVE | DELAWARE ST | ALLEY DELAWARE ST | E | AC | 9 | 170 | 37 | 6,290 | 8/15/23 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 806 | 14632 | GENEVA AVE | FLORIDA ST | INDIANAPOLIS AVE | E | AC | 9 | 378 | 37 | 13,986 | 8/15/23 | 57 | 63 | 28 | 9 | New Construction | 1/1/80 |
| 806 | 14633 | GENEVA AVE | ALLEY DELAWARE ST | ALLEY HARTFORD AVE | E | AC | 9 | 368 | 37 | 13,616 | 8/15/23 | 80 | 34 | 24 | 42 | New Construction | 1/1/80 |
| 806 | 15670 | GENEVA AVE | ALLEY HARTFORD AVE | FLORIDA ST | E | AC | 9 | 280 | 37 | 10,360 | 8/15/23 | 67 | 54 | 19 | 27 | New Construction | 1/1/80 |
| 806 | 15865 | GENEVA AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 40 | 13,200 | 8/15/23 | 75 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 806 | 15872 | GENEVA AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/15/23 | 85 | 25 | 75 | 0 | New Construction | 1/1/80 |
| 806 | 15878 | GENEVA AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 39 | 12,870 | 8/15/23 | 80 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 807 | 13779 | GENOA CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 4/8/26 | 81 | 0 | 54 | 46 | New Construction | 1/1/80 |
| 808 | 13596 | GENTRY LN | MYRTLE DR | SHAYNE DR | E | AC | 3 | 1,016 | 36 | 37,076 | 4/6/26 | 82 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 809 | 14784 | GEORGETOWN LN | WOODWIND DR | WINDFIELD DR | E | AC | 4 | 765 | 40 | 30,600 | 5/13/24 | 76 | 24 | 76 | 0 | Surface Treatment - Slurry Seal | 11/1/19 |
| 810 | 14675 | GEORGIA ST | INDIANAPOLIS AVE | JOILET AVE | E | AC | 6 | 331 | 37 | 11,840 | 8/15/23 | 72 | 45 | 38 | 17 | New Construction | 1/1/80 |
| 810 | 14676 | GEORGIA ST | JOILET AVE | KNOXVILLE AVE | E | AC | 6 | 330 | 37 | 11,988 | 8/15/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 811 | 14802 | GERALDINE LN | SLATER AVE | ROSANNA DR | E | AAC | 4 | 511 | 36 | 19,146 | 4/13/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 812 | 14879 | GERSHWIN DR | GRAHAM ST | BERLIN LN | E | AC | 5 | 167 | 36 | 6,012 | 4/1/26 | 65 | 87 | 13 | 0 | New Construction | 1/1/80 |
| 813 | 14444 | GETTYSBURG DR | MAGNOLIA ST FRONTAGE | LOTUS LN | E | AC | 7 | 1,036 | 36 | 37,296 | 4/20/26 | 86 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 814 | 15789 | GHENT DR | BREDA LN | WILD ROSE LN | E | AC | 5 | 513 | 36 | 18,718 | 4/2/26 | 83 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 815 | 13271 | GIARC LN | WALTON DR | DORIANE CIR | E | AC | 3 | 168 | 36 | 6,798 | 12/18/24 | 87 | 0 | 76 | 24 | New Construction | 1/1/80 |
| 815 | 15104 | GIARC LN | DORIANE CIR | LENNOX DR | E | AC | 3 | 546 | 36 | 19,656 | 12/18/24 | 77 | 32 | 68 | 0 | New Construction | 1/1/80 |
| 816 | 13376 | GIBSON CIR | MANHATTAN DR | END | E | AAC | 3 | 438 | 36 | 17,268 | 5/28/24 | 81 | 0 | 81 | 19 | Overlay - AC Structural | 10/1/12 |
| 817 | 15063 | GILBERT DR | CHANNEL LN | SOMERSET LN | E | AC | 2 | 1,332 | 36 | 48,452 | 4/9/22 | 87 | 52 | 38 | 10 | New Construction | 1/1/80 |
| 818 | 13315 | GILDRED CIR | GREENVIEW LN | END | E | AC | 3 | 410 | 36 | 16,560 | 4/2/26 | 70 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 819 | 13936 | GILFORD CIR | NEWHAVEN LN | CDS | E | AC | 7 | 408 | 36 | 17,768 | 4/2/24 | 83 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 820 | 14178 | GLACIER CIR | ROCKY MOUNTAIN DR | CDS | E | AAC | 8 | 364 | 36 | 14,604 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 821 | 13643 | GLADYS AVE | WHARTON ST | HARTLUND ST | E | AAC | 4 | 387 | 33 | 13,371 | 4/14/26 | 91 | 38 | 62 | 0 | Overlay - AC Structural | 11/28/19 |
| 822 | 13539 | GLASGOW CIR | BRESSEL LN | CDS | E | AAC | 4 | 420 | 32 | 14,690 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 823 | 13650 | GLEADA ST | STERLING AVE | KINER AVE | E | AC | 4 | 397 | 33 | 13,601 | 4/8/24 | 91 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 824 | 13866 | GLEN DR | TULLOW LN | END | E | AC | 3 | 315 | 32 | 11,580 | 4/7/26 | 97 | 0 | 100 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 824 | 13870 | GLEN DR | WICKLOW LN | TULLOW LN | E | AC | 3 | 258 | 36 | 9,000 | 1/6/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 824 | 15344 | GLEN DR | DAWSON LN | WICKLOW LN | E | AC | 3 | 1,287 | 36 | 46,044 | 12/12/24 | 95 | 0 | 93 | 7 | New Construction | 1/1/80 |
| 826 | 14295 | GLENCAIRN LN | FRIARSCOURT DR. | SCOTTOUN DR | E | AC | 8 | 1,033 | 36 | 37,188 | 3/19/24 | 75 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 827 | 13496 | GLENCOE AVE | SILVER LN | BEACH BLVD | E | AC | 4 | 1,320 | 36 | 47,520 | 3/18/22 | 84 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 828 | 13461 | GLENFOX DR | HEATHPOINT LN | WELLBROOK CIR | E | AAC | 5 | 269 | 36 | 10,434 | 5/23/24 | 56 | 47 | 53 | 0 | Overlay - AC Structural | 10/1/12 |
| 828 | 15208 | GLENFOX DR | WELLBROOK CIR | LAKEPOINT LN | E | AAC | 5 | 755 | 36 | 26,892 | 5/23/24 | 69 | 47 | 47 | 6 | Overlay - AC Structural | 10/1/12 |
| 829 | 14837 | GLENHAVEN LN | TERRY DR | ARNETT DR | E | AC | 4 | 465 | 36 | 16,990 | 4/6/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 830 | 14880 | GLENROY DR | GREENLEAF LN | NEWQUIST LN | E | AC | 2 | 321 | 36 | 12,696 | 4/1/26 | 79 | 19 | 78 | 3 | New Construction | 1/1/80 |
| 830 | 15778 | GLENROY DR | NEWQUIST LN | ST ANDREWS LN | E | AC | 2 | 778 | 36 | 28,008 | 4/1/26 | 90 | 17 | 83 | 0 | New Construction | 1/1/80 |
| 831 | 14908 | GLENSTONE DR | HILLGATE LN | GRAHAM ST | E | AC | 2 | 166 | 36 | 5,976 | 4/1/26 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 831 | 15793 | GLENSTONE DR | GRAHAM ST | FRANS LN | E | AC | 5 | 423 | 36 | 15,228 | 5/8/26 | 56 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 831 | 15794 | GLENSTONE DR | HILLGATE LN | CDS | E | AC | 2 | 786 | 36 | 29,646 | 4/1/26 | 70 | 42 | 58 | 0 | New Construction | 1/1/80 |
| 832 | 13679 | GLENWOOD DR | SHINKLE CIR | CHALET LN | E | AAC | 1 | 258 | 36 | 10,788 | 5/7/24 | 80 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 832 | 15294 | GLENWOOD DR | SPRINGDALE ST | SHINKLE CIR | E | AAC | 1 | 899 | 36 | 32,364 | 5/7/24 | 72 | 45 | 54 | 1 | Overlay - AC Fabric | 10/1/16 |
| 833 | 15129 | GLORIA DR | TRUDY LN | TORJIAN LN | E | AC | 3 | 1,140 | 36 | 41,040 | 5/7/26 | 74 | 62 | 36 | 2 | New Construction | 1/1/80 |
| 834 | 15833 | GLOUCESTER LN | CAPE COD DR | END | E | AAC | 7 | 1,414 | 36 | 50,904 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 835 | 13268 | GOLD CIR | FLINT DR | CDS | E | AC | 3 | 168 | 32 | 6,626 | 4/7/26 | 55 | 82 | 18 | 0 | New Construction | 1/1/80 |
| 836 | 13178 | GOLDEN GATE LN | MEADOWLARK DR | CALIENTE DR | E | AAC | 2 | 863 | 36 | 31,068 | 5/21/24 | 90 | 0 | 95 | 5 | Overlay - AC Fabric | 10/1/16 |
| 837 | 15156 | GOLDEN VIEW LN | ROCK DR | FENWICK DR | E | AC | 3 | 726 | 36 | 27,636 | 5/22/24 | 69 | 30 | 70 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 838 | 13656 | GOODWIN LN | FORELLE DR | ELLIS AVE | E | AC | 4 | 660 | 36 | 23,184 | 4/8/24 | 92 | 27 | 68 | 5 | Surface Treatment - Slurry Seal | 11/28/19 |
| 839 | 14230 | GOSHAWK LN | REILLY DR | KINGFISHER DR | E | AC | 9 | 985 | 36 | 35,460 | 8/24/23 | 68 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 841 | 14139 | GOTHIC CIR | BELLSHIRE DR | CDS | E | AAC | 7 | 456 | 32 | 16,092 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 842 | 13259 | GOVIN CIR | NORMANDY LN | CDS | E | AC | 3 | 238 | 32 | 8,866 | 4/6/26 | 74 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 843 | 14025 | GRACE CIR | DITMAR LN | END | E | AAC | 7 | 345 | 32 | 11,040 | 8/17/23 | 89 | 20 | 80 | 0 | Overlay - AC Structural | 3/1/11 |
| 844 | 13305 | GRAHAM PL | HEIL AVE | CDS | E | AC | 2 | 550 | 36 | 21,050 | 4/2/26 | 55 | 83 | 14 | 3 | New Construction | 1/1/80 |
| 751 | 14462 | GRAHAM ST | RANCHO RD | HAROLD PL | E | AAC | 1 | 394 | 18 | 9,092 | 5/8/24 | 76 | 36 | 37 | 27 | Overlay - AC Structural | 10/1/16 |
| 751 | 223 | GRAHAM ST | SLATER AVE | END | E | AC | 0 | 1,638 | 30 | 49,140 | 3/31/26 | 88 | 71 | 29 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 665 | GRAHAM ST | SLATER AVE | END | E | AC | 0 | 1,638 | 30 | 49,140 | 3/31/26 | 85 | 67 | 33 | 0 | New Construction - Initial | 1/1/80 |
| 845 | 15745 | GRANADA LN | BLAYLOCK DR | VALENCIA DR | E | AAC | 4 | 530 | 36 | 19,330 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 846 | 15902 | GRAND DR | WATERBURY LN | CDS | E | AC | 8 | 1,026 | 36 | 38,736 | 4/15/26 | 81 | 80 | 20 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 847 | 15915 | GRANT DR | WEYMOUTH LN | HARDING LN | E | AC | 7 | 942 | 37 | 34,854 | 4/2/24 | 79 | 55 | 45 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 848 | 13559 | GRASS CIR | SUNBREEZE DR | END | E | AAC | 3 | 223 | 36 | 10,278 | 5/20/24 | 91 | 0 | 93 | 7 | Overlay - AC Structural | 10/1/12 |
| 849 | 15485 | GRAYSTONE LN | VERDANT DR | END | E | AC | 8 | 554 | 34 | 20,636 | 2/23/22 | 87 | 17 | 44 | 39 | Surface Treatment - Slurry Seal | 2/13/23 |
| 850 | 13298 | GRAZ CIR | STALLION CIR | CDS | E | AC | 2 | 291 | 36 | 11,726 | 4/2/26 | 71 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 851 | 13907 | GRAZIADIO DR | BEACH BLVD | LIBRA CIR | E | AAC | 7 | 512 | 36 | 17,412 | 4/14/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 852 | 14962 | GREEN ST | PEARCE ST | BARRACUDA LN | E | AC | 2 | 437 | 36 | 15,732 | 3/22/22 | 91 | 0 | 95 | 5 | New Construction | 1/1/80 |
| 852 | 14983 | GREEN ST | HEIL AVE | RUDDER DR | E | AAC | 2 | 589 | 36 | 21,204 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 852 | 15019 | GREEN ST | WARNER AVE | KING CIR | E | AAC | 2 | 505 | 36 | 18,180 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 852 | 15116 | GREEN ST | BARRACUDA LN | WARNER AVE | E | AC | 2 | 884 | 36 | 31,824 | 3/22/22 | 88 | 37 | 50 | 13 | New Construction | 1/1/80 |
| 852 | 15780 | GREEN ST | KING CIR | LOS PATOS AVE | E | AAC | 2 | 821 | 36 | 29,556 | 5/21/24 | 93 | 0 | 86 | 14 | Overlay - AC Fabric | 12/1/17 |
| 852 | 15815 | GREEN ST | RUDDER DR | PEARCE ST | E | AAC | 2 | 747 | 36 | 26,892 | 5/21/24 | 94 | 0 | 81 | 19 | Overlay - AC Structural | 12/1/17 |
| 853 | 14315 | GREENBORO LN | MARTINIQUE DR | SABLE DR | E | AC | 9 | 1,022 | 36 | 36,792 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 855 | 15781 | GREENLEAF LN | GLENROY DR | END | E | AC | 2 | 452 | 36 | 17,184 | 4/1/26 | 74 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 856 | 14875 | GREENTREE LN | WARNER AVE | VINELAND DR | E | AC | 2 | 672 | 36 | 24,192 | 4/1/26 | 81 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 857 | 13318 | GREENVIEW LN | GILDRED CIR | TROPHY DR | E | AC | 3 | 418 | 36 | 15,048 | 4/2/26 | 67 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 857 | 15121 | GREENVIEW LN | LANGPORT CIR | TREETOP CIR | E | AC | 3 | 259 | 36 | 10,074 | 4/2/26 | 96 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 857 | 15122 | GREENVIEW LN | TREETOP CIR | DONLYN DR | E | AC | 3 | 525 | 36 | 18,900 | 4/2/26 | 77 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 857 | 15123 | GREENVIEW LN | DONLYN DR | GILDRED CIR | E | AC | 3 | 780 | 36 | 28,080 | 5/8/26 | 66 | 49 | 50 | 1 | New Construction | 1/1/80 |
| 858 | 14446 | GREENWICH DR | WATERBURY LN | BUSHARD ST | E | AC | 7 | 1,070 | 36 | 38,520 | 4/16/26 | 91 | 39 | 56 | 5 | Surface Treatment - Slurry Seal | 7/15/21 |
| 859 | 15365 | GREGORY LN | GARFIELD AVE | CDS | E | AC | 7 | 1,164 | 27 | 31,428 | 4/8/24 | 78 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 860 | 14789 | GRIFFIN LN | SLATER AVE | BURTON DR | E | AC | 4 | 448 | 40 | 17,920 | 5/8/24 | 81 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 11/1/19 |
| 861 | 14931 | GRIFFITH CIR | PRICE DR | END | E | AC | 5 | 385 | 36 | 15,660 | 3/30/26 | 68 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 862 | 14420 | GRIMSBY DR | TALBERT AVE | BELLFIELD LN | E | AC | 5 | 160 | 36 | 4,760 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 862 | 15166 | GRIMSBY DR | WHITFORD LN | TALBERT AVE | E | AC | 5 | 850 | 36 | 30,312 | 3/30/26 | 69 | 17 | 70 | 13 | New Construction | 1/1/80 |
| 863 | 14070 | GROTON DR | CHESAPEAKE LN | POTOMAC LN | E | AAC | 7 | 270 | 36 | 10,720 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 864 | 14872 | GROVE CIR | SUMMERDALE DR | END | E | AAC | 5 | 246 | 36 | 10,584 | 5/30/24 | 81 | 36 | 64 | 0 | Overlay - AC Structural | 10/1/12 |
| 865 | 14814 | GUILDERS DR | MARKEN LN | JEFFERSON LN | E | AC | 4 | 780 | 36 | 28,330 | 4/6/22 | 62 | 87 | 13 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 866 | 13638 | GULF LN | TALBERT AVE | ALLEY TALBERT AVE | E | AC | 4 | 159 | 36 | 5,724 | 5/13/24 | 76 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 866 | 15275 | GULF LN | ALLEY TALBERT AVE | CDS | E | AC | 4 | 534 | 36 | 19,224 | 5/13/24 | 75 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 867 | 14397 | GULSTRAND CIR | STARFIRE LN | CDS | E | AAC | 9 | 355 | 32 | 13,160 | 4/17/24 | 94 | 0 | 90 | 10 | Overlay - AC Structural | 5/11/18 |
| 868 | 13320 | GUMM DR | TRUDY LN | END | E | AC | 3 | 672 | 36 | 24,192 | 4/6/26 | 79 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 869 | 13622 | GURNEY LN | ATHENA DR | MARCELLENA DR | E | AC | 5 | 400 | 36 | 15,540 | 5/28/24 | 42 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 870 | 15471 | GUSS DR | HARBOR ISLE LN | CDS | E | AAC | 7 | 550 | 32 | 19,950 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 871 | 13662 | HACIENDA DR | DUNES LN | END | E | AAC | 1 | 290 | 36 | 11,690 | 5/8/24 | 67 | 43 | 57 | 0 | Overlay - AC Fabric | 10/1/16 |
| 871 | 14975 | HACIENDA DR | DUNES LN | SANDS DR | E | AAC | 1 | 1,230 | 36 | 44,280 | 5/8/24 | 80 | 41 | 57 | 2 | Overlay - AC Structural | 10/1/16 |
| 872 | 14352 | HAGERSTOWN CIR | CORNERBROOK DR | CDS | E | AC | 8 | 340 | 36 | 13,740 | 5/20/24 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 873 | 14824 | HAGUE LN | AMSTERDAM DR | EDAM CIR | E | AC | 4 | 245 | 36 | 8,820 | 3/31/22 | 57 | 83 | 17 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 873 | 15742 | HAGUE LN | EDAM CIR | VALENCIA DR | E | AC | 4 | 765 | 36 | 27,540 | 3/31/22 | 87 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 874 | 14377 | HAITI DR | BAHAMA LN | KANEHOE LN | E | AAC | 9 | 259 | 36 | 10,074 | 3/26/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 875 | 14012 | HALAWA DR | MAUNA LN | PITSCAIM LN | E | AC | 8 | 1,080 | 36 | 38,880 | 3/2/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 876 | 14268 | HALF LEAGUE DR | BEACHWOOD LN | SNUG HARBOR CIR | E | AC | 9 | 250 | 36 | 9,750 | 5/6/24 | 74 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 877 | 13773 | HALIFAX DR | EDWARDS ST | HANOVER LN | E | AC | 1 | 535 | 36 | 18,972 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 877 | 15323 | HALIFAX DR | VICTORIA LN | FLINTRIDGE LN | E | AC | 1 | 505 | 36 | 18,930 | 4/8/26 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 877 | 15929 | HALIFAX DR | HANOVER LN | VICTORIA LN | E | AC | 1 | 780 | 36 | 27,792 | 12/18/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 878 | 15178 | HALLCROFT LN | HAMSHIRE DR | VARSITY DR | E | AC | 5 | 532 | 36 | 19,152 | 5/21/24 | 53 | 86 | 13 | 1 | New Construction | 1/1/80 |
| 879 | 14414 | HALLPORT LN | VARSITY DR | NEWBURY DR | E | AAC | 5 | 155 | 36 | 5,292 | 5/23/24 | 67 | 0 | 74 | 26 | Overlay - AC Structural | 10/1/12 |
| 880 | 13928 | HAMDEN LN | HARDING LN | NEWHAVEN LN | E | AC | 7 | 256 | 36 | 8,928 | 4/2/24 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 880 | 15371 | HAMDEN LN | GARFIELD AVE | NEWHAVEN LN | E | AC | 7 | 1,434 | 36 | 51,624 | 4/2/24 | 85 | 0 | 87 | 13 | Surface Treatment - Slurry Seal | 11/28/19 |
| 881 | 15287 | HAMMON LN | HAROLD PL | SANDS DR | E | AC | 1 | 690 | 36 | 24,840 | 4/7/26 | 46 | 57 | 30 | 13 | New Construction | 1/1/80 |
| 881 | 15288 | HAMMON LN | SANDS DR | SPA DR | E | AC | 1 | 772 | 36 | 27,792 | 4/8/22 | 93 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 882 | 15982 | HAMSHIRE DR | SPRINGDALE ST | HALLCROFT LN | E | AC | 5 | 1,191 | 36 | 42,876 | 5/21/24 | 68 | 83 | 17 | 0 | New Construction | 1/1/80 |
| 883 | 14389 | HANAKAI LN | NEOLANI DR | MALAHINE DR | E | AAC | 9 | 752 | 36 | 27,822 | 5/20/24 | 78 | 42 | 47 | 11 | Overlay - AC Structural | 5/11/18 |
| 884 | 13777 | HANOVER LN | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 4/8/26 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 884 | 13781 | HANOVER LN | ALEXANDRIA DR | OXFORD DR | E | AC | 1 | 260 | 36 | 9,360 | 4/8/26 | 91 | 23 | 77 | 0 | New Construction | 1/1/80 |
| 884 | 13782 | HANOVER LN | OXFORD DR | PARIS CIR | E | AC | 1 | 260 | 36 | 9,360 | 4/8/26 | 88 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 884 | 13783 | HANOVER LN | HALIFAX DR | MELBOURNE DR | E | AC | 1 | 260 | 36 | 9,072 | 4/8/26 | 90 | 0 | 52 | 48 | New Construction | 1/1/80 |
| 884 | 13784 | HANOVER LN | MELBOURNE DR | MC FADDEN AVE | E | AC | 1 | 512 | 36 | 18,144 | 5/8/26 | 80 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 884 | 15317 | HANOVER LN | PARIS CIR | HALIFAX DR | E | AC | 1 | 780 | 36 | 27,792 | 5/8/26 | 76 | 10 | 81 | 9 | New Construction | 1/1/80 |
| 2301 | 60780 | HANSEN LN | PATCH DR | THOMPSON DR | E | AC | 8 | 531 | 36 | 19,116 | 3/2/22 | 95 | 0 | 100 | 0 | New Construction - AC | 1/1/15 |
| 885 | 14987 | HAPPY DR | JOLLY LN | JOYFUL LN | E | AC | 4 | 509 | 36 | 18,324 | 5/13/24 | 83 | 15 | 85 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 886 | 15830 | HARBOR BLUFFS CIR | CDS | CDS | E | AC | 2 | 514 | 36 | 20,794 | 4/1/26 | 77 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 888 | 14155 | HARBOR ISLE LN | BROWNING DR | STRATHCONA CIR | E | AC | 7 | 583 | 36 | 22,488 | 4/21/26 | 92 | 32 | 68 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 888 | 15470 | HARBOR ISLE LN | ADAMS AVE | GUSS DR | E | AC | 7 | 1,151 | 36 | 42,186 | 4/16/26 | 91 | 42 | 58 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 889 | 13892 | HARBOR KEY CIR | EVENING HILL DR | CDS | E | AAC | 5 | 195 | 32 | 8,240 | 4/30/26 | 89 | 0 | 33 | 67 | Overlay - AC Structural | 11/28/19 |
| 890 | 15605 | HARBORBREEZE LN | SHOEBREEZE DR | SUMMERWIND LN | E | AAC | 9 | 770 | 36 | 29,720 | 4/21/26 | 82 | 0 | 94 | 6 | Overlay - AC Structural | 5/11/19 |
| 891 | 14544 | HARBOUR LN | MORNING STAR DR | END | E | AC | 2 | 761 | 36 | 27,396 | 4/7/22 | 80 | 14 | 83 | 3 | New Construction | 1/1/80 |
| 892 | 14271 | HARCOURT CIR | BROOKSIDE LN | CDS | E | AAC | 9 | 252 | 32 | 9,864 | 5/20/24 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 893 | 13929 | HARDING LN | HAMDEN LN | GRANT DR | E | AAC | 7 | 314 | 37 | 11,618 | 4/14/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 893 | 15967 | HARDING LN | GRANT DR | YORKTOWN AVE | E | AAC | 7 | 1,076 | 37 | 39,812 | 4/14/26 | 89 | 20 | 70 | 10 | Overlay - AC Structural | 11/28/19 |
| 894 | 13682 | HARDWICK CIR | EDGEVIEW LN | END | E | AAC | 1 | 530 | 36 | 20,830 | 5/7/24 | 71 | 25 | 75 | 0 | Overlay - AC Structural | 10/1/16 |
| 895 | 13216 | HARKNESS CIR | TRUMBULL DR | CDS | E | AC | 2 | 529 | 36 | 20,544 | 4/7/22 | 84 | 43 | 55 | 2 | New Construction | 1/1/80 |
| 896 | 13693 | HARMONY CIR | SUNNYCREST LN | END | E | AAC | 1 | 352 | 32 | 13,064 | 5/7/24 | 79 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 897 | 14463 | HAROLD PL | SPA DR | GRAHAM ST | E | AAC | 1 | 563 | 36 | 20,268 | 5/8/24 | 89 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 897 | 14464 | HAROLD PL | GRAHAM ST | HAMMON LN | E | AC | 1 | 1,322 | 36 | 47,592 | 4/7/26 | 75 | 28 | 72 | 0 | New Construction | 1/1/80 |
| 898 | 14110 | HARPOON CIR | SEAPORT DR | END | E | AAC | 9 | 238 | 32 | 7,616 | 8/21/23 | 72 | 24 | 76 | 0 | Overlay - AC Structural | 3/1/11 |
| 899 | 50500 | HARRIET WIEDER REG | GARFIELD AVE | OVERLOOK DR | E | AC | 5 | 2,193 | 24 | 52,632 | 5/7/24 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 4/1/17 |
| 900 | 14780 | HARRIMAN ST | GOTHARD ST | CDS | E | AC | 4 | 331 | 36 | 11,916 | 5/9/24 | 89 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 4030 | 50200 | HART CIR | BRUSH DR | CDS | E | AAC | 4 | 425 | 35 | 16,120 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 902 | 13385 | HARTFIELD CIR | BERSHIRE DR | END | E | AC | 5 | 155 | 36 | 7,080 | 3/31/26 | 65 | 30 | 61 | 9 | New Construction | 1/1/80 |
| 903 | 14634 | HARTFORD AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 37 | 12,210 | 8/14/23 | 83 | 26 | 51 | 23 | New Construction | 1/1/80 |
| 903 | 14636 | HARTFORD AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 37 | 12,210 | 8/15/23 | 68 | 25 | 55 | 20 | New Construction | 1/1/80 |
| 903 | 15871 | HARTFORD AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/14/23 | 68 | 65 | 35 | 0 | New Construction | 1/1/80 |
| 903 | 15877 | HARTFORD AVE | DELAWARE ST | GENEVA AVE | E | AC | 9 | 626 | 37 | 23,162 | 8/15/23 | 91 | 0 | 69 | 31 | New Construction | 1/1/80 |
| 904 | 13637 | HARTLUND ST | TALBERT AVE | ALLEY TALBERT AVE | E | AAC | 4 | 175 | 34 | 5,814 | 4/13/26 | 89 | 23 | 77 | 0 | Overlay - AC Structural | 11/28/19 |
| 904 | 13642 | HARTLUND ST | LE CONTE DR | CDS | E | AC | 4 | 475 | 34 | 17,950 | 4/8/24 | 59 | 71 | 17 | 12 | Surface Treatment - Slurry Seal | 11/28/19 |
| 904 | 15274 | HARTLUND ST | ALLEY TALBERT AVE | MAGIC CIR | E | AAC | 4 | 437 | 34 | 14,858 | 4/13/26 | 86 | 30 | 70 | 0 | Overlay - AC Structural | 11/28/19 |
| 904 | 15276 | HARTLUND ST | MAGIC CIR | LE CONTE DR | E | AAC | 4 | 832 | 34 | 28,288 | 4/13/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 905 | 14073 | HARTSDALE CIR | INNSBRUCK DR | END | E | AC | 8 | 295 | 32 | 10,940 | 3/9/22 | 93 | 0 | 71 | 29 | Surface Treatment - Slurry Seal | 2/8/23 |
| 906 | 13758 | HARVARD CIR | COLUMBIA LN | END | E | AC | 1 | 543 | 36 | 21,048 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 907 | 15613 | HARWICH LN | GATESHEAD DR | WALLINGFORD LN | E | AAC | 9 | 816 | 36 | 30,126 | 4/22/26 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 908 | 13540 | HASTINGS CIR | ROSS LN | CDS | E | AAC | 4 | 244 | 32 | 9,058 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 909 | 15549 | HATTERAS DR | SEAFORTH LN | BRETON LN | E | AC | 9 | 533 | 36 | 19,938 | 8/30/23 | 57 | 63 | 32 | 5 | New Construction | 1/1/80 |
| 911 | 14078 | HAVENHURST LN | WOODLAWN DR | WARBURTON DR | E | AC | 8 | 293 | 36 | 10,548 | 3/9/22 | 91 | 0 | 80 | 20 | Surface Treatment - Slurry Seal | 2/8/23 |
| 912 | 13166 | HAWAII LN | KAUI LN | SCENARIO DR | E | AC | 2 | 695 | 36 | 25,520 | 3/24/22 | 84 | 69 | 21 | 10 | New Construction | 1/1/80 |
| 913 | 14121 | HAXTON CIR | VINTAGE LN | CDS | E | AAC | 7 | 435 | 32 | 15,420 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 914 | 13921 | HAYES CIR | HARDING LN | CDS | E | AAC | 7 | 520 | 37 | 22,860 | 4/14/26 | 94 | 0 | 89 | 11 | Overlay - AC Structural | 11/28/19 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 915 | 15893 | HAZELBROOK DR | RAMONA LN | BUSHARD ST | E | AC | 7 | 1,122 | 36 | 40,392 | 4/16/26 | 89 | 35 | 65 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 916 | 13970 | HEATHERTON CIR | RANDI LN | CDS | E | AAC | 8 | 400 | 32 | 14,600 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 917 | 13458 | HEATHPOINT LN | NEWBURY DR | GLENFOX DR | E | AC | 5 | 256 | 36 | 9,966 | 5/23/24 | 68 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 825 | 13482 | HEIL AVE | CDS | SABOT LN | E | AAC | 3 | 654 | 26 | 17,004 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 825 | 13483 | HEIL AVE | SABOT LN | CDS | E | AAC | 3 | 355 | 26 | 9,126 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 825 | 14539 | HEIL AVE | TRUDY LN | TORJIAN LN | E | AC | 3 | 1,140 | 36 | 41,040 | 4/6/26 | 90 | 0 | 0 | 100 | New Construction - Initial | 1/1/80 |
| 918 | 14042 | HELENA CIR | ANCHORAGE DR | END | E | AAC | 7 | 341 | 36 | 13,526 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 919 | 14944 | HELENBROOK LN | WINDCROFT DR | LARKMONT DR | E | AC | 5 | 464 | 36 | 16,704 | 3/31/26 | 89 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 920 | 14938 | HELMSIDE DR | AMBERTON LN | CRESTMOOR LN | E | AC | 5 | 292 | 36 | 11,512 | 3/30/26 | 77 | 35 | 44 | 21 | New Construction | 1/1/80 |
| 921 | 15028 | HENDRICKSEN DR | SCHYER LN | DAVIS LN | E | AAC | 2 | 1,025 | 36 | 38,400 | 5/21/24 | 84 | 48 | 52 | 0 | Overlay - AC Fabric | 10/1/16 |
| 922 | 15466 | HENTON DR | BRENTSTONE LN | CDS | E | AC | 7 | 547 | 32 | 17,504 | 4/21/26 | 77 | 46 | 54 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 923 | 15767 | HERBERT LN | ROGERS DR | RENOIR CIR | E | AC | 5 | 500 | 36 | 18,000 | 5/8/26 | 28 | 80 | 20 | 0 | New Construction | 1/1/80 |
| 924 | 14298 | HERCULES DR | BROOKHURST ST | SUBURBUA LN | E | AAC | 8 | 185 | 36 | 6,660 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 925 | 14843 | HERITAGE LN | TERYY DR | LANCASTER DR | E | AC | 4 | 465 | 36 | 16,990 | 4/6/22 | 85 | 50 | 45 | 5 | Surface Treatment - Slurry Seal | 7/29/20 |
| 926 | 14878 | HERMANSON CIR | LYNN ST | CDS | E | AAC | 2 | 407 | 36 | 16,152 | 5/21/24 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 927 | 13519 | HERMIT CIR | VANTAGE DR | CDS | E | AAC | 4 | 131 | 32 | 5,692 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 928 | 14235 | HERON CIR | SANDPIPER LN | END | E | AC | 9 | 360 | 36 | 12,960 | 8/24/23 | 85 | 51 | 46 | 3 | New Construction | 1/1/80 |
| 929 | 15705 | HESS CIR | UTICA AVE | END | E | AAC | 6 | 307 | 34 | 12,845 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 930 | 13971 | HICKORY LN | HYDE PARK DR | BRABHAM DR | E | AC | 8 | 1,286 | 36 | 47,296 | 4/15/26 | 74 | 77 | 21 | 2 | Surface Treatment - Slurry Seal | 7/15/21 |
| 930 | 14429 | HICKORY LN | BRABHAM DR | ANNIK DR | E | AC | 8 | 260 | 36 | 10,110 | 4/15/26 | 80 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 931 | 14858 | HIGGINS CIR | BRUSH DR | CDS | E | AAC | 4 | 424 | 32 | 14,818 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 932 | 15180 | HIGHLAND LN | BRAEMAR DR | VARSITY DR | E | AC | 5 | 280 | 36 | 10,080 | 5/20/24 | 100 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 933 | 14489 | HIGHTIDE DR | OCEANVIEW LN | SEACREST LN | E | AAC | 9 | 258 | 36 | 10,288 | 4/21/26 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 933 | 14491 | HIGHTIDE DR | SUMMER CIR | VACATION LN | E | AAC | 9 | 254 | 36 | 10,144 | 4/21/26 | 89 | 20 | 69 | 11 | Overlay - AC Structural | 5/11/19 |
| 933 | 15600 | HIGHTIDE DR | SEACREST LN | SUMMER CIR | E | AAC | 9 | 511 | 36 | 18,396 | 4/21/26 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 934 | 14475 | HILARIA CIR | LANDFALL DR. | CDS | E | AAC | 9 | 472 | 36 | 18,492 | 4/21/26 | 76 | 0 | 72 | 28 | Overlay - AC Structural | 5/11/19 |
| 935 | 14638 | HILL ST | ALLEY GENEVA AVE | GENEVA AVE | E | AC | 9 | 160 | 33 | 5,280 | 8/24/23 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 935 | 14639 | HILL ST | FRANKFORT AVE | ALLEY GENEVA AVE | E | AC | 9 | 160 | 33 | 5,280 | 8/24/23 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 936 | 14709 | HILLCREST CIR | OCEANHILL DR | CDS | E | AC | 6 | 248 | 32 | 9,436 | 8/15/23 | 51 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 937 | 14907 | HILLGATE LN | CDS | GLENSTONE DR | E | AC | 2 | 103 | 36 | 5,058 | 4/1/26 | 71 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 937 | 14910 | HILLGATE LN | GLENSTONE DR | CDS | E | AC | 2 | 197 | 36 | 8,442 | 4/1/26 | 78 | 0 | 94 | 6 | New Construction | 1/1/80 |
| 938 | 14612 | HILLHEAD CIR | LOCHLEA LN | CDS | E | AC | 9 | 576 | 33 | 21,708 | 8/30/23 | 54 | 50 | 38 | 12 | New Construction | 1/1/80 |
| 939 | 13975 | HILLSBORO CIR | LITCHFIELD DR | CDS | E | AC | 8 | 510 | 36 | 20,160 | 4/16/26 | 74 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 940 | 14899 | HILLSIDE CIR | LOS PATOS AVE | CDS | E | AC | 2 | 80 | 25 | 2,000 | 3/22/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 941 | 13247 | HILLVIEW CIR | FERNHILL CIR | END | E | AC | 3 | 179 | 34 | 7,886 | 4/2/26 | 76 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 942 | 13137 | HILO CIR | WAIKIKI LN | CDS | E | AC | 2 | 535 | 36 | 19,260 | 3/24/22 | 83 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 943 | 13265 | HILTON LN | BELLINGER DR | FLINT DR | E | AC | 3 | 352 | 36 | 12,672 | 4/7/26 | 65 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 944 | 15505 | HINGHAM DR | LANTERN LN | MONTAUK CIR | E | AC | 9 | 370 | 36 | 14,070 | 5/10/24 | 59 | 78 | 17 | 5 | Surface Treatment - Slurry Seal | 5/11/18 |
| 945 | 13287 | HOBART LN | DEFIANCE DR | BRIDGEWATER DR | E | AC | 3 | 254 | 36 | 10,144 | 12/19/24 | 72 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 946 | 13768 | HOLIDAY LN | MEDFORD DR | MC FADDEN AVE | E | AC | 1 | 179 | 36 | 6,444 | 12/18/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 947 | 14816 | HOLLAND DR | WAAL CIR | JEFFERSON LN | E | AC | 4 | 260 | 36 | 9,360 | 4/6/22 | 87 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 947 | 14817 | HOLLAND DR | MARKEN LN | END | E | AC | 4 | 96 | 36 | 3,456 | 4/6/22 | 77 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 947 | 15016 | HOLLAND DR | BEACH BLVD | CDS | E | AC | 4 | 625 | 36 | 23,750 | 4/6/22 | 86 | 43 | 57 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 947 | 15737 | HOLLAND DR | MARKEN LN | WAAL CIR | E | AC | 4 | 520 | 36 | 18,720 | 4/6/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 948 | 14754 | HOLLY ST | CLAY AVE | CDS | E | AC | 7 | 450 | 34 | 15,300 | 3/12/24 | 93 | 0 | 77 | 23 | New Construction | 1/1/80 |
| 948 | 15713 | HOLLY ST | GARFIELD AVE | MAIN ST | E | AC | 7 | 580 | 36 | 20,880 | 3/12/24 | 92 | 0 | 85 | 15 | Surface Treatment - Slurry Seal | 11/28/19 |
| 949 | 14404 | HOLLYWOOD LN | MEADOWLARK DR | CALIENTE DR | E | AC | 2 | 863 | 36 | 31,818 | 3/23/22 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 950 | 13493 | HOLT AVE | PARKSIDE LN | BEACH BLVD | E | AC | 4 | 660 | 36 | 23,760 | 4/1/22 | 91 | 0 | 67 | 33 | Surface Treatment - Slurry Seal | 7/29/20 |
| 951 | 15910 | HOMESTEAD LN | LUSS DR | END | E | AAC | 7 | 732 | 32 | 24,674 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 952 | 14062 | HONEYWOOD LN | YORKTOWN AVE | VERONICA DR | E | AC | 7 | 170 | 36 | 6,120 | 5/5/26 | 93 | 0 | 58 | 42 | Surface Treatment - Slurry Seal | 7/15/21 |
| 953 | 13165 | HONOLULU LN | KAUI LN | SCENARIO DR | E | AC | 2 | 693 | 36 | 24,948 | 3/24/22 | 78 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 954 | 13851 | HOOKER DR | WILLETT LN | STANDISH LN | E | AC | 1 | 780 | 36 | 28,080 | 12/27/24 | 62 | 62 | 29 | 9 | New Construction | 1/1/80 |
| 955 | 13958 | HOPEBAY LN | CLIFFSIDE DR | SAILPORT DR | E | AAC | 7 | 250 | 36 | 9,000 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 956 | 14259 | HOPETOWN LN | SPENCER CIR | CARROLLTOWN DR | E | AC | 9 | 300 | 36 | 10,800 | 5/9/24 | 74 | 60 | 39 | 1 | New Construction | 1/1/80 |
| 956 | 15503 | HOPETOWN LN | ELLSWORTH DR | SPENCER CIR | E | AC | 9 | 602 | 36 | 21,672 | 5/9/24 | 83 | 37 | 62 | 1 | Surface Treatment - Slurry Seal | 5/11/18 |
| 957 | 15522 | HORIZON LN | SPINNAKER DR | SILVER STRAND DR | E | AAC | 8 | 500 | 36 | 18,000 | 3/6/24 | 89 | 0 | 57 | 43 | Overlay - AC Structural | 5/11/18 |
| 958 | 13295 | HOSKINS ST | PEARCE ST | MILO ST | E | AAC | 2 | 660 | 36 | 23,760 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 958 | 14860 | HOSKINS ST | MILO ST | WARNER AVE | E | AAC | 2 | 660 | 36 | 23,760 | 5/21/24 | 93 | 0 | 73 | 27 | Overlay - AC Structural | 12/1/17 |
| 959 | 14197 | HOT SPRINGS DR | EVERGLADES LN | RUNNING SPRINGS LN | E | AC | 8 | 1,006 | 36 | 36,716 | 3/1/22 | 82 | 43 | 32 | 25 | Surface Treatment - Slurry Seal | 2/13/23 |
| 960 | 13534 | HOWARD CIR | LUCIA LN | CDS | E | AAC | 4 | 420 | 32 | 14,690 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 961 | 13275 | HOWLAND LN | LENNOX DR | EDGEMONT DR | E | AC | 3 | 1,058 | 36 | 38,088 | 12/19/24 | 82 | 19 | 81 | 0 | New Construction | 1/1/80 |
| 962 | 14990 | HOYT CIR | LINDENWOOD DR | CONSTANTINE DR | E | AAC | 7 | 330 | 36 | 11,880 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 963 | 14400 | HUDSON DR | IMPALA LN | STARFIRE LN | E | AC | 9 | 558 | 36 | 21,588 | 4/24/24 | 72 | 83 | 17 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 964 | 13857 | HUGHES DR | CARRIE LN | EDWARDS ST | E | AC | 1 | 531 | 36 | 19,116 | 12/19/24 | 81 | 54 | 46 | 0 | New Construction | 1/1/80 |
| 965 | 14500 | HULA CIR | CHRISTINE DR | CDS | E | AC | 9 | 220 | 36 | 10,420 | 4/17/24 | 88 | 36 | 64 | 0 | New Construction | 1/1/80 |
| 966 | 13170 | HUMBOLDT DR | ARDSLEY CIR | WAYFARER LN | E | AC | 2 | 445 | 36 | 16,020 | 4/7/22 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 966 | 14958 | HUMBOLDT DR | WAYFARER LN | SAYBROOK LN | E | AC | 2 | 981 | 36 | 29,816 | 4/7/22 | 77 | 20 | 64 | 16 | New Construction | 1/1/80 |
| 966 | 15050 | HUMBOLDT DR | BARNSTABLE CIR | ARDSLEY CIR | E | AC | 2 | 397 | 36 | 14,292 | 4/7/22 | 76 | 54 | 46 | 0 | New Construction | 1/1/80 |
| 966 | 15054 | HUMBOLDT DR | WANDERER LN | BARNSTABLE CIR | E | AC | 2 | 1,115 | 36 | 40,140 | 4/7/22 | 88 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 967 | 13817 | HUMMINGBIRD LN | DOVEWOOD DR | ROBINWOOD DR | E | AC | 1 | 1,040 | 36 | 37,440 | 3/21/22 | 84 | 0 | 95 | 5 | New Construction | 1/1/80 |
| 967 | 15327 | HUMMINGBIRD LN | ROBINWOOD DR | SKYLARK DR | E | AC | 1 | 520 | 36 | 18,970 | 3/21/22 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 968 | 15958 | HUNTER LN | ERSKINE DR | SCOTSTOUN DR | E | AC | 8 | 1,288 | 36 | 46,368 | 3/19/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 969 | 14609 | HUNTINGTON ST | PCH | PACIFIC VIEW | E | AAC | 9 | 450 | 50 | 21,445 | 8/24/23 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/10 |
| 969 | 14645 | HUNTINGTON ST | GENEVA AVE | HARTFORD AVE | E | AC | 9 | 331 | 38 | 12,578 | 8/14/23 | 70 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 969 | 14646 | HUNTINGTON ST | FRANKFORT AVE | GENEVA AVE | E | AC | 9 | 330 | 40 | 13,200 | 8/14/23 | 69 | 0 | 83 | 17 | New Construction | 1/1/80 |
| 969 | 14647 | HUNTINGTON ST | CHICAGO AVE | DETROIT AVE | E | AC | 9 | 330 | 37 | 12,210 | 8/14/23 | 52 | 92 | 7 | 1 | New Construction | 1/1/80 |
| 969 | 14648 | HUNTINGTON ST | BALTIMORE AVE | CHICAGO AVE | E | AC | 9 | 329 | 37 | 12,173 | 8/14/23 | 44 | 79 | 10 | 11 | New Construction | 1/1/80 |
| 969 | 14649 | HUNTINGTON ST | ATLANTA AVE | BALTIMORE AVE | E | AC | 9 | 335 | 37 | 12,395 | 8/24/23 | 50 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 969 | 14656 | HUNTINGTON ST | NASHVILLE AVE | OSWEGO AVE | E | AC | 6 | 330 | 36 | 11,592 | 8/14/23 | 86 | 25 | 37 | 38 | New Construction | 1/1/80 |
| 969 | 14657 | HUNTINGTON ST | MEMPHIS AVE | NASHVILLE AVE | E | AC | 6 | 330 | 37 | 12,210 | 8/14/23 | 77 | 68 | 24 | 8 | New Construction | 1/1/80 |
| 969 | 14658 | HUNTINGTON ST | KNOXVILLE AVE | LINCOLN AVE | E | AC | 6 | 330 | 40 | 13,200 | 8/14/23 | 86 | 39 | 56 | 5 | New Construction | 1/1/80 |
| 969 | 14659 | HUNTINGTON ST | LINCOLN AVE | MEMPHIS AVE | E | AC | 6 | 330 | 37 | 11,877 | 8/14/23 | 52 | 81 | 13 | 6 | New Construction | 1/1/80 |
| 969 | 14660 | HUNTINGTON ST | JOILET AVE | KNOXVILLE AVE | E | AC | 6 | 330 | 40 | 13,200 | 8/14/23 | 67 | 28 | 70 | 2 | Surface Treatment - Slurry Seal | 3/1/11 |
| 969 | 14661 | HUNTINGTON ST | INDIANAPOLIS AVE | JOILET AVE | E | AC | 6 | 330 | 40 | 13,200 | 8/14/23 | 53 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 969 | 14662 | HUNTINGTON ST | HARTFORD AVE | INDIANAPOLIS AVE | E | AC | 9 | 329 | 36 | 11,844 | 8/14/23 | 62 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 969 | 14711 | HUNTINGTON ST | SPRINGFIELD AVE | UTICA AVE | E | AC | 6 | 640 | 36 | 22,490 | 6/29/21 | 81 | 42 | 27 | 31 | Surface Treatment - Slurry Seal | 7/27/22 |
| 969 | 14712 | HUNTINGTON ST | ADAMS AVE | SPRINGFIELD AVE | E | AAC | 6 | 615 | 36 | 21,526 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 969 | 14736 | HUNTINGTON ST | GARFIELD AVE | CLAY AVE | E | AAC | 7 | 1,320 | 36 | 47,520 | 4/6/26 | 85 | 0 | 94 | 6 | Overlay - AC Structural | 11/28/19 |
| 969 | 14737 | HUNTINGTON ST | YORKTOWN AVE | SEVENTEENTH ST | E | AAC | 7 | 317 | 36 | 11,412 | 4/6/26 | 82 | 16 | 84 | 0 | Overlay - AC Structural | 11/28/19 |
| 969 | 14768 | HUNTINGTON ST | TAYLOR DR | ONTARIO DR | E | AAC | 4 | 260 | 36 | 9,360 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 969 | 14769 | HUNTINGTON ST | ONTARIO DR | QUEBEC CIR | E | AAC | 4 | 267 | 36 | 9,612 | 4/14/26 | 93 | 0 | 83 | 17 | Overlay - AC Structural | 11/28/19 |
| 969 | 14997 | HUNTINGTON ST | PACIFIC VIEW | ATLANTA AVE | E | AAC | 9 | 1,249 | 37 | 46,213 | 8/24/23 | 92 | 0 | 57 | 43 | Overlay - AC Structural | 7/1/10 |
| 969 | 15002 | HUNTINGTON ST | MONTE CRISTO LN | GARFIELD AVE | E | AC | 4 | 472 | 36 | 16,992 | 4/9/24 | 90 | 24 | 76 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 969 | 15006 | HUNTINGTON ST | MAIN ST | CDS | E | AAC | 4 | 593 | 42 | 26,156 | 4/6/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 969 | 15672 | HUNTINGTON ST | ELMIRA AVE | FRANKFORT AVE | E | AC | 9 | 329 | 40 | 13,160 | 8/14/23 | 60 | 35 | 51 | 14 | New Construction | 1/1/80 |
| 969 | 15673 | HUNTINGTON ST | DETROIT AVE | ELMIRA AVE | E | AC | 9 | 330 | 38 | 12,540 | 8/14/23 | 64 | 33 | 53 | 14 | New Construction | 1/1/80 |
| 969 | 15682 | HUNTINGTON ST | OSWEGO AVE | ADAMS AVE | E | AAC | 6 | 660 | 36 | 23,760 | 8/14/23 | 86 | 32 | 68 | 0 | Overlay - AC Structural | 3/1/11 |
| 969 | 15693 | HUNTINGTON ST | UTICA AVE | YORKTOWN AVE | E | AAC | 6 | 1,153 | 36 | 41,508 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 969 | 15709 | HUNTINGTON ST | SEVENTEENTH ST | CLAY AVE | E | AAC | 7 | 1,105 | 36 | 39,780 | 4/6/26 | 83 | 37 | 63 | 0 | Overlay - AC Structural | 11/28/19 |
| 969 | 15718 | HUNTINGTON ST | QUEBEC CIR | ALBERTA DR | E | AAC | 4 | 258 | 36 | 9,288 | 4/14/26 | 93 | 0 | 86 | 14 | Overlay - AC Structural | 11/28/19 |
| 969 | 15719 | HUNTINGTON ST | ALBERTA DR | ELLIS AVE | E | AAC | 4 | 537 | 36 | 19,332 | 4/14/26 | 91 | 0 | 87 | 13 | Overlay - AC Structural | 11/28/19 |
| 970 | 14977 | HUNTINGTON VILLAGE | MC FADDEN AVE | CENTER AVE | E | AC | 4 | 1,711 | 44 | 75,284 | 4/1/22 | 42 | 65 | 30 | 5 | New Construction | 1/1/80 |
| 971 | 15405 | HURSTWELL DR | BOWMAN LN | DITMAR LN | E | AAC | 7 | 566 | 36 | 20,376 | 8/17/23 | 88 | 0 | 80 | 20 | Overlay - AC Structural | 3/1/11 |
| 972 | 14447 | HYANNIS PORT DR | WATERBURY LN | BUSHARD ST | E | AC | 7 | 1,065 | 36 | 38,340 | 4/16/26 | 88 | 62 | 29 | 9 | Surface Treatment - Slurry Seal | 7/15/21 |
| 973 | 15385 | HYDE PARK DR | MAGNOLIA ST | HICKORY LN | E | AAC | 8 | 1,162 | 36 | 42,832 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 974 | 14396 | IMPALA LN | MOKIHANA DR | HUDSON DR | E | AC | 9 | 260 | 36 | 10,110 | 4/24/24 | 83 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 974 | 15572 | IMPALA LN | NEOLANI DR | MOKIHANA DR | E | AC | 9 | 1,013 | 36 | 37,218 | 4/24/24 | 82 | 48 | 52 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 975 | 14127 | IMPERIAL COVE LN | VISCOUNT DR | MASTER DR | E | AC | 7 | 904 | 36 | 33,294 | 4/20/26 | 100 | 0 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 976 | 15445 | INDEPENDENCE LN | YORKTOWN AVE | SHANGRI LA DR | E | AAC | 8 | 442 | 36 | 15,912 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 977 | 14361 | INDIAN WELLS CIR | LEMONTREE LN | CDS | E | AC | 8 | 499 | 36 | 19,464 | 5/20/24 | 88 | 0 | 94 | 6 | Surface Treatment - Slurry Seal | 5/11/18 |
| 978 | 14346 | INDIGO CIR | ORIENT DR | CDS | E | AC | 8 | 451 | 36 | 17,736 | 4/1/24 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 979 | 13821 | INDUSTRIAL DR | CHEMICAL LN | GRAHAM ST | E | AAC | 1 | 1,170 | 40 | 46,800 | 5/3/24 | 81 | 43 | 55 | 2 | Overlay - AC Fabric | 10/1/16 |
| 980 | 13820 | INDUSTRY LN | MC FADDEN AVE | RESEARCH DR | E | AAC | 1 | 1,116 | 40 | 44,640 | 5/3/24 | 81 | 42 | 54 | 4 | Overlay - AC Fabric | 10/1/16 |
| 981 | 14344 | INFERNO LN | ORIENT DR | VOLANTE DR | E | AC | 8 | 512 | 36 | 18,932 | 4/1/24 | 80 | 42 | 30 | 28 | Surface Treatment - Slurry Seal | 5/11/18 |
| 982 | 14422 | INLET DR | LAKEPOINT LN | EDWARDS ST | E | AAC | 5 | 175 | 36 | 6,012 | 5/29/24 | 77 | 0 | 97 | 3 | Overlay - AC Structural | 10/1/12 |
| 982 | 14423 | INLET DR | EDWARDS ST | CLEARWATER CIR | E | AC | 5 | 155 | 36 | 5,580 | 5/29/24 | 55 | 76 | 24 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 982 | 15582 | INLET DR | CLEARWATER CIR | LAKEVIEW DR | E | AC | 5 | 583 | 36 | 20,988 | 5/29/24 | 79 | 36 | 51 | 13 | Surface Treatment - Slurry Seal | 10/1/12 |
| 983 | 15900 | INNSBRUCK DR | BUSHARD ST FRONTAGE | TIBBETT LN | E | AC | 8 | 1,167 | 36 | 42,512 | 3/9/22 | 83 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 984 | 15896 | INTERIOR LN | OLYMPIC DR | YELLOWSTONE DR | E | AAC | 8 | 1,129 | 36 | 41,144 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 985 | 13209 | INTREPID LN | REMORA DR | BROADWAY | E | AAC | 2 | 957 | 32 | 30,624 | 5/13/24 | 94 | 0 | 75 | 25 | Overlay - AC Fabric | 12/1/17 |
| 986 | 14590 | INVERNESS LN | ARGYLE DR | ABERDEEN DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 986 | 14591 | INVERNESS LN | DEVONSHIRE DR | CORNWALL DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 987 | 14393 | IOLANI CIR | ZAMORA LN | CDS | E | AC | 9 | 235 | 32 | 9,020 | 5/20/24 | 85 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 988 | 14285 | IONA LN | NETHERWAY DR | ERSKINE DR | E | AC | 8 | 237 | 36 | 8,532 | 3/19/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 989 | 15753 | IRBY LN | LAMBERT DR | ARNETT DR | E | AAC | 4 | 727 | 36 | 26,172 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 989 | 15754 | IRBY LN | HEIL AVE | BRUSH DR | E | AAC | 4 | 526 | 36 | 18,936 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 989 | 15755 | IRBY LN | BRUSH DR | LAMBERT DR | E | AAC | 4 | 524 | 36 | 18,864 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 990 | 13369 | IRELAND LN | SHENLYN DR. | CORY DR | E | AAC | 3 | 259 | 36 | 10,074 | 5/22/24 | 81 | 13 | 87 | 0 | Overlay - AC Structural | 10/1/12 |
| 991 | 13441 | IRONGATE CIR | NEWMOON LN | END | E | AAC | 5 | 476 | 36 | 18,636 | 5/22/24 | 66 | 24 | 69 | 7 | Overlay - AC Structural | 10/1/12 |
| 992 | 13048 | ISLAND BAY LN | PALM AVE | MORNING TIDE DR | E | AC | 5 | 285 | 36 | 9,400 | 6/30/21 | 91 | 0 | 62 | 38 | Surface Treatment - Slurry Seal | 7/27/22 |
| 992 | 13078 | ISLAND BAY LN | MORNING TIDE DR | CDS | E | AC | 5 | 943 | 32 | 38,740 | 6/30/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 993 | 13614 | ISLAND CIR | VISTA DR | CDS | E | AC | 2 | 243 | 36 | 13,270 | 4/7/22 | 84 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 994 | 14505 | ISLANDER LN | PLAYA DR | CHRISTINE DR | E | AAC | 9 | 695 | 36 | 26,020 | 4/22/26 | 86 | 42 | 38 | 20 | Overlay - AC Structural | 5/11/19 |
| 995 | 15418 | ISTHMUS LN | CUTTER DR | ADAMS AVE | E | AAC | 7 | 1,113 | 36 | 40,568 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 996 | 14149 | IVES LN | CHARFORD DR | INDIANAPOLIS AVE | E | AAC | 7 | 170 | 36 | 6,120 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 997 | 13683 | IVORY CIR | EDGEVIEW LN | END | E | AC | 1 | 530 | 36 | 20,830 | 5/6/26 | 74 | 84 | 16 | 0 | New Construction | 1/1/80 |
| 998 | 13444 | IVORYCREST LN | VARSITY DR | JASONWOOD DR | E | AAC | 5 | 166 | 36 | 5,976 | 5/29/24 | 64 | 56 | 43 | 1 | Overlay - AC Structural | 10/1/12 |
| 998 | 15200 | IVORYCREST LN | JASONWOOD DR | NORBROOK DR | E | AAC | 5 | 828 | 36 | 29,808 | 5/23/24 | 64 | 42 | 46 | 12 | Overlay - AC Structural | 10/1/12 |
| 999 | 14032 | IVY CIR | FLAGSTONELN | END | E | AC | 7 | 466 | 34 | 15,844 | 8/21/23 | 50 | 57 | 16 | 27 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1000 | 14807 | JACQUELYN LN | ALLEY BARTON DR | ALLEY SLATER AVE | E | AC | 4 | 500 | 36 | 19,000 | 5/28/24 | 73 | 66 | 20 | 14 | New Construction | 1/1/80 |
| 1000 | 14808 | JACQUELYN LN | ALLEY SLATER AVE | SLATER AVE | E | AC | 4 | 150 | 36 | 5,400 | 5/30/24 | 85 | 50 | 48 | 2 | New Construction | 1/1/80 |
| 1000 | 14809 | JACQUELYN LN | SPEER AVE | LIBERTY AVE | E | AC | 4 | 330 | 36 | 11,880 | 5/13/24 | 90 | 1 | 38 | 61 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1001 | 13684 | JADE CIR | EDGEVIEW LN | END | E | AC | 1 | 530 | 36 | 20,830 | 5/6/26 | 92 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 1002 | 14996 | JALM DR | NEWLAND ST | CDS | E | AC | 4 | 536 | 36 | 21,296 | 5/13/24 | 81 | 13 | 87 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1003 | 14868 | JAMES CIR | LYNN ST | ALLEY JAMES CIR | E | AC | 2 | 189 | 36 | 9,304 | 3/22/22 | 81 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 1004 | 14785 | JAMESTOWN LN | WOODWIND DR | WINDFIELD DR | E | AC | 4 | 766 | 40 | 30,640 | 5/13/24 | 79 | 40 | 47 | 13 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1005 | 14751 | JANA CIR | FLORIDA ST | CDS | E | AAC | 7 | 190 | 33 | 6,270 | 4/15/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1006 | 13424 | JARDINES DR | AVILLA LN | END | E | AAC | 5 | 528 | 36 | 21,008 | 5/29/24 | 73 | 0 | 95 | 5 | Overlay - AC Structural | 10/1/12 |
| 1006 | 15183 | JARDINES DR | SAN ROGUE LN | AVILLA LN | E | AAC | 5 | 1,108 | 36 | 40,388 | 5/20/24 | 74 | 35 | 56 | 9 | Overlay - AC Structural | 10/1/12 |
| 1007 | 15196 | JASONWOOD DR | IVORYCREST LN | END | E | AAC | 5 | 836 | 36 | 31,896 | 5/22/24 | 61 | 33 | 67 | 0 | Overlay - AC Structural | 10/1/12 |
| 1008 | 14731 | JAY CIR | FLORIDA ST | CDS | E | AAC | 6 | 210 | 32 | 8,785 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1009 | 15127 | JEAN DR | BUSBY LN | TRUDY LN | E | AC | 3 | 520 | 36 | 18,552 | 4/6/26 | 82 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 1010 | 14800 | JEFFERSON LN | SLATER AVE | MICHAEL DR | E | AAC | 4 | 530 | 36 | 18,080 | 4/13/26 | 84 | 22 | 19 | 59 | Overlay - AC Structural | 11/28/19 |
| 1010 | 14801 | JEFFERSON LN | MICHAEL DR | DANY DR | E | AC | 4 | 260 | 36 | 9,072 | 5/13/24 | 81 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1010 | 15730 | JEFFERSON LN | GUILDER DR | SLATER AVE | E | AAC | 4 | 920 | 36 | 33,370 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1011 | 14838 | JEFFREY CIR | TERRY DR | CDS | E | AAC | 4 | 197 | 32 | 7,554 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1012 | 14973 | JENNY DR | LOCHLEA LN | NEWLAND ST | E | AC | 9 | 660 | 36 | 23,760 | 8/30/23 | 79 | 10 | 90 | 0 | New Construction | 1/1/80 |
| 1013 | 13370 | JEPSEN CIR | CORY DR | END | E | AAC | 3 | 449 | 36 | 18,164 | 5/22/24 | 73 | 23 | 69 | 8 | Overlay - AC Structural | 10/1/12 |
| 1014 | 13266 | JEREVA CIR | FLINT DR | CDS | E | AC | 3 | 99 | 32 | 4,418 | 4/7/26 | 61 | 52 | 48 | 0 | New Construction | 1/1/80 |
| 1015 | 13978 | JERRILYN LN | GRAND DR | KREPP DR | E | AC | 8 | 1,020 | 36 | 36,720 | 4/15/26 | 77 | 83 | 17 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1016 | 13260 | JERSEY CIR | NORMANDY LN | CDS | E | AC | 3 | 238 | 32 | 8,866 | 4/6/26 | 94 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 1018 | 14152 | JETT DR | SUNSHINE DR | JOHNSON LN | E | AC | 7 | 255 | 36 | 9,180 | 4/21/26 | 82 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1019 | 13292 | JIB CIR | RUDDER DR | CDS | E | AC | 2 | 499 | 36 | 21,240 | 4/7/22 | 80 | 55 | 43 | 2 | New Construction | 1/1/80 |
| 1020 | 14202 | JILL DR | VIVA CIR | LAWSON LN | E | AAC | 8 | 264 | 34 | 8,976 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1021 | 15892 | JOHSON LN | GUSS DR | BROWNING DR | E | AC | 7 | 750 | 36 | 27,000 | 4/21/26 | 81 | 47 | 44 | 9 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1022 | 13983 | JOICE LN | KAREN CIR | GRAND DR | E | AC | 8 | 254 | 36 | 9,894 | 4/15/26 | 93 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1022 | 15391 | JOICE LN | RONNEY DR | KAREN CIR | E | AC | 8 | 510 | 36 | 19,110 | 4/15/26 | 92 | 48 | 52 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1023 | 14704 | JOLIET AVE | GEORGIA ST | BEACH BLVD | E | AC | 6 | 315 | 37 | 11,655 | 8/15/23 | 82 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 1023 | 15873 | JOLIET AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 485 | 37 | 17,723 | 8/15/23 | 63 | 35 | 58 | 7 | Overlay - AC Structural | 3/1/11 |
| 1023 | 15874 | JOLIET AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 330 | 37 | 12,210 | 8/15/23 | 67 | 26 | 67 | 7 | Overlay - AC Structural | 3/1/11 |
| 1023 | 15875 | JOLIET AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 6 | 329 | 37 | 12,173 | 8/15/23 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1023 | 15876 | JOLIET AVE | DELAWARE ST | ENGLAND ST | E | AC | 6 | 331 | 37 | 12,247 | 8/15/23 | 43 | 81 | 19 | 0 | New Construction | 1/1/80 |
| 1023 | 15881 | JOLIET AVE | ENGLAND ST | FLORIDA ST | E | AC | 6 | 330 | 37 | 12,210 | 8/15/23 | 65 | 36 | 37 | 27 | New Construction | 1/1/80 |
| 1023 | 15882 | JOLIET AVE | FLORIDA ST | GEORGIA ST | E | AC | 6 | 345 | 37 | 12,765 | 8/15/23 | 28 | 89 | 10 | 1 | Surface Treatment - Slurry Seal | 3/1/11 |
| 2290 | 17025 | JOLLY LN | HAPPY DR | TALBERT AVE | E | AC | 4 | 466 | 36 | 18,176 | 5/13/24 | 84 | 25 | 71 | 4 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1024 | 14211 | JON DAY DR | BROOKHURST ST | CRAIMER LN | E | AC | 8 | 1,280 | 36 | 46,080 | 2/28/22 | 92 | 0 | 51 | 49 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1024 | 14216 | JON DAY DR | CRAIMER LN | RAVENWOOD LN | E | AC | 8 | 313 | 36 | 12,268 | 2/28/22 | 63 | 76 | 24 | 0 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1025 | 14524 | JONESPORT LN | ALLISON CIR | CAPE MAY LN | E | AC | 9 | 647 | 36 | 23,004 | 4/24/24 | 85 | 39 | 46 | 15 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1025 | 15615 | JONESPORT LN | MELINDA CIR | ALLISON CIR | E | AC | 9 | 248 | 36 | 9,428 | 4/17/24 | 81 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1026 | 14545 | JOYFUL LN | TALBERT AVE | HAPPY DR | E | AC | 4 | 508 | 36 | 18,288 | 5/13/24 | 86 | 19 | 54 | 27 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1027 | 13440 | JUDWICK CIR | NEWMOON LN | END | E | AAC | 5 | 479 | 36 | 18,744 | 5/22/24 | 61 | 31 | 64 | 5 | Overlay - AC Structural | 10/1/12 |
| 1028 | 13532 | JUDY CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 72 | 69 | 31 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1029 | 13282 | JULIEN CIR | LAKEMONT LN | CDS | E | AC | 3 | 143 | 36 | 6,648 | 12/19/24 | 74 | 58 | 42 | 0 | New Construction | 1/1/80 |
| 1030 | 15224 | JULIETTE LOW DR | ANITA LN | SILVER LN | E | AC | 4 | 890 | 36 | 32,040 | 3/18/22 | 87 | 58 | 39 | 3 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1031 | 13374 | JULIP LN | ROCK DR | CAPSTONE DR | E | AC | 3 | 573 | 36 | 20,340 | 5/22/24 | 68 | 28 | 68 | 4 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1032 | 14887 | JUNE DR | FRASER LN | ERWIN LN | E | AC | 5 | 251 | 36 | 9,338 | 5/22/24 | 43 | 69 | 29 | 2 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1033 | 14287 | JURA DR | WOODLEA LN | HUNTER LN | E | AC | 8 | 267 | 36 | 9,612 | 3/19/24 | 88 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1034 | 14379 | KAHULUI DR | KIOWA LN | KANEHOE LN | E | AC | 9 | 930 | 36 | 33,480 | 3/27/24 | 77 | 71 | 16 | 13 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1035 | 14002 | KAIMU DR | KIPAHULU DR | TONGA LN | E | AAC | 8 | 670 | 36 | 24,120 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1036 | 13212 | KAMALII DR | BARUNA LN | SEA WITCH LN | E | AC | 2 | 445 | 36 | 16,020 | 4/7/22 | 86 | 21 | 79 | 0 | New Construction | 1/1/80 |
| 1037 | 14823 | KAMPEN LN | AMSTERDAM DR | VALENCIA DR | E | AC | 4 | 1,010 | 36 | 36,360 | 3/31/22 | 73 | 66 | 34 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1038 | 14010 | KAMUELA DR | MAUNA LN | PITCAIM LN | E | AAC | 8 | 1,080 | 36 | 38,880 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1038 | 15400 | KAMUELA DR | PITCAIM LN | CDS | E | AAC | 8 | 877 | 36 | 33,372 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1038 | 15905 | KAMUELA DR | BROOKHURST ST | MAUNA LN | E | AAC | 8 | 592 | 36 | 21,312 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1039 | 14388 | KANAKOA LN | NEOLANI DR | MALAHINE DR | E | AC | 9 | 752 | 36 | 27,072 | 5/20/24 | 69 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1040 | 14376 | KANEOHE LN | REGATTA DR | HAITI DR | E | AC | 9 | 273 | 36 | 10,578 | 3/26/24 | 88 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1040 | 14383 | KANEOHE LN | KAPAA DR | ALOHA DR | E | AC | 9 | 256 | 36 | 9,966 | 3/27/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1040 | 15567 | KANEOHE LN | HAITI DR | BERMUDA DR | E | AC | 9 | 1,008 | 36 | 36,288 | 3/27/24 | 86 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 1040 | 15568 | KANEOHE LN | BERMUDA DR | KAPAA DR | E | AC | 9 | 768 | 36 | 27,648 | 3/27/24 | 85 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 1041 | 14381 | KAPAA DR | KIOWA LN | KANEHOE LN | E | AC | 9 | 930 | 36 | 32,904 | 3/27/24 | 71 | 64 | 34 | 2 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1042 | 13982 | KAREN CIR | JOICE LN | CDS | E | AAC | 8 | 246 | 32 | 9,672 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1043 | 13911 | KATHERINE DR | CAROLYN LN | LISTER LN | E | AAC | 7 | 236 | 36 | 9,436 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/1/19 |
| 1044 | 13139 | KAUI LN | HONOLULU LN | HAWAII LN | E | AC | 2 | 262 | 36 | 10,432 | 3/24/22 | 75 | 46 | 33 | 21 | New Construction | 1/1/80 |
| 1045 | 14322 | KAUSCH CIR | SATTERFIELD DR | END | E | AC | 9 | 240 | 32 | 9,180 | 8/30/23 | 93 | 0 | 87 | 13 | New Construction | 1/1/80 |
| 1046 | 13944 | KEEL DR | YACHT LN | LOOKOUT LN | E | AAC | 7 | 461 | 36 | 16,596 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1047 | 13573 | KEELSON LN | ALLEY SLATER AVE | SLATER AVE | E | AAC | 4 | 150 | 36 | 5,400 | 5/30/24 | 90 | 0 | 49 | 51 | Overlay - AC Structural | 10/1/12 |
| 1047 | 13574 | KEELSON LN | KRISTIN CIR | END | E | AAC | 4 | 107 | 38 | 5,266 | 5/30/24 | 89 | 0 | 47 | 53 | Overlay - AC Structural | 10/1/12 |
| 1047 | 15265 | KEELSON LN | ALLEY SLATER AVE | KRISTIN CIR | E | AAC | 4 | 1,012 | 36 | 36,432 | 5/30/24 | 90 | 17 | 47 | 36 | Overlay - AC Structural | 10/1/12 |
| 2304 | 60810 | KELLEY CIR | PRESCOTT LN | CDS | E | AC | 5 | 410 | 36 | 18,360 | 5/13/24 | 50 | 79 | 21 | 0 | New Construction - AC | 1/1/80 |
| 3500 | 35000 | KELLOG CIR | MADDOX DR | CDS | E | AC | 3 | 223 | 36 | 11,328 | 3/18/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1054 | 13685 | KELSEY CIR | EDGEVIEW LN | END | E | AAC | 1 | 530 | 36 | 20,830 | 5/7/24 | 72 | 9 | 91 | 0 | Overlay - AC Structural | 10/1/16 |
| 3100 | 20100 | KELSO DR | NEWLAND ST | VINTAGE DR | E | AAC | 7 | 490 | 36 | 18,390 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 3000 | 20000 | KELVIN LN | ELLSWORTH DR | CARROLTOWN DR | E | AC | 9 | 902 | 36 | 32,472 | 5/9/24 | 69 | 40 | 52 | 8 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1053 | 14252 | KELVINGROVE LN | INDIANAPOLIS AVE | COLBREGGAN DR | E | AAC | 9 | 371 | 32 | 11,872 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1053 | 15473 | KELVINGROVE LN | INDIANAPOLIS AVE | CDS | E | AC | 7 | 493 | 32 | 17,576 | 4/21/26 | 83 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 4040 | 50210 | KENBROOK DR | BELLFIELD LN | FOSS LN | E | AC | 5 | 567 | 33 | 18,711 | 3/31/26 | 62 | 77 | 0 | 23 | New Construction - Initial | 1/1/80 |
| 4040 | 50220 | KENBROOK DR | FOSS LN | SPRINGDALE ST | E | AC | 5 | 180 | 33 | 5,440 | 3/31/26 | 71 | 100 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1055 | 13322 | KENDRICK CIR | LOVELL LN | CDS | E | AC | 3 | 351 | 36 | 13,986 | 4/6/26 | 73 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 1056 | 15783 | KENILWORTH DR | GREENLEAF LN | GRAHAM ST | E | AC | 2 | 1,400 | 36 | 50,400 | 4/1/26 | 82 | 22 | 75 | 3 | New Construction | 1/1/80 |
| 1057 | 14555 | KENSINGTON DR | SHEFFIELD LN | BURNLEY LN | E | AAC | 8 | 202 | 24 | 4,648 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1057 | 14556 | KENSINGTON DR | SIDCUP LN | LURES LN | E | AAC | 8 | 202 | 24 | 4,848 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1057 | 14557 | KENSINGTON DR | DERBYSHIRE LN | VERMONT LN | E | AAC | 8 | 390 | 24 | 9,160 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1058 | 13547 | KENT CIR | ROSS LN | CDS | E | AAC | 4 | 199 | 32 | 7,618 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1059 | 13439 | KENWICK CIR | NEWMOON LN | END | E | AAC | 5 | 488 | 36 | 19,068 | 5/23/24 | 62 | 50 | 49 | 1 | Overlay - AC Structural | 10/1/12 |
| 1060 | 14210 | KENWORTH CIR | CRAILET DR | CDS | E | AAC | 8 | 245 | 32 | 9,640 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1061 | 14167 | KENYON LN | HAZELBROOK DR | CLIFFWOOD DR | E | AC | 7 | 241 | 36 | 8,164 | 4/21/26 | 92 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1062 | 14391 | KEOKI CIR | ZAMORA LN | CDS | E | AC | 9 | 235 | 32 | 9,020 | 5/20/24 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1063 | 14883 | KERN DR | TIFFANY CIR | RENOIR CIR | E | AC | 5 | 354 | 36 | 12,744 | 5/8/26 | 28 | 83 | 17 | 0 | New Construction | 1/1/80 |
| 1063 | 14902 | KERN DR | BERLIN LN | CDS | E | AC | 5 | 105 | 36 | 5,030 | 4/1/26 | 46 | 80 | 20 | 0 | New Construction | 1/1/80 |
| 1063 | 15782 | KERN DR | BERLIN LN | TIFFANY CIR | E | AC | 5 | 849 | 36 | 30,564 | 5/8/26 | 25 | 84 | 13 | 3 | New Construction | 1/1/80 |
| 1064 | 14568 | KESWICK LN | CORNWALL DR | CHASING CROSS DR | E | AAC | 8 | 320 | 24 | 7,680 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1064 | 14569 | KESWICK LN | ARGYLE DR | ABERDEEN DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1064 | 15636 | KESWICK LN | ABERDEEN DR | CORNWALL DR | E | AAC | 8 | 495 | 24 | 11,880 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1065 | 50450 | KETTLER LN | BONNIE DR | SYLVIA DR | E | AC | 3 | 1,018 | 36 | 40,348 | 3/18/22 | 93 | 0 | 92 | 8 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1066 | 13366 | KILDA CIR | KRISTOPHER LN | END | E | AAC | 3 | 368 | 36 | 15,248 | 5/22/24 | 85 | 44 | 56 | 0 | Overlay - AC Structural | 10/1/12 |
| 1067 | 14104 | KILKENNY LN | MALLOY DR | ALLEY MALLOY DR | E | AC | 9 | 139 | 36 | 5,004 | 8/23/23 | 58 | 80 | 20 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1067 | 14105 | KILKENNY LN | ALLEY MALLOY DR | INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/23/23 | 29 | 93 | 7 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1068 | 13488 | KIM LN | RHONE LN | CDS | E | AC | 4 | 294 | 36 | 11,084 | 3/18/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1069 | 13734 | KIMBERLY DR | CAPETOWN LN | KINGSTON LN | E | AC | 1 | 270 | 36 | 10,470 | 12/26/24 | 94 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 1069 | 15308 | KIMBERLY DR | CAPETOWN LN | END | E | AC | 1 | 794 | 36 | 30,384 | 12/26/24 | 82 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 1070 | 14277 | KIMBERWICK LN | FIRESIDE DR | HAVEN LN | E | AC | 9 | 177 | 36 | 6,372 | 5/7/24 | 86 | 47 | 53 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1071 | 13644 | KINER AVE | WHARTON ST | HARTLUND ST | E | AAC | 4 | 387 | 33 | 13,371 | 4/14/26 | 93 | 38 | 62 | 0 | Overlay - AC Structural | 11/28/19 |
| 1071 | 13651 | KINER AVE | GLEADA LN | LISA LN | E | AAC | 4 | 854 | 33 | 28,682 | 4/13/26 | 93 | 55 | 45 | 0 | Overlay - AC Structural | 11/28/19 |
| 1071 | 17030 | KINER AVE | HARTLUND ST | CDS | E | AAC | 4 | 126 | 33 | 3,894 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1072 | 14869 | KING CIR | ALLEY GREEN ST | GREEN ST | E | AAC | 2 | 187 | 36 | 9,232 | 5/21/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1073 | 14225 | KINGFISHER DR | CATAMARAN LN | FARNSWORTH LN | E | AC | 9 | 591 | 36 | 21,276 | 8/23/23 | 60 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 1073 | 15884 | KINGFISHER DR | FARNSWORTH LN | ALICANTE LN | E | AC | 9 | 911 | 36 | 32,796 | 8/23/23 | 58 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 1074 | 15482 | KINGS CANYON DR | INTERIOR LN | RUNNING SPRINGS LN | E | AC | 8 | 1,286 | 36 | 46,796 | 3/1/22 | 81 | 34 | 35 | 31 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1075 | 15409 | KINGSDALE DR | COLDWATER LN | EDGEWOOD LN | E | AC | 7 | 835 | 36 | 30,060 | 8/21/23 | 65 | 59 | 33 | 8 | New Construction | 1/1/80 |
| 1076 | 13914 | KINGSPORT DR | FLAGSTAFF LN | NEWLAND ST | E | AAC | 7 | 176 | 33 | 4,848 | 4/6/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1077 | 13733 | KINGSTON LN | DOVER DR | KIMBERLY DR | E | AC | 1 | 578 | 36 | 22,308 | 12/26/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1078 | 14588 | KINGSWOOD LN | CONTINENTAL DR | DEVONSHIRE DR | E | AAC | 8 | 115 | 24 | 2,760 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1078 | 14589 | KINGSWOOD LN | DEVONSHIRE DR | CORNWALL DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1078 | 15645 | KINGSWOOD LN | ARGYLE DR | CONTINENTAL DR | E | AAC | 8 | 383 | 24 | 9,192 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1079 | 14382 | KIOWA LN | BERMUDA DR | KAHULUI DR | E | AC | 9 | 256 | 36 | 8,928 | 3/27/24 | 72 | 64 | 34 | 2 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1079 | 15569 | KIOWA LN | KAHULUI DR | ALOHA DR | E | AC | 9 | 768 | 36 | 27,648 | 3/27/24 | 85 | 61 | 39 | 0 | New Construction | 1/1/80 |
| 1080 | 13998 | KIPAHULU DR | GARFIELD AVE | KAIMU DR | E | AAC | 8 | 187 | 36 | 6,732 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1080 | 15396 | KIPAHULU DR | KAIMU DR | KUKUI DR | E | AAC | 8 | 801 | 36 | 28,836 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1081 | 13368 | KIRKLUND CIR | KRISTOPHER LN | END | E | AAC | 3 | 368 | 36 | 15,248 | 5/22/24 | 85 | 12 | 72 | 16 | Overlay - AC Structural | 10/1/12 |
| 1082 | 15271 | KISER DR | STILL HARBOR LN | PRESCOTT LN | E | AC | 5 | 858 | 36 | 32,388 | 5/28/24 | 45 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1083 | 15944 | KITE DR | SPARKMAN LN | SKIMMER LN | E | AC | 8 | 1,007 | 36 | 36,252 | 3/18/24 | 88 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1084 | 13221 | KITTEN CIR | BARUNA LN | CDS | E | AC | 2 | 170 | 36 | 6,120 | 4/7/22 | 83 | 50 | 45 | 5 | New Construction | 1/1/80 |
| 1085 | 14526 | KITTERY CIR | CASTINE DR | CDS | E | AC | 9 | 169 | 32 | 6,908 | 4/17/24 | 85 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1086 | 14130 | KNIGHTS CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 85 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1087 | 13794 | KNOLLWOOD CIR | HALIFAX DR | END | E | AC | 1 | 326 | 36 | 13,236 | 4/8/26 | 89 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 1088 | 14693 | KNOXVILLE AVE | ALABAMA ST | ALLEY ALABAMA ST | E | AAC | 6 | 323 | 37 | 11,951 | 8/15/23 | 78 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1088 | 14694 | KNOXVILLE AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 162 | 37 | 5,994 | 8/15/23 | 78 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1088 | 14695 | KNOXVILLE AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 6 | 330 | 37 | 12,210 | 8/15/23 | 74 | 63 | 29 | 8 | New Construction | 1/1/80 |
| 1088 | 14697 | KNOXVILLE AVE | CALIFORNIA ST | ALLEY CALIFORNIA ST | E | AC | 6 | 160 | 37 | 5,920 | 8/15/23 | 72 | 50 | 29 | 21 | New Construction | 1/1/80 |
| 1088 | 14698 | KNOXVILLE AVE | ALLEY CALIFORNIA ST | DELAWARE ST | E | AC | 6 | 169 | 37 | 6,253 | 8/15/23 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1088 | 14699 | KNOXVILLE AVE | DELAWARE ST | ALLEY DELAWARE ST | E | AAC | 6 | 171 | 37 | 6,327 | 8/15/23 | 53 | 52 | 48 | 0 | Overlay - AC Structural | 3/1/11 |
| 1088 | 14700 | KNOXVILLE AVE | ALLEY DELAWARE ST | ENGLAND ST | E | AC | 6 | 160 | 37 | 5,920 | 8/15/23 | 58 | 55 | 45 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1088 | 14701 | KNOXVILLE AVE | ENGLAND ST | ALLEY ENGLAND ST | E | AC | 6 | 165 | 37 | 6,105 | 8/15/23 | 61 | 0 | 53 | 47 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1088 | 14702 | KNOXVILLE AVE | ALLEY ENGLAND ST | FLORIDA ST | E | AC | 6 | 165 | 37 | 6,105 | 8/15/23 | 52 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1088 | 14703 | KNOXVILLE AVE | FLORIDA ST | BEACH BLVD | E | AC | 6 | 660 | 37 | 24,420 | 8/15/23 | 52 | 62 | 31 | 7 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1089 | 13570 | KOLEDO LN | ALLEY SLATER AVE | SLATER AVE | E | AC | 4 | 150 | 36 | 5,400 | 5/30/24 | 39 | 72 | 25 | 3 | New Construction | 1/1/80 |
| 1089 | 13571 | KOLEDO LN | BARTON DR | ALLEY BARTON DR | E | AAC | 4 | 165 | 36 | 5,940 | 5/30/24 | 88 | 0 | 87 | 13 | Overlay - AC Structural | 10/1/12 |
| 1089 | 15263 | KOLEDO LN | MANDRELL DR | BARTON DR | E | AAC | 4 | 330 | 36 | 11,880 | 5/30/24 | 89 | 16 | 56 | 28 | Overlay - AC Structural | 10/1/12 |
| 1090 | 15033 | KONA DR | WAIKIKI LN | BOLSA CHICA ST | E | AC | 2 | 670 | 36 | 24,120 | 3/24/22 | 50 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 1091 | 15012 | KOVACS LN | TALBERT AVE | REDONDO CIR | E | AC | 4 | 911 | 40 | 36,440 | 5/13/24 | 88 | 19 | 81 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1092 | 15903 | KREPP DR | WATERBURY LN | STEVEN LN | E | AC | 8 | 960 | 36 | 36,060 | 4/15/26 | 87 | 83 | 10 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1093 | 13575 | KRISTIN CIR | KEELSON LN | END | E | AAC | 4 | 197 | 34 | 6,698 | 5/30/24 | 88 | 0 | 57 | 43 | Overlay - AC Structural | 10/1/12 |
| 1094 | 15991 | KRISTOPHER LN | WRENFIELD DR | SHENLYN DR | E | AAC | 3 | 1,264 | 36 | 44,928 | 5/21/24 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1095 | 15550 | KROLL LN | ARCEL CIR | STILWELL DR | E | AC | 9 | 406 | 32 | 14,492 | 8/30/23 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1096 | 13999 | KUKUI DR | BROOKHURST ST | KIPAHULU DR | E | AAC | 8 | 682 | 36 | 24,552 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1096 | 14000 | KUKUI DR | KIPAHULU DR | MOOREA LN | E | AAC | 8 | 1,101 | 36 | 39,636 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1096 | 14014 | KUKUI DR | MOOREA LN | BIKINI LN | E | AAC | 8 | 693 | 36 | 25,698 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1097 | 13628 | KURT LN | MANHATTEN DR | SPICKARD DR | E | AAC | 3 | 261 | 36 | 9,896 | 5/28/24 | 72 | 16 | 84 | 0 | Overlay - AC Structural | 10/1/12 |
| 1098 | 14283 | LA CRESTA CIR | PIERVIEW LN | CDS | E | AC | 8 | 510 | 36 | 19,560 | 3/6/24 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1099 | 14508 | LA JOLLA CIR | MALIBU LN | CDS | E | AAC | 9 | 331 | 32 | 12,092 | 4/22/26 | 89 | 20 | 76 | 4 | Overlay - AC Structural | 5/11/19 |
| 1100 | 13509 | LA MANCHA CIR | ALLEY BARDON LN | CDS | E | AAC | 3 | 258 | 36 | 11,538 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1100 | 13510 | LA MANCHA CIR | BARDON LN | ALLEY BARDON LN | E | AAC | 3 | 136 | 36 | 4,896 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1101 | 15144 | LA MESA LN | PALO ALTO DR | POINT LOMA DR | E | AC | 5 | 1,020 | 36 | 36,720 | 5/24/24 | 64 | 59 | 41 | 0 | New Construction | 1/1/80 |
| 1102 | 13657 | LA PALMA DR | PATTERSON LN | CDS | E | AAC | 4 | 281 | 32 | 10,492 | 4/13/26 | 82 | 36 | 35 | 29 | Overlay - AC Structural | 11/28/19 |
| 1103 | 15229 | LA PAZ DR | MALAGA LN | ALLEY VILLA YORBA | E | AAC | 4 | 219 | 36 | 9,368 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1104 | 15313 | LA SALLE LN | CORNELL DR | MC FADDEN AVE | E | AC | 1 | 1,292 | 36 | 46,512 | 4/21/26 | 92 | 71 | 15 | 14 | New Construction | 1/1/80 |
| 1105 | 13185 | LADONA CIR | MISTRAL DR | CDS | E | AC | 2 | 358 | 32 | 12,956 | 4/7/22 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1106 | 13283 | LAFAYETTE DR | POMONA LN | CDS | E | AC | 3 | 168 | 32 | 7,176 | 12/19/24 | 81 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 1106 | 15108 | LAFAYETTE DR | WINDEMEIR LN | POMONA LN | E | AC | 3 | 1,196 | 36 | 43,806 | 12/19/24 | 56 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 1107 | 14502 | LAGUNA CIR | CHRISTINE DR | CDS | E | AAC | 9 | 243 | 36 | 10,248 | 4/22/26 | 76 | 65 | 20 | 15 | Overlay - AC Structural | 5/11/19 |
| 1108 | 15107 | LAKEMONT LN | EDGEMONT DR | CHELE CIR | E | AC | 3 | 520 | 36 | 19,470 | 12/19/24 | 77 | 44 | 51 | 5 | New Construction | 1/1/80 |
| 1109 | 13459 | LAKEPOINT LN | INLET DR | END | E | AC | 5 | 268 | 36 | 11,448 | 5/29/24 | 84 | 30 | 49 | 21 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1109 | 15207 | LAKEPOINT LN | NEWBURY DR | INLET DR | E | AAC | 5 | 519 | 36 | 19,434 | 5/29/24 | 64 | 47 | 50 | 3 | Overlay - AC Structural | 10/1/12 |
| 1110 | 14705 | LAKESIDE LN | MEMPHIS AVE | OCEANHILL DR | E | AAC | 6 | 986 | 34 | 33,524 | 8/15/23 | 84 | 44 | 54 | 2 | Overlay - AC Structural | 3/1/11 |
| 1111 | 15826 | LAKEVIEW DR | INLET DR | CLIFFVIEW LN | E | AC | 5 | 700 | 30 | 21,750 | 5/29/24 | 82 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1112 | 13535 | LAMAR DR | NEWLAND ST | LUCIA LN | E | AC | 4 | 493 | 36 | 17,748 | 4/6/22 | 87 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2299 | 60760 | LAMB LN | YORKTOWN AVE | PATCH DR | E | AC | 8 | 630 | 36 | 22,680 | 3/2/22 | 91 | 0 | 44 | 56 | New Construction - AC | 1/1/15 |
| 1113 | 14845 | LAMBERT DR | MONROE LN | CDS | E | AAC | 4 | 380 | 32 | 13,410 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1113 | 14846 | LAMBERT DR | MONROE LN | IRBY LN | E | AAC | 4 | 1,116 | 36 | 40,176 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1114 | 14516 | LANAI CIR | LUAU LN | CDS | E | AAC | 9 | 345 | 32 | 12,540 | 4/22/26 | 87 | 20 | 80 | 0 | Overlay - AC Structural | 5/11/19 |
| 1115 | 13951 | LANARK CIR | LINDSAY LN | CDS | E | AAC | 7 | 419 | 36 | 16,334 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1116 | 15758 | LANCASTER DR | HERITAGE LN | MONTCLAIR LN | E | AAC | 4 | 788 | 36 | 28,718 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1117 | 13388 | LANCEFIELD DR | SHAMLEY CIR | WELLBANK LN | E | AC | 5 | 255 | 36 | 10,180 | 3/31/26 | 70 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 1117 | 15167 | LANCEFIELD DR | OLDGLEN LN | SHAMLEY CIR | E | AC | 5 | 509 | 36 | 19,324 | 3/31/26 | 69 | 17 | 83 | 0 | New Construction | 1/1/80 |
| 1118 | 14273 | LANCELOT LN | WOODCREST DR | COMSTOCK DR | E | AC | 9 | 502 | 36 | 18,822 | 5/6/24 | 60 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1119 | 15253 | LANDAU LN | HEIL AVE | ROYAL DR | E | AC | 4 | 1,349 | 36 | 48,564 | 3/31/22 | 84 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2298 | 60750 | LANDERS DR | SLAYBACK LN | WARDLOW LN | E | AC | 7 | 262 | 36 | 9,432 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - AC | 1/1/14 |
| 1120 | 14474 | LANDFALL DR | BUSHARD ST | HILARIA CIR | E | AC | 9 | 166 | 36 | 5,976 | 4/25/24 | 64 | 56 | 27 | 17 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1120 | 15577 | LANDFALL DR | DIRIGO CIR | BRANTA CIR | E | AC | 9 | 260 | 36 | 10,360 | 4/25/24 | 72 | 42 | 25 | 33 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1120 | 15596 | LANDFALL DR | HILARIA CIR | DIRIGO CIR | E | AC | 9 | 764 | 36 | 27,504 | 4/25/24 | 86 | 0 | 72 | 28 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1121 | 13310 | LANGPORT CIR | GREENVIEW LN | END | E | AC | 3 | 333 | 32 | 13,156 | 4/2/26 | 77 | 40 | 60 | 0 | New Construction | 1/1/80 |
| 1122 | 14270 | LANTERN LN | HINGHAM DR | CASTLEGATE DR | E | AAC | 9 | 243 | 36 | 8,748 | 5/10/24 | 76 | 44 | 33 | 23 | Overlay - AC Structural | 5/11/18 |
| 1123 | 14292 | LAPWORTH CIR | NATIONAL LN | CDS | E | AAC | 8 | 491 | 36 | 20,716 | 3/18/24 | 91 | 25 | 61 | 14 | Overlay - AC Structural | 5/11/18 |
| 1124 | 13694 | LARCHWOOD DR | SUNNYCREST LN | END | E | AC | 1 | 352 | 36 | 14,472 | 4/8/26 | 76 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1124 | 13695 | LARCHWOOD DR | NORTHRIDGE LN | SUNNYCREST LN | E | AC | 1 | 1,280 | 36 | 45,792 | 4/8/26 | 76 | 16 | 84 | 0 | New Construction | 1/1/80 |
| 1124 | 15298 | LARCHWOOD DR | SPRINGDALE ST | NORTHRIDGE LN | E | AC | 1 | 915 | 36 | 32,652 | 4/8/26 | 77 | 28 | 72 | 0 | New Construction | 1/1/80 |
| 1125 | 13400 | LARCREST CIR | FOXSHIELD DR | CDS | E | AC | 5 | 250 | 36 | 10,250 | 5/21/24 | 26 | 87 | 11 | 2 | New Construction | 1/1/80 |
| 1126 | 15124 | LARK LN | TROPHY DR | WARNER AVE | E | AC | 3 | 537 | 36 | 20,082 | 4/2/26 | 65 | 28 | 72 | 0 | New Construction | 1/1/80 |
| 1128 | 15808 | LARKMONT DR | CRESTMOOR LN | HELENBROOK LN | E | AC | 5 | 517 | 36 | 19,362 | 3/31/26 | 80 | 31 | 66 | 3 | New Construction | 1/1/80 |
| 1129 | 15421 | LARKPORT DR | BRIARLY LN | FELCLIFF LN | E | AAC | 7 | 1,027 | 36 | 36,972 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1131 | 13691 | LARKSPUR CIR | SUNNYCREST LN | END | E | AAC | 1 | 352 | 32 | 13,064 | 5/7/24 | 81 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1132 | 16024 | LARTHORN DR | NORCROFT LN | MEANDER LN | E | AAC | 7 | 1,236 | 36 | 45,246 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1133 | 14180 | LASSEN CIR | BIG BEND LN | CDS | E | AAC | 8 | 504 | 36 | 19,944 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1134 | 13952 | LAUDER CIR | LINDSAY LN | CDS | E | AAC | 7 | 419 | 36 | 16,334 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1135 | 13915 | LAURA CIR | GREGORY LN | CDS | E | AC | 7 | 160 | 27 | 5,570 | 4/8/24 | 85 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 1136 | 16005 | LAURELHURST DR | WINDEMEIR LN | GOLDENWEST ST | E | AC | 3 | 1,540 | 36 | 54,864 | 12/19/24 | 65 | 35 | 62 | 3 | New Construction - Initial | 1/1/80 |
| 1137 | 15526 | LAVONNE LN | CYNTHIA DR | EDYE DR | E | AAC | 8 | 776 | 36 | 28,936 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1138 | 15353 | LAWN HAVEN DR | EVENING HILL DR | CDS | E | AAC | 5 | 226 | 32 | 9,032 | 4/30/26 | 98 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1138 | 15354 | LAWN HAVEN DR | EVENING HILL DR | CDS (E) | E | AC | 5 | 1,090 | 36 | 41,240 | 5/6/24 | 91 | 22 | 73 | 5 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1139 | 14199 | LAWSON LN | ADAMS AVE | NIAGARA DR | E | AAC | 8 | 546 | 35 | 19,110 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1139 | 15489 | LAWSON LN | NIAGARA DR | MEREDITH DR | E | AC | 8 | 516 | 35 | 18,060 | 2/28/22 | 33 | 81 | 7 | 12 | New Construction - Initial | 1/1/80 |
| 1140 | 15281 | LE CONTE DR | HARTLUND ST | CDS | E | AAC | 4 | 460 | 36 | 18,060 | 4/13/26 | 93 | 0 | 87 | 13 | Overlay - AC Structural | 11/28/19 |
| 1141 | 14961 | LE GRAND LN | HEIL AVE | PRAIRE DR | E | AAC | 2 | 664 | 36 | 25,570 | 5/21/24 | 87 | 17 | 25 | 58 | Overlay - AC Structural | 12/1/17 |
| 1142 | 13448 | LEAF CIR | PACEMONT DR | END | E | AAC | 5 | 380 | 36 | 17,680 | 5/29/24 | 66 | 48 | 51 | 1 | Overlay - AC Structural | 10/1/12 |
| 1143 | 14844 | LEAFWOOD CIR | TERRY DR | CDS | E | AAC | 4 | 520 | 36 | 19,975 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1144 | 15542 | LEASURE LN | ATLANTA AVE | SATTERFIELD DR | E | AC | 9 | 433 | 36 | 16,338 | 8/30/23 | 40 | 73 | 22 | 5 | New Construction - Initial | 1/1/80 |
| 1145 | 13553 | LEE CIR | FORD DR | END | E | AAC | 3 | 350 | 32 | 12,700 | 5/28/24 | 94 | 0 | 87 | 13 | Overlay - AC Structural | 10/1/12 |
| 1146 | 14061 | LEECREST LN | LARKPORT DR | LOWMEAD DR | E | AC | 7 | 266 | 36 | 10,326 | 4/20/26 | 84 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1147 | 13219 | LEGEND CIR | BARUNA LN | CDS | E | AC | 2 | 170 | 36 | 7,620 | 4/7/22 | 83 | 74 | 26 | 0 | New Construction - Initial | 1/1/80 |
| 1148 | 14385 | LEHUA LN | HAMILTON AVE | NEOLANI DR | E | AC | 9 | 178 | 36 | 6,120 | 4/24/24 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1149 | 14566 | LEIGHTON LN | CORNWALL DR | END | E | AAC | 8 | 227 | 24 | 5,448 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1150 | 15611 | LEILANI DR | MAILBU LN | BUSHARD ST | E | AC | 9 | 894 | 36 | 32,934 | 4/17/24 | 56 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1151 | 14364 | LEMONTREE LN | CHEVY CHASE DR | CDS | E | AC | 8 | 127 | 36 | 4,572 | 5/20/24 | 85 | 0 | 47 | 53 | New Construction - Initial | 1/1/80 |
| 1151 | 15561 | LEMONTREE LN | PEPPERTREE DR | CHEVY CHASE DR | E | AC | 8 | 838 | 36 | 30,918 | 5/20/24 | 73 | 77 | 23 | 0 | New Construction - Initial | 1/1/80 |
| 1152 | 13343 | LENIS CIR | MARIE LN | CDS | E | AAC | 3 | 229 | 36 | 9,844 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1153 | 13598 | LENNOX DR | BRIMHALL LN | EDWARDS ST | E | AC | 3 | 180 | 36 | 6,480 | 4/22/26 | 41 | 65 | 30 | 5 | New Construction - Initial | 1/1/80 |
| 1153 | 16003 | LENNOX DR | EDWARDS ST | WINDEMEIR LN | E | AC | 3 | 1,104 | 36 | 39,744 | 1/6/25 | 60 | 41 | 43 | 16 | New Construction - Initial | 1/1/80 |
| 1154 | 13172 | LEONARD LN | MISTRAL DR | HUMBOLDT DR | E | AC | 2 | 260 | 36 | 9,072 | 4/7/22 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1155 | 14865 | LESLIE LN | WARNER AVE | DUNBAR AVE | E | AC | 2 | 440 | 36 | 15,840 | 4/1/26 | 80 | 20 | 80 | 0 | New Construction - Initial | 1/1/80 |
| 1156 | 14282 | LEVEE DR | QUEENS PARK LN | REEF LN | E | AC | 8 | 246 | 36 | 8,856 | 3/18/24 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1157 | 13634 | LEWIS LN | GALIPEAN DR | WINTERGREEN DR | E | AC | 5 | 531 | 36 | 19,866 | 5/20/24 | 30 | 85 | 4 | 11 | New Construction - Initial | 1/1/80 |
| 1158 | 13901 | LEXIE CIR | PALM AVE | END | E | AC | 5 | 173 | 36 | 9,015 | 7/8/21 | 91 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1159 | 14096 | LEXINGTON LN | SHANGRI LA DR | LURLINE DR | E | AAC | 8 | 780 | 36 | 29,080 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1159 | 15442 | LEXINGTON LN | LURLINE DR | ADAMS AVE | E | AC | 8 | 1,358 | 36 | 48,888 | 2/28/22 | 68 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1160 | 14805 | LIBERTY AVE | JACQUELYN LN | ALLEY LIBERTY AVE | E | AAC | 4 | 155 | 36 | 5,580 | 4/13/26 | 81 | 0 | 100 | 0 | Overlay - AC Structural | 11/1/19 |
| 1160 | 14806 | LIBERTY AVE | ALLEY LIBERTY AVE | BEACH BLVD | E | AAC | 4 | 1,331 | 36 | 47,916 | 4/13/26 | 87 | 22 | 66 | 12 | Overlay - AC Structural | 11/1/19 |
| 1160 | 15732 | LIBERTY AVE | CRABB LN | JACQUELYN LN | E | AAC | 4 | 325 | 36 | 11,700 | 4/13/26 | 82 | 38 | 62 | 0 | Overlay - AC Structural | 11/1/19 |
| 1161 | 15362 | LIBRA CIR | CDS | CDS | E | AAC | 7 | 529 | 34 | 20,870 | 4/14/26 | 94 | 0 | 82 | 18 | Overlay - AC Structural | 11/28/19 |
| 1162 | 13621 | LIDO LN | MARIPOSA DR | SANTA YNEZ DR | E | AC | 5 | 320 | 36 | 12,660 | 5/28/24 | 29 | 91 | 6 | 3 | New Construction - Initial | 1/1/80 |
| 1162 | 15147 | LIDO LN | FREEBORN DR | MARIPOSA DR | E | AC | 5 | 953 | 36 | 35,240 | 5/28/24 | 52 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1163 | 14890 | LIEGE DR | CHAPPARAL LN | WILD ROSE LN | E | AC | 5 | 629 | 36 | 22,644 | 4/1/26 | 83 | 61 | 39 | 0 | New Construction | 1/1/80 |
| 1164 | 14109 | LIGHTHOUSE LN | SEAPORT DR | SEALROCK DR | E | AAC | 9 | 246 | 36 | 8,856 | 8/21/23 | 88 | 20 | 80 | 0 | Overlay - AC Structural | 3/1/11 |
| 1164 | 15448 | LIGHTHOUSE LN | SEALROCK DR | END | E | AAC | 9 | 151 | 40 | 6,040 | 8/21/23 | 82 | 27 | 73 | 0 | Overlay - AC Structural | 3/1/11 |
| 1165 | 13513 | LILAC LN | ELK CIR | ALLEY WARNER AVE | E | AC | 3 | 137 | 32 | 4,384 | 4/7/22 | 58 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 1165 | 15235 | LILAC LN | TOULOUSE DR | ELK CIR | E | AAC | 3 | 280 | 36 | 10,830 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1166 | 13129 | LILES LN | EDINGER AVE | ALLEY EDINGER AVE | E | AAC | 2 | 158 | 36 | 5,688 | 5/21/24 | 56 | 55 | 14 | 31 | Overlay - AC Fabric | 10/1/16 |
| 1166 | 13130 | LILES LN | ALLEY EDINGER AVE | HENDRICKSEN DR | E | AAC | 2 | 144 | 36 | 5,184 | 5/21/24 | 87 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1167 | 13349 | LIMELIGHT CIR | SUN DR | CDS | E | AAC | 3 | 220 | 36 | 9,920 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1168 | 15343 | LIMERICK DR | WICKLOW LN | END | E | AC | 3 | 557 | 36 | 21,552 | 1/3/25 | 94 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 1169 | 14683 | LINCOLN AVE | ALABAMA ST | ALLEY ALABAMA ST | E | AAC | 6 | 323 | 37 | 11,951 | 8/15/23 | 85 | 14 | 79 | 7 | Overlay - AC Structural | 3/1/11 |
| 1169 | 14684 | LINCOLN AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 162 | 37 | 5,994 | 5/6/26 | 86 | 100 | 0 | 0 | Overlay - AC Structural | 3/1/11 |
| 1169 | 14685 | LINCOLN AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 330 | 37 | 12,210 | 8/15/23 | 60 | 68 | 32 | 0 | Overlay - AC Structural | 3/1/11 |
| 1169 | 14687 | LINCOLN AVE | CALIFORNIA ST | ALLEY CALIFORNIA ST | E | AAC | 6 | 160 | 37 | 5,920 | 8/15/23 | 52 | 56 | 44 | 0 | Overlay - AC Structural | 3/1/11 |
| 1169 | 14688 | LINCOLN AVE | ALLEY CALIFORNIA ST | DELAWARE ST | E | AAC | 6 | 169 | 37 | 5,957 | 8/15/23 | 58 | 58 | 42 | 0 | Overlay - AC Structural | 3/1/11 |
| 1169 | 14689 | LINCOLN AVE | DELAWARE ST | ALLEY DELAWARE ST | E | AC | 6 | 171 | 36 | 5,868 | 8/15/23 | 67 | 46 | 54 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1169 | 14690 | LINCOLN AVE | ALLEY DELAWARE ST | ENGLAND ST | E | AC | 6 | 160 | 36 | 5,760 | 8/15/23 | 52 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1169 | 14691 | LINCOLN AVE | ENGLAND ST | ALLEY ENGLAND ST | E | AC | 6 | 165 | 37 | 6,031 | 8/15/23 | 59 | 44 | 56 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1169 | 14692 | LINCOLN AVE | ALLEY ENGLAND ST | FLORIDA ST | E | AC | 6 | 165 | 37 | 6,105 | 8/15/23 | 50 | 40 | 35 | 25 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1170 | 13135 | LINDA CIR | TOMAS LN | END | E | AAC | 2 | 470 | 36 | 18,720 | 5/21/24 | 88 | 50 | 50 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1172 | 15909 | LINDSAY LN | GARFIELD AVE | LUSS DR | E | AAC | 7 | 998 | 36 | 36,178 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1173 | 13649 | LISA LN | STERLING DR | CDS | E | AAC | 4 | 124 | 33 | 3,828 | 4/13/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1173 | 13654 | LISA LN | TAYLOR DR | FORELLE DR | E | AAC | 4 | 533 | 33 | 17,325 | 4/13/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/21/19 |
| 1173 | 15278 | LISA LN | STERLING AVE | TAYLOR DR | E | AAC | 4 | 659 | 33 | 21,483 | 4/13/26 | 90 | 71 | 29 | 0 | Overlay - AC Structural | 11/28/19 |
| 1174 | 15364 | LISTER LN | MODALE DR | GARFIELD AVE | E | AAC | 7 | 1,440 | 36 | 51,840 | 4/14/26 | 87 | 43 | 54 | 3 | Overlay - AC Structural | 11/28/19 |
| 1175 | 15907 | LITCHFIELD DR | WOODWARD LN | BUSHARD ST | E | AC | 8 | 1,098 | 36 | 39,528 | 5/7/26 | 53 | 54 | 43 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1176 | 13906 | LITTLE HARBOR DR | SUMMER BREEZE LN | GOLDENWEST ST | E | AC | 5 | 130 | 36 | 5,526 | 6/30/21 | 70 | 43 | 18 | 39 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1177 | 13443 | LITTLEFIELD DR | NEWMOON LN | TWINFORD LN | E | AAC | 5 | 328 | 36 | 11,808 | 5/23/24 | 52 | 48 | 38 | 14 | Overlay - AC Structural | 10/1/12 |
| 1177 | 15195 | LITTLEFIELD DR | SPRINGDALE ST | NEWMOON LN | E | AAC | 5 | 629 | 36 | 22,644 | 5/23/24 | 57 | 64 | 35 | 1 | Overlay - AC Structural | 10/1/12 |
| 1178 | 14960 | LITTLER DR | BIRDIE LN | CLARK DR | E | AAC | 3 | 1,153 | 36 | 41,758 | 5/9/24 | 90 | 31 | 61 | 8 | Overlay - AC Fabric | 10/1/16 |
| 1179 | 14309 | LOCHLEA LN | HILLHEAD CIR | ALLEY DONCASTER DR | E | AC | 9 | 165 | 36 | 5,940 | 8/30/23 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1179 | 14310 | LOCHLEA LN | ALLEY LOMOND DR | LOMOND DR | E | AC | 9 | 170 | 28 | 5,786 | 8/30/23 | 89 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1179 | 15534 | LOCHLEA LN | ATLANTA AVE | GALLEY DR | E | AC | 9 | 573 | 36 | 23,884 | 8/24/23 | 55 | 85 | 11 | 4 | New Construction | 1/1/80 |
| 1179 | 15535 | LOCHLEA LN | JENNY DR | HILLHEAD CIR | E | AC | 9 | 660 | 36 | 23,760 | 8/30/23 | 84 | 33 | 61 | 6 | New Construction | 1/1/80 |
| 1179 | 15536 | LOCHLEA LN | ALLEY DONCASTER DR | ALLEY LOMOND DR | E | AC | 9 | 326 | 36 | 11,736 | 8/30/23 | 86 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1180 | 14356 | LOCKHAVEN CIR | EFFINGHAM DR | CDS | E | AC | 8 | 495 | 36 | 19,320 | 4/10/24 | 64 | 71 | 12 | 17 | New Construction | 1/1/80 |
| 1181 | 13526 | LOIRE CIR | RHINE DR | CDS | E | AAC | 4 | 465 | 36 | 18,240 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1182 | 13530 | LOIS CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 76 | 60 | 40 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1183 | 13984 | LOLA LN | ANNIK DR | YORKTOWN AVE | E | AC | 8 | 171 | 36 | 6,156 | 5/5/26 | 70 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1184 | 13119 | LOMA AVE | SAN NICHOLAS CIR | MAIN ST | E | AC | 6 | 255 | 36 | 9,535 | 6/30/21 | 97 | 0 | 46 | 54 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1184 | 13121 | LOMA AVE | LAKE ST | PARK ST | E | AAC | 6 | 590 | 37 | 21,830 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1184 | 50480 | LOMA AVE | PARK ST | MAIN ST | E | AC | 6 | 349 | 36 | 12,564 | 6/28/21 | 86 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1186 | 15912 | LOMBARDY LN | LORRAINE DR | YORKTOWN AVE | E | AC | 7 | 685 | 36 | 24,660 | 4/15/26 | 87 | 54 | 46 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1187 | 14312 | LOMOND DR | LOCHLEA LN | NEWLAND ST | E | AC | 9 | 660 | 39 | 26,766 | 8/30/23 | 69 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 1188 | 14115 | LONDONDERRY LN | MALLOY DR | MUNSTER DR | E | AAC | 9 | 260 | 36 | 9,360 | 8/23/23 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1188 | 14116 | LONDONDERRY LN | MUNSTER DR | END | E | AC | 9 | 130 | 36 | 4,680 | 8/23/23 | 89 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1189 | 13858 | LONGFORD CIR | CARRIE LN | END | E | AC | 1 | 419 | 36 | 16,334 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 4050 | 50250 | LOOKOUT LN | NAPLES DR | KEEL DR | E | AC | 7 | 500 | 35 | 17,500 | 4/15/26 | 65 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1191 | 13484 | LORGE CIR | GOTHARD ST | END | E | AAC | 3 | 404 | 36 | 16,044 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1192 | 15379 | LORRAINE DR | SAUSALITO LN | BAYWATER LN | E | AC | 7 | 916 | 36 | 32,976 | 4/15/26 | 85 | 45 | 41 | 14 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1193 | 13421 | LOS AMIGOS CIR | VIA ESPANA LN | END | E | AAC | 5 | 916 | 36 | 34,476 | 5/29/24 | 74 | 19 | 81 | 0 | Overlay - AC Structural | 10/1/12 |
| 1194 | 14900 | LOS PATOS AVE | GREEN ST | BOLSA CHICA ST | E | AC | 2 | 660 | 36 | 23,112 | 3/22/22 | 69 | 53 | 46 | 1 | New Construction | 1/1/80 |
| 1194 | 15785 | LOS PATOS AVE | SIMS ST | GREEN ST | E | AC | 2 | 1,320 | 36 | 47,520 | 3/22/22 | 84 | 0 | 50 | 50 | New Construction | 1/1/80 |
| 1194 | 15941 | LOS PATOS AVE | WARNER AVE | SIMS ST | E | AC | 2 | 1,174 | 36 | 43,764 | 3/22/22 | 83 | 45 | 24 | 31 | New Construction | 1/1/80 |
| 1195 | 13308 | LOS VERDES LN | HEIL AVE | MEADOWBROOK DR | E | AC | 3 | 321 | 36 | 10,968 | 4/2/26 | 83 | 69 | 31 | 0 | New Construction | 1/1/80 |
| 1196 | 15897 | LOTUS LN | PIONEER DR | ADAMS AVE | E | AC | 7 | 803 | 36 | 29,808 | 4/20/26 | 96 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1197 | 14936 | LOURDES DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 36,192 | 3/30/26 | 82 | 63 | 28 | 9 | New Construction | 1/1/80 |
| 1198 | 15125 | LOVELL LN | ANNETTE CIR | SHIELDS DR | E | AC | 3 | 781 | 36 | 28,116 | 4/6/26 | 72 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 1199 | 13226 | LOWELL CIR | WESTPORT DR | CDS | E | AC | 2 | 479 | 36 | 18,744 | 3/24/22 | 56 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 1200 | 14059 | LOWMEAD DR | BRIARLY LN | LEECREST LN | E | AC | 7 | 628 | 36 | 24,108 | 4/20/26 | 73 | 89 | 11 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1201 | 13285 | LOYOLA DR | TUFTS LN | WHITTIER LN | E | AC | 3 | 1,094 | 36 | 40,384 | 1/6/25 | 79 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 1202 | 14514 | LUAU LN | LANAI CIR | LEILANI DR | E | AC | 9 | 258 | 36 | 8,700 | 4/17/24 | 89 | 23 | 77 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1202 | 15610 | LUAU LN | MOLOKAI DR | LANAI CIR | E | AC | 9 | 514 | 36 | 18,504 | 4/17/24 | 66 | 79 | 18 | 3 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1203 | 15817 | LUCERO LN | NIMROD DR | SLATER AVE | E | AAC | 3 | 314 | 32 | 10,048 | 5/20/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1204 | 13536 | LUCIA LN | HEIL AVE | LOIS CIR | E | AAC | 4 | 161 | 36 | 5,796 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1204 | 13537 | LUCIA LN | HOWARD CIR | ARNETT DR | E | AAC | 4 | 298 | 36 | 10,728 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1204 | 15246 | LUCIA LN | LOIS CIR | JUDY CIR | E | AAC | 4 | 512 | 36 | 18,432 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1204 | 15247 | LUCIA LN | JUDY CIR | HOWARD CIR | E | AAC | 4 | 797 | 36 | 28,692 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1205 | 13435 | LUCIENTO DR | SALAMANCA LN | SAN LEANDRO LN | E | AAC | 5 | 438 | 36 | 15,768 | 5/23/24 | 73 | 35 | 65 | 0 | Overlay - AC Structural | 10/1/12 |
| 1205 | 15189 | LUCIENTO DR | CADIZ CIR | SALAMANCA LN | E | AAC | 5 | 429 | 36 | 15,444 | 5/23/24 | 81 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1206 | 14942 | LUDLOW CIR | AMDERTON LN | END | E | AC | 5 | 258 | 36 | 11,088 | 3/30/26 | 72 | 85 | 6 | 9 | New Construction | 1/1/80 |
| 1207 | 14559 | LURES LN | RALEIGH DR | KENSINGTON DR | E | AAC | 8 | 269 | 24 | 6,456 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1207 | 14560 | LURES LN | CORNWALL DR | END | E | AAC | 8 | 174 | 24 | 4,176 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1208 | 15437 | LURLINE DR | CANBERRA LN | LEXINGTON LN | E | AAC | 8 | 520 | 36 | 19,720 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1209 | 15378 | LUSS DR | LINDSAY LN | CDS | E | AAC | 7 | 949 | 36 | 35,414 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1210 | 13347 | LYDIA DR | MARIE LN | GOLDENWEST ST | E | AC | 3 | 409 | 36 | 14,724 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1211 | 14274 | LYMAN DR | CRESTVIEW LN | BUSHARD ST | E | AC | 9 | 166 | 36 | 5,976 | 5/6/24 | 73 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1212 | 15245 | LYNDON ST | WARNER AVE | CDS | E | AC | 4 | 466 | 36 | 18,576 | 3/31/22 | 85 | 47 | 49 | 4 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1213 | 13606 | LYNN ST | PRAIRIE DR | PEARCE ST | E | AAC | 2 | 660 | 36 | 24,750 | 5/21/24 | 93 | 0 | 88 | 12 | Overlay - AC Fabric | 12/1/17 |
| 1213 | 15018 | LYNN ST | WARNER AVE | JAMES CIR | E | AAC | 2 | 505 | 36 | 18,180 | 5/21/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1213 | 15115 | LYNN ST | PEARCE ST | WARNER AVE | E | AC | 2 | 1,321 | 36 | 47,556 | 3/22/22 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1213 | 15786 | LYNN ST | JAMES CIR | LOS PATOS AVE | E | AAC | 2 | 821 | 36 | 27,056 | 5/21/24 | 87 | 0 | 35 | 65 | Overlay - AC Fabric | 12/1/17 |
| 1214 | 14782 | LYONS CIR | TALBERT AVE | CDS | E | AC | 4 | 275 | 40 | 12,500 | 5/13/24 | 90 | 0 | 92 | 8 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1215 | 13495 | MAC DONALD AVE | BEACH BLVD | END | E | AC | 4 | 660 | 35 | 23,100 | 4/1/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1216 | 15923 | MACHINE DR | PIPELINE LN | SPRINGDALE ST | E | AC | 1 | 1,254 | 40 | 50,160 | 4/8/26 | 76 | 59 | 5 | 36 | New Construction | 1/1/80 |
| 1217 | 13504 | MADDOX DR | ALLEY GOLDENWEST ST | BARTLETT LN | E | AC | 3 | 157 | 36 | 5,652 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1217 | 13505 | MADDOX DR | ALLEY SABOT LN | ALLEY MADDOX DR | E | AC | 3 | 160 | 36 | 5,760 | 3/18/22 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1217 | 15022 | MADDOX DR | GOLDENWEST ST | ALLEY GOLDENWEST ST | E | AC | 3 | 181 | 36 | 6,516 | 3/18/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1217 | 15230 | MADDOX DR | BARTLETT LN | ALLEY BARTLETT LN | E | AC | 3 | 157 | 36 | 5,652 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1217 | 15231 | MADDOX DR | ALLEY BARTLETT LN | TUNSTALL LN | E | AC | 3 | 158 | 36 | 5,688 | 4/9/22 | 81 | 57 | 43 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1217 | 15232 | MADDOX DR | TUNSTALL LN | ALLEY SABOT LN | E | AC | 3 | 359 | 36 | 12,924 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1218 | 15964 | MADELINE DR | MAGNOLIA ST | OCCIDENTAL LN | E | AC | 7 | 1,121 | 36 | 41,106 | 4/20/26 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1219 | 13623 | MADERA LN | SANTA YNEZ DR | CDS | E | AC | 5 | 485 | 36 | 19,020 | 5/28/24 | 38 | 84 | 16 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1219 | 14604 | MADERA LN | ATHENA DR | MUKAI CT | E | AC | 5 | 386 | 36 | 15,036 | 5/22/24 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1220 | 13605 | MAGELLAN LN | BOUQUET DR | SUNLIGHT DR | E | AC | 3 | 1,041 | 36 | 37,476 | 3/18/22 | 93 | 0 | 91 | 9 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1221 | 13639 | MAGIC CIR | HARTLUND ST | CDS | E | AC | 4 | 121 | 32 | 5,372 | 4/8/24 | 65 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 2287 | 17016 | MAGNOLIA ST FRONTAGE | PIONEER DR | GETTYSBURG DR | E | AAC | 7 | 260 | 26 | 6,760 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2287 | 17017 | MAGNOLIA ST FRONTAGE | SUNSHINE DR | VILLAGE DR | E | AAC | 7 | 655 | 26 | 17,030 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1222 | 14380 | MAHALO DR | KIOWA LN | KANEOHE LN | E | AC | 9 | 930 | 36 | 32,904 | 3/27/24 | 81 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 1223 | 14001 | MAIKAI DR | KIPAHULU DR | TONGA LN | E | AAC | 8 | 671 | 36 | 24,156 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1223 | 15398 | MAIKAI DR | TONGA LN | END | E | AC | 8 | 864 | 36 | 32,904 | 3/7/22 | 82 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1130 | 12860 | MAIN ST | SIXTH ST | ACACIA AVE | E | AAC | 6 | 320 | 45 | 12,850 | 6/29/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 13046 | MAIN ST | LOMA AVE | ADAMS AVE | E | AAC | 6 | 349 | 30 | 3,468 | 6/29/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 13051 | MAIN ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 578 | 45 | 26,185 | 6/29/21 | 87 | 0 | 28 | 72 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 13052 | MAIN ST | ORANGE AVE | SIXTH ST | E | AAC | 6 | 695 | 43 | 37,605 | 6/29/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 13053 | MAIN ST | OLIVE AVE | ORANGE AVE | E | AAC | 6 | 415 | 38 | 15,655 | 6/29/21 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 6/1/16 |
| 1130 | 13054 | MAIN ST | PCH | OLIVE AVE | E | AAC | 6 | 790 | 33 | 29,160 | 6/29/21 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 6/1/16 |
| 1130 | 13055 | MAIN ST | ADAMS AVE | SEVENTEENTH ST | E | AAC | 6 | 1,191 | 30 | 11,910 | 6/29/21 | 81 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 13056 | MAIN ST | PALM AVE | CREST AVE | E | AAC | 6 | 858 | 45 | 39,610 | 6/29/21 | 91 | 0 | 44 | 56 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 13057 | MAIN ST | CREST AVE | TWELTH ST | E | AAC | 6 | 1,015 | 45 | 45,675 | 6/29/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 13059 | MAIN ST | TWELTH ST | LOMA AVE | E | AAC | 6 | 845 | 45 | 44,486 | 6/29/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 17004 | MAIN ST | ADAMS AVE | LOMA AVE | E | AAC | 6 | 349 | 33 | 11,517 | 6/30/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 17005 | MAIN ST | SEVENTEENTH ST | ADAMS AVE | E | AAC | 6 | 1,191 | 28 | 33,348 | 6/30/21 | 99 | 0 | 2 | 98 | Surface Treatment - Slurry Seal | 5/1/21 |
| 1224 | 14832 | MAJOR CIR | B ST | CDS | E | AC | 4 | 303 | 34 | 11,552 | 3/31/22 | 57 | 76 | 24 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1225 | 15228 | MALAGA LN | SAN ANGELO DR | LA PAZ DR | E | AAC | 4 | 819 | 36 | 31,234 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1226 | 15573 | MALAHINE DR | IMPALA LN | HANAKAI LN | E | AC | 9 | 516 | 36 | 19,326 | 5/20/24 | 54 | 84 | 16 | 0 | New Construction | 1/1/80 |
| 1227 | 13188 | MALDEN CIR | SOMERSET LN | CDS | E | AC | 2 | 331 | 32 | 12,092 | 4/9/22 | 81 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 1228 | 14530 | MALIBU LN | TAHITI CIR | LEILANI DR | E | AAC | 9 | 275 | 36 | 10,650 | 4/22/26 | 84 | 48 | 49 | 3 | Overlay - AC Structural | 5/11/19 |
| 1228 | 15608 | MALIBU LN | BANNING AVE | TAHITI CIR | E | AAC | 9 | 944 | 36 | 33,984 | 4/22/26 | 76 | 43 | 55 | 2 | Overlay - AC Structural | 5/11/19 |
| 1229 | 14119 | MALLOY DR | SOMERVILLE LN | YVONNE DR | E | AC | 9 | 291 | 36 | 10,476 | 8/23/23 | 55 | 67 | 25 | 8 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1229 | 15452 | MALLOY DR | YVONNE DR | DUBLIN LN | E | AC | 9 | 1,326 | 36 | 47,736 | 8/21/23 | 67 | 81 | 17 | 2 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1230 | 13886 | MALM CIR | BREELAND DR | END | E | AC | 3 | 560 | 36 | 21,960 | 4/7/26 | 90 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 1231 | 13224 | MALTA CIR | COURTNEY LN | CDS | E | AC | 2 | 716 | 36 | 27,276 | 3/24/22 | 65 | 68 | 32 | 0 | New Construction | 1/1/80 |
| 1232 | 15895 | MAMMOTH DR | EVERGLADES LN | RUNNING SPRINGS LN | E | AC | 8 | 1,032 | 36 | 36,576 | 3/1/22 | 71 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1233 | 13940 | MANDEVILLE DR | DALEHURST CIR | SUMMERFIELD LN | E | AAC | 7 | 401 | 36 | 15,414 | 4/15/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/21/19 |
| 1234 | 15264 | MANDRELL DR | ALLEY OAK LN | ASH ST | E | AC | 4 | 437 | 36 | 16,232 | 5/30/24 | 51 | 62 | 31 | 7 | New Construction | 1/1/80 |
| 1235 | 14367 | MANESSA CIR | DANA DR | END | E | AAC | 8 | 322 | 32 | 10,304 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1236 | 13235 | MANGRUM DR | EAGLE LN | BIRDIE LN | E | AC | 3 | 260 | 36 | 9,360 | 3/23/22 | 91 | 23 | 77 | 0 | New Construction | 1/1/80 |
| 1236 | 15083 | MANGRUM DR | BIRDIE LN | END | E | AC | 3 | 1,216 | 36 | 43,776 | 3/23/22 | 62 | 72 | 27 | 1 | New Construction | 1/1/80 |
| 1237 | 15988 | MANHATTAN DR | MAYOR LN | WHETMORE LN | E | AAC | 3 | 1,181 | 36 | 42,516 | 5/22/24 | 75 | 11 | 85 | 4 | Overlay - AC Structural | 10/1/12 |
| 1238 | 14767 | MANITOBA LN | ALBERTA DR | YUKON DR | E | AC | 4 | 246 | 36 | 9,856 | 5/13/24 | 83 | 0 | 94 | 6 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1238 | 15717 | MANITOBA LN | ONTARIO DR | ALBERTA DR | E | AAC | 4 | 561 | 36 | 20,196 | 4/14/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1239 | 13895 | MANOR POINT CIR | EVENING HILL DR | CDS | E | AAC | 5 | 354 | 36 | 14,744 | 4/30/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1240 | 15199 | MANORFIELD DR | OLDGATE LN | OXBORO LN | E | AAC | 5 | 1,032 | 36 | 37,152 | 5/23/24 | 53 | 48 | 28 | 24 | Overlay - AC Structural | 10/1/12 |
| 1241 | 15890 | MANSARD LN | HENTON DR | BAINFORD DR | E | AC | 7 | 941 | 36 | 34,376 | 4/16/26 | 86 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1242 | 13823 | MANUFACTURE LN | PRODUCTION DR | SYSTEM DR | E | AC | 1 | 339 | 40 | 13,810 | 4/1/22 | 79 | 44 | 53 | 3 | New Construction | 1/1/80 |
| 1243 | 15301 | MAR VISTA DR | SUNNYCREST LN | EDWARDS ST | E | AAC | 1 | 452 | 36 | 16,272 | 5/7/24 | 59 | 56 | 44 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1243 | 15925 | MAR VISTA DR | NORTHRIDGE LN | SUNNYCREST LN | E | AC | 1 | 1,300 | 36 | 46,800 | 5/8/26 | 49 | 62 | 36 | 2 | New Construction | 1/1/80 |
| 1244 | 14410 | MARBER LN | WOODBORO DR | TALBERT AVE | E | AC | 5 | 182 | 36 | 6,552 | 3/30/26 | 88 | 42 | 58 | 0 | New Construction | 1/1/80 |
| 1245 | 14520 | MARBLEHEAD LN | BANNING AVE | PORT CLYDE DR | E | AC | 9 | 167 | 36 | 6,012 | 4/17/24 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1246 | 15150 | MARCELLENA DR | LIDO LN | GURNEY LN | E | AC | 5 | 529 | 36 | 20,184 | 5/28/24 | 39 | 74 | 22 | 4 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1247 | 14407 | MARGARITA LN | FENWICK DR | BAKER DR | E | AAC | 3 | 300 | 36 | 11,550 | 5/21/24 | 80 | 0 | 93 | 7 | Overlay - AC Structural | 10/1/12 |
| 1248 | 14434 | MARIANA CIR | WELLINGTON CIR | CDS | E | AAC | 2 | 279 | 32 | 10,428 | 5/6/24 | 80 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1249 | 15139 | MARIE LN | PAULA CIR | MARILYN DR | E | AC | 3 | 827 | 36 | 29,772 | 3/18/22 | 97 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1249 | 15994 | MARIE LN | HEIL AVE | PAULA CIR | E | AC | 3 | 933 | 36 | 33,588 | 3/18/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2305 | 60820 | MARIGAYLE CIR | EDWARDS ST | CDS | E | AC | 5 | 185 | 36 | 8,550 | 5/7/24 | 93 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 1250 | 13336 | MARILYN DR | COOPER LN | CDS | E | AAC | 3 | 428 | 36 | 17,008 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1250 | 15133 | MARILYN DR | DIANE LN | COOPER LN | E | AAC | 3 | 919 | 36 | 33,084 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1250 | 15995 | MARILYN DR | DIANE LN | CDS | E | AAC | 3 | 1,071 | 36 | 40,056 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1251 | 14157 | MARINA LN | ADAMS AVE FRONTAGE | NAUTILUS DR | E | AC | 7 | 805 | 36 | 29,730 | 4/16/26 | 90 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1252 | 15020 | MARINA VIEW PL | ORION AVE | LOS PATOS AVE | E | AAC | 2 | 686 | 36 | 24,696 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1253 | 14405 | MARIPOSA DR | CORONADO LN | LIDO LN | E | AC | 5 | 262 | 36 | 9,432 | 5/21/24 | 47 | 74 | 21 | 5 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1254 | 15106 | MARJAN LN | EDINGER AVE | LAURELHURST DR | E | AC | 3 | 1,190 | 36 | 42,264 | 12/18/24 | 81 | 29 | 68 | 3 | New Construction | 1/1/80 |
| 1255 | 13490 | MARK LN | NANCY DR | ALHAMBRA AVE | E | AC | 4 | 260 | 36 | 10,110 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1256 | 14815 | MARKEN LN | HOLLAND DR | SLATER AVE | E | AAC | 4 | 660 | 36 | 23,760 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1256 | 15736 | MARKEN LN | FRIESLAND DR | HOLLAND DR | E | AAC | 4 | 520 | 36 | 18,970 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1257 | 13506 | MARS DR | GEMINI LN | GOTHARD ST | E | AC | 3 | 361 | 40 | 15,190 | 4/7/22 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1258 | 14828 | MARSEILLE DR | GRANADA LN | BARCELONA LN | E | AC | 4 | 757 | 36 | 27,252 | 3/31/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1259 | 15091 | MARSHALL DR | ACE LN | NASSAU LN | E | AC | 3 | 1,165 | 36 | 42,440 | 3/23/22 | 45 | 84 | 15 | 1 | New Construction | 1/1/80 |
| 1260 | 14313 | MARTINIQUE DR | WHITE HORSE LN | MIRAMAR LN | E | AC | 9 | 253 | 36 | 9,108 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1260 | 15537 | MARTINIQUE DR | SHEPHERD LN | WHITE HORSE LN | E | AC | 9 | 504 | 36 | 18,894 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1261 | 13173 | MARUFFA CIR | MISTRAL DR | CDS | E | AC | 2 | 381 | 32 | 13,692 | 4/7/22 | 76 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1262 | 14133 | MARVALE DR | ALLPORT LN | CAMFIELD LN | E | AAC | 7 | 737 | 36 | 27,282 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1263 | 14222 | MARY CIR | FARNSWORTH LN | END | E | AC | 9 | 321 | 32 | 10,272 | 8/24/23 | 69 | 31 | 69 | 0 | New Construction | 1/1/80 |
| 1264 | 15160 | MARYPORT DR | CRESTMOOR LN | SHOREHAM LN | E | AC | 5 | 524 | 36 | 18,864 | 3/31/26 | 81 | 0 | 94 | 6 | New Construction | 1/1/80 |
| 1264 | 15809 | MARYPORT DR | FALKIRK LN | CRESTMOOR LN | E | AC | 5 | 521 | 36 | 18,756 | 3/30/26 | 68 | 49 | 48 | 3 | New Construction | 1/1/80 |
| 1265 | 13555 | MASHIE CIR | NIMROD DR | END | E | AAC | 3 | 216 | 32 | 8,412 | 5/20/24 | 93 | 0 | 58 | 42 | Overlay - AC Structural | 10/1/12 |
| 1266 | 13337 | MASON DR | DALE VISTA LN | FOUNTAIN LN | E | AC | 3 | 398 | 36 | 14,328 | 3/18/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1267 | 15889 | MASTERS DR | NORCROFT LN | NEWBY LN | E | AC | 7 | 1,033 | 36 | 37,938 | 4/16/26 | 96 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1268 | 14240 | MATARO LN | VARAS CIR | ALVARADO DR | E | AC | 9 | 273 | 36 | 9,828 | 8/23/23 | 79 | 31 | 69 | 0 | New Construction | 1/1/80 |
| 1270 | 15438 | MATSONIA LN | CONSTITUTION DR | CUTTY SARK DR | E | AAC | 8 | 520 | 36 | 18,720 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1269 | 13976 | MATTHEW CIR | LITCHFIELD DR | CDS | E | AAC | 8 | 510 | 36 | 20,160 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1271 | 13145 | MAUI CIR | WAIKIKI LN | CDS | E | AC | 2 | 535 | 36 | 19,260 | 3/24/22 | 54 | 83 | 17 | 0 | New Construction | 1/1/80 |
| 1272 | 15821 | MAUNA LN | KAMUELA DR | YORKTOWN AVE | E | AAC | 8 | 1,188 | 36 | 42,768 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1273 | 14097 | MAURETANIA CIR | CARMANIA LN | CDS | E | AAC | 8 | 303 | 32 | 11,696 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1274 | 15337 | MAYFLOWER LN | MC FADDEN AVE | PRISCILLA DR | E | AC | 1 | 961 | 36 | 34,846 | 12/20/24 | 35 | 81 | 4 | 15 | New Construction | 1/1/80 |
| 1275 | 13372 | MAYOR LN | SLATER AVE | CORY DR | E | AAC | 3 | 168 | 36 | 6,048 | 5/22/24 | 81 | 11 | 65 | 24 | Overlay - AC Structural | 10/1/12 |
| 1275 | 15154 | MAYOR LN | CORY DR | END | E | AAC | 3 | 368 | 36 | 15,748 | 5/22/24 | 81 | 13 | 87 | 0 | Overlay - AC Structural | 10/1/12 |
| 1276 | 15460 | MAYPORT LN | ADAMS AVE | MIDBURY DR | E | AAC | 7 | 746 | 36 | 26,856 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1277 | 14411 | MC CARTHY DR | SPRINGDALE ST | STILL HARBOR LN | E | AC | 5 | 180 | 36 | 6,480 | 5/24/24 | 26 | 96 | 4 | 0 | New Construction | 1/1/80 |
| 1185 | 14469 | MC FADDEN AVE | BOLSA CHICA ST | PELICAN LN | E | AC | 1 | 520 | 60 | 31,200 | 3/21/22 | 62 | 87 | 13 | 0 | New Construction | 1/1/80 |
| 1185 | 14470 | MC FADDEN AVE | INDUSTRY LN | GRAHAM ST | E | AC | 1 | 256 | 44 | 11,264 | 3/21/22 | 82 | 42 | 31 | 27 | New Construction | 1/1/80 |
| 1185 | 15591 | MC FADDEN AVE | PELICAN LN | CHEMICAL LN | E | AC | 1 | 1,028 | 60 | 61,030 | 3/21/22 | 47 | 80 | 12 | 8 | New Construction | 1/1/80 |
| 1185 | 15592 | MC FADDEN AVE | CHEMICAL LN | INDUSTRY LN | E | AC | 1 | 914 | 44 | 40,216 | 3/21/22 | 53 | 83 | 6 | 11 | New Construction | 1/1/80 |
| 1278 | 14179 | MC KINLEY LN | ROCKY MOUNTAIN DR | YELLOWSTONE DR | E | AAC | 8 | 872 | 36 | 32,142 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1279 | 13404 | MC KINNEY CIR | ARMADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/29/24 | 62 | 81 | 15 | 4 | New Construction | 1/1/80 |
| 1280 | 14428 | MC LAREN LN | ANNIK DR | BRABHAM DR | E | AC | 8 | 260 | 36 | 9,360 | 5/5/26 | 66 | 82 | 15 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1280 | 15386 | MC LAREN LN | BRABHAM DR | CDS | E | AAC | 8 | 759 | 36 | 29,124 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1281 | 13307 | MEADOW CIR | GRAHAM ST | CDS | E | AC | 2 | 451 | 36 | 18,036 | 4/2/26 | 81 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 1282 | 15120 | MEADOWBROOK DR | CHARLEYVILLE CIR | GREENVIEW LN | E | AC | 3 | 513 | 36 | 18,968 | 4/2/26 | 74 | 35 | 65 | 0 | New Construction | 1/1/80 |
| 1283 | 14874 | MEADOWCREST DR | NORTHFIELD LN | EDWARDS ST | E | AC | 5 | 540 | 36 | 20,580 | 5/30/24 | 66 | 51 | 49 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1284 | 13148 | MEADOWLARK DR | GRAHAM ST | EAGLE LN | E | AAC | 3 | 176 | 34 | 5,984 | 5/9/24 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 1284 | 13149 | MEADOWLARK DR | EAGLE LN | BIRDIE LN | E | AAC | 3 | 265 | 36 | 9,540 | 5/9/24 | 84 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 1284 | 13239 | MEADOWLARK DR | NASSAU LN | FAIRWAY LN | E | AAC | 3 | 260 | 36 | 9,360 | 5/9/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1284 | 15088 | MEADOWLARK DR | FAIRWAY LN | SPRINGDALE ST | E | AAC | 3 | 614 | 45 | 26,630 | 5/9/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1284 | 15934 | MEADOWLARK DR | SARATOGA LN | DEL MAR LN | E | AAC | 2 | 783 | 36 | 28,688 | 5/21/24 | 89 | 0 | 85 | 15 | Overlay - AC Fabric | 10/1/16 |
| 1284 | 15935 | MEADOWLARK DR | DEL MAR LN | GRAHAM ST | E | AAC | 2 | 1,024 | 36 | 36,864 | 5/21/24 | 89 | 0 | 93 | 7 | Overlay - AC Fabric | 10/1/16 |
| 1285 | 14145 | MEANDER LN | RATH CIR | CHARFORD DR | E | AC | 7 | 593 | 36 | 21,348 | 4/16/26 | 98 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1285 | 15463 | MEANDER LN | BURLCREST DR | RATH CIR | E | AC | 7 | 600 | 36 | 22,350 | 4/16/26 | 90 | 70 | 30 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1286 | 13867 | MEATH CIR | TULLOW LN | END | E | AC | 3 | 294 | 32 | 11,208 | 4/27/26 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1287 | 13767 | MEDFORD DR | BAYSIDE LN | HOLIDAY LN | E | AC | 1 | 523 | 36 | 19,578 | 12/18/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1287 | 15315 | MEDFORD DR | HOLIDAY LN | END | E | AC | 1 | 540 | 36 | 20,940 | 12/18/24 | 86 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 1288 | 14144 | MEDITERRANEAN DR | SWANSEA LN | MAGNOLIA ST | E | AC | 7 | 179 | 36 | 6,444 | 4/21/26 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1288 | 14151 | MEDITERRANEAN DR | MAGNOLIA ST | HARBOR ISLE LN | E | AC | 7 | 1,117 | 36 | 40,212 | 4/16/26 | 82 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1289 | 14818 | MEER CIR | HOLLAND DR | CDS | E | AC | 4 | 560 | 36 | 21,410 | 4/6/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1291 | 13774 | MELBOURNE DR | HANOVER LN | END | E | AC | 1 | 433 | 36 | 17,388 | 12/18/24 | 94 | 0 | 75 | 25 | New Construction | 1/1/80 |
| 1291 | 15927 | MELBOURNE DR | VICTORIA LN | YORKSHIRE LN | E | AC | 1 | 780 | 36 | 29,080 | 12/12/24 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1291 | 15928 | MELBOURNE DR | HANOVER LN | VICTORIA LN | E | AC | 1 | 780 | 36 | 28,080 | 4/8/26 | 82 | 47 | 49 | 4 | New Construction | 1/1/80 |
| 1292 | 14522 | MELINDA CIR | JONESPORT LN | CDS | E | AC | 9 | 409 | 32 | 15,588 | 4/17/24 | 82 | 48 | 38 | 14 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1294 | 15030 | MELODY LN | EDINGER AVE | RHAPSODY DR | E | AC | 2 | 1,295 | 36 | 47,370 | 3/24/22 | 77 | 52 | 24 | 24 | New Construction | 1/1/80 |
| 1295 | 14436 | MELVILLE CIR | MARIANA CIR | CDS | E | AAC | 2 | 367 | 32 | 13,244 | 5/6/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1296 | 14681 | MEMPHIS AVE | HUNTINGTON ST | DELAWARE ST | E | AC | 6 | 659 | 37 | 24,087 | 8/15/23 | 77 | 70 | 23 | 7 | New Construction | 1/1/80 |
| 1296 | 14682 | MEMPHIS AVE | DELAWARE ST | FLORIDA ST | E | AAC | 6 | 661 | 36 | 23,508 | 8/15/23 | 70 | 58 | 27 | 15 | Overlay - AC Structural | 3/1/11 |
| 1296 | 15688 | MEMPHIS AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 6 | 485 | 36 | 17,460 | 8/14/23 | 68 | 90 | 9 | 1 | New Construction | 1/1/80 |
| 1296 | 15691 | MEMPHIS AVE | FLORIDA ST | BEACH BLVD | E | AC | 6 | 660 | 36 | 23,472 | 8/15/23 | 65 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1296 | 15847 | MEMPHIS AVE | LAKE ST | ALABAMA ST | E | AC | 6 | 372 | 36 | 13,392 | 8/14/23 | 50 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1297 | 13256 | MERCIER LN | MYRTLE DR | SHAYNE DR | E | AC | 3 | 1,020 | 36 | 36,720 | 5/7/26 | 49 | 71 | 28 | 1 | New Construction | 1/1/80 |
| 1298 | 14207 | MEREDITH DR | CRAIMER LN | MIDLAND LN | E | AC | 8 | 377 | 36 | 14,322 | 2/28/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1298 | 16020 | MEREDITH DR | BROOKHURST ST | CRAIMER LN | E | AC | 8 | 1,358 | 36 | 48,888 | 2/28/22 | 85 | 53 | 42 | 5 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1299 | 13538 | MERLE CIR | BRESSEL LN | CDS | E | AAC | 4 | 420 | 36 | 16,620 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1300 | 14454 | MERMAID CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 79 | 33 | 67 | 0 | New Construction | 1/1/80 |
| 1301 | 14090 | MERRIMAC DR | BROOKHURST ST | CANBERRA LN | E | AC | 8 | 1,156 | 36 | 41,616 | 3/3/22 | 77 | 40 | 60 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1302 | 14790 | METZLER LN | SLATER AVE | BELVA DR | E | AAC | 4 | 1,319 | 40 | 52,760 | 4/13/26 | 88 | 57 | 38 | 5 | Overlay - AC Structural | 11/1/19 |
| 1302 | 14791 | METZLER LN | BELVA DR | CDS | E | AC | 4 | 310 | 40 | 14,200 | 5/9/24 | 82 | 17 | 80 | 3 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1303 | 14796 | MICHAEL DR | VAN BUREN ST | CDS | E | AC | 4 | 190 | 32 | 7,880 | 5/13/24 | 82 | 33 | 67 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1303 | 14797 | MICHAEL DR | VAN BUREN ST | JEFFERSON LN | E | AC | 4 | 561 | 34 | 19,074 | 5/13/24 | 85 | 17 | 83 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1303 | 14798 | MICHAEL DR | JEFFERSON LN | CDS | E | AC | 4 | 81 | 36 | 4,416 | 5/13/24 | 79 | 34 | 64 | 2 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1304 | 15461 | MIDBURY DR | TRANQUIL LN | ASTOR LN | E | AAC | 7 | 732 | 36 | 27,102 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1305 | 13243 | MIDDLECOFF DR | CLUBHOUSE LN | FAIRWAY LN | E | AC | 3 | 855 | 36 | 31,030 | 3/23/22 | 85 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 1305 | 15092 | MIDDLECOFF DR | EAGLE LN | CLUBHOUSE LN | E | AC | 3 | 1,087 | 36 | 39,132 | 3/23/22 | 96 | 0 | 90 | 10 | New Construction | 1/1/80 |
| 1306 | 13312 | MIDIRON CIR | GREENVIEW LN | END | E | AC | 3 | 412 | 32 | 14,684 | 4/2/26 | 73 | 16 | 82 | 2 | New Construction | 1/1/80 |
| 1307 | 15488 | MIDLAND LN | MEREDITH DR | CDS | E | AAC | 8 | 872 | 32 | 30,654 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1308 | 15192 | MIDWAY DR | BELLFIELD LN | FOSS LN | E | AC | 5 | 1,047 | 36 | 37,692 | 3/31/26 | 75 | 26 | 60 | 14 | New Construction | 1/1/80 |
| 1309 | 13937 | MILFORD CIR | NEWLAND ST | CDS | E | AAC | 7 | 311 | 32 | 13,912 | 4/15/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1310 | 13552 | MILL CIR | FORD DR | END | E | AAC | 3 | 350 | 32 | 12,700 | 5/28/24 | 93 | 0 | 62 | 38 | Overlay - AC Structural | 10/1/12 |
| 1311 | 14620 | MILLBRIDGE CIR | PORT GREENWICH LN | END | E | AC | 9 | 453 | 34 | 15,402 | 8/21/23 | 81 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1312 | 14329 | MILNE DR | ANTIGUA LN | SAND DOLLAR LN | E | AC | 9 | 252 | 36 | 9,572 | 8/30/23 | 52 | 80 | 17 | 3 | New Construction | 1/1/80 |
| 1313 | 13609 | MILO ST | SIMS ST | BLANTON ST | E | AC | 2 | 330 | 36 | 12,860 | 3/22/22 | 83 | 68 | 25 | 7 | New Construction | 1/1/80 |
| 1313 | 13611 | MILO ST | LYNN ST | HOSKINS ST | E | AC | 2 | 330 | 36 | 11,664 | 3/22/22 | 50 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 1313 | 13612 | MILO ST | HOSKINS ST | GREEN ST | E | AAC | 2 | 330 | 36 | 11,664 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 1314 | 13834 | MILTON CIR | AULNAY LN | END | E | AC | 1 | 330 | 36 | 13,130 | 12/18/24 | 93 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 1315 | 15502 | MINERVA LN | ELLSWORTH DR | ELLSWORTH DR | E | AAC | 9 | 512 | 32 | 16,384 | 5/9/24 | 73 | 26 | 42 | 32 | Overlay - AC Structural | 5/11/18 |
| 1316 | 14833 | MINORU LN | ALLEY WARNER AVE | WARNER AVE | E | AC | 4 | 180 | 36 | 6,480 | 4/6/22 | 92 | 44 | 56 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1316 | 15750 | MINORU LN | ALLEY SARU CIR | ALLEY WARNER AVE | E | AC | 4 | 466 | 36 | 16,776 | 4/6/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1317 | 13138 | MINUET DR | FANTASIA LN | BALLAD LN | E | AC | 2 | 800 | 36 | 29,300 | 3/24/22 | 73 | 69 | 31 | 0 | New Construction | 1/1/80 |
| 1318 | 13434 | MIRA EL RIO LN | LUCIENTO DR | CENTRAL PARK DR | E | AAC | 5 | 177 | 36 | 6,084 | 5/23/24 | 87 | 0 | 98 | 2 | Overlay - AC Structural | 10/1/12 |
| 1319 | 13361 | MIRA LOMA CIR | SANTA YNEZ DR | CDS | E | AC | 5 | 350 | 36 | 13,950 | 5/28/24 | 36 | 85 | 13 | 2 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1320 | 14317 | MIRAMAR LN | DORSETT DR | SABLE DR | E | AC | 9 | 512 | 36 | 18,144 | 8/30/23 | 86 | 41 | 52 | 7 | New Construction | 1/1/80 |
| 1320 | 15538 | MIRAMAR LN | GREENFIELD LN | DORSETT DR | E | AC | 9 | 686 | 36 | 24,696 | 8/30/23 | 92 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 1321 | 14238 | MISSION LN | ALVARADO DR | END | E | AC | 9 | 481 | 36 | 17,316 | 8/23/23 | 83 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 1321 | 15500 | MISSION LN | SNOWBIRD DR | ALVARADO DR | E | AC | 9 | 505 | 36 | 18,180 | 8/23/23 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1322 | 13155 | MISTRAL DR | TISBURY CIR | WAYFARER LN | E | AC | 2 | 481 | 36 | 17,316 | 4/7/22 | 93 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 1322 | 15048 | MISTRAL DR | LEONARD LN | TISBURY CIR | E | AC | 2 | 527 | 36 | 18,972 | 4/7/22 | 89 | 0 | 67 | 33 | New Construction | 1/1/80 |
| 1322 | 15051 | MISTRAL DR | WANDERER LN | LEONARD LN | E | AC | 2 | 1,080 | 36 | 38,880 | 4/7/22 | 77 | 55 | 43 | 2 | New Construction | 1/1/80 |
| 1323 | 14918 | MISTY LN | SLATER AVE | PRICE DR | E | AC | 5 | 170 | 36 | 6,120 | 3/30/26 | 75 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 1323 | 15168 | MISTY LN | RAPHAEL DR | PADUA DR | E | AC | 5 | 780 | 36 | 28,080 | 3/30/26 | 71 | 49 | 51 | 0 | New Construction | 1/1/80 |
| 1323 | 15800 | MISTY LN | PRICE DR | RAPHAEL DR | E | AC | 5 | 905 | 36 | 32,580 | 3/30/26 | 67 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 1324 | 14982 | MODALE DR | FLAGSTAFF LN | NEWLAND ST | E | AC | 7 | 595 | 36 | 21,420 | 4/8/24 | 88 | 34 | 66 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1324 | 15814 | MODALE DR | CHAPEL LN | FLAGSTAFF LN | E | AC | 7 | 727 | 36 | 26,652 | 4/8/24 | 89 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1325 | 14394 | MOKIHANA DR | ALLEY BUSHARD ST | BUSHARD ST | E | AAC | 9 | 120 | 36 | 4,320 | 5/6/24 | 82 | 60 | 40 | 0 | Overlay - AC Structural | 5/11/18 |
| 1325 | 15574 | MOKIHANA DR | IMPALA LN | ALLEY BUSHARD ST | E | AAC | 9 | 990 | 36 | 35,640 | 5/20/24 | 71 | 61 | 39 | 0 | Overlay - AC Structural | 5/11/18 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1326 | 14507 | MOLOKAI DR | MALIBU LN | CATALINA CIR | E | AAC | 9 | 252 | 36 | 9,072 | 4/22/26 | 90 | 0 | 93 | 7 | Overlay - AC Structural | 5/11/19 |
| 1326 | 14513 | MOLOKAI DR | NEWPORT CIR | BUSHARD ST | E | AAC | 9 | 322 | 36 | 11,592 | 4/22/26 | 88 | 61 | 35 | 4 | Overlay - AC Structural | 5/11/19 |
| 1326 | 15609 | MOLOKAI DR | CATALINA CIR | NEWPORT CIR | E | AAC | 9 | 520 | 36 | 18,720 | 4/22/26 | 87 | 51 | 49 | 0 | Overlay - AC Structural | 5/11/19 |
| 1327 | 13636 | MONA LN | BETTY DR | END | E | AC | 3 | 126 | 36 | 4,536 | 5/30/24 | 64 | 13 | 81 | 6 | New Construction | 1/1/80 |
| 1328 | 15440 | MONITOR DR | CANBERRA LN | INDEPENDENCE LN | E | AC | 8 | 1,142 | 36 | 40,896 | 3/2/22 | 91 | 0 | 74 | 26 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1329 | 14852 | MONROE LN | HEIL AVE | BRUSH DR | E | AAC | 4 | 526 | 36 | 18,936 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1329 | 15864 | MONROE LN | BRUSH DR | TERRY DR | E | AAC | 4 | 786 | 36 | 28,296 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1330 | 14266 | MONTAUK CIR | HINGHAM DR | CDS | E | AC | 9 | 279 | 32 | 11,478 | 5/8/24 | 71 | 53 | 29 | 18 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1331 | 14927 | MONTBURY CIR | SERENE DR | END | E | AC | 5 | 420 | 36 | 16,920 | 3/30/26 | 78 | 58 | 42 | 0 | New Construction | 1/1/80 |
| 1332 | 14840 | MONTCLAIR LN | TERRY DR | LANCASTER DR | E | AAC | 4 | 465 | 36 | 16,990 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1334 | 13250 | MONTECITO DR | ANGLER LN | WOODSTOCK LN | E | AC | 3 | 1,012 | 36 | 36,432 | 4/7/26 | 58 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 1335 | 13418 | MONTOYA CIR | SAN ROQUE LN | END | E | AAC | 5 | 285 | 36 | 11,760 | 5/29/24 | 75 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1336 | 13302 | MOODY CIR | PEARCE ST | CDS | E | AC | 2 | 259 | 36 | 10,574 | 4/2/26 | 68 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 1337 | 13882 | MOONBEAM DR | SUNFLOWER LN | SUNBURST LN | E | AC | 3 | 254 | 36 | 11,144 | 12/20/24 | 94 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 1338 | 14168 | MOONCREST CIR | CLOUDHAVEN DR | CDS | E | AC | 7 | 342 | 36 | 14,812 | 4/21/26 | 87 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1339 | 13451 | MOONFIELD DR | IVORYCREST LN | FIELDBURY LN | E | AAC | 5 | 917 | 36 | 33,012 | 5/23/24 | 61 | 44 | 51 | 5 | Overlay - AC Structural | 10/1/12 |
| 1340 | 13603 | MOONGLOW LN | BLUESAILS DR | STONEWOOD DR | E | AAC | 3 | 260 | 36 | 10,860 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1341 | 13479 | MOONLIGHT CIR | WISHINGWELL LN | CDS | E | AC | 3 | 486 | 36 | 19,296 | 3/18/22 | 90 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1342 | 14451 | MOONSHADOW CIR | VIEWPOINT LN | CDS | E | AC | 4 | 273 | 32 | 10,236 | 4/6/22 | 87 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1343 | 15834 | MOONTIDE CIR | ADAMS AVE FRONTAGE | CDS | E | AC | 7 | 635 | 36 | 24,360 | 4/16/26 | 89 | 66 | 34 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1344 | 14083 | MOORE CIR | EDUCATION LN | CDS | E | AAC | 8 | 472 | 36 | 18,792 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1345 | 14008 | MOOREA LN | PUA DR | KUKUI DR | E | AC | 8 | 260 | 36 | 9,360 | 3/7/22 | 74 | 42 | 47 | 11 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1346 | 13972 | MOORPARK DR | SEAHURST DR | MC LAREN LN | E | AAC | 8 | 180 | 36 | 6,480 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1348 | 14810 | MORGAN LN | SLATER AVE | SPEER AVE | E | AAC | 4 | 661 | 36 | 23,796 | 4/13/26 | 85 | 12 | 82 | 6 | Overlay - AC Structural | 11/1/19 |
| 1349 | 13406 | MORION CIR | COLLINS LN | CDS | E | AC | 5 | 222 | 36 | 7,992 | 5/20/24 | 87 | 17 | 83 | 0 | New Construction | 1/1/80 |
| 1350 | 13195 | MORNING STAR DR | EDGEWATER LN | CDS | E | AAC | 2 | 357 | 36 | 14,352 | 5/10/24 | 92 | 0 | 88 | 12 | Overlay - AC Fabric | 12/1/17 |
| 1350 | 15056 | MORNING STAR DR | SAYBROOK LN | EDGEWATER LN | E | AAC | 2 | 794 | 36 | 28,584 | 5/10/24 | 81 | 42 | 58 | 0 | Overlay - AC Structural | 12/1/17 |
| 1352 | 13047 | MORNING TIDE DR | ISLAND BAY LN | OCEAN BLUFF CIR | E | AAC | 5 | 1,284 | 36 | 46,556 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1353 | 14185 | MORRISTOWN CIR | MAMMOTH DR | CDS | E | AC | 8 | 579 | 32 | 20,028 | 3/1/22 | 79 | 43 | 54 | 3 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1354 | 13624 | MORRO BAY LN | SANTA YNEZ DR | SLATER AVE | E | AC | 5 | 170 | 36 | 6,120 | 5/28/24 | 57 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1355 | 13214 | MORSE CIR | TRUMBULL DR | CDS | E | AAC | 2 | 306 | 36 | 11,016 | 5/10/24 | 90 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1356 | 14923 | MOSS DR | WRIGHTWOOD LN | SPRINGDALE ST | E | AC | 5 | 180 | 36 | 6,204 | 3/30/26 | 75 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 1357 | 14060 | MOSSFORD DR | BRIARLY LN | FELCLIFF LN | E | AAC | 7 | 1,027 | 36 | 36,972 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1358 | 14917 | MOSSVALE CIR | WOODFERN LN | END | E | AC | 5 | 548 | 35 | 20,980 | 3/30/26 | 73 | 60 | 35 | 5 | New Construction | 1/1/80 |
| 1359 | 14777 | MOUNTJOY DR | GOTHARD ST | ENTERPRISE LN | E | AAC | 4 | 439 | 40 | 18,310 | 4/14/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1360 | 14993 | MUKAI CT | MADERA LN | CDS | E | AC | 5 | 271 | 36 | 12,036 | 5/22/24 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1361 | 14117 | MUNSTER DR | SOMERVILLE LN | LONDONDERRY LN | E | AC | 9 | 577 | 36 | 20,772 | 8/23/23 | 64 | 76 | 24 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1361 | 14118 | MUNSTER DR | LONDONDERRY LN | DUBLIN LN | E | AC | 9 | 1,040 | 36 | 37,440 | 8/23/23 | 84 | 19 | 59 | 22 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1362 | 14140 | MURAL CIR | BELLSHIRE DR | CDS | E | AAC | 7 | 449 | 32 | 15,868 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1363 | 14859 | MURDY CIR | GOTHARD ST | CDS | E | AAC | 3 | 435 | 36 | 17,460 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1364 | 13398 | MUTHER LN | KISER DR | HAMSHIRE DR | E | AC | 5 | 257 | 36 | 9,252 | 5/21/24 | 76 | 83 | 14 | 3 | New Construction | 1/1/80 |
| 1365 | 13597 | MYCROFT LN | SHAYNE DR | HEIL AVE | E | AC | 3 | 170 | 36 | 6,120 | 5/5/26 | 59 | 74 | 26 | 0 | New Construction | 1/1/80 |
| 1366 | 16002 | MYRTLE DR | GENTRY LN | BRIMHALL LN | E | AC | 3 | 1,016 | 36 | 37,076 | 5/7/26 | 72 | 23 | 77 | 0 | New Construction | 1/1/80 |
| 1367 | 15993 | MYTINGER LN | GLORIA DR | CAMILLE DR | E | AC | 3 | 859 | 36 | 30,924 | 4/6/26 | 69 | 85 | 15 | 0 | New Construction | 1/1/80 |
| 1368 | 13199 | NALU CIR | BARUNA LN | CDS | E | AC | 2 | 229 | 36 | 9,744 | 4/7/22 | 84 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 1369 | 15225 | NANCY DR | RHONE LN | MARK LN | E | AC | 4 | 890 | 36 | 32,790 | 3/18/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1370 | 15822 | NANTUCKET DR | WATERBURY LN | BUSHARD ST | E | AC | 7 | 1,122 | 36 | 40,392 | 4/16/26 | 86 | 83 | 10 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1371 | 13358 | NAPA CIR | OJAI LN | CDS | E | AC | 5 | 216 | 36 | 10,266 | 5/28/24 | 53 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1372 | 15375 | NAPLES DR | NEWLAND ST | LOOKOUT LN | E | AAC | 7 | 641 | 36 | 23,326 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1373 | 14680 | NASHVILLE AVE | HUNTINGTON ST | DELAWARE ST | E | AAC | 6 | 660 | 37 | 23,828 | 8/14/23 | 83 | 19 | 81 | 0 | Overlay - AC Structural | 3/1/11 |
| 1373 | 15686 | NASHVILLE AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 485 | 37 | 17,649 | 8/14/23 | 81 | 49 | 51 | 0 | Overlay - AC Structural | 3/1/11 |
| 1374 | 13237 | NASSAU LN | MANGRUM DR | SNEAD DR | E | AC | 3 | 311 | 36 | 11,196 | 3/23/22 | 68 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 1374 | 13241 | NASSAU LN | VENTURI DR | MARSHALL DR | E | AC | 3 | 260 | 36 | 9,610 | 3/23/22 | 81 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1374 | 15086 | NASSAU LN | SNEAD DR | VENTURI DR | E | AC | 3 | 998 | 36 | 35,928 | 3/23/22 | 65 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 1375 | 16013 | NATIONAL LN | STAR DR | KITE DR | E | AC | 8 | 1,014 | 36 | 36,504 | 3/18/24 | 81 | 55 | 33 | 12 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1376 | 15824 | NAUTILUS DR | MARINA LN | BUSHARD ST | E | AC | 7 | 1,106 | 36 | 40,566 | 4/16/26 | 84 | 58 | 39 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1377 | 15801 | NEARGATE DR | RAINGLEN LN | GRAHAM ST | E | AC | 5 | 587 | 36 | 20,844 | 5/8/26 | 54 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 1378 | 13293 | NEELY CIR | GREEN ST | CDS | E | AC | 2 | 269 | 36 | 10,934 | 4/7/22 | 82 | 50 | 47 | 3 | New Construction | 1/1/80 |
| 1379 | 14386 | NEOLANI DR | IMPALA LN | KANAKOA LN | E | AC | 9 | 278 | 36 | 11,008 | 4/24/24 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1379 | 14387 | NEOLANI DR | ZAMORA LN | CDS | E | AC | 9 | 235 | 32 | 9,320 | 4/24/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1379 | 15571 | NEOLANI DR | KANAKOA LN | ZAMORA LN | E | AC | 9 | 517 | 36 | 18,612 | 4/24/24 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1380 | 15513 | NETHERWAY DR | PAISLEY LN | QUEENS PARK LN | E | AC | 8 | 1,039 | 36 | 38,580 | 3/18/24 | 89 | 0 | 66 | 34 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1381 | 14468 | NEVADA DR | STARDUST DR | TANGIERS DR | E | AAC | 1 | 260 | 36 | 9,360 | 5/8/24 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1381 | 15589 | NEVADA DR | TANGIERS DR | HAMMON LN | E | AAC | 1 | 1,203 | 36 | 43,308 | 5/8/24 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 1382 | 14623 | NEW BRITAIN LN | HAMMON LN | END | E | AAC | 9 | 639 | 36 | 23,004 | 8/21/23 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1382 | 15658 | NEW BRITAIN LN | ROTHERT LN | END | E | AC | 9 | 773 | 36 | 27,828 | 8/21/23 | 68 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1383 | 13457 | NEWBURY DR | LAKEPOINT LN | HALLPORT LN | E | AAC | 5 | 542 | 36 | 20,262 | 5/29/24 | 69 | 34 | 65 | 1 | Overlay - AC Structural | 10/1/12 |
| 1383 | 15206 | NEWBURY DR | HALLPORT LN | END | E | AAC | 5 | 785 | 36 | 30,060 | 5/29/24 | 68 | 35 | 65 | 0 | Overlay - AC Structural | 10/1/12 |
| 1384 | 14132 | NEWBY LN | MASTERS DR | LARTHORN DR | E | AAC | 7 | 238 | 36 | 9,318 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1386 | 13785 | NEWCASTLE LN | OXFORD DR | HALIFAX DR | E | AC | 1 | 1,040 | 36 | 37,152 | 4/8/26 | 81 | 50 | 38 | 12 | New Construction | 1/1/80 |
| 1387 | 13042 | NEWFOUNDLAND CIR | PALM AVE | CDS | E | AC | 6 | 195 | 36 | 9,045 | 6/22/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1389 | 13930 | NEWHAVEN LN | HAMDEN LN | BRIDGEPORT DR | E | AAC | 7 | 370 | 36 | 13,320 | 4/14/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1389 | 13931 | NEWHAVEN LN | ALLEY GIILFORD CIR | YORKTOWN AVE | E | AC | 7 | 150 | 36 | 5,400 | 4/2/24 | 89 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1389 | 15370 | NEWHAVEN LN | BRIDGEPORT DR | ALLEY GILFORD CIR | E | AC | 7 | 877 | 36 | 31,572 | 4/2/24 | 69 | 67 | 30 | 3 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1391 | 15013 | NEWMAN AVE | BEACH BLVD | CDS | E | AAC | 4 | 1,330 | 36 | 47,880 | 4/13/26 | 86 | 15 | 85 | 0 | Overlay - AC Structural | 11/28/19 |
| 1391 | 15014 | NEWMAN AVE | BEACH BLVD | VAN BUREN ST | E | AC | 4 | 955 | 40 | 36,920 | 5/13/24 | 77 | 72 | 27 | 1 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1391 | 15727 | NEWMAN AVE | VAN BUREN ST | CDS | E | AC | 4 | 1,049 | 40 | 43,460 | 5/13/24 | 85 | 21 | 57 | 22 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1392 | 13442 | NEWMOON LN | JASONWOOD DR | IRONGATE CIR | E | AAC | 5 | 255 | 36 | 9,180 | 5/22/24 | 68 | 21 | 78 | 1 | Overlay - AC Structural | 10/1/12 |
| 1392 | 15197 | NEWMOON LN | IRONGATE CIR | LITTLEFIELD DR | E | AAC | 5 | 814 | 36 | 29,304 | 5/23/24 | 65 | 35 | 65 | 0 | Overlay - AC Structural | 10/1/12 |
| 1393 | 14512 | NEWPORT CIR | MOLOKAI DR | CDS | E | AAC | 9 | 313 | 32 | 11,516 | 4/22/26 | 77 | 52 | 48 | 0 | Overlay - AC Structural | 5/11/19 |
| 1394 | 15775 | NEWQUIST LN | EL DORADO DR | GLENROY DR | E | AC | 2 | 733 | 36 | 27,528 | 4/1/26 | 75 | 30 | 70 | 0 | New Construction | 1/1/80 |
| 1396 | 16019 | NIAGARA DR | LAWSON LN | MIDLAND LN | E | AAC | 8 | 756 | 36 | 27,216 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1397 | 13169 | NIANTIC CIR | MISTRAL DR | CDS | E | AC | 2 | 405 | 32 | 14,460 | 4/7/22 | 62 | 27 | 38 | 35 | New Construction | 1/1/80 |
| 1398 | 14964 | NICHOLS ST | WAGON DR | SLATER AVE | E | AC | 0 | 327 | 44 | 14,388 | 5/8/24 | 90 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 1398 | 15652 | NICHOLS ST | WARNER AVE | CDS | E | AC | 4 | 615 | 36 | 23,940 | 3/31/22 | 80 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1398 | 15838 | NICHOLS ST | BELSITO DR | WARNER AVE | E | AC | 0 | 670 | 44 | 29,480 | 5/8/24 | 82 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1398 | 15839 | NICHOLS ST | WAGON DR | BELSITO DR | E | AC | 0 | 1,645 | 44 | 72,380 | 5/8/24 | 84 | 35 | 63 | 2 | New Construction | 1/1/80 |
| 1399 | 14371 | NIGUEL CIR | POLYNESIAN LN | CDS | E | AAC | 9 | 480 | 36 | 19,080 | 3/26/24 | 88 | 0 | 93 | 7 | Overlay - AC Structural | 5/11/18 |
| 1400 | 13520 | NILE CIR | RHINE DR | CDS | E | AC | 4 | 166 | 32 | 6,812 | 3/31/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1401 | 13168 | NIMBLE CIR | SUNDANCER LN | CDS | E | AAC | 2 | 194 | 32 | 7,708 | 5/7/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1402 | 15255 | NIMROD DR | MASHIE CIR | LUCERO LN | E | AAC | 3 | 658 | 36 | 25,188 | 5/20/24 | 94 | 0 | 70 | 30 | Overlay - AC Structural | 10/1/12 |
| 1403 | 13009 | NINETEENTH ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 390 | 46 | 17,940 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1403 | 13010 | NINETEENTH ST | PECAN AVE | ACACIA AVE | E | AAC | 6 | 405 | 46 | 18,630 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1403 | 13011 | NINETEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 415 | 46 | 19,090 | 6/23/21 | 78 | 85 | 15 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1403 | 13012 | NINETEENTH ST | PCH | WALNUT AVE | E | AC | 6 | 370 | 50 | 18,500 | 6/23/21 | 87 | 0 | 34 | 66 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1403 | 13013 | NINETEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/23/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1403 | 13095 | NINETEENTH ST | ORANGE AVE | PECAN AVE | E | AAC | 6 | 395 | 46 | 18,170 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1404 | 12959 | NINTH ST | OLIVE AVE | ORANGE AVE | E | AAC | 6 | 395 | 48 | 18,960 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1404 | 12960 | NINTH ST | PECAN AVE | ACACIA AVE | E | AAC | 6 | 375 | 46 | 17,250 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1404 | 12961 | NINTH ST | ORANGE AVE | PECAN AVE | E | AAC | 6 | 375 | 48 | 18,000 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1404 | 12963 | NINTH ST | WALNUT AVE | OLIVE AVE | E | AAC | 6 | 395 | 48 | 18,960 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1404 | 12964 | NINTH ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 375 | 46 | 17,250 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1404 | 15840 | NINTH ST | PCH | WALNUT AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/22/21 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1405 | 14799 | NOBLE CIR | FOREST LN | CDS | E | AC | 4 | 400 | 34 | 15,100 | 5/13/24 | 75 | 34 | 66 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1406 | 13445 | NORBROOK DR | IVORYCREST LN | TWINFORD LN | E | AAC | 5 | 136 | 36 | 5,646 | 5/21/24 | 70 | 39 | 57 | 4 | Overlay - AC Structural | 10/1/12 |
| 1406 | 13452 | NORBROOK DR | FIELDBURY LN | END | E | AAC | 5 | 104 | 36 | 3,744 | 5/29/24 | 55 | 50 | 49 | 1 | Overlay - AC Structural | 10/1/12 |
| 1406 | 15203 | NORBROOK DR | TWINFORD LN | FIELDBURY LN | E | AAC | 5 | 664 | 36 | 23,904 | 5/21/24 | 60 | 53 | 47 | 0 | Overlay - AC Structural | 10/1/12 |
| 1407 | 14904 | NORCON CIR | TILBURG DR | CDS | E | AC | 5 | 128 | 36 | 5,858 | 4/2/26 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1408 | 15456 | NORCROFT LN | KELSO DR | LARTHORN DR | E | AAC | 7 | 534 | 36 | 19,974 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1409 | 14913 | NORDINA DR | FORBES LN | CHAPPARAL LN | E | AC | 5 | 249 | 36 | 9,214 | 4/1/26 | 69 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 1409 | 15795 | NORDINA DR | CHAPPARAL LN | WILD ROSE LN | E | AC | 5 | 767 | 36 | 27,862 | 5/8/26 | 65 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 1410 | 14621 | NORFOLK DR | PORT GREENWICH LN | KELSO DR | E | AAC | 9 | 549 | 36 | 19,764 | 8/21/23 | 91 | 58 | 42 | 0 | Overlay - AC Structural | 3/1/11 |
| 1411 | 13263 | NORGROVE CIR | SILVERWOOD DR | CDS | E | AC | 3 | 140 | 32 | 5,730 | 4/6/26 | 61 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 1412 | 13626 | NORINO DR | COBRA LN | GOLDEN VIEW LN | E | AC | 3 | 253 | 36 | 9,108 | 5/30/24 | 66 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1413 | 15268 | NORMA DR | GOLDENWEST ST | TUNSTALL LN | E | AC | 3 | 653 | 36 | 23,508 | 3/18/22 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1414 | 13257 | NORMANDY LN | MYRTLE DR | RINGO CIR | E | AC | 3 | 255 | 36 | 9,180 | 4/6/26 | 80 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1414 | 15100 | NORMANDY LN | RINGO CIR | SHAYNE DR | E | AC | 3 | 765 | 36 | 27,540 | 4/6/26 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 5000 | 60000 | NORTH PACIFIC | WARNER AVE | 5TH ST | E | AC | 2 | 1,347 | 20 | 26,940 | 5/6/24 | 83 | 73 | 27 | 0 | New Construction - Initial | 1/1/80 |
| 5000 | 60010 | NORTH PACIFIC | 5TH ST | 7TH ST | E | AC | 2 | 470 | 25 | 11,750 | 5/6/24 | 94 | 0 | 86 | 14 | New Construction - Initial | 1/1/80 |
| 5000 | 60020 | NORTH PACIFIC | 7TH ST | 10TH ST | E | AC | 2 | 705 | 25 | 17,625 | 5/6/24 | 92 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5000 | 60030 | NORTH PACIFIC | 10TH ST | BROADWAY | E | AC | 2 | 728 | 25 | 18,200 | 5/6/24 | 68 | 87 | 13 | 0 | New Construction - Initial | 1/1/80 |
| 5000 | 60040 | NORTH PACIFIC | BROADWAY | 16TH ST | E | AC | 2 | 727 | 25 | 18,175 | 5/6/24 | 81 | 74 | 18 | 8 | New Construction - Initial | 1/1/80 |
| 5000 | 60050 | NORTH PACIFIC | 16TH ST | 19TH ST | E | AC | 2 | 705 | 25 | 17,625 | 5/6/24 | 88 | 52 | 48 | 0 | New Construction - Initial | 1/1/80 |
| 5000 | 60060 | NORTH PACIFIC | 19TH ST | 22ND ST | E | AC | 2 | 706 | 25 | 17,650 | 5/6/24 | 83 | 38 | 21 | 41 | New Construction - Initial | 1/1/80 |
| 5000 | 60070 | NORTH PACIFIC | 22ND ST | 25TH ST | E | AC | 2 | 705 | 25 | 17,625 | 5/6/24 | 89 | 66 | 34 | 0 | New Construction - Initial | 1/1/80 |
| 5000 | 60080 | NORTH PACIFIC | 25TH ST | ANDERSON ST | E | AC | 2 | 485 | 25 | 12,125 | 5/6/24 | 87 | 42 | 23 | 35 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1415 | 14895 | NORTHFIELD LN | MEADOWCREST DR | FREEBORN DR | E | AC | 5 | 610 | 36 | 21,960 | 5/30/24 | 55 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1416 | 14618 | NORTHPORT DR | PORT GREENWICH LN | END | E | AC | 9 | 453 | 36 | 16,308 | 8/21/23 | 88 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1416 | 15656 | NORTHPORT DR | NEW BRITAIN LN | PORT GREENWICH LN | E | AC | 9 | 534 | 36 | 19,224 | 8/21/23 | 90 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1417 | 15300 | NORTHRIDGE LN | LARCHWOOD DR | END | E | AAC | 1 | 742 | 36 | 28,712 | 5/7/24 | 57 | 55 | 45 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1418 | 14342 | NORTHSHORE LN | PIER DR | HAMILTON AVE | E | AC | 9 | 169 | 36 | 5,796 | 4/1/24 | 72 | 53 | 31 | 16 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1419 | 13962 | NORTHSTAR LN | CLIFFSIDE DR | SAILPORT DR | E | AAC | 7 | 253 | 36 | 9,358 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1420 | 13792 | NORWICH CIR | MELBOURNE DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/8/26 | 86 | 0 | 82 | 18 | New Construction | 1/1/80 |
| 1421 | 13786 | NOTTINGHAM LN | OXFORD DR | HALIFAX DR | E | AC | 1 | 1,040 | 36 | 37,152 | 12/18/24 | 88 | 70 | 27 | 3 | New Construction | 1/1/80 |
| 1422 | 13669 | NUGGET CIR | SAHARA LN | END | E | AC | 1 | 270 | 36 | 11,220 | 4/13/26 | 83 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1423 | 13394 | NUTWOOD CIR | PRESCOTT LN | CDS | E | AC | 5 | 340 | 36 | 13,490 | 5/21/24 | 52 | 81 | 16 | 3 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1424 | 13276 | NYANZA DR | MARJAN LN | TYEE LN | E | AC | 3 | 840 | 36 | 30,240 | 1/6/25 | 79 | 36 | 64 | 0 | New Construction | 1/1/80 |
| 1425 | 13153 | OAHU DR | WAIKIKI LN | BOLSA CHICA ST | E | AAC | 2 | 670 | 36 | 24,120 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 1426 | 13565 | OAK LN | ALLEY ASH ST | ALLEY OAK LN | E | AC | 4 | 176 | 36 | 6,336 | 5/30/24 | 62 | 63 | 34 | 3 | New Construction | 1/1/80 |
| 1426 | 15259 | OAK LN | WARNER AVE | SYCAMORE AVE | E | AC | 4 | 397 | 36 | 14,292 | 5/30/24 | 48 | 90 | 10 | 0 | New Construction | 1/1/80 |
| 1426 | 15260 | OAK LN | SYCAMORE AVE | ALLEY ASH ST | E | AC | 4 | 933 | 36 | 33,588 | 5/30/24 | 48 | 75 | 16 | 9 | New Construction | 1/1/80 |
| 1427 | 13279 | OAKGROVE CIR | OAKMONT LN | CDS | E | AC | 3 | 420 | 36 | 16,920 | 12/19/24 | 86 | 0 | 77 | 23 | New Construction | 1/1/80 |
| 1428 | 15996 | OAKMONT LN | EDGEMONT DR | HEIL AVE | E | AC | 3 | 690 | 36 | 24,265 | 1/6/25 | 67 | 68 | 21 | 11 | New Construction | 1/1/80 |
| 1429 | 13876 | OAKSHIRE LN | RED COACH DR | GAS LIGHT DR | E | AC | 3 | 253 | 36 | 10,108 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1430 | 13699 | OAKTREE CIR | MAR VISTA DR | END | E | AC | 1 | 480 | 36 | 19,080 | 4/8/26 | 68 | 33 | 67 | 0 | New Construction | 1/1/80 |
| 1431 | 15423 | OCCIDENTAL LN | VERONICA DR | MADELINE DR | E | AC | 7 | 827 | 36 | 31,272 | 4/20/26 | 83 | 83 | 3 | 14 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1432 | 12851 | OCEAN BLUFF CIR | MORNING TIDE DR | CDS | E | AAC | 5 | 232 | 36 | 11,360 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1434 | 15603 | OCEANBREEZE LN | OCEANCREST DR | SUMMERWIND LN | E | AC | 9 | 796 | 36 | 29,406 | 3/26/24 | 92 | 0 | 89 | 11 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1435 | 14494 | OCEANCREST DR | SUMMERWIND LN | CDS | E | AAC | 9 | 130 | 34 | 5,920 | 4/21/26 | 83 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 1435 | 15602 | OCEANCREST DR | SUMMERWIND LN | CDS | E | AAC | 9 | 775 | 34 | 28,150 | 4/21/26 | 77 | 28 | 53 | 19 | Overlay - AC Structural | 5/11/19 |
| 1436 | 14706 | OCEANHILL DR | DELAWARE ST | CDS | E | AAC | 6 | 1,218 | 34 | 42,912 | 8/15/23 | 86 | 21 | 62 | 17 | Overlay - AC Structural | 3/1/11 |
| 1437 | 13706 | OCEANUS DR | TRITON LN | GRAHAM ST | E | AC | 1 | 2,027 | 40 | 81,080 | 3/21/22 | 66 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 1438 | 15598 | OCEANVIEW LN | ROCK POINT DR | HIGHTIDE DR | E | AC | 9 | 1,026 | 36 | 38,936 | 3/26/24 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1439 | 14262 | OCEANWOOD DR | MAGNOLIA ST | SEA MIST LN | E | AC | 9 | 379 | 36 | 14,394 | 5/6/24 | 78 | 10 | 89 | 1 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1440 | 12852 | OFELIA LN | MORNING TIDE DR | PALM AVE | E | AC | 5 | 202 | 36 | 6,555 | 6/30/21 | 96 | 0 | 19 | 81 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1441 | 13359 | OJAI LN | NAPA CIR | POINT LOMA DR | E | AC | 5 | 262 | 36 | 10,572 | 5/28/24 | 70 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1442 | 14011 | OLANA LN | KAMUELA DR | YORKTOWN AVE | E | AAC | 8 | 1,132 | 36 | 40,752 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1444 | 15198 | OLDGATE LN | LITTLEFIELD DR | END | E | AAC | 5 | 337 | 36 | 12,132 | 5/23/24 | 73 | 22 | 75 | 3 | Overlay - AC Structural | 10/1/12 |
| 1445 | 13387 | OLDGLEN LN | LANCEFIELD DR | WOODBORO DR | E | AC | 5 | 315 | 36 | 12,340 | 3/31/26 | 84 | 0 | 61 | 39 | New Construction | 1/1/80 |
| 1446 | 12905 | OLIVE AVE | ELEVENTH ST | FOURTEENTH ST | E | AC | 6 | 930 | 38 | 35,340 | 6/23/21 | 86 | 0 | 62 | 38 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1446 | 12911 | OLIVE AVE | EIGHTH ST | ELEVENTH ST | E | AAC | 6 | 930 | 37 | 34,410 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1446 | 12917 | OLIVE AVE | SIXTH ST | EIGHTH ST | E | AC | 6 | 600 | 40 | 24,000 | 6/23/21 | 87 | 0 | 50 | 50 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1446 | 12922 | OLIVE AVE | FIFTH ST | SIXTH ST | E | AC | 6 | 270 | 36 | 9,720 | 6/23/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1446 | 12924 | OLIVE AVE | MAIN ST | FIFTH ST | E | AC | 6 | 310 | 36 | 10,195 | 6/23/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1446 | 12926 | OLIVE AVE | SECOND ST | THIRD ST | E | AC | 6 | 265 | 26 | 6,890 | 6/30/21 | 76 | 80 | 19 | 1 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1446 | 12927 | OLIVE AVE | FIRST ST | SECOND ST | E | AC | 6 | 265 | 36 | 9,540 | 6/30/21 | 89 | 0 | 36 | 64 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1446 | 13065 | OLIVE AVE | THIRD ST | MAIN ST | E | AC | 6 | 267 | 36 | 9,612 | 6/30/21 | 90 | 0 | 51 | 49 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1446 | 13106 | OLIVE AVE | NINETEENTH ST | TWENTY-SECOND ST | E | AAC | 6 | 825 | 36 | 29,700 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 1446 | 13107 | OLIVE AVE | SEVENTEENTH ST | NINETEENTH ST | E | AAC | 6 | 610 | 36 | 21,960 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/17/21 |
| 1446 | 13113 | OLIVE AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AC | 6 | 930 | 36 | 33,480 | 6/23/21 | 92 | 0 | 63 | 37 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1446 | 16034 | OLIVE AVE | 22ND ST | GOLDENWEST ST | E | AC | 6 | 255 | 36 | 9,430 | 6/23/21 | 82 | 61 | 37 | 2 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1447 | 14174 | OLYMPIC DR | INTERIOR LN | CDS | E | AC | 8 | 379 | 32 | 13,628 | 3/1/22 | 77 | 32 | 68 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1447 | 15480 | OLYMPIC DR | BIG BEND LN | INTERIOR LN | E | AAC | 8 | 1,006 | 36 | 36,966 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1448 | 13202 | ONDINE CIR | EDGEWATER LN | CDS | E | AAC | 2 | 350 | 36 | 14,100 | 5/10/24 | 85 | 41 | 59 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1449 | 14528 | ONSET CIR | CAPE MAY LN | CDS | E | AC | 9 | 206 | 32 | 8,092 | 4/24/24 | 87 | 17 | 83 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1450 | 14763 | ONTARIO DR | CARNABY LN | HUNTINGTON ST | E | AAC | 4 | 483 | 36 | 17,100 | 4/14/26 | 88 | 18 | 73 | 9 | Overlay - AC Structural | 11/28/19 |
| 1450 | 15716 | ONTARIO DR | HUNTINGTON ST | DELAWARE ST | E | AAC | 4 | 888 | 36 | 31,680 | 4/14/26 | 89 | 57 | 39 | 4 | Overlay - AC Structural | 11/28/19 |
| 1451 | 14804 | OPAL CIR | VAN BUREN ST | CDS | E | AAC | 4 | 190 | 32 | 7,580 | 4/13/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/5/19 |
| 1452 | 13162 | OPERA LN | OPERETTA DR | SCENARIO DR | E | AC | 2 | 260 | 26 | 7,260 | 3/24/22 | 80 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 1453 | 13152 | OPERETTA DR | FANTASIA LN | OPERA LN | E | AC | 2 | 1,060 | 36 | 38,660 | 3/24/22 | 80 | 0 | 81 | 19 | New Construction | 1/1/80 |
| 1455 | 15951 | ORIENT DR | CHUBASCO LN | COCOBANA LN | E | AC | 8 | 1,025 | 36 | 38,400 | 4/1/24 | 78 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1456 | 13533 | ORINDA CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 77 | 49 | 38 | 13 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1457 | 13815 | ORIOLE LN | ROBINWOOD DR | SPARROW DR | E | AC | 1 | 260 | 36 | 9,360 | 3/21/22 | 75 | 72 | 28 | 0 | New Construction | 1/1/80 |
| 1457 | 13819 | ORIOLE LN | SPARROW DR | SKYLARK DR | E | AC | 1 | 260 | 36 | 9,610 | 3/21/22 | 71 | 48 | 51 | 1 | New Construction | 1/1/80 |
| 1458 | 14870 | ORION AVE | MARINA VIEW PL | SANDRA LEE LN | E | AAC | 2 | 256 | 36 | 9,216 | 5/13/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1458 | 15769 | ORION AVE | SANDRA LEE LN | SIMS ST | E | AAC | 2 | 330 | 36 | 11,592 | 5/21/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1459 | 13414 | ORKNEY CIR | BRAEMAR DR | CDS | E | AC | 5 | 125 | 36 | 6,750 | 5/20/24 | 98 | 0 | 24 | 76 | New Construction | 1/1/80 |
| 1460 | 15098 | ORLANDO DR | SPRINGDALE ST | BRADBURY LN | E | AC | 3 | 668 | 36 | 24,048 | 5/7/26 | 52 | 51 | 33 | 16 | New Construction | 1/1/80 |
| 1461 | 14098 | ORONSAY CIR | CARMANIA LN | CDS | E | AAC | 8 | 295 | 32 | 11,440 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1462 | 14678 | OSWEGO AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 162 | 36 | 5,544 | 8/14/23 | 81 | 55 | 45 | 0 | Overlay - AC Structural | 3/1/11 |
| 1462 | 14679 | OSWEGO AVE | HUNTINGTON ST | DELAWARE ST | E | AAC | 6 | 660 | 36 | 23,184 | 8/14/23 | 82 | 41 | 59 | 0 | Overlay - AC Structural | 3/1/11 |
| 1462 | 14732 | OSWEGO AVE | ALABAMA ST | ALLEY ALABAMA ST | E | AAC | 6 | 322 | 36 | 11,304 | 8/14/23 | 88 | 48 | 52 | 0 | Overlay - AC Structural | 3/1/11 |
| 1462 | 15848 | OSWEGO AVE | LAKE ST | ALABAMA ST | E | AAC | 6 | 372 | 37 | 13,764 | 8/15/23 | 75 | 66 | 34 | 0 | Overlay - AC Structural | 3/1/11 |
| 1463 | 14600 | OVERLOOK DR | EDWARDS ST | WILDFLOWER LN | E | AC | 5 | 403 | 36 | 14,508 | 5/7/24 | 83 | 37 | 41 | 22 | New Construction | 1/1/80 |
| 1464 | 14743 | OWEN AVE | FLORIDA ST | BEACH BLVD | E | AAC | 7 | 660 | 36 | 23,760 | 4/15/26 | 88 | 18 | 75 | 7 | Overlay - AC Structural | 11/28/19 |
| 1465 | 13455 | OXBORO LN | MANOFIELD DR | END | E | AAC | 5 | 115 | 36 | 4,140 | 5/29/24 | 70 | 0 | 99 | 1 | Overlay - AC Structural | 10/1/12 |
| 1465 | 15205 | OXBORO LN | NORBROOK DR | MANOFIELD DR | E | AAC | 5 | 547 | 36 | 19,692 | 5/21/24 | 64 | 40 | 59 | 1 | Overlay - AC Structural | 10/1/12 |
| 1466 | 13769 | OXFORD DR | HANOVER LN | END | E | AC | 1 | 433 | 36 | 15,588 | 12/12/24 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1466 | 15319 | OXFORD DR | VICTORIA LN | GOLDENWEST ST | E | AC | 1 | 1,334 | 36 | 48,024 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 1466 | 15930 | OXFORD DR | HANOVER LN | VICTORIA LN | E | AC | 1 | 781 | 36 | 28,116 | 12/12/24 | 85 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 1467 | 14122 | OXLEY CIR | VINTAGE LN | CDS | E | AAC | 7 | 435 | 32 | 15,420 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1468 | 14301 | OYSTER BED LN | EDYE DR | CLIFF DR | E | AAC | 8 | 254 | 36 | 9,144 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1469 | 13449 | PACEMONT DR | IVORYCREST LN | VESTRY CIR | E | AC | 5 | 213 | 36 | 7,668 | 5/23/24 | 85 | 59 | 37 | 4 | New Construction | 1/1/80 |
| 1469 | 15201 | PACEMONT DR | VESTRY CIR | FIELDBURY LN | E | AC | 5 | 873 | 36 | 31,428 | 5/23/24 | 89 | 29 | 48 | 23 | New Construction | 1/1/80 |
| 1473 | 14154 | PADDOCK CIR | JOHNSON LN | CDS | E | AC | 7 | 324 | 32 | 10,368 | 4/21/26 | 83 | 0 | 95 | 5 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1474 | 13383 | PADUA DR | WRIGHTWOOD LN | SPRINGDALE ST | E | AC | 5 | 180 | 36 | 6,480 | 3/30/26 | 74 | 58 | 38 | 4 | New Construction | 1/1/80 |
| 1474 | 15164 | PADUA DR | WHITFORD LN | WRIGHTWOOD LN | E | AC | 5 | 1,295 | 36 | 45,820 | 5/8/26 | 54 | 64 | 35 | 1 | New Construction | 1/1/80 |
| 1475 | 14125 | PAGE CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 80 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1476 | 14020 | PAGO PAGO CIR | TOBAGO LN | END | E | AAC | 8 | 358 | 32 | 13,256 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1477 | 16016 | PAISLEY LN | CAITHNESS DR | NETHERWAY DR | E | AC | 8 | 758 | 36 | 29,640 | 3/18/24 | 83 | 37 | 42 | 21 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1478 | 13954 | PALERMO DR | CDS | LOMBARDY LN | E | AAC | 7 | 585 | 32 | 19,970 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1478 | 13956 | PALERMO DR | LOMBARDY LN | CDS | E | AAC | 7 | 221 | 32 | 8,322 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1479 | 16007 | PALISADE ST | ANGLER LN | WOODSTOCK LN | E | AC | 3 | 1,012 | 36 | 36,432 | 5/7/26 | 74 | 10 | 90 | 0 | New Construction | 1/1/80 |
| 1385 | 12863 | PALM AVE | ELEVENTH ST | FOURTEENTH ST | E | AC | 6 | 975 | 40 | 39,000 | 6/23/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1385 | 12869 | PALM AVE | MAIN ST | ELEVENTH ST | E | AC | 6 | 1,320 | 40 | 52,800 | 6/23/21 | 81 | 59 | 14 | 27 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1385 | 13110 | PALM AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AAC | 6 | 955 | 40 | 38,200 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1385 | 15841 | PALM AVE | MAIN ST | LAKE ST | E | AC | 6 | 265 | 46 | 12,190 | 7/8/21 | 89 | 0 | 77 | 23 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1480 | 13561 | PALMDALE ST | WARNER AVE | CAIN AVE | E | AC | 3 | 330 | 38 | 12,540 | 5/30/24 | 74 | 43 | 13 | 44 | New Construction | 1/1/80 |
| 1480 | 13562 | PALMDALE ST | CAIN AVE | CEDAR AVE | E | AC | 3 | 660 | 38 | 25,080 | 5/30/24 | 60 | 81 | 11 | 8 | New Construction | 1/1/80 |
| 1481 | 15142 | PALO ALTO DR | SPRINGDALE ST | PINEHURST LN | E | AC | 5 | 700 | 36 | 26,340 | 5/22/24 | 53 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1482 | 14762 | PAMMY LN | TAYLOR DR | FRANKLIN DR | E | AAC | 4 | 1,000 | 36 | 35,712 | 4/14/26 | 89 | 0 | 95 | 5 | Overlay - AC Structural | 11/28/19 |
| 1483 | 15557 | PANACEA DR | BUSHARD ST | CDS | E | AC | 8 | 401 | 36 | 15,936 | 4/1/24 | 70 | 38 | 62 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1484 | 14004 | PAPUA LN | MAIKAI DR | PUA DR | E | AAC | 8 | 259 | 36 | 9,324 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1485 | 13240 | PAR CIR | FAIRWAY LN | END | E | AC | 3 | 348 | 32 | 12,386 | 3/23/22 | 75 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 1486 | 13770 | PARIS CIR | HANOVER LN | END | E | AC | 1 | 433 | 36 | 17,388 | 12/18/24 | 79 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 1487 | 14540 | PARK AVE | PCH | END | E | AC | 2 | 255 | 36 | 9,180 | 4/9/22 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1488 | 13029 | PARK ST | SPRINGFIELD AVE | UTICA AVE | E | AC | 6 | 645 | 37 | 23,865 | 6/29/21 | 87 | 0 | 45 | 55 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1488 | 13030 | PARK ST | ADAMS AVE | SPRINGFIELD AVE | E | AC | 6 | 645 | 37 | 23,865 | 7/8/21 | 94 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1488 | 13033 | PARK ST | THIRTEENTH ST | ADAMS AVE | E | AC | 6 | 646 | 37 | 23,902 | 6/29/21 | 67 | 58 | 20 | 22 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1488 | 13099 | PARK ST | TWELTH ST | THIRTEENTH ST | E | AAC | 6 | 450 | 36 | 16,200 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1488 | 14733 | PARK ST | UTICA AVE | LAKE ST | E | AC | 6 | 1,145 | 36 | 41,220 | 6/29/21 | 86 | 51 | 4 | 45 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1489 | 13543 | PARKER CIR | ROSS LN | CDS | E | AC | 4 | 244 | 32 | 9,058 | 3/31/22 | 83 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1490 | 14985 | PARKSIDE LN | STARK ST | HOLT AVE | E | AC | 4 | 475 | 36 | 17,100 | 4/1/22 | 91 | 0 | 84 | 16 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1490 | 15625 | PARKSIDE LN | EDINGER AVE | STARK ST | E | AC | 4 | 905 | 36 | 32,580 | 4/1/22 | 91 | 0 | 83 | 17 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1493 | 13299 | PARLAY CIR | STALLION CIR | CDS | E | AC | 2 | 282 | 36 | 11,402 | 4/2/26 | 75 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 1494 | 13807 | PARTRIDGE CIR | PELICAN LN | END | E | AAC | 1 | 380 | 36 | 14,930 | 5/9/24 | 86 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1495 | 14548 | PASEO CIR | NEWLAND ST | CDS | E | AC | 4 | 362 | 36 | 15,032 | 5/13/24 | 86 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2300 | 60770 | PATCH DR | HANSEN LN | CDS | E | AC | 8 | 550 | 36 | 20,842 | 3/2/22 | 95 | 0 | 100 | 0 | New Construction - AC | 1/1/15 |
| 1496 | 15136 | PATRICIA LN | HEIL AVE | RUTH DR | E | AC | 3 | 610 | 36 | 22,660 | 3/18/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1497 | 15285 | PATTERSON LN | FORELLE DR | CDS | E | AAC | 4 | 252 | 32 | 9,564 | 4/13/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1497 | 15862 | PATTERSON LN | FORELLE DR | ELLIS AVE | E | AAC | 4 | 665 | 32 | 21,024 | 4/13/26 | 90 | 0 | 94 | 6 | Overlay - AC Structural | 11/28/19 |
| 1498 | 13345 | PAULA CIR | MARIE LN | CDS | E | AAC | 3 | 229 | 36 | 9,844 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1499 | 13974 | PAULINE LN | GARFIELD AVE | LITCHFIELD DR | E | AC | 8 | 630 | 36 | 22,680 | 4/16/26 | 85 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1501 | 15057 | PEALE LN | MALDEN CIR | GILBERT DR | E | AC | 2 | 1,178 | 36 | 42,408 | 4/9/22 | 91 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 1502 | 13294 | PEARCE ST | GREEN ST | BOLSA CHICA ST | E | AC | 2 | 660 | 36 | 23,760 | 3/22/22 | 84 | 61 | 33 | 6 | New Construction | 1/1/80 |
| 1502 | 13303 | PEARCE ST | ROOSEVELT LN | CDS | E | AC | 2 | 332 | 36 | 13,202 | 4/2/26 | 93 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 1502 | 13607 | PEARCE ST | BLANTON ST | LYNN ST | E | AC | 2 | 330 | 36 | 11,880 | 3/22/22 | 91 | 59 | 41 | 0 | New Construction | 1/1/80 |
| 1502 | 13608 | PEARCE ST | SIMS ST | BLANTON ST | E | AC | 2 | 330 | 36 | 11,880 | 3/22/22 | 63 | 81 | 19 | 0 | New Construction | 1/1/80 |
| 1502 | 15114 | PEARCE ST | LYNN ST | GREEN ST | E | AC | 2 | 660 | 36 | 23,760 | 3/22/22 | 92 | 0 | 45 | 55 | New Construction | 1/1/80 |
| 1502 | 15119 | PEARCE ST | BOLSA CHICA ST | ROOSEVELT LN | E | AC | 2 | 663 | 36 | 23,868 | 4/2/26 | 86 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 1502 | 15812 | PEARCE ST | ALGONQUIN ST | SIMS ST | E | AC | 2 | 660 | 36 | 23,760 | 3/22/22 | 76 | 62 | 21 | 17 | New Construction | 1/1/80 |
| 1504 | 15517 | PEBBLE LN | SPINNAKER DR | CDS | E | AAC | 8 | 529 | 36 | 20,244 | 3/6/24 | 90 | 0 | 91 | 9 | Overlay - AC Structural | 5/11/18 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1505 | 12889 | PECAN AVE | ELEVENTH ST | FOURTEENTH ST | E | AAC | 6 | 880 | 36 | 31,680 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1505 | 12895 | PECAN AVE | EIGHTH ST | ELEVENTH ST | E | AC | 6 | 912 | 36 | 32,832 | 6/23/21 | 92 | 0 | 83 | 17 | Surface Treatment - Slurry Seal | 6/8/21 |
| 1505 | 12901 | PECAN AVE | PECAN AVE | EIGHTH ST | E | AAC | 6 | 540 | 36 | 19,440 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1505 | 12957 | PECAN AVE | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/23/21 | 92 | 0 | 84 | 16 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1505 | 12958 | PECAN AVE | ACACIA AVE | MAIN ST | E | AC | 6 | 42 | 65 | 2,380 | 7/8/21 | 81 | 23 | 77 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1505 | 13104 | PECAN AVE | TWENTIETH ST | GOLDENWEST ST | E | AC | 6 | 795 | 36 | 28,920 | 6/23/21 | 72 | 72 | 10 | 18 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1505 | 13105 | PECAN AVE | SEVENTEENTH ST | TWENTIETH ST | E | AC | 6 | 820 | 36 | 29,520 | 6/23/21 | 94 | 0 | 97 | 3 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1505 | 13112 | PECAN AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AC | 6 | 930 | 36 | 33,480 | 6/23/21 | 77 | 49 | 18 | 33 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1505 | 15845 | PECAN AVE | LAKE ST | ALABAMA ST | E | AC | 9 | 372 | 37 | 13,764 | 8/24/23 | 61 | 87 | 13 | 0 | New Construction | 1/1/80 |
| 1505 | 15846 | PECAN AVE | MAIN ST | LAKE ST | E | AC | 6 | 265 | 36 | 9,540 | 7/8/21 | 97 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1506 | 14198 | PECK DR | RUNNING SPRINGS LN | BROOKHURST ST | E | AC | 8 | 187 | 45 | 7,585 | 3/1/22 | 91 | 0 | 59 | 41 | New Construction | 1/1/80 |
| 1507 | 13333 | PEGGY CIR | COOPER LN | CDS | E | AC | 3 | 423 | 36 | 18,528 | 3/18/22 | 84 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1508 | 13806 | PELICAN LN | MC FADDEN AVE | ALLEY MC FADDEN AVE | E | AC | 1 | 161 | 36 | 5,796 | 3/21/22 | 35 | 84 | 10 | 6 | New Construction | 1/1/80 |
| 1508 | 15324 | PELICAN LN | ALLEY MC FADDEN AVE | DOVEWOOD DR | E | AC | 1 | 660 | 36 | 23,760 | 3/21/22 | 66 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 1509 | 13646 | PEMBERCO CIR | STERLING AVE | CDS | E | AAC | 4 | 130 | 32 | 5,660 | 4/13/26 | 78 | 35 | 55 | 10 | Overlay - AC Structural | 11/28/19 |
| 1510 | 14867 | PENDLETON DR | ST ANDREWS LN | GRAHAM ST | E | AC | 2 | 170 | 32 | 5,440 | 4/1/26 | 73 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1511 | 13700 | PENFIELD CIR | MAR VISTA DR | END | E | AC | 1 | 480 | 36 | 19,080 | 4/8/26 | 82 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 1513 | 14363 | PENSACOLA CIR | PEPPERTREE DR | CDS | E | AC | 8 | 334 | 32 | 12,188 | 5/20/24 | 88 | 22 | 41 | 37 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1514 | 13411 | PEPPER LN | VATCHER DR | BALMORAL DR | E | AC | 5 | 253 | 36 | 9,108 | 5/20/24 | 74 | 64 | 29 | 7 | New Construction | 1/1/80 |
| 1515 | 14359 | PEPPERTREE DR | PINETREE LN | AUGUSTA CIR | E | AAC | 8 | 250 | 36 | 9,750 | 5/20/24 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1515 | 15562 | PEPPERTREE DR | LEMONTREE LN | SPYGLASS LN | E | AAC | 8 | 496 | 36 | 18,606 | 5/20/24 | 89 | 0 | 94 | 6 | Overlay - AC Structural | 5/11/18 |
| 1516 | 13995 | PERCH CIR | TARPON DR | CDS | E | AC | 8 | 309 | 32 | 11,388 | 3/7/22 | 81 | 0 | 97 | 3 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1517 | 15586 | PETTSWOOD DR | BUSHARD ST | BROMLEY LN | E | AAC | 8 | 1,190 | 36 | 43,590 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1518 | 13808 | PHEASANT CIR | PELICAN LN | END | E | AAC | 1 | 380 | 36 | 14,930 | 5/9/24 | 71 | 56 | 44 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1519 | 13204 | PHELPS LN | BRANFORD DR | CALHOUN DR | E | AC | 2 | 264 | 36 | 9,504 | 3/24/22 | 83 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 1519 | 15065 | PHELPS LN | CALHOUN DR | DALE DR | E | AC | 2 | 420 | 36 | 15,120 | 3/24/22 | 58 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 1519 | 15069 | PHELPS LN | DALE DR | CDS | E | AAC | 2 | 560 | 36 | 21,460 | 5/10/24 | 81 | 70 | 30 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1520 | 15412 | PHOENIX LN | PIERRE DR | BOISE DR | E | AAC | 7 | 757 | 36 | 27,752 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1521 | 14594 | PICCADILLY LN | ADAMS AVE | ADAMS AVE | E | AC | 8 | 68 | 50 | 3,400 | 4/6/22 | 66 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 1522 | 14547 | PICKWICK CIR | TALISMAN LN | PICKWICK CIR | E | AAC | 2 | 559 | 36 | 21,724 | 5/10/24 | 90 | 21 | 79 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1523 | 15555 | PIER DR | NORTHSHORE LN | CDS | E | AC | 9 | 547 | 36 | 21,492 | 3/20/24 | 83 | 31 | 69 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1523 | 15556 | PIER DR | FLEET LN | NORTHSHORE LN | E | AAC | 9 | 302 | 36 | 11,622 | 3/20/24 | 71 | 80 | 20 | 0 | Overlay - AC Structural | 5/11/18 |
| 1524 | 14039 | PIERRE DR | SACRAMENTO LN | PHOENIX LN | E | AAC | 7 | 253 | 36 | 9,358 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1525 | 13207 | PIERSON DR | PHELPS LN | SAYBROOK LN | E | AC | 2 | 734 | 36 | 26,424 | 3/24/22 | 52 | 62 | 29 | 9 | New Construction | 1/1/80 |
| 1526 | 15515 | PIERVIEW LN | INDIANAPOLIS AVE | SALINE DR | E | AC | 8 | 416 | 36 | 14,720 | 3/6/24 | 85 | 17 | 83 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1527 | 13849 | PILGRIM CIR | ROYALIST DR | END | E | AC | 1 | 530 | 36 | 20,330 | 12/20/24 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1528 | 13034 | PINE ST | SPRINGFIELD AVE | UTICA AVE | E | AC | 6 | 642 | 37 | 23,754 | 6/29/21 | 84 | 41 | 46 | 13 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1528 | 13035 | PINE ST | ADAMS AVE | SPRINGFIELD AVE | E | AC | 6 | 645 | 37 | 23,865 | 6/29/21 | 75 | 57 | 32 | 11 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1528 | 13036 | PINE ST | THIRTEENTH ST | ADAMS AVE | E | AC | 6 | 645 | 37 | 23,865 | 6/29/21 | 79 | 31 | 39 | 30 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1528 | 14735 | PINE ST | UTICA AVE | PARK ST | E | AC | 6 | 660 | 36 | 23,760 | 6/29/21 | 86 | 0 | 0 | 100 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1529 | 15269 | PINEHURST LN | SUMMERDALE DR | PALO ALTO DR | E | AC | 5 | 860 | 36 | 32,100 | 5/21/24 | 45 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1529 | 15829 | PINEHURST LN | WARNER AVE | SUMMERDALE DR | E | AC | 5 | 595 | 36 | 21,420 | 5/30/24 | 47 | 80 | 20 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1530 | 15560 | PINETREE LN | CHEVY CHASE DR | PEPPERTREE DR | E | AAC | 8 | 836 | 36 | 31,596 | 5/20/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1531 | 13392 | PINON DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 35,892 | 3/30/26 | 69 | 79 | 17 | 4 | New Construction | 1/1/80 |
| 1532 | 15585 | PIONEER DR | MAGNOLIA ST | LOTUS LN | E | AC | 7 | 1,117 | 36 | 40,662 | 4/20/26 | 94 | 67 | 33 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1533 | 13723 | PIPELINE LN | ENGINEER DR | MACHINE DR | E | AC | 1 | 1,141 | 40 | 45,320 | 4/8/26 | 61 | 49 | 19 | 32 | New Construction | 1/1/80 |
| 1534 | 13164 | PIRATE CIR | SUNDANCER LN | CDS | E | AAC | 2 | 404 | 32 | 14,428 | 5/7/24 | 93 | 0 | 86 | 14 | Overlay - AC Fabric | 12/1/17 |
| 1535 | 15966 | PISMO LN | CRESCENT DR | BAYWOOD DR | E | AAC | 7 | 498 | 36 | 17,928 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1536 | 14021 | PITCAIRN LN | CHRISTMAS DR | YORKTOWN AVE | E | AAC | 8 | 170 | 36 | 6,120 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1536 | 15399 | PITCAIRN LN | KAMUELA DR | CHRISTMAS DR | E | AAC | 8 | 1,019 | 36 | 36,684 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1537 | 13274 | PITMAN LN | WALTON DR | LAURELHURST DR | E | AC | 3 | 1,010 | 36 | 35,784 | 12/18/24 | 82 | 25 | 75 | 0 | New Construction | 1/1/80 |
| 1538 | 13865 | PLACID CIR | RED COACH DR | END | E | AC | 3 | 227 | 32 | 8,764 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1539 | 14504 | PLAYA DR | SURFRIDER LN | ISLANDER LN | E | AC | 9 | 270 | 36 | 11,720 | 4/17/24 | 76 | 70 | 30 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 2306 | 60860 | PLAZA LN | WARNER AVE | ACORN DR | E | AC | 2 | 750 | 36 | 34,320 | 4/2/26 | 89 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 2306 | 60870 | PLAZA LN | ACORN DR | DOVERTON DR | E | AC | 2 | 828 | 28 | 23,184 | 4/2/26 | 88 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 2306 | 60880 | PLAZA LN | DOVERTON DR | HEIL AVE | E | AC | 2 | 1,078 | 28 | 33,200 | 4/2/26 | 92 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 1540 | 14882 | PLEASANT CIR | GLENROY DR | CDS | E | AC | 2 | 476 | 36 | 18,486 | 4/1/26 | 79 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1541 | 15911 | PLUM TREE LN | GARFIELD AVE | WINDLASS DR | E | AC | 7 | 438 | 36 | 16,018 | 4/15/26 | 94 | 0 | 77 | 23 | Surface Treatment - Slurry Seal | 7/14/21 |
| 1542 | 13836 | PLYMOUTH LN | ROYALIST DR | EDINGER AVE | E | AC | 1 | 640 | 36 | 23,040 | 1/3/25 | 45 | 76 | 16 | 8 | New Construction | 1/1/80 |
| 1542 | 13844 | PLYMOUTH LN | ALBION DR | PRISCILLA DR | E | AC | 1 | 260 | 36 | 9,360 | 12/20/24 | 60 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 1542 | 13846 | PLYMOUTH LN | PRISCILLA DR | ROYALIST DR | E | AC | 1 | 1,040 | 36 | 37,440 | 1/3/25 | 48 | 74 | 17 | 9 | New Construction | 1/1/80 |
| 1543 | 14028 | POE DR | DITMAR LN | RUMFORD LN | E | AAC | 7 | 261 | 36 | 9,396 | 8/17/23 | 81 | 56 | 42 | 2 | Overlay - AC Structural | 3/1/11 |
| 1544 | 13353 | POINT LOMA DR | OJAI LN | CORONADO LN | E | AC | 5 | 474 | 36 | 17,064 | 5/21/24 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1544 | 15143 | POINT LOMA DR | AVALON LN | OJAI LN | E | AC | 5 | 515 | 36 | 19,680 | 5/21/24 | 85 | 14 | 82 | 4 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1545 | 14827 | POLDER CIR | HAGUE LN | CDS | E | AC | 4 | 554 | 36 | 21,194 | 3/31/22 | 79 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1546 | 13923 | POLK CIR | HARDING LN | CDS | E | AAC | 7 | 524 | 37 | 23,008 | 4/14/26 | 92 | 0 | 93 | 7 | Overlay - AC Structural | 11/28/19 |
| 1547 | 13991 | POLLACK DR | WEAKFISH LN | SALMON LN | E | AAC | 8 | 1,019 | 36 | 36,684 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1548 | 14368 | POLYNESIAN LN | HAMILTON AVE | REGATTA DR | E | AAC | 9 | 168 | 36 | 6,048 | 5/6/24 | 88 | 21 | 75 | 4 | Overlay - AC Structural | 5/11/18 |
| 1548 | 14373 | POLYNESIAN LN | REGATTA DR | BOBBIE CIR | E | AAC | 9 | 256 | 36 | 9,216 | 3/26/24 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1548 | 15566 | POLYNESIAN LN | BOBBIE CIR | RHODESIA DR | E | AAC | 9 | 768 | 36 | 27,648 | 3/26/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1549 | 13284 | POMONA LN | LAFAYETTE DR | AUBURN DR | E | AC | 3 | 259 | 36 | 9,324 | 12/19/24 | 75 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 1550 | 14160 | PORT CIR | ADAMS AVE FRONTAGE | CDS | E | AAC | 7 | 559 | 36 | 21,624 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1551 | 15614 | PORT CLYDE DR | CAPE MAY LN | ROCKPORT LN | E | AC | 9 | 612 | 36 | 24,032 | 4/17/24 | 80 | 64 | 36 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1552 | 14617 | PORT GREENWICH LN | NORTHPORT DR | BOOTHBAY CIR | E | AC | 9 | 255 | 36 | 9,180 | 8/21/23 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1552 | 15655 | PORT GREENWICH LN | BOOTHBAY CIR | CAPE NEWBURY DR | E | AC | 9 | 768 | 36 | 27,648 | 8/21/23 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1553 | 15684 | PORTLAND AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 485 | 36 | 16,884 | 8/14/23 | 71 | 48 | 46 | 6 | Overlay - AC Structural | 3/1/11 |
| 1554 | 14677 | PORTLAND CIR | HUNTINGTON ST | END | E | AAC | 6 | 576 | 36 | 22,236 | 8/15/23 | 74 | 16 | 76 | 8 | Overlay - AC Structural | 3/1/11 |
| 1556 | 13389 | PORTSIDE CIR | LANCEFIELD DR | END | E | AC | 5 | 102 | 36 | 5,472 | 3/31/26 | 65 | 31 | 57 | 12 | New Construction | 1/1/80 |
| 1557 | 14448 | PORTSMOUTH DR | WATERBURY LN | BUSHARD ST | E | AAC | 7 | 1,068 | 36 | 38,448 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1558 | 14323 | POSTON LN | DORSETT DR | STILLWELL DR | E | AC | 9 | 659 | 36 | 24,474 | 8/30/23 | 49 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 1559 | 15426 | POTOMAC LN | CAPE COD DR | ADAMS AVE | E | AAC | 7 | 1,336 | 36 | 48,096 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1560 | 14854 | POTTER CIR | BRUSH DR | CDS | E | AAC | 4 | 424 | 32 | 14,818 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1561 | 13291 | PRAIRIE DR | DOLORES ST | ALLEY LE GRAND LN | E | AC | 2 | 201 | 36 | 8,556 | 3/29/22 | 34 | 93 | 5 | 2 | New Construction | 1/1/80 |
| 1561 | 15113 | PRAIRIE DR | ALLEY LE GRAND LN | LYNN ST | E | AAC | 2 | 786 | 36 | 29,276 | 5/21/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1562 | 13838 | PRATT CIR | WINSLOW DR | END | E | AC | 1 | 339 | 36 | 13,454 | 1/3/25 | 41 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 1563 | 13134 | PRELUDE DR | BALLAD LN | MELODY LN | E | AC | 2 | 260 | 36 | 9,360 | 3/24/22 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1563 | 15936 | PRELUDE DR | FANTASIA LN | BALLAD LN | E | AC | 2 | 800 | 36 | 28,800 | 3/24/22 | 82 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 1564 | 15173 | PRESCOTT LN | KELLEY CIR | KISER DR | E | AC | 5 | 1,129 | 36 | 41,394 | 5/20/24 | 61 | 86 | 13 | 1 | New Construction | 1/1/80 |
| 1564 | 15979 | PRESCOTT LN | FENLEY DR | KELLEY CIR | E | AC | 5 | 516 | 36 | 18,576 | 5/20/24 | 63 | 89 | 11 | 0 | New Construction | 1/1/80 |
| 1567 | 13916 | PRESTWICK CIR | COLSHESTER LN | CDS | E | AAC | 7 | 250 | 32 | 11,850 | 4/15/26 | 94 | 0 | 84 | 16 | Overlay - AC Structural | 11/28/19 |
| 1568 | 14919 | PRICE DR | MISTY LN | DE LONG CIR | E | AC | 5 | 254 | 36 | 8,868 | 3/30/26 | 77 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 1568 | 15797 | PRICE DR | DE LONG CIR | WRIGHTWOOD LN | E | AC | 5 | 759 | 36 | 28,074 | 3/30/26 | 70 | 18 | 78 | 4 | New Construction | 1/1/80 |
| 1569 | 13516 | PRINCE DR | GOTHARD ST | BURKE LN | E | AC | 3 | 436 | 40 | 17,440 | 4/23/26 | 75 | 37 | 60 | 3 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1570 | 14129 | PRINCESS CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 81 | 85 | 15 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1571 | 14205 | PRINCETON CIR | MEREDITH DR | CDS | E | AC | 8 | 108 | 31 | 5,348 | 2/28/22 | 84 | 43 | 36 | 21 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1572 | 13832 | PRISCILLA DR | SPRINGDALE ST | AULNAY LN | E | AC | 1 | 551 | 36 | 19,836 | 12/27/24 | 56 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 1572 | 13845 | PRISCILLA DR | AULNAY LN | PLYMOUTH LN | E | AC | 1 | 261 | 36 | 9,396 | 1/3/25 | 64 | 65 | 34 | 1 | New Construction | 1/1/80 |
| 1572 | 15338 | PRISCILLA DR | PLYMOUTH LN | MAYFLOWER LN | E | AC | 1 | 1,040 | 36 | 37,690 | 12/27/24 | 37 | 81 | 13 | 6 | New Construction | 1/1/80 |
| 1573 | 13248 | PRO CIR | FERNHILL CIR | END | E | AC | 3 | 183 | 34 | 8,022 | 4/2/26 | 83 | 0 | 81 | 19 | New Construction | 1/1/80 |
| 1574 | 14776 | PRODAN DR | GOTHARD ST | ENTERPRISE LN | E | AC | 4 | 402 | 40 | 16,830 | 5/9/24 | 64 | 70 | 30 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1575 | 13827 | PRODUCER LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 35 | 83 | 6 | 11 | New Construction | 1/1/80 |
| 1576 | 13722 | PRODUCT LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 57 | 80 | 10 | 10 | New Construction | 1/1/80 |
| 1577 | 15329 | PRODUCTION DR | CHEMICAL LN | GRAHAM ST | E | AC | 1 | 1,170 | 40 | 46,320 | 4/1/22 | 64 | 61 | 37 | 2 | New Construction | 1/1/80 |
| 1578 | 14757 | PROFESSIONAL CIR | FLORIDA ST | CDS | E | AC | 4 | 314 | 22 | 6,908 | 4/8/24 | 53 | 69 | 17 | 14 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1579 | 14602 | PROMENADE PKWY DR | SEAGATE DR | GOTHARD AVE | E | AC | 4 | 1,017 | 42 | 42,714 | 3/5/24 | 92 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1579 | 14603 | PROMENADE PKWY DR | MAIN ST | SEAGATE DR | E | AC | 4 | 849 | 42 | 35,658 | 3/5/24 | 89 | 0 | 54 | 46 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1580 | 14622 | PROVIDENCE LN | CAPE COD DR | ADAMS AVE | E | AC | 7 | 1,338 | 36 | 48,168 | 4/16/26 | 89 | 40 | 60 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1581 | 14009 | PUA DR | MOOREA LN | END | E | AC | 8 | 431 | 36 | 17,316 | 3/7/22 | 84 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1581 | 15397 | PUA DR | KIPAHULU LN | MOOREA LN | E | AC | 8 | 1,102 | 36 | 39,672 | 3/7/22 | 69 | 82 | 18 | 0 | South Gate Slurry Seal | 2/8/23 |
| 1582 | 14241 | PUERTO DR | MISSION LN | NEWLAND ST | E | AC | 9 | 167 | 36 | 6,012 | 8/23/23 | 73 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 1583 | 13850 | PURITAN CIR | ROYALIST DR | END | E | AC | 1 | 530 | 36 | 20,330 | 12/20/24 | 56 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 1584 | 14924 | PUTNEY CIR | BARWOOD DR | END | E | AC | 5 | 313 | 36 | 13,268 | 3/31/26 | 82 | 0 | 77 | 23 | New Construction | 1/1/80 |
| 1585 | 13810 | QUAIL CIR | BLUEBIRD LN | END | E | AAC | 1 | 530 | 36 | 20,330 | 5/9/24 | 72 | 72 | 28 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1586 | 15008 | QUARTERHORSE LN | ELLIS AVE | CHURCHILL DR | E | AC | 5 | 1,480 | 36 | 53,280 | 5/7/24 | 84 | 58 | 35 | 7 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1586 | 15009 | QUARTERHORSE LN | CHURCHILL DR | END | E | AC | 5 | 566 | 36 | 20,376 | 5/7/24 | 90 | 0 | 93 | 7 | New Construction | 1/1/80 |
| 1588 | 14764 | QUEBEC DR | HUNTINGTON ST | MANITOBA LN | E | AAC | 4 | 617 | 36 | 21,924 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1588 | 14774 | QUEBEC DR | HUNTINGTON DR | CDS | E | AC | 4 | 150 | 34 | 6,600 | 5/13/24 | 83 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1589 | 13569 | QUEENS LN | ALLEY BARTON DR | ALLEY SLATER AVE | E | AAC | 4 | 501 | 36 | 18,036 | 5/30/24 | 82 | 45 | 55 | 0 | Overlay - AC Structural | 10/1/12 |
| 1589 | 13572 | QUEENS LN | ALLEY SLATER AVE | SLATER AVE | E | AAC | 4 | 150 | 36 | 5,400 | 5/30/24 | 89 | 0 | 87 | 13 | Overlay - AC Structural | 10/1/12 |
| 1589 | 14426 | QUEENS LN | BARTON DR | ALLEY BARTON DR | E | AAC | 4 | 158 | 36 | 5,688 | 5/30/24 | 91 | 45 | 52 | 3 | Overlay - AC Structural | 10/1/12 |
| 1590 | 14281 | QUEENS PARK LN | CAITHNESS DR | LEVEE DR | E | AC | 8 | 456 | 36 | 16,416 | 3/18/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1590 | 15514 | QUEENS PARK LN | CAITHNESS DR | NETHERWAY DR | E | AC | 8 | 684 | 36 | 25,800 | 3/18/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1590 | 15520 | QUEENS PARK LN | UPLAND DR | ATLANTA AVE | E | AC | 8 | 747 | 36 | 26,892 | 3/19/24 | 76 | 60 | 29 | 11 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1591 | 13154 | QUICKSTEP CIR | SPARTAN CIR | CDS | E | AAC | 2 | 182 | 32 | 7,624 | 5/7/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1592 | 13903 | QUIET BAY LN | DEEP HARBOR DR | CDS | E | AAC | 5 | 290 | 36 | 12,380 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1592 | 15361 | QUIET BAY LN | BAR HARBOR LN | DEEP HARBOR LN | E | AAC | 5 | 805 | 36 | 30,069 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1593 | 12857 | QUIET SURF CIR | SCENIC BAY LN | CDS | E | AAC | 5 | 177 | 32 | 7,630 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1594 | 13889 | QUIETSANDS CIR | LAWN HAVEN DR | CDS | E | AC | 5 | 193 | 36 | 8,948 | 4/15/24 | 88 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1595 | 13701 | QUILL CIR | MAR VISTA DR | END | E | AAC | 1 | 480 | 36 | 19,080 | 5/7/24 | 71 | 22 | 78 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1596 | 15190 | QUINTANA LN | VILLA NUEVA DR | CARRANZA LN | E | AAC | 5 | 1,020 | 36 | 36,720 | 5/29/24 | 65 | 39 | 60 | 1 | Overlay - AC Structural | 10/1/12 |
| 1597 | 13151 | RAGTIME CIR | SUNDANCER LN | CDS | E | AAC | 2 | 196 | 32 | 8,072 | 5/7/24 | 91 | 0 | 76 | 24 | Overlay - AC Fabric | 12/1/17 |
| 1598 | 13453 | RAIN CIR | NORBROOK DR | END | E | AAC | 5 | 280 | 36 | 11,880 | 5/23/24 | 72 | 40 | 47 | 13 | Overlay - AC Structural | 10/1/12 |
| 1599 | 14939 | RAINGLEN LN | BANKTON DR | NEARGATE DR | E | AC | 5 | 357 | 36 | 12,852 | 3/31/26 | 75 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 1599 | 15831 | RAINGLEN LN | NEARGATE DR | END | E | AC | 5 | 897 | 36 | 34,292 | 3/31/26 | 69 | 44 | 53 | 3 | New Construction | 1/1/80 |
| 1600 | 14175 | RAINIER CIR | INTERIOR LN | CDS | E | AC | 8 | 379 | 32 | 13,628 | 2/23/22 | 81 | 26 | 74 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1601 | 15632 | RALEIGH DR | SIDCUP LN | LURES LN | E | AAC | 8 | 202 | 24 | 4,848 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1601 | 15633 | RALEIGH DR | SHEFFIELD LN | BURNLEY LN | E | AAC | 8 | 202 | 24 | 4,848 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1602 | 14471 | RAMBLER DR | ALLEY BUSHARD ST | BUSHARD ST | E | AC | 9 | 150 | 36 | 5,400 | 5/20/24 | 89 | 46 | 54 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1602 | 14485 | RAMBLER DR | BUSHARD ST | OCEANVIEW LN | E | AC | 9 | 167 | 36 | 5,724 | 3/26/24 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1602 | 15594 | RAMBLER DR | STARFIRE LN | ALLEY BUSHARD ST | E | AC | 9 | 403 | 36 | 14,508 | 5/20/24 | 72 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1603 | 14163 | RAMONA LN | CANDLEWOOD DR | HAZELBROOK DR | E | AAC | 7 | 743 | 36 | 26,748 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1604 | 15908 | RANDI LN | GARFIELD AVE | HYDE PARK DR | E | AAC | 8 | 995 | 34 | 33,830 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1605 | 15832 | RANGER LN | CUTTY SARK DR | ADAMS AVE | E | AC | 8 | 1,163 | 36 | 41,868 | 2/28/22 | 70 | 69 | 28 | 3 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1606 | 14940 | RAPHAEL DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 35,892 | 3/30/26 | 81 | 58 | 29 | 13 | New Construction | 1/1/80 |
| 1607 | 13147 | RASCAL LN | SEASCAPE DR | AQUARIUS DR | E | AAC | 2 | 385 | 36 | 13,860 | 5/7/24 | 93 | 0 | 70 | 30 | Overlay - AC Fabric | 12/1/17 |
| 1608 | 14137 | RATH CIR | MEANDER LN | CDS | E | AAC | 7 | 76 | 63 | 6,288 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1609 | 14218 | RAVENWOOD LN | JON DAY DR | WARWICK DR | E | AC | 8 | 1,219 | 36 | 45,384 | 2/28/22 | 81 | 79 | 19 | 2 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1610 | 13171 | REBEL CIR | SUNDANCER LN | CDS | E | AAC | 2 | 485 | 34 | 17,990 | 5/7/24 | 89 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1611 | 13860 | RED COACH DR | WHITEOAK LN | WILD CHERRY CIR | E | AC | 3 | 399 | 36 | 15,364 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1611 | 13871 | RED COACH DR | OAKSHIRE LN | DAWSON LN | E | AC | 3 | 584 | 36 | 21,024 | 12/19/24 | 90 | 0 | 39 | 61 | New Construction | 1/1/80 |
| 1611 | 15341 | RED COACH DR | WILD CHERRY CIR | OAKSHIRE LN | E | AC | 3 | 746 | 36 | 26,856 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1612 | 14345 | RED JACKET CIR | ORIENT DR | CDS | E | AC | 8 | 451 | 36 | 16,236 | 4/1/24 | 83 | 14 | 86 | 0 | New Construction | 1/1/80 |
| 1613 | 13278 | REDGROVE CIR | OAKMONT LN | CDS | E | AC | 3 | 420 | 36 | 16,920 | 12/19/24 | 85 | 22 | 78 | 0 | New Construction | 1/1/80 |
| 1614 | 16006 | REDLANDS LN | LAFAYETTE DR | HEIL AVE | E | AC | 3 | 1,228 | 36 | 44,208 | 12/19/24 | 83 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 1615 | 14781 | REDONDO CIR | TALBERT AVE | KOVACS LN | E | AAC | 4 | 718 | 40 | 28,720 | 4/13/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1616 | 14195 | REDWOOD LN | BIG SUR DR | VICKSBURG DR | E | AAC | 8 | 252 | 36 | 9,822 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1617 | 14291 | REEF LN | LEVEE DR | STAR DR | E | AC | 8 | 127 | 36 | 6,572 | 3/6/24 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1617 | 15521 | REEF LN | SALINE DR | LEVEE DR | E | AC | 8 | 904 | 36 | 34,544 | 3/6/24 | 70 | 21 | 79 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1618 | 14135 | REGAL CIR | TRUXTON DR | CDS | E | AAC | 7 | 411 | 32 | 13,152 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1619 | 14369 | REGATTA DR | POLYNESIAN LN | CDS | E | AAC | 9 | 480 | 36 | 18,780 | 3/26/24 | 82 | 62 | 38 | 0 | Overlay - AC Structural | 5/11/18 |
| 1619 | 14375 | REGATTA DR | POLYNESIAN LN | KANEOHE LN | E | AAC | 9 | 478 | 36 | 17,708 | 3/26/24 | 85 | 41 | 59 | 0 | Overlay - AC Structural | 5/11/18 |
| 1620 | 13297 | REGINA CIR | HEIL AVE | CDS | E | AC | 2 | 592 | 36 | 22,562 | 4/2/26 | 54 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 1621 | 14229 | REILLY DR | SANDPIPER LN | END | E | AC | 9 | 364 | 36 | 13,104 | 8/24/23 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1621 | 15883 | REILLY DR | FARNSWORTH LN | SANDPIPER LN | E | AC | 9 | 796 | 36 | 28,656 | 8/24/23 | 83 | 53 | 33 | 14 | New Construction | 1/1/80 |
| 1622 | 15743 | REMBRANDT DR | HAGUE LN | NEWLAND ST | E | AC | 4 | 653 | 36 | 23,508 | 3/31/22 | 86 | 44 | 56 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1623 | 14862 | REMINGTON LN | WARNER AVE | ROGERS DR | E | AC | 5 | 191 | 36 | 6,876 | 4/29/26 | 43 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 1624 | 13196 | REMORA DR | BAY VIEW DR | INTREPID LN | E | AAC | 2 | 103 | 28 | 2,884 | 5/13/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1625 | 13367 | RENNRICK CIR | KRISTOPHER LN | END | E | AAC | 3 | 368 | 36 | 15,248 | 5/22/24 | 80 | 0 | 85 | 15 | Overlay - AC Structural | 10/1/12 |
| 1626 | 13828 | RENO CIR | TAFT LN | END | E | AC | 1 | 127 | 52 | 6,604 | 1/7/25 | 65 | 51 | 42 | 7 | New Construction | 1/1/80 |
| 1627 | 14876 | RENOIR CIR | KERN DR | CDS | E | AC | 5 | 50 | 36 | 1,800 | 4/1/26 | 72 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1628 | 14950 | REPAIR LN | AUTOPARK DR | ELLIS AVE | E | AC | 4 | 183 | 40 | 7,000 | 5/9/24 | 93 | 14 | 86 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1629 | 15331 | RESEARCH DR | GRAHAM ST | COMPUTER LN | E | AC | 1 | 925 | 40 | 37,000 | 1/7/25 | 65 | 85 | 15 | 0 | New Construction | 1/1/80 |
| 1629 | 15332 | RESEARCH DR | COMPUTER LN | PRODUCER LN | E | AC | 1 | 1,097 | 40 | 43,880 | 1/7/25 | 60 | 83 | 10 | 7 | New Construction | 1/1/80 |
| 1629 | 15933 | RESEARCH DR | CHEMICAL LN | GRAHAM ST | E | AC | 1 | 1,170 | 40 | 46,800 | 3/21/22 | 47 | 79 | 17 | 4 | New Construction | 1/1/80 |
| 1630 | 13126 | RETHERFORD DR | SHERBECK LN | ROLLINS LN | E | AC | 3 | 1,010 | 36 | 37,110 | 4/7/26 | 80 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1632 | 13599 | REUBENS DR | BALLANTINE LN | BRIMHALL LN | E | AC | 3 | 1,014 | 36 | 36,504 | 5/7/26 | 58 | 57 | 40 | 3 | New Construction | 1/1/80 |
| 1633 | 14787 | REYNOLDS CIR | SAMPSON LN | CDS | E | AC | 4 | 304 | 40 | 13,660 | 5/8/24 | 84 | 22 | 72 | 6 | New Construction | 1/1/80 |
| 1634 | 13583 | RHAPSODY DR | FANTASIA LN | MELODY LN | E | AC | 2 | 1,060 | 36 | 38,910 | 3/24/22 | 74 | 54 | 46 | 0 | New Construction | 1/1/80 |
| 1635 | 13528 | RHINE CIR | RHINE DR | CDS | E | AAC | 4 | 129 | 32 | 5,628 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1636 | 15240 | RHINE DR | RHONE LN | CHARLES LN | E | AC | 4 | 520 | 36 | 18,720 | 3/18/22 | 87 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1636 | 15241 | RHINE DR | CHARLES LN | DON DR | E | AC | 4 | 670 | 36 | 24,120 | 3/18/22 | 90 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1636 | 15243 | RHINE DR | DON DR | LOIRE CIR | E | AC | 4 | 520 | 36 | 18,720 | 3/18/22 | 80 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1636 | 15244 | RHINE DR | LOIRE CIR | HEIL AVE | E | AC | 4 | 693 | 36 | 24,948 | 3/18/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1637 | 14374 | RHODESIA DR | BAHAMA LN | KANEOHE LN | E | AAC | 9 | 260 | 36 | 9,072 | 3/27/24 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1637 | 15565 | RHODESIA DR | BAHAMA LN | CDS | E | AAC | 9 | 740 | 36 | 28,440 | 3/27/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1638 | 13489 | RHONE LN | SHER LN | KIM LN | E | AC | 4 | 851 | 36 | 30,636 | 3/18/22 | 85 | 60 | 40 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1638 | 13518 | RHONE LN | RHINE DR | VANTAGE DR | E | AC | 4 | 500 | 36 | 19,000 | 3/31/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1638 | 15222 | RHONE LN | KIM LN | HEIL AVE | E | AAC | 4 | 1,062 | 36 | 38,232 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1638 | 15238 | RHONE LN | HEIL AVE | RHINE DR | E | AC | 4 | 1,190 | 36 | 42,840 | 3/31/22 | 90 | 59 | 37 | 4 | Surface Treatment - Slurry Seal | 7/29/20 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1639 | 13743 | RICE CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/9/26 | 72 | 0 | 59 | 41 | New Construction | 1/1/80 |
| 1640 | 14357 | RICHMOND CIR | EFFINGHAM DR | CDS | E | AC | 8 | 495 | 36 | 19,320 | 4/10/24 | 66 | 53 | 16 | 31 | New Construction | 1/1/80 |
| 1641 | 15802 | RIDGEBURY DR | GRAHAM ST | CRESTMOOR LN | E | AC | 5 | 716 | 36 | 25,776 | 5/8/26 | 60 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 1642 | 13702 | RIDGEVIEW CIR | MAR VISTA DR | END | E | AAC | 1 | 480 | 36 | 19,280 | 5/7/24 | 73 | 23 | 77 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1643 | 13258 | RINGO CIR | NORMANDY LN | CDS | E | AC | 3 | 238 | 32 | 8,866 | 4/6/26 | 60 | 88 | 12 | 0 | New Construction | 1/1/80 |
| 1644 | 15186 | RIO VISTA DR | GOLDENWEST ST | END | E | AAC | 5 | 539 | 36 | 21,404 | 5/29/24 | 71 | 8 | 92 | 0 | Overlay - AC Structural | 10/1/12 |
| 1645 | 13447 | RIVERSIDE CIR | PACEMONT DR | END | E | AAC | 5 | 360 | 36 | 14,460 | 5/23/24 | 63 | 42 | 47 | 11 | Overlay - AC Structural | 10/1/12 |
| 1646 | 14708 | RIVERVIEW CIR | OCEANHILL DR | CDS | E | AC | 6 | 248 | 32 | 9,436 | 8/15/23 | 27 | 94 | 6 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1647 | 14974 | RIVIERA DR | STARDUST DR | HAMMON LN | E | AAC | 1 | 1,028 | 36 | 37,008 | 5/8/24 | 72 | 70 | 30 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1648 | 15157 | ROB ROY CIR | MANHATTAN DR | END | E | AAC | 3 | 446 | 36 | 16,556 | 5/28/24 | 79 | 17 | 83 | 0 | Overlay - AC Structural | 10/1/12 |
| 1649 | 13326 | ROBERT LN | JEAN DR | SHIELDS DR | E | AC | 3 | 1,281 | 36 | 46,116 | 5/7/26 | 85 | 74 | 26 | 0 | New Construction | 1/1/80 |
| 1650 | 13653 | ROBERTA CIR | TAYLOR DR | CDS | E | AAC | 4 | 232 | 32 | 8,924 | 4/13/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1651 | 15749 | ROBIDOUX DR | BEACH BLVD | B ST | E | AC | 4 | 599 | 28 | 15,572 | 3/31/22 | 88 | 58 | 36 | 6 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1652 | 15932 | ROBINWOOD DR | BOLSA CHICA ST | HUMMINGBIRD LN | E | AC | 1 | 1,190 | 36 | 42,840 | 3/21/22 | 63 | 63 | 36 | 1 | New Construction | 1/1/80 |
| 1653 | 15703 | ROCHESTER AVE | CALIFORNIA ST | DELAWARE ST | E | AAC | 6 | 270 | 36 | 9,720 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1653 | 15856 | ROCHESTER AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 435 | 36 | 15,660 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1653 | 15857 | ROCHESTER AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 288 | 36 | 10,368 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1654 | 14484 | ROCK POINT DR | OCEANVIEW LN | SEASIDE LN | E | AAC | 9 | 515 | 36 | 19,290 | 4/21/26 | 80 | 11 | 89 | 0 | Overlay - AC Structural | 5/11/19 |
| 1656 | 13961 | ROCKCREST LN | SAILPORT DR | YORKTOWN AVE | E | AC | 7 | 173 | 33 | 5,019 | 5/5/26 | 78 | 86 | 0 | 14 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1657 | 14761 | ROCKINGHORSE LN | CHURCHILL DR | FAIRCREST DR | E | AC | 5 | 467 | 36 | 16,812 | 5/7/24 | 91 | 0 | 15 | 85 | New Construction | 1/1/80 |
| 1658 | 15429 | ROCKLAND LN | YORKTOWN AVE | INNSBRUCK DR | E | AC | 8 | 450 | 36 | 16,200 | 3/9/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1659 | 15616 | ROCKPORT LN | PORT CLYDE DR | CDS | E | AC | 9 | 382 | 36 | 16,252 | 4/17/24 | 86 | 0 | 67 | 33 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1660 | 15483 | ROCKY MOUNTAIN DR | BIG BEND LN | MC KINLEY LN | E | AAC | 8 | 753 | 36 | 27,858 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1661 | 14063 | RODERICK LN | VERONICA DR | MADELINE DR | E | AAC | 7 | 828 | 36 | 30,558 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1662 | 15762 | RODGERS DR | BERLIN LN | TWAIN LN | E | AC | 5 | 508 | 36 | 18,538 | 5/8/26 | 84 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 1662 | 15763 | RODGERS DR | TWAIN LN | CDS | E | AC | 5 | 798 | 36 | 29,978 | 5/8/26 | 74 | 59 | 41 | 0 | New Construction | 1/1/80 |
| 1663 | 14427 | ROLF CIR | HARTLUND ST | CDS | E | AC | 4 | 121 | 32 | 5,372 | 4/8/24 | 61 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1664 | 13888 | ROLLINS LN | RETHERFORD DR | BREELAND DR | E | AC | 3 | 281 | 36 | 10,866 | 12/12/24 | 88 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 1665 | 13771 | ROME CIR | HANOVER LN | END | E | AC | 1 | 433 | 36 | 17,388 | 12/18/24 | 87 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 1666 | 15726 | RONALD RD | ALLEY RONALD RD | BEACH BLVD | E | AC | 4 | 1,310 | 36 | 48,410 | 5/9/24 | 73 | 75 | 23 | 2 | New Construction | 1/1/80 |
| 1667 | 15390 | RONNEY DR | JOICE LN | BUSHARD ST | E | AC | 8 | 344 | 36 | 13,134 | 4/15/26 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1668 | 15155 | ROOK DR | GOLDEN VIEW LN | TAURUS LN | E | AC | 3 | 1,000 | 36 | 37,500 | 5/28/24 | 58 | 57 | 43 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1669 | 15023 | ROOSEVELT LN | PEARCE ST | CDS | E | AC | 2 | 487 | 36 | 18,782 | 4/2/26 | 90 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 1669 | 15118 | ROOSEVELT LN | STALLION CIR | PEARCE ST | E | AC | 2 | 515 | 36 | 18,540 | 4/2/26 | 67 | 87 | 10 | 3 | New Construction | 1/1/80 |
| 1671 | 14803 | ROSANNA DR | GERALDINE LN | ROXANNE LN | E | AAC | 4 | 288 | 36 | 11,118 | 4/13/26 | 85 | 34 | 66 | 0 | Overlay - AC Structural | 12/6/19 |
| 1672 | 13351 | ROSEMONT DR | AUTUMN CIR | PINEHURST LN | E | AAC | 5 | 260 | 36 | 9,360 | 5/21/24 | 70 | 17 | 79 | 4 | Overlay - AC Structural | 10/1/12 |
| 1672 | 15141 | ROSEMONT DR | SPRINGDALE ST | AUTUMN CIR | E | AAC | 5 | 440 | 36 | 15,840 | 5/21/24 | 83 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1673 | 13549 | ROSS LN | HEIL AVE | HASTINGS CIR | E | AAC | 4 | 159 | 36 | 5,724 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1673 | 15249 | ROSS LN | HASTINGS CIR | ROYER CIR | E | AAC | 4 | 516 | 36 | 18,576 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1673 | 15250 | ROSS LN | ROYER CIR | ROYAL DR | E | AAC | 4 | 615 | 36 | 22,140 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1673 | 15251 | ROSS LN | ROYAL DR | SALEM CIR | E | AAC | 4 | 414 | 36 | 14,904 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1673 | 15252 | ROSS LN | SALEM CIR | WARNER AVE | E | AAC | 4 | 936 | 36 | 33,696 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1674 | 14034 | ROTHERT LN | FLAXMAN DR | NEW BRITAIN LN | E | AAC | 7 | 465 | 36 | 16,740 | 4/21/26 | 99 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1675 | 14820 | ROTTERDAM DR | VALENCIA DR | FRIESLAND DR | E | AAC | 4 | 261 | 36 | 9,396 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1675 | 15738 | ROTTERDAM DR | WARNER AVE | VALENCIA DR | E | AAC | 4 | 1,200 | 36 | 43,200 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1676 | 13232 | ROUNDHILL DR | BLAIR LN | COURTNEY LN | E | AC | 2 | 1,169 | 36 | 41,884 | 3/29/22 | 72 | 23 | 77 | 0 | New Construction | 1/1/80 |
| 1676 | 15078 | ROUNDHILL DR | DAVENPORT DR | BLAIR LN | E | AC | 2 | 1,407 | 36 | 50,430 | 3/29/22 | 61 | 65 | 35 | 0 | New Construction | 1/1/80 |
| 1677 | 15731 | ROXANNE LN | ROSANNA DR | CDS | E | AAC | 4 | 333 | 32 | 12,456 | 4/13/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1678 | 14424 | ROYAL DR | ROSS LN | LANDAU LN | E | AC | 4 | 245 | 36 | 8,820 | 3/31/22 | 72 | 83 | 17 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1679 | 15296 | ROYAL OAK DR | SUNNYCREST LN | EDWARDS ST | E | AC | 1 | 452 | 36 | 15,984 | 4/29/26 | 82 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 1679 | 15924 | ROYAL OAK DR | CHALET LN | SUNNYCREST LN | E | AAC | 1 | 1,041 | 36 | 38,976 | 5/7/24 | 78 | 34 | 66 | 0 | Overlay - AC Structural | 10/1/16 |
| 1680 | 13847 | ROYALIST DR | PLYMOUTH LN | WILLETT LN | E | AC | 1 | 260 | 36 | 9,360 | 12/27/24 | 48 | 62 | 11 | 27 | New Construction | 1/1/80 |
| 1680 | 15336 | ROYALIST DR | SPRINGDALE ST | PLYMOUTH LN | E | AC | 1 | 811 | 36 | 29,196 | 12/27/24 | 37 | 79 | 5 | 16 | New Construction | 1/1/80 |
| 1680 | 16009 | ROYALIST DR | WILLET LN | STANDISH LN | E | AC | 1 | 780 | 36 | 28,080 | 12/27/24 | 45 | 83 | 13 | 4 | New Construction | 1/1/80 |
| 1681 | 13542 | ROYER CIR | ROSS LN | CDS | E | AC | 4 | 244 | 32 | 9,058 | 3/31/22 | 73 | 76 | 23 | 1 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1682 | 13615 | RUDDER DR | GREEN ST | JIB CIR | E | AC | 2 | 446 | 36 | 16,056 | 4/7/22 | 81 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 1683 | 14029 | RUMFORD LN | POE DR | DEEPVIEW DR | E | AAC | 7 | 520 | 36 | 18,720 | 8/17/23 | 73 | 28 | 58 | 14 | Overlay - AC Structural | 3/1/11 |
| 1684 | 14065 | RUMSEY LN | WARFIELD DR | ELVA CIR | E | AAC | 7 | 311 | 36 | 11,946 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1685 | 14184 | RUNNING SPRINGS LN | KINGS CANYON DR | MAMMOTH DR | E | AC | 8 | 253 | 36 | 9,858 | 3/1/22 | 66 | 76 | 9 | 15 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1685 | 15487 | RUNNING SPRINGS LN | MAMMOTH DR | HOT SPRINGS DR | E | AC | 8 | 1,341 | 36 | 49,026 | 3/1/22 | 83 | 25 | 38 | 37 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1686 | 13175 | RUNNING TIDE CIR | SUNDANCER LN | CDS | E | AAC | 2 | 576 | 34 | 21,084 | 5/7/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1687 | 13470 | RUSHMOOR LN | ETNA CIR | SUGAR AVE | E | AC | 4 | 682 | 36 | 24,336 | 5/13/24 | 65 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1687 | 15212 | RUSHMOOR LN | WHITNEY DR | ETNA CIR | E | AC | 4 | 626 | 36 | 22,536 | 5/13/24 | 73 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1688 | 13760 | RUTGERS CIR | COLUMBIA LN | END | E | AC | 1 | 543 | 36 | 21,048 | 12/18/24 | 86 | 67 | 25 | 8 | New Construction | 1/1/80 |
| 1689 | 13338 | RUTH DR | PATRICIA LN | SIMMONE LN | E | AC | 3 | 265 | 36 | 10,340 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1690 | 13419 | SABBICAS CIR | SAN ROQUE LN | END | E | AAC | 5 | 285 | 36 | 12,260 | 5/29/24 | 70 | 52 | 48 | 0 | Overlay - AC Structural | 10/1/12 |
| 1691 | 14318 | SABLE DR | SHEPHERD LN | CHELSEA LN | E | AC | 9 | 117 | 36 | 4,962 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1691 | 14319 | SABLE DR | MIRAMAR LN | BRETON LN | E | AC | 9 | 270 | 36 | 9,720 | 8/30/23 | 68 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 1691 | 15539 | SABLE DR | CHELSEA LN | MIRAMAR LN | E | AC | 9 | 640 | 36 | 23,040 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1692 | 13500 | SABOT LN | HEIL AVE | ALLEY HEIL AVE | E | AAC | 3 | 165 | 36 | 5,940 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1692 | 13501 | SABOT LN | ALLEY HEIL AVE | MADDOX DR | E | AAC | 3 | 365 | 36 | 13,140 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1692 | 15819 | SABOT LN | SUNLIGHT DR | HEIL AVE | E | AC | 3 | 312 | 36 | 11,232 | 3/18/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1693 | 13728 | SABRE LN | ATLAS DR | BOLSA AVE | E | AC | 1 | 224 | 36 | 8,814 | 12/26/24 | 93 | 0 | 62 | 38 | New Construction | 1/1/80 |
| 1693 | 15299 | SABRE LN | BOLSA AVE | END | E | AC | 1 | 613 | 36 | 24,068 | 4/28/26 | 75 | 35 | 65 | 0 | New Construction | 1/1/80 |
| 1694 | 15971 | SACRAMENTO LN | SALT LAKE DR | BOISE DR | E | AAC | 7 | 1,021 | 36 | 37,256 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1695 | 15007 | SADDLEBACK LN | ELLIS AVE | CDS | E | AC | 5 | 1,434 | 36 | 51,624 | 5/6/24 | 79 | 56 | 39 | 5 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1695 | 15010 | SADDLEBACK LN | GARFIELD AVE | CDS | E | AC | 5 | 643 | 37 | 23,791 | 5/7/24 | 90 | 13 | 50 | 37 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1696 | 15036 | SAGAMORE DR | TYPHOON LN | CDS | E | AAC | 2 | 1,093 | 36 | 41,148 | 5/7/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1697 | 13668 | SAHARA LN | CROUPIER CIR | NUGGET CIR | E | AC | 1 | 260 | 36 | 10,860 | 4/13/26 | 80 | 16 | 79 | 5 | New Construction | 1/1/80 |
| 1698 | 14453 | SAIL CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 80 | 35 | 65 | 0 | New Construction | 1/1/80 |
| 1699 | 13992 | SAILFISH DR | WEAKFISH LN | SALMON LN | E | AC | 8 | 1,019 | 36 | 36,684 | 3/7/22 | 81 | 43 | 50 | 7 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1700 | 13959 | SAILPORT DR | HOPEBAY LN | CDS | E | AC | 7 | 340 | 32 | 12,130 | 4/15/26 | 88 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1700 | 15382 | SAILPORT DR | CORALWOOD LN | HOPEBAY LN | E | AC | 7 | 1,039 | 36 | 37,654 | 4/15/26 | 88 | 26 | 57 | 17 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1701 | 13966 | SAILWIND LN | SEASPRAY DR | BAYWOOD DR | E | AC | 7 | 261 | 36 | 9,646 | 5/5/26 | 92 | 51 | 49 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1702 | 13433 | SALAMANCA LN | CARRANZA LN | LUCIENTO DR | E | AAC | 5 | 254 | 36 | 8,856 | 5/24/24 | 81 | 19 | 81 | 0 | Overlay - AC Structural | 10/1/12 |
| 1703 | 13546 | SALEM CIR | ROSS LN | CDS | E | AAC | 4 | 199 | 32 | 7,618 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1704 | 15516 | SALINE DR | REEF LN | PEBBLE LN | E | AC | 8 | 760 | 36 | 31,360 | 3/6/24 | 69 | 0 | 95 | 5 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1705 | 13793 | SALISBURY LN | MELBOURNE DR | MC FADDEN AVE | E | AC | 1 | 512 | 36 | 18,144 | 12/12/24 | 77 | 78 | 17 | 5 | New Construction | 1/1/80 |
| 1706 | 13990 | SALMON LN | FLOUNDER DR | POLLACK DR | E | AAC | 8 | 260 | 36 | 9,360 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1706 | 15394 | SALMON LN | POLLACK DR | YORKTOWN AVE | E | AAC | 8 | 929 | 36 | 33,444 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1707 | 14284 | SALT AIR CIR | SPINNAKER DR | CDS | E | AAC | 8 | 528 | 36 | 20,208 | 3/6/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1708 | 14037 | SALT LAKE DR | TOPEKA LN | CDS | E | AAC | 7 | 231 | 36 | 9,566 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1708 | 15411 | SALT LAKE DR | SACRAMENTO LN | TOPEKA LN | E | AAC | 7 | 537 | 36 | 19,582 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1709 | 14476 | SALUDA CIR | LANDFALL DR | CDS | E | AC | 9 | 472 | 36 | 18,492 | 4/25/24 | 80 | 0 | 48 | 52 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1710 | 14007 | SAMOA DR | SUVA LN | END | E | AAC | 8 | 196 | 32 | 8,072 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1710 | 14013 | SAMOA DR | BIKINI LN | SUVA LN | E | AAC | 8 | 675 | 36 | 24,300 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1711 | 14786 | SAMPSON LN | WOODWIND DR | CDS | E | AC | 4 | 540 | 40 | 22,800 | 5/8/24 | 55 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1711 | 15724 | SAMPSON LN | BURTON DR | WOODWIND DR | E | AC | 4 | 1,119 | 40 | 44,760 | 5/8/24 | 81 | 43 | 48 | 9 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1712 | 15227 | SAN ANGELO DR | MALAGA LN | ALLEY SAN ANGELO DR | E | AAC | 4 | 227 | 36 | 9,922 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1713 | 13427 | SAN DOVAL LN | VILLA NUEVA DR | ARACENA DR | E | AAC | 5 | 596 | 36 | 22,206 | 5/24/24 | 68 | 31 | 69 | 0 | Overlay - AC Structural | 10/1/12 |
| 1714 | 13431 | SAN LEANDRO LN | VILLA NUEVA DR | CALPE CIR | E | AAC | 5 | 1,084 | 36 | 38,736 | 5/23/24 | 69 | 47 | 49 | 4 | Overlay - AC Structural | 10/1/12 |
| 1715 | 13039 | SAN NICOLAS CIR | LOMA AVE | CDS | E | AC | 6 | 258 | 54 | 17,890 | 6/30/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/9/21 |
| 1717 | 13420 | SAN ROQUE LN | CRISTA PALMA DR | SEGOVIA CIR | E | AAC | 5 | 246 | 36 | 9,606 | 5/29/24 | 77 | 21 | 79 | 0 | Overlay - AC Structural | 10/1/12 |
| 1717 | 15182 | SAN ROQUE LN | SEGOVIA CIR | JARDINES DR | E | AAC | 5 | 730 | 36 | 27,030 | 5/23/24 | 79 | 18 | 74 | 8 | Overlay - AC Structural | 10/1/12 |
| 1718 | 13666 | SAN SOUCI CIR | CALNEVA LN | END | E | AAC | 1 | 530 | 36 | 19,080 | 5/8/24 | 72 | 20 | 80 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1719 | 14327 | SAND DOLLAR LN | ST AUGUSTINE DR | MILNE DR | E | AC | 9 | 758 | 36 | 27,788 | 8/30/23 | 63 | 71 | 23 | 6 | New Construction | 1/1/80 |
| 1720 | 14064 | SANDERSON LN | WARFIELD DR | MADELINE DR | E | AAC | 7 | 568 | 36 | 21,198 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1721 | 14966 | SANDPEBBLE CIR | GARDEN CIR | CDS | E | AC | 5 | 338 | 36 | 15,668 | 5/6/24 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1722 | 14228 | SANDPIPER LN | INDIANAPOLIS AVE | ALLEY INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/24/23 | 79 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 1722 | 14232 | SANDPIPER LN | ALLEY INDIANAPOLIS AVE | REILLY DR | E | AC | 9 | 140 | 36 | 5,040 | 8/24/23 | 70 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 1722 | 14233 | SANDPIPER LN | REILLY DR | TERN CIR | E | AC | 9 | 261 | 36 | 9,396 | 8/24/23 | 78 | 32 | 54 | 14 | New Construction | 1/1/80 |
| 1722 | 15498 | SANDPIPER LN | TERN CIR | KINGFISHER DR | E | AC | 9 | 758 | 36 | 27,288 | 8/24/23 | 76 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 1723 | 14863 | SANDRA LEE LN | WARNER AVE | SANDRA LEE LN | E | AAC | 2 | 201 | 36 | 7,236 | 5/13/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1723 | 14897 | SANDRA LEE LN | ORION AVE | LOS PATOS AVE | E | AAC | 2 | 662 | 36 | 23,832 | 5/21/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1723 | 15764 | SANDRA LEE LN | ORION AVE | CDS | E | AAC | 2 | 441 | 36 | 17,376 | 5/21/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1725 | 13584 | SANDRA LN | AUDREY DR | CHERYL DR | E | AAC | 2 | 569 | 36 | 21,234 | 5/21/24 | 85 | 63 | 37 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1726 | 15289 | SANDS LN | HAMMON LN | TROPICANA LN | E | AAC | 1 | 520 | 36 | 18,720 | 5/8/24 | 79 | 47 | 53 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1727 | 14330 | SANDY HOOK DR | ANTIGUA LN | SEAFORTH LN | E | AC | 9 | 446 | 36 | 16,806 | 8/30/23 | 84 | 21 | 79 | 0 | New Construction | 1/1/80 |
| 1728 | 13179 | SANTA ANITA LN | MEADOWLARK DR | CALIENTE DR | E | AC | 2 | 863 | 36 | 31,068 | 3/23/22 | 70 | 51 | 31 | 18 | New Construction | 1/1/80 |
| 1731 | 15148 | SANTA YNEZ DR | LIDO LN | MIRA LOMA CIR | E | AC | 5 | 509 | 36 | 19,464 | 5/21/24 | 80 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 1731 | 15149 | SANTA YNEZ DR | MIRA LOMA CIR | MADERA LN | E | AC | 5 | 511 | 36 | 19,280 | 5/21/24 | 77 | 62 | 38 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1732 | 13641 | SANTANA CIR | GULF LN | CDS | E | AAC | 4 | 233 | 32 | 8,956 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1733 | 13177 | SARATOGA LN | MEADOWLARK DR | CALIENTE DR | E | AC | 2 | 860 | 36 | 32,460 | 3/23/22 | 95 | 0 | 76 | 24 | New Construction | 1/1/80 |
| 1734 | 14834 | SARU CIR | MINORU LN | ALLEY SARU CIR | E | AAC | 4 | 223 | 22 | 5,406 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1735 | 15543 | SATTERFIELD DR | LEASURE LN | SHAW LN | E | AC | 9 | 687 | 36 | 25,482 | 8/30/23 | 62 | 72 | 26 | 2 | New Construction | 1/1/80 |
| 1736 | 13507 | SATURN DR | GEMINI LN | GOTHARD ST | E | AC | 3 | 395 | 40 | 16,550 | 4/7/22 | 91 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 7/29/20 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1737 | 15376 | SAUSALITO LN | NAPLES DR | LORRAINE DR | E | AC | 7 | 501 | 36 | 18,036 | 4/15/26 | 89 | 36 | 64 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1738 | 13550 | SAVOY CIR | LANDAU LN | CDS | E | AAC | 4 | 270 | 36 | 10,970 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1631 | 13222 | SAYBROOK LN | DAVENPORT DR | WESTPORT DR | E | AC | 2 | 472 | 36 | 16,992 | 3/24/22 | 51 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 1631 | 14443 | SAYBROOK LN | HEIL AVE | ALLEY SEABROOK LN | E | AAC | 2 | 193 | 36 | 6,948 | 5/10/24 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/1/17 |
| 1631 | 15058 | SAYBROOK LN | ALLEY SEABROOK LN | BRANFORD DR | E | AAC | 2 | 420 | 36 | 15,120 | 5/10/24 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 1631 | 15061 | SAYBROOK LN | BRANFORD DR | TALISMAN LN | E | AAC | 2 | 365 | 36 | 13,140 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 1631 | 15064 | SAYBROOK LN | TALISMAN LN | SILLMAN DR | E | AAC | 2 | 392 | 36 | 14,112 | 5/10/24 | 82 | 63 | 37 | 0 | Overlay - AC Structural | 12/1/17 |
| 1631 | 15067 | SAYBROOK LN | SILLMAN DR | DAVENPORT DR | E | AAC | 2 | 1,137 | 36 | 40,932 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 1739 | 13163 | SCENARIO DR | FANTASIA LN | OPERA LN | E | AC | 2 | 1,060 | 36 | 38,660 | 3/24/22 | 94 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 1739 | 13167 | SCENARIO DR | WAIKIKI LN | CDS | E | AC | 2 | 535 | 36 | 20,760 | 3/24/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1739 | 15047 | SCENARIO DR | OPERA LN | WAIKIKI LN | E | AC | 2 | 781 | 36 | 28,116 | 3/24/22 | 73 | 91 | 9 | 0 | New Construction | 1/1/80 |
| 1740 | 13049 | SCENIC BAY LN | ISLAND BAY LN | CDS | E | AAC | 5 | 860 | 36 | 32,580 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1741 | 15827 | SCEPTRE LN | ALADDIN DR | WARNER AVE | E | AC | 2 | 367 | 36 | 13,212 | 4/9/22 | 86 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 1742 | 15501 | SCHOONER LN | SNOWBIRD DR | ATLANTA AVE | E | AC | 9 | 311 | 36 | 11,196 | 8/24/23 | 60 | 63 | 32 | 5 | New Construction | 1/1/80 |
| 1743 | 13142 | SCHRYER LN | HENDRICKSEN DR | SISSON DR | E | AAC | 2 | 849 | 36 | 30,564 | 5/21/24 | 86 | 0 | 83 | 17 | Overlay - AC Fabric | 10/1/16 |
| 1744 | 14307 | SCONE DR | CUPAR LN | BANFF LN | E | AC | 9 | 266 | 36 | 9,576 | 8/30/23 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1745 | 13413 | SCOTIA CIR | BALMORAL DR | CDS | E | AC | 5 | 350 | 36 | 14,100 | 5/20/24 | 98 | 0 | 40 | 60 | New Construction | 1/1/80 |
| 1746 | 14841 | SCOTSDALE CIR | LANCASTER DR | CDS | E | AAC | 4 | 213 | 32 | 8,066 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1747 | 15943 | SCOTSTOUN DR | GLENCAIRN LN | QUEENS PARK LN | E | AC | 8 | 1,027 | 36 | 36,972 | 3/19/24 | 86 | 35 | 65 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1748 | 14153 | SCOUGALL CIR | JOHNSON LN | CDS | E | AC | 7 | 323 | 32 | 11,836 | 4/21/26 | 80 | 18 | 82 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1749 | 14023 | SCRIBE DR | COLDWATER LN | DRYBROOK LN | E | AAC | 7 | 210 | 36 | 7,560 | 8/17/23 | 90 | 0 | 76 | 24 | Overlay - AC Structural | 3/1/11 |
| 1750 | 13617 | SCULPIN DR | SUN DR | WARNER AVE | E | AAC | 3 | 199 | 36 | 7,164 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1752 | 12853 | SEA CANYON CIR | MORNING TIDE DR | CDS | E | AC | 5 | 363 | 32 | 14,055 | 6/30/21 | 68 | 77 | 15 | 8 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1753 | 14112 | SEA CIR | SEAPORT DR | END | E | AAC | 9 | 155 | 32 | 4,960 | 8/21/23 | 70 | 0 | 79 | 21 | Overlay - AC Structural | 3/1/11 |
| 1754 | 14263 | SEA MIST LN | FIVE HARBORS DR | OCEANWOOD DR | E | AC | 9 | 249 | 36 | 9,714 | 5/6/24 | 84 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1755 | 15070 | SEA WITCH LN | BARUNA LN | FINISTERRE DR | E | AC | 2 | 1,312 | 36 | 47,232 | 4/5/22 | 84 | 30 | 70 | 0 | New Construction | 1/1/80 |
| 1756 | 14223 | SEABIRD CIR | FARNSWORTH LN | END | E | AC | 9 | 321 | 32 | 10,272 | 8/24/23 | 71 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 1759 | 14488 | SEACREST LN | BEACHSIDE DR | HIGHTIDE DR | E | AAC | 9 | 773 | 36 | 28,578 | 4/21/26 | 85 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 1760 | 14331 | SEAFORTH LN | SANDY HOOK DR | HAMILTON AVE | E | AC | 9 | 175 | 36 | 6,300 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1760 | 15548 | SEAFORTH LN | ST AUGUSTINE DR | SANDY HOOK DR | E | AC | 9 | 1,025 | 36 | 36,900 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1761 | 14992 | SEAGATE DR | PROMENADE PKWY | CDS | E | AC | 4 | 592 | 42 | 26,114 | 3/5/24 | 85 | 0 | 45 | 55 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1762 | 13967 | SEAHURST DR | CORALWOOD LN | MAGNOLIA AVE | E | AAC | 7 | 182 | 33 | 5,276 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1763 | 14107 | SEALROCK DR | LIGHTHOUSE LN | NEWLAND ST | E | AAC | 9 | 162 | 36 | 5,832 | 8/21/23 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1763 | 14108 | SEALROCK DR | SEASHELL CIR | LIGHTHOUSE LN | E | AC | 9 | 246 | 36 | 8,856 | 8/21/23 | 78 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1764 | 14888 | SEAPINE CIR | GREEN ST | CDS | E | AAC | 2 | 347 | 36 | 13,992 | 5/21/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 1765 | 14113 | SEAPORT DR | SEA CIR | END | E | AAC | 9 | 120 | 36 | 4,320 | 8/21/23 | 76 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1765 | 14114 | SEAPORT DR | DUBLIN LN | LIGHTHOUSE LN | E | AAC | 9 | 135 | 36 | 4,860 | 8/21/23 | 81 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1765 | 15449 | SEAPORT DR | SEA CIR | DUBLIN LN | E | AAC | 9 | 791 | 36 | 28,476 | 8/21/23 | 77 | 47 | 46 | 7 | Overlay - AC Structural | 3/1/11 |
| 1766 | 15037 | SEASCAPE DR | CDS | CDS | E | AAC | 2 | 945 | 36 | 37,620 | 5/7/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1767 | 14106 | SEASHELL CIR | SEALROCK DR | END | E | AAC | 9 | 151 | 36 | 5,436 | 8/21/23 | 69 | 0 | 73 | 27 | Overlay - AC Structural | 3/1/11 |
| 1768 | 14483 | SEASIDE LN | LANDFALL DR | ROCK POINT DR | E | AAC | 9 | 656 | 36 | 23,328 | 4/21/26 | 77 | 32 | 65 | 3 | Overlay - AC Structural | 5/11/19 |
| 1768 | 15599 | SEASIDE LN | ROCK POINT DR | HIGHTIDE DR | E | AAC | 9 | 1,026 | 36 | 36,936 | 4/21/26 | 81 | 10 | 90 | 0 | Overlay - AC Structural | 5/11/19 |
| 1769 | 13965 | SEASPRAY DR | PISMO LN | SAILWIND LN | E | AAC | 7 | 872 | 36 | 31,642 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1771 | 13902 | SEAWAY CIR | QUIET BAY LN | CDS | E | AAC | 5 | 132 | 30 | 6,245 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1772 | 12943 | SECOND ST | OLIVE AVE | ORANGE AVE | E | AAC | 6 | 385 | 36 | 14,365 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1772 | 12944 | SECOND ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 385 | 36 | 13,860 | 6/22/21 | 66 | 57 | 43 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1772 | 13067 | SECOND ST | PCH | WALNUT AVE | E | AAC | 6 | 355 | 36 | 12,780 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1773 | 13417 | SEGOVIA CIR | SAN ROQUE LN | END | E | AAC | 5 | 285 | 36 | 11,760 | 5/29/24 | 70 | 17 | 82 | 1 | Overlay - AC Structural | 10/1/12 |
| 1774 | 13523 | SEINE DR | TIBER LN | THAMES LN | E | AC | 4 | 809 | 36 | 29,874 | 3/31/22 | 87 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1775 | 13380 | SELKIRK DR | DENVALE CIR | SHOREHAM LN | E | AC | 5 | 258 | 36 | 9,012 | 3/30/26 | 92 | 0 | 87 | 13 | New Construction | 1/1/80 |
| 1775 | 15161 | SELKIRK DR | FALKIRK LN | DENVALE CIR | E | AC | 5 | 765 | 36 | 27,264 | 3/30/26 | 82 | 31 | 64 | 5 | New Construction | 1/1/80 |
| 1776 | 15112 | SELL CIR | HEIL AVE | CDS | E | AC | 2 | 492 | 36 | 21,672 | 4/9/22 | 89 | 28 | 57 | 15 | New Construction | 1/1/80 |
| 1777 | 15216 | SERENADE LN | STONEWOOD DR | SUNLIGHT DR | E | AAC | 3 | 1,300 | 36 | 46,800 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1778 | 14925 | SERENE DR | WOODFERN LN | END | E | AC | 5 | 499 | 36 | 19,964 | 3/30/26 | 73 | 52 | 42 | 6 | New Construction | 1/1/80 |
| 1778 | 14929 | SERENE DR | MISTY LN | MONTBURY CIR | E | AC | 5 | 254 | 36 | 8,856 | 3/30/26 | 74 | 52 | 48 | 0 | New Construction | 1/1/80 |
| 1778 | 15799 | SERENE DR | MONTBURY CIR | WOODFERN LN | E | AC | 5 | 618 | 36 | 22,248 | 3/30/26 | 73 | 65 | 34 | 1 | New Construction | 1/1/80 |
| 1779 | 14101 | SEVEN SEAS LN | INDIANAPOLIS AVE | END | E | AC | 9 | 536 | 36 | 19,296 | 8/24/23 | 62 | 65 | 31 | 4 | New Construction | 1/1/80 |
| 1779 | 14219 | SEVEN SEAS LN | INDIANAPOLIS AVE | INDIANAPOLIS AVE | E | AC | 9 | 204 | 36 | 7,344 | 8/24/23 | 38 | 85 | 15 | 0 | New Construction | 1/1/80 |
| 1670 | 14739 | SEVENTEENTH ST | FLORIDA ST | CLAY AVE | E | AC | 7 | 660 | 36 | 23,760 | 3/13/24 | 84 | 0 | 67 | 33 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1670 | 14740 | SEVENTEENTH ST | DELAWARE ST | CLAY AVE | E | AC | 7 | 383 | 36 | 13,788 | 3/13/24 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1670 | 15003 | SEVENTEENTH ST | HUNTINGTON ST | DELAWARE ST | E | AC | 7 | 1,043 | 56 | 58,408 | 3/13/24 | 69 | 65 | 27 | 8 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1670 | 50260 | SEVENTEENTH ST | MAIN ST | UTICA AVE | E | AC | 0 | 170 | 25 | 4,250 | 3/13/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1780 | 12949 | SEVENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 390 | 48 | 18,720 | 6/23/21 | 81 | 11 | 45 | 44 | Surface Treatment - Slurry Seal | 7/27/22 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1780 | 12950 | SEVENTH ST | WALNUT AVE | OLIVE AVE | E | AAC | 6 | 390 | 48 | 18,720 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1780 | 12952 | SEVENTH ST | PCH | WALNUT AVE | E | AC | 6 | 390 | 48 | 18,720 | 6/22/21 | 80 | 24 | 47 | 29 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1780 | 13069 | SEVENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 375 | 46 | 17,250 | 6/22/21 | 78 | 0 | 56 | 44 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1780 | 13070 | SEVENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 360 | 48 | 17,280 | 6/23/21 | 79 | 43 | 30 | 27 | New Construction | 1/1/80 |
| 1780 | 16033 | SEVENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/23/21 | 80 | 23 | 38 | 39 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1781 | 13780 | SEVILLA CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 4/8/26 | 78 | 34 | 25 | 41 | New Construction | 1/1/80 |
| 1782 | 14353 | SHACKLEFORD CIR | CORNERBROOK DR | CDS | E | AC | 8 | 340 | 36 | 13,740 | 5/20/24 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1783 | 13897 | SHADY HARBOR CIR | EVENING HILL DR | CDS | E | AAC | 5 | 416 | 36 | 16,976 | 4/30/26 | 91 | 0 | 67 | 33 | Overlay - AC Structural | 11/28/19 |
| 1784 | 14755 | SHAFFER CIR | FLORIDA ST | CDS | E | AAC | 4 | 184 | 34 | 6,256 | 5/5/26 | 83 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1785 | 15443 | SHALOM DR | LEXINGTON LN | CDS | E | AAC | 8 | 590 | 36 | 23,040 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1786 | 13390 | SHAMLEY CIR | LANCEFIELD DR | END | E | AC | 5 | 102 | 36 | 5,472 | 3/31/26 | 65 | 32 | 64 | 4 | New Construction | 1/1/80 |
| 1787 | 15441 | SHANGRI LA DR | LEXINGTON LN | ARAGON CIR | E | AC | 8 | 824 | 36 | 31,664 | 3/3/22 | 55 | 70 | 27 | 3 | New Construction | 1/1/80 |
| 1788 | 13884 | SHANNON DR | DUNDALK LN | SHERBECK LN | E | AC | 3 | 260 | 36 | 10,110 | 4/7/26 | 90 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 1788 | 15351 | SHANNON DR | SHERBECK LN | END | E | AC | 3 | 770 | 36 | 29,520 | 4/7/26 | 90 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 1789 | 15211 | SHASTA LN | WHITNEY DR | SUGAR AVE | E | AC | 4 | 1,290 | 36 | 46,440 | 5/13/24 | 59 | 72 | 27 | 1 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1790 | 15544 | SHAW LN | STILLWELL DR | END | E | AC | 9 | 1,153 | 36 | 43,008 | 8/30/23 | 90 | 49 | 51 | 0 | New Construction | 1/1/80 |
| 1791 | 15998 | SHAYNE DR | GENTRY LN | CDS | E | AC | 3 | 1,012 | 36 | 37,932 | 4/6/26 | 71 | 47 | 51 | 2 | New Construction | 1/1/80 |
| 1792 | 14561 | SHEFFIELD LN | RALEIGH DR | KENSINGTON DR | E | AAC | 8 | 269 | 24 | 6,456 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1792 | 14562 | SHEFFIELD LN | CORNWALL DR | RALEIGH DR | E | AC | 8 | 125 | 24 | 3,000 | 3/9/22 | 37 | 84 | 16 | 0 | New Construction | 1/1/80 |
| 1793 | 14264 | SHELL HARBOR CIR | FIVE HARBORS DR | CDS | E | AAC | 9 | 317 | 32 | 11,644 | 5/6/24 | 54 | 57 | 13 | 30 | Overlay - AC Structural | 5/11/18 |
| 1794 | 13739 | SHELLY DR | BOLSA PARK LN | END | E | AC | 1 | 294 | 36 | 12,384 | 4/27/26 | 79 | 30 | 70 | 0 | New Construction | 1/1/80 |
| 1794 | 13748 | SHELLY DR | FIELDSTON LN | BOLSA PARK LN | E | AC | 1 | 769 | 36 | 28,184 | 4/27/26 | 76 | 0 | 93 | 7 | New Construction | 1/1/80 |
| 1795 | 14161 | SHELTER LN | NAUTILUS DR | CANDLEWOOD DR | E | AC | 7 | 258 | 36 | 9,288 | 4/21/26 | 96 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1796 | 15153 | SHENLYN DR | EDWARDS ST | IRELAND LN | E | AAC | 3 | 531 | 36 | 19,866 | 5/22/24 | 85 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1797 | 14314 | SHEPHERD LN | MARTINIQUE DR | SABLE DR | E | AC | 9 | 1,022 | 36 | 38,292 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1798 | 13485 | SHER LN | EDINGER AVE | ALLEY VOLGA DR | E | AAC | 4 | 670 | 36 | 24,120 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1798 | 15218 | SHER LN | ALLEY VOLGA DR | ALLEY AMAZON DR | E | AAC | 4 | 308 | 36 | 11,088 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1798 | 15219 | SHER LN | ALLEY AMAZON DR | ALLEY RHONE LN | E | AAC | 4 | 308 | 36 | 11,088 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1798 | 15220 | SHER LN | ALLEY RHONE LN | JULIETTE LOW DR | E | AAC | 4 | 660 | 36 | 23,560 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1799 | 13885 | SHERBECK LN | BREELAND DR | EDINGER AVE | E | AC | 3 | 670 | 36 | 23,842 | 12/12/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1799 | 15352 | SHERBECK LN | SHANNON DR | BREELAND DR | E | AC | 3 | 521 | 36 | 18,478 | 12/12/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1800 | 13918 | SHERBORNE LN | DARTMOOR DR | FALMOUTH DR | E | AAC | 7 | 254 | 36 | 11,462 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2296 | 60730 | SHERIDAN DR | SLAYBACK LN | CDS | E | AC | 7 | 438 | 36 | 16,810 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - AC | 1/1/14 |
| 1801 | 13698 | SHERMAN DR | VANGUARD LN | SABRE LN | E | AC | 1 | 267 | 36 | 10,612 | 4/28/26 | 80 | 36 | 64 | 0 | New Construction | 1/1/80 |
| 1802 | 13968 | SHERRY CIR | RANDI LN | CDS | E | AAC | 8 | 330 | 32 | 12,360 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1803 | 13321 | SHIELDS DR | LOVELL LN | END | E | AC | 3 | 400 | 36 | 15,650 | 4/6/26 | 74 | 9 | 91 | 0 | New Construction | 1/1/80 |
| 1803 | 15126 | SHIELDS DR | LOVELL LN | TRUDY LN | E | AC | 3 | 803 | 36 | 30,258 | 4/6/26 | 73 | 8 | 92 | 0 | New Construction | 1/1/80 |
| 1803 | 15130 | SHIELDS DR | TRUDY LN | EDWARDS ST | E | AC | 3 | 1,323 | 36 | 47,628 | 5/7/26 | 80 | 22 | 78 | 0 | New Construction | 1/1/80 |
| 1804 | 13677 | SHINKLE CIR | GLENWOOD DR | END | E | AAC | 1 | 350 | 32 | 12,950 | 5/7/24 | 77 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1805 | 13100 | SHIPLEY ST | ADAMS AVE | CDS | E | AC | 6 | 464 | 36 | 17,250 | 7/8/21 | 73 | 47 | 37 | 16 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1806 | 14045 | SHOAL CIR | WESTWINDS LN | CDS | E | AC | 7 | 232 | 36 | 9,602 | 4/20/26 | 70 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1807 | 14044 | SHORE CIR | WESTWINDS LN | CDS | E | AAC | 7 | 232 | 36 | 8,352 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1808 | 14496 | SHOREBREEZE DR | HARBORBREEZE LN | OCEANBREEZE LN | E | AAC | 9 | 262 | 36 | 10,182 | 4/21/26 | 91 | 0 | 96 | 4 | Overlay - AC Structural | 5/11/19 |
| 1809 | 15162 | SHOREHAM LN | BRIGHTON DR | BERSHIRE DR | E | AC | 5 | 913 | 36 | 32,292 | 3/30/26 | 63 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 1810 | 13468 | SHOREVEIW CIR | LAKEVIEW DR | END | E | AC | 5 | 237 | 32 | 9,084 | 5/29/24 | 59 | 51 | 49 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1811 | 14150 | SHOREWOOD CIR | ADAMS AVE | CDS | E | AC | 7 | 630 | 36 | 24,480 | 4/21/26 | 79 | 80 | 18 | 2 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1812 | 13899 | SICILY CIR | EVENING HILL DR | CDS | E | AC | 5 | 361 | 36 | 16,196 | 5/6/24 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1813 | 14553 | SIDCUP LN | CORNWALL DR | END | E | AAC | 8 | 176 | 24 | 4,224 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1813 | 14554 | SIDCUP LN | CORNWALL DR | RALEIGH DR | E | AAC | 8 | 125 | 24 | 3,000 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1813 | 15631 | SIDCUP LN | RALEIGH DR | ADAMS AVE FRONTAGE | E | AAC | 8 | 378 | 24 | 9,072 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1814 | 14304 | SIGNET CIR | AQUATIC LN | END | E | AAC | 8 | 448 | 36 | 18,128 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1815 | 13210 | SILLIMAN DR | PHELPS LN | SAYBROOK LN | E | AAC | 2 | 871 | 36 | 31,356 | 5/10/24 | 81 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1816 | 15358 | SILVER BEACH CIR | SUMMER BREEZE LN | CDS | E | AAC | 5 | 564 | 36 | 22,104 | 4/30/26 | 95 | 0 | 94 | 6 | Overlay - AC Structural | 11/28/19 |
| 1817 | 13491 | SILVER LN | ALHAMBRA AVE | HEIL AVE | E | AC | 4 | 165 | 36 | 5,940 | 3/18/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1817 | 15272 | SILVER LN | JULIETTE LOW DR | ALHAMBRA AVE | E | AAC | 4 | 530 | 36 | 19,080 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1818 | 15946 | SILVER STRAND DR | REEF LN | CDS | E | AC | 8 | 1,010 | 36 | 37,560 | 3/6/24 | 86 | 0 | 88 | 12 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1819 | 13408 | SILVERHEEL CIR | COLLINS LN | CDS | E | AC | 5 | 222 | 36 | 9,492 | 5/20/24 | 75 | 81 | 19 | 0 | New Construction | 1/1/80 |
| 1820 | 16000 | SILVERWOOD DR | WOODSTOCK LN | BRIMHALL LN | E | AC | 3 | 1,272 | 36 | 45,792 | 5/7/26 | 74 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 1821 | 15138 | SIMMONE LN | SYLVIA DR | CDS | E | AAC | 3 | 758 | 36 | 28,658 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1822 | 13289 | SIMS ST | PRAIRE DR | PEARCE ST | E | AC | 2 | 660 | 36 | 23,760 | 3/22/22 | 71 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 1822 | 14898 | SIMS ST | STELLRECHT CIR | LOS PATOS AVE | E | AAC | 2 | 561 | 36 | 20,196 | 5/21/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1822 | 15770 | SIMS ST | WARNER AVE | STELLRECHT CIR | E | AAC | 2 | 764 | 36 | 27,504 | 5/13/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1822 | 15811 | SIMS ST | PEARCE ST | WARNER AVE | E | AC | 2 | 1,320 | 36 | 47,520 | 3/22/22 | 78 | 75 | 25 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1823 | 13227 | SIRIUS DR | BOLERO LN | BARUNA LN | E | AC | 2 | 430 | 36 | 16,980 | 4/7/22 | 84 | 61 | 19 | 20 | New Construction | 1/1/80 |
| 1824 | 15038 | SISSON DR | BOLSA CHICA ST | WARREN LN | E | AAC | 2 | 1,195 | 36 | 43,020 | 5/21/24 | 85 | 25 | 42 | 33 | Overlay - AC Fabric | 10/1/16 |
| 1824 | 15039 | SISSON DR | WARREN LN | DAVIS LN | E | AAC | 2 | 1,286 | 36 | 47,046 | 5/21/24 | 85 | 41 | 57 | 2 | Overlay - AC Fabric | 10/1/16 |
| 1825 | 13001 | SIXTEENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 89 | 0 | 91 | 9 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1825 | 13002 | SIXTEENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/22/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1825 | 13003 | SIXTEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 81 | 0 | 18 | 82 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1825 | 13092 | SIXTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 380 | 46 | 17,480 | 6/22/21 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1825 | 13093 | SIXTEENTH ST | PCH | WALNUT AVE | E | AC | 6 | 370 | 46 | 16,825 | 6/22/21 | 85 | 0 | 25 | 75 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1825 | 16025 | SIXTEENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 380 | 46 | 17,480 | 6/22/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1827 | 14267 | SKI HARBOR CIR | BEACHWOOD LN | CDS | E | AC | 9 | 303 | 32 | 11,196 | 5/6/24 | 83 | 33 | 49 | 18 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1828 | 14051 | SKIFF CIR | WESTWINDS LN | CDS | E | AAC | 7 | 232 | 36 | 9,602 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1829 | 15525 | SKIMMER LN | STAR DR | KITE DR | E | AC | 8 | 1,014 | 36 | 36,504 | 3/18/24 | 75 | 41 | 38 | 21 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1830 | 13635 | SKYE LN | BALMORAL DR | BRAEMAR DR | E | AC | 5 | 236 | 36 | 8,996 | 5/20/24 | 100 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1831 | 14531 | SKYLAB RD | ABLE LN | SPRINGDALE ST | E | AC | 1 | 1,325 | 60 | 79,500 | 4/9/26 | 72 | 82 | 18 | 0 | New Construction | 1/1/80 |
| 1831 | 14532 | SKYLAB RD | DELTA LN | ABLE LN | E | AC | 1 | 1,631 | 60 | 97,860 | 4/9/26 | 84 | 75 | 19 | 6 | New Construction | 1/1/80 |
| 1833 | 13818 | SKYLARK DR | ORIOLE LN | HUMMINGBIRD LN | E | AC | 1 | 980 | 36 | 35,780 | 3/21/22 | 76 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 1834 | 13558 | SKYLINE LN | SUNBREEZE DR | SLATER AVE | E | AC | 3 | 314 | 36 | 11,304 | 5/28/24 | 76 | 32 | 68 | 0 | New Construction | 1/1/80 |
| 1835 | 13878 | SKYVIEW DR | SWEETBRIAR LN | DAWSON LN | E | AC | 3 | 594 | 36 | 21,096 | 12/12/24 | 92 | 0 | 52 | 48 | New Construction | 1/1/80 |
| 2207 | 13557 | SLATER AVE FRONTAGE RD | LUCERO L N | CDS | E | AC | 3 | 232 | 27 | 7,464 | 5/20/24 | 82 | 53 | 35 | 12 | New Construction | 1/1/80 |
| 2207 | 13560 | SLATER AVE FRONTAGE RD | FLOWER LN | END | E | AAC | 3 | 251 | 27 | 7,977 | 5/20/24 | 92 | 0 | 79 | 21 | Overlay - AC Structural | 10/1/12 |
| 2297 | 60740 | SLAYBACK LN | SHERIDAN DR | LANDERS DR | E | AC | 7 | 277 | 36 | 9,972 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - AC | 1/1/14 |
| 1836 | 13856 | SLIGO CIR | CARRIE LN | END | E | AC | 1 | 419 | 36 | 16,334 | 12/20/24 | 34 | 87 | 13 | 0 | New Construction | 1/1/80 |
| 1837 | 13908 | SMOKEWOOD CIR | CONSTANTINE DR | CDS | E | AAC | 7 | 273 | 34 | 9,282 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1839 | 14188 | SMOKEY CIR | CARLSBAD LN | END | E | AC | 8 | 363 | 36 | 14,568 | 2/23/22 | 86 | 43 | 45 | 12 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1840 | 15087 | SNEAD DR | NASSAU LN | CHIPPER LN | E | AAC | 3 | 576 | 36 | 20,986 | 5/9/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1841 | 14226 | SNOWBIRD DR | CATAMARAN LN | SCHOONER LN | E | AC | 9 | 415 | 36 | 14,940 | 8/23/23 | 92 | 0 | 86 | 14 | New Construction | 1/1/80 |
| 1841 | 14244 | SNOWBIRD DR | BASTIA LN | MISSION LN | E | AC | 9 | 706 | 36 | 25,416 | 8/23/23 | 92 | 15 | 78 | 7 | New Construction | 1/1/80 |
| 1841 | 15497 | SNOWBIRD DR | SCHOONER LN | BASTIA LN | E | AC | 9 | 624 | 36 | 22,464 | 8/23/23 | 83 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 2303 | 60800 | SNOWDON LN | PATCH DR | THOMPSON DR | E | AC | 8 | 480 | 36 | 17,280 | 3/2/22 | 95 | 0 | 100 | 0 | New Construction - AC | 1/1/15 |
| 1842 | 14269 | SNUG HARBOR CIR | HALF LEAGUE DR | CDS | E | AC | 9 | 255 | 32 | 10,410 | 5/6/24 | 74 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1843 | 15094 | SOFTWIND DR | SPRINGDALE ST | WOODSTOCK LN | E | AC | 3 | 1,194 | 36 | 42,984 | 5/7/26 | 65 | 60 | 36 | 4 | New Construction | 1/1/80 |
| 1844 | 13192 | SOMERSET LN | MALDEN CIR | GILBERT DR | E | AC | 2 | 1,041 | 36 | 37,976 | 4/9/22 | 88 | 34 | 36 | 30 | New Construction | 1/1/80 |
| 1845 | 15451 | SOMERVILLE LN | MALLOY DR | END | E | AC | 9 | 390 | 36 | 14,040 | 8/23/23 | 53 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1846 | 13357 | SONOMA DR | ELSINORE CIR | CORONADO LN | E | AAC | 5 | 253 | 36 | 9,108 | 5/24/24 | 78 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1846 | 15145 | SONOMA DR | LA MESA LN | ELSINORE CIR | E | AAC | 5 | 499 | 36 | 17,964 | 5/24/24 | 79 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1847 | 13772 | SORENTO CIR | HANOVER LN | END | E | AC | 1 | 433 | 36 | 17,388 | 12/18/24 | 89 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 1848 | 13429 | SORIA CIR | QUINTANA LN | END | E | AAC | 5 | 92 | 42 | 5,364 | 5/29/24 | 63 | 47 | 38 | 15 | Overlay - AC Structural | 10/1/12 |
| 5010 | 60090 | SOUTH PACIFIC | ANDERSON ST | 25TH ST | E | AC | 2 | 481 | 25 | 12,025 | 4/23/26 | 89 | 0 | 84 | 16 | New Construction - Initial | 1/1/80 |
| 5010 | 60100 | SOUTH PACIFIC | 25TH ST | 22ND ST | E | AC | 2 | 709 | 25 | 17,725 | 4/23/26 | 89 | 0 | 81 | 19 | New Construction - Initial | 1/1/80 |
| 5010 | 60110 | SOUTH PACIFIC | 22ND ST | 19TH ST | E | AC | 2 | 706 | 25 | 17,650 | 4/23/26 | 82 | 24 | 71 | 5 | New Construction - Initial | 1/1/80 |
| 5010 | 60120 | SOUTH PACIFIC | 19TH ST | 16TH ST | E | AC | 2 | 705 | 25 | 17,625 | 4/23/26 | 89 | 19 | 68 | 13 | New Construction - Initial | 1/1/80 |
| 5010 | 60130 | SOUTH PACIFIC | 16TH ST | BROADWAY | E | AC | 2 | 727 | 25 | 18,175 | 4/23/26 | 82 | 28 | 72 | 0 | New Construction - Initial | 1/1/80 |
| 5010 | 60140 | SOUTH PACIFIC | BROADWAY | 10TH ST | E | AC | 2 | 728 | 25 | 18,200 | 4/23/26 | 88 | 44 | 47 | 9 | New Construction - Initial | 1/1/80 |
| 5010 | 60150 | SOUTH PACIFIC | 10TH ST | 7TH ST | E | AC | 2 | 705 | 25 | 17,625 | 4/23/26 | 91 | 40 | 40 | 20 | New Construction - Initial | 1/1/80 |
| 5010 | 60160 | SOUTH PACIFIC | 7TH ST | 5TH ST | E | AC | 2 | 470 | 25 | 11,750 | 4/23/26 | 92 | 35 | 56 | 9 | New Construction - Initial | 1/1/80 |
| 5010 | 60170 | SOUTH PACIFIC | 5TH ST | END | E | AC | 2 | 956 | 25 | 23,900 | 4/23/26 | 89 | 0 | 94 | 6 | New Construction - Initial | 1/1/80 |
| 1849 | 15447 | SOUTHPORT DR | CAPE COTTAGE LN | END | E | AAC | 9 | 372 | 36 | 13,392 | 8/21/23 | 82 | 69 | 31 | 0 | Overlay - AC Structural | 3/1/11 |
| 1850 | 14337 | SOUTHSHORE DR | FLEET LN | COMPASS LN | E | AC | 9 | 618 | 36 | 22,748 | 4/1/24 | 87 | 37 | 63 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1851 | 13658 | SPA DR | RANCHO RD | HAROLD PL | E | AC | 1 | 173 | 36 | 6,228 | 4/8/22 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1851 | 13659 | SPA DR | DOLLAR DR | HAMMON LN | E | AC | 1 | 1,391 | 36 | 50,076 | 4/13/26 | 76 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 1851 | 13661 | SPA DR | HAMMON LN | CALNEVA LN | E | AC | 1 | 780 | 36 | 28,080 | 4/13/26 | 68 | 57 | 43 | 0 | New Construction | 1/1/80 |
| 1851 | 15286 | SPA DR | HAROLD PL | DOLLAR DR | E | AC | 1 | 776 | 36 | 27,936 | 4/8/22 | 79 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1852 | 14979 | SPAR CIR | BROOKHURST ST | END | E | AAC | 8 | 579 | 36 | 20,844 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1853 | 15524 | SPARKMAN LN | KITE DR | CDS | E | AC | 8 | 751 | 36 | 28,732 | 3/18/24 | 85 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1854 | 13816 | SPARROW DR | ORIOLE LN | HUMMINGBIRD LN | E | AC | 1 | 980 | 36 | 35,280 | 3/21/22 | 53 | 81 | 14 | 5 | New Construction | 1/1/80 |
| 1855 | 15044 | SPARTAN CIR | AQUARIUS DR | CDS | E | AAC | 2 | 554 | 36 | 21,744 | 5/7/24 | 93 | 0 | 86 | 14 | Overlay - AC Fabric | 12/1/17 |
| 1856 | 15015 | SPEER AVE | MORGAN LN | BEACH BLVD | E | AAC | 4 | 1,320 | 26 | 33,940 | 4/13/26 | 86 | 7 | 93 | 0 | Overlay - AC Structural | 11/1/19 |
| 1856 | 15733 | SPEER AVE | CRABB LN | MORGAN LN | E | AAC | 4 | 479 | 36 | 17,244 | 4/13/26 | 80 | 33 | 67 | 0 | Overlay - AC Structural | 11/1/19 |
| 1857 | 14254 | SPENCER CIR | HOPETOWN LN | CDS | E | AAC | 9 | 245 | 32 | 7,840 | 5/6/24 | 83 | 24 | 73 | 3 | Overlay - AC Structural | 5/11/18 |
| 1858 | 15270 | SPICKARD DR | KURT LN | WHETMORE LN | E | AAC | 3 | 927 | 36 | 34,872 | 5/28/24 | 72 | 11 | 86 | 3 | Overlay - AC Structural | 10/1/12 |
| 1859 | 15530 | SPINDRIFT LN | CLIFF DR | CDS | E | AAC | 8 | 1,179 | 36 | 45,444 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1860 | 15945 | SPINNAKER DR | HORIZON LN | BROOKHURST ST | E | AC | 8 | 695 | 36 | 24,500 | 3/6/24 | 86 | 0 | 58 | 42 | New Construction | 1/1/80 |
| 1861 | 13912 | SPRING CIR | FLAGSTAFF LN | CDS | E | AAC | 7 | 401 | 32 | 17,088 | 4/6/26 | 93 | 0 | 95 | 5 | Overlay - AC Structural | 11/28/19 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1751 | 14529 | SPRINGDALE ST | LITTLEFIELD DR | END | E | AC | 5 | 225 | 80 | 18,000 | 3/31/26 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1751 | 15619 | SPRINGDALE ST | TALBERT AVE | LITTLEFIELD DR | E | AC | 5 | 1,152 | 80 | 92,160 | 3/31/26 | 90 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 1862 | 13116 | SPRINGFIELD AVE | PARK ST | MAIN ST | E | AC | 6 | 348 | 36 | 12,528 | 6/30/21 | 90 | 0 | 62 | 38 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1862 | 15701 | SPRINGFIELD AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 287 | 36 | 10,332 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1862 | 15702 | SPRINGFIELD AVE | CALIFORNIA ST | DELWARE ST | E | AC | 6 | 280 | 36 | 10,080 | 6/30/21 | 68 | 71 | 18 | 11 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1862 | 15849 | SPRINGFIELD AVE | LAKE ST | PARK ST | E | AC | 6 | 585 | 36 | 21,060 | 6/30/21 | 77 | 23 | 77 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1862 | 15850 | SPRINGFIELD AVE | LAKE ST | ALABAMA ST | E | AAC | 6 | 315 | 36 | 11,340 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1862 | 15855 | SPRINGFIELD AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 436 | 36 | 15,696 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1864 | 15282 | SPRINGTIME LN | LE CORTE DR | FORELLE DR | E | AC | 4 | 527 | 36 | 18,684 | 4/8/24 | 64 | 78 | 15 | 7 | New Construction | 1/1/80 |
| 1865 | 15584 | SPRIT CIR | BROOKHURST ST | END | E | AAC | 8 | 501 | 36 | 18,036 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1866 | 14365 | SPYGLASS LN | PEPPERTREE DR | HAMILTON AVE | E | AC | 8 | 177 | 36 | 6,150 | 5/20/24 | 97 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1867 | 14131 | SQUIRES CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 84 | 47 | 53 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1868 | 14892 | ST ANDREWS LN | GLENROY DR | KENILWORTH DR | E | AC | 2 | 260 | 36 | 9,360 | 4/1/26 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1868 | 15768 | ST ANDREWS LN | EL DORADO DR | GLENROY DR | E | AC | 2 | 741 | 36 | 27,816 | 4/1/26 | 82 | 12 | 82 | 6 | New Construction | 1/1/80 |
| 1869 | 14325 | ST AUGUSTINE DR | NEWLAND ST | ANTIGUA LN | E | AC | 9 | 171 | 36 | 6,156 | 8/30/23 | 61 | 45 | 29 | 26 | New Construction | 1/1/80 |
| 1869 | 15545 | ST AUGUSTINE DR | ANTIGUA LN | SAND DOLLAR LN | E | AC | 9 | 252 | 36 | 9,072 | 2/22/22 | 63 | 49 | 36 | 15 | New Construction | 1/1/80 |
| 1869 | 15546 | ST AUGUSTINE DR | SAND DOLLAR LN | BRETON LN | E | AC | 9 | 769 | 36 | 27,684 | 8/30/23 | 32 | 90 | 6 | 4 | New Construction | 1/1/80 |
| 1870 | 14842 | ST CLOUD CIR | LANCASTER DR | CDS | E | AAC | 4 | 213 | 32 | 8,066 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1871 | 15017 | ST GEORGE LN | WARNER AVE | ST PAUL CIR | E | AC | 5 | 335 | 36 | 13,200 | 5/20/24 | 81 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1872 | 14481 | ST JOHN LN | HAMILTON AVE | CLEARBROOK DR | E | AAC | 9 | 525 | 36 | 19,650 | 4/21/26 | 77 | 51 | 37 | 12 | Overlay - AC Structural | 5/11/19 |
| 1873 | 14864 | ST PAUL CIR | ST GEORGE LN | END | E | AC | 5 | 545 | 36 | 22,110 | 5/20/24 | 74 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1874 | 13300 | STALLION CIR | ROOSEVELT LN | CDS | E | AC | 2 | 275 | 36 | 11,150 | 4/2/26 | 78 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 1874 | 15117 | STALLION CIR | PARLAY CIR | ROOSEVELT LN | E | AC | 2 | 489 | 36 | 17,604 | 4/2/26 | 71 | 81 | 19 | 0 | New Construction | 1/1/80 |
| 1875 | 15340 | STANDISH LN | HOOKER DR | EDINGER AVE | E | AC | 1 | 900 | 36 | 32,400 | 12/20/24 | 78 | 57 | 43 | 0 | New Construction | 1/1/80 |
| 1876 | 14943 | STANFIELD CIR | LARKMONT DR | END | E | AC | 5 | 202 | 36 | 8,772 | 3/31/26 | 89 | 0 | 92 | 8 | New Construction | 1/1/80 |
| 1877 | 13750 | STANFORD LN | CORNELL DR | CITADEL DR | E | AC | 1 | 780 | 36 | 27,792 | 12/18/24 | 84 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 1877 | 13762 | STANFORD LN | CITADEL DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/21/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 1878 | 15523 | STAR DR | REEF LN | SKIMMER LN | E | AC | 8 | 1,008 | 36 | 35,744 | 3/18/24 | 83 | 25 | 63 | 12 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1879 | 14305 | STARBOARD CIR | SURGE LN | CDS | E | AAC | 8 | 199 | 36 | 8,664 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1880 | 14465 | STARDUST DR | SPA DR | NEVEDA DR | E | AC | 1 | 808 | 36 | 29,088 | 4/8/22 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1880 | 15590 | STARDUST DR | NEVADA DR | HAMMON LN | E | AC | 1 | 790 | 36 | 28,440 | 4/9/22 | 83 | 43 | 57 | 0 | New Construction | 1/1/80 |
| 1881 | 15576 | STARFIRE LN | HUDSON DR | DAYTONA CIR | E | AC | 9 | 899 | 36 | 33,114 | 4/17/24 | 67 | 80 | 20 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1881 | 15825 | STARFIRE LN | DAYTONA CIR | BANNING AVE | E | AC | 9 | 294 | 36 | 10,584 | 4/17/24 | 88 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1882 | 13497 | STARK ST | ALLEY MALAGA LN | MALAGA LN | E | AC | 4 | 150 | 36 | 150 | 4/9/22 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 1882 | 14963 | STARK ST | PARKSIDE LN | BEACH BLVD | E | AAC | 4 | 660 | 36 | 23,760 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1882 | 9002 | STARK ST | BEACH BLVD | MALAGA LN | E | AAC | 4 | 738 | 78 | 56,064 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1883 | 13478 | STARLIGHT CIR | WISHINGWELL LN | CDS | E | AAC | 3 | 486 | 36 | 19,296 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1884 | 13630 | STARMONT LN | GRIMSBY DR | BERSHIRE DR | E | AC | 5 | 440 | 36 | 15,552 | 3/31/26 | 68 | 27 | 71 | 2 | New Construction | 1/1/80 |
| 1885 | 15342 | STARSHINE DR | EDWARDS ST | TULLOW LN | E | AC | 3 | 412 | 36 | 14,544 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1886 | 15861 | STEEP LN | FOX CIR | ELLIS AVE | E | AC | 4 | 321 | 36 | 11,268 | 5/13/24 | 85 | 16 | 84 | 0 | New Construction | 1/1/80 |
| 1887 | 13403 | STEINER CIR | ARMADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/29/24 | 55 | 87 | 12 | 1 | New Construction | 1/1/80 |
| 1888 | 14877 | STELLRECHT CIR | SIMS ST | CDS | E | AC | 2 | 397 | 36 | 15,792 | 3/22/22 | 91 | 0 | 86 | 14 | New Construction | 1/1/80 |
| 1889 | 13647 | STERLING AVE | PEMBERCO CIR | LISA LN | E | AC | 4 | 282 | 33 | 9,306 | 5/9/24 | 57 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 1889 | 13648 | STERLING AVE | LISA LN | WHARTON ST | E | AC | 4 | 272 | 33 | 8,712 | 5/9/24 | 56 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 1889 | 15279 | STERLING AVE | BEACH BLVD | PEMBERCO CIR | E | AC | 4 | 906 | 33 | 29,634 | 5/9/24 | 64 | 71 | 27 | 2 | New Construction | 1/1/80 |
| 1890 | 13980 | STEVEN LN | KNEEP DR | RONNEY DR | E | AC | 8 | 255 | 36 | 9,530 | 4/15/26 | 88 | 36 | 57 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1891 | 14752 | STEWART ST | GARFIELD AVE | CLAY AVE | E | AC | 7 | 1,320 | 30 | 39,600 | 5/6/24 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1891 | 14753 | STEWART ST | ERNEST AVE | GARFIELD AVE | E | AAC | 4 | 1,055 | 40 | 42,200 | 5/4/26 | 94 | 0 | 33 | 67 | Overlay - AC Structural | 11/28/19 |
| 1892 | 13213 | STILES CIR | TRUMBELL DR | CDS | E | AAC | 2 | 223 | 36 | 9,528 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1893 | 13393 | STILL HARBOR LN | FENLEY DR | MC CARTHY DR | E | AC | 5 | 460 | 36 | 17,310 | 5/28/24 | 42 | 80 | 17 | 3 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1893 | 13632 | STILL HARBOR LN | WINTERGREEN DR | KISER DR | E | AC | 5 | 260 | 36 | 10,110 | 5/21/24 | 79 | 78 | 22 | 0 | New Construction - Initial | 1/1/80 |
| 1893 | 15170 | STILL HARBOR LN | MC CARTHY DR | WINTERGREEN DR | E | AC | 5 | 928 | 36 | 33,408 | 5/21/24 | 64 | 92 | 8 | 0 | New Construction - Initial | 1/1/80 |
| 1894 | 14334 | STILWELL DR | SHAW LN | MAGNOLIA ST | E | AC | 9 | 179 | 36 | 6,444 | 8/30/23 | 24 | 96 | 4 | 0 | New Construction - Initial | 1/1/80 |
| 1894 | 15551 | STILWELL DR | KROLL LN | SHAW LN | E | AC | 9 | 55 | 36 | 2,730 | 8/30/23 | 81 | 0 | 23 | 77 | New Construction - Initial | 1/1/80 |
| 1895 | 13987 | STINGRAY LN | ALBACORE DR | VELARDO DR | E | AC | 8 | 709 | 36 | 27,524 | 3/7/22 | 81 | 69 | 28 | 3 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1896 | 13831 | STONE CIR | AULNAY LN | END | E | AC | 1 | 397 | 36 | 15,542 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1897 | 13306 | STONEHAVEN CIR | GRAHAM ST | CDS | E | AC | 2 | 403 | 36 | 15,758 | 4/2/26 | 75 | 24 | 76 | 0 | New Construction - Initial | 1/1/80 |
| 1898 | 13474 | STONEWOOD DR | GOLDENWEST ST | BRIDGE LN | E | AAC | 3 | 180 | 36 | 6,480 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1898 | 15214 | STONEWOOD DR | BRIDGE LN | MOONGLOW LN | E | AAC | 3 | 995 | 36 | 36,570 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1899 | 14542 | STONINGTON CIR | CAPE MAY LN | CDS | E | AAC | 9 | 118 | 32 | 5,276 | 5/5/26 | 84 | 0 | 77 | 23 | Overlay - AC Structural | 5/11/19 |
| 1900 | 14212 | STONYBROOK DR | BROOKJURST ST | CRAIMER LN | E | AC | 8 | 1,255 | 36 | 45,180 | 2/28/22 | 88 | 0 | 67 | 33 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1901 | 14156 | STRATHCONA DR | KELVINGROVE LN | HARBOR ISLE LN | E | AAC | 7 | 243 | 36 | 9,498 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1902 | 14351 | STRATHMOOR LN | BLUEFIELD DR | EFFINGHAM DR | E | AC | 8 | 515 | 36 | 18,540 | 4/10/24 | 53 | 35 | 7 | 58 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1902 | 15558 | STRATHMOOR LN | ATLANTA AVE | BLUEFIELD DR | E | AC | 8 | 681 | 36 | 24,228 | 4/1/24 | 82 | 0 | 31 | 69 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1903 | 15949 | SUBURBIA LN | EDYE DR | CDS | E | AAC | 8 | 918 | 36 | 35,548 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1904 | 15213 | SUGAR AVE | SHASTA LN | MC FADDEN AVE | E | AAC | 4 | 678 | 32 | 21,696 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1905 | 13136 | SUITE DR | FANTASIA LN | BALLAD LN | E | AC | 2 | 800 | 36 | 28,800 | 3/24/22 | 72 | 67 | 33 | 0 | New Construction - Initial | 1/1/80 |
| 1906 | 15360 | SUMMER BREEZE LN | LITTLE HARBOR DR | CDS | E | AC | 5 | 807 | 36 | 31,845 | 6/30/21 | 93 | 0 | 66 | 34 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1907 | 14490 | SUMMER CIR | HIGHTIDE DR | CDS | E | AAC | 9 | 307 | 32 | 11,324 | 5/5/26 | 77 | 38 | 62 | 0 | Overlay - AC Structural | 5/11/19 |
| 1908 | 15131 | SUMMERCLOUD LN | CAMILLE DR | SHIELDS DR | E | AC | 3 | 573 | 36 | 20,628 | 4/6/26 | 90 | 27 | 34 | 39 | New Construction - Initial | 1/1/80 |
| 1909 | 14871 | SUMMERDALE DR | TREEHAVEN LN | PINEHURST LN | E | AC | 5 | 485 | 36 | 19,492 | 5/21/24 | 76 | 38 | 62 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1909 | 15771 | SUMMERDALE DR | PINEHURST LN | ALLEY PINEHURST LN | E | AC | 5 | 125 | 36 | 4,500 | 5/30/24 | 40 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1909 | 15772 | SUMMERDALE DR | ALLEY PINEHURST LN | ALLEY GROVE CIR | E | AC | 5 | 257 | 36 | 9,252 | 5/30/24 | 49 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1909 | 15773 | SUMMERDALE DR | ALLEY GROVE CIR | FRASER LN | E | AC | 5 | 594 | 36 | 21,384 | 5/30/24 | 62 | 62 | 35 | 3 | Surface Treatment - Slurry Seal | 1/10/12 |
| 1910 | 15372 | SUMMERFIELD LN | GARFIELD AVE | DEAUVILLE DR | E | AC | 7 | 515 | 36 | 19,518 | 4/2/24 | 85 | 68 | 26 | 6 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1911 | 14497 | SUMMERWIND LN | OCEANBREEZE LN | HARBORBREEZE LN | E | AC | 9 | 504 | 36 | 18,894 | 3/26/24 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1911 | 15604 | SUMMERWIND LN | OCEANCREST DR | OCEANBREEZE LN | E | AC | 9 | 817 | 36 | 29,412 | 3/26/24 | 89 | 48 | 40 | 12 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1912 | 14458 | SUMMIT DR | BEACON HILL LN | GOLDENWEST ST | E | AC | 5 | 709 | 44 | 31,196 | 5/6/24 | 89 | 0 | 57 | 43 | New Construction - Initial | 1/1/80 |
| 1912 | 14981 | SUMMIT DR | SEAPOINT AVE | PENINSULA LN | E | AC | 5 | 1,617 | 44 | 71,148 | 5/6/24 | 92 | 0 | 70 | 30 | New Construction - Initial | 1/1/80 |
| 1912 | 14984 | SUMMIT DR | PENINSULA LN | BEACON HILL LN | E | AC | 5 | 2,155 | 44 | 94,820 | 5/6/24 | 90 | 0 | 55 | 45 | New Construction - Initial | 1/1/80 |
| 1913 | 15140 | SUN DR | COD CIR | LIMELIGHT CIR | E | AAC | 3 | 350 | 36 | 12,600 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1914 | 15256 | SUNBREEZE DR | FLOWER LN | GRASS CIR | E | AAC | 3 | 665 | 36 | 25,440 | 5/20/24 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1915 | 13881 | SUNBURST LN | MOONBEAM DR | BLUEBONNET DR | E | AC | 3 | 365 | 36 | 14,140 | 12/20/24 | 91 | 0 | 48 | 52 | New Construction - Initial | 1/1/80 |
| 1915 | 15349 | SUNBURST LN | BLUEBONNET DR | END | E | AC | 3 | 647 | 36 | 25,092 | 12/20/24 | 94 | 0 | 88 | 12 | New Construction - Initial | 1/1/80 |
| 1916 | 13960 | SUNCORAL DR | BAYWATER LN | PISMO LN | E | AC | 7 | 251 | 36 | 9,036 | 4/15/26 | 90 | 36 | 64 | 0 | New Construction - Initial | 1/1/80 |
| 1917 | 13407 | SUNDANCE CIR | COLLINS LN | CDS | E | AC | 5 | 222 | 36 | 9,492 | 5/20/24 | 88 | 20 | 80 | 0 | New Construction - Initial | 1/1/80 |
| 1918 | 13146 | SUNDANCER LN | SEASCAPE DR | RAGTIME CIR | E | AAC | 2 | 378 | 36 | 13,608 | 5/7/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1918 | 15045 | SUNDANCER LN | RAGTIME CIR | NIMBLE CIR | E | AAC | 2 | 399 | 36 | 14,364 | 5/7/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1918 | 15046 | SUNDANCER LN | NIMBLE CIR | REBEL CIR | E | AAC | 2 | 309 | 36 | 11,124 | 5/7/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1918 | 15049 | SUNDANCER LN | REBEL CIR | VENTURE DR | E | AAC | 2 | 506 | 36 | 18,216 | 5/7/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1919 | 14018 | SUNDAY DR | TOBAGO LN | WARD ST | E | AC | 8 | 455 | 32 | 14,560 | 3/2/22 | 73 | 80 | 19 | 1 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1920 | 15350 | SUNFLOWER LN | CHESTNUT DR | MOONBEAM DR | E | AC | 3 | 539 | 36 | 21,404 | 12/20/24 | 93 | 0 | 56 | 44 | New Construction - Initial | 1/1/80 |
| 1921 | 13913 | SUNKIST CIR | FLAGSTAFF LN | CDS | E | AAC | 7 | 231 | 32 | 11,192 | 4/6/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1922 | 13481 | SUNLIGHT DR | WISHINGWELL LN | CDS | E | AC | 3 | 486 | 36 | 17,496 | 3/18/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1922 | 15217 | SUNLIGHT DR | MAGELLAN LN | WISHINGWELL LN | E | AC | 3 | 520 | 36 | 18,720 | 3/18/22 | 92 | 27 | 73 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1923 | 13688 | SUNNYCREST LN | ROYAL OAK DR | END | E | AC | 1 | 334 | 36 | 14,024 | 4/8/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1923 | 13690 | SUNNYCREST LN | ROYAL OAK DR | LARKSPUR CIR | E | AC | 1 | 258 | 36 | 9,288 | 4/8/26 | 76 | 40 | 60 | 0 | New Construction - Initial | 1/1/80 |
| 1923 | 13703 | SUNNYCREST LN | LARCHWOOD DR | MAR VISTA DR | E | AC | 1 | 259 | 36 | 9,324 | 4/8/26 | 84 | 44 | 56 | 0 | New Construction - Initial | 1/1/80 |
| 1923 | 13704 | SUNNYCREST LN | MAR VISTA DR | END | E | AC | 1 | 481 | 36 | 19,316 | 4/8/26 | 78 | 56 | 44 | 0 | New Construction - Initial | 1/1/80 |
| 1923 | 15297 | SUNNYCREST LN | LARKSPUR CIR | LARCHWOOD DR | E | AC | 1 | 770 | 36 | 27,720 | 4/8/26 | 71 | 25 | 72 | 3 | New Construction - Initial | 1/1/80 |
| 1924 | 15508 | SUNRIDGE DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 955 | 36 | 35,130 | 5/20/24 | 86 | 0 | 76 | 24 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1925 | 14457 | SUNRISE DR | BEACH BLVD | BEACH BLVD | E | AC | 9 | 131 | 46 | 6,026 | 8/30/23 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1925 | 14613 | SUNRISE DR | SEABREEZE DR | BEACH BLVD | E | AC | 9 | 380 | 22 | 11,181 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1926 | 14455 | SUNSET CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 84 | 17 | 51 | 32 | New Construction - Initial | 1/1/80 |
| 1927 | 14989 | SUNSHINE DR | MAGNOLIA ST FRONTAGE | JETT DR | E | AC | 7 | 677 | 36 | 24,372 | 4/21/26 | 81 | 92 | 8 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1928 | 14303 | SUNTAN CIR | AQUATIC LN | END | E | AAC | 8 | 510 | 36 | 20,360 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1929 | 13125 | SUNVIEW DR | SWEETBRIAR LN | DAWSON LN | E | AC | 3 | 603 | 36 | 21,132 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1931 | 14493 | SURFCREST DR | VACATION LN | HARBORBREEZE LN | E | AC | 9 | 259 | 36 | 9,324 | 3/26/24 | 80 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1931 | 15601 | SURFCREST DR | SEASIDE LN | VACATION LN | E | AC | 9 | 509 | 36 | 18,324 | 3/26/24 | 68 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1932 | 15356 | SURFDALE LN | LAWN HAVEN DR | GARDEN CIR | E | AC | 5 | 522 | 36 | 18,792 | 5/6/24 | 87 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1932 | 17100 | SURFDALE LN | GARDEN CIR | SILVERBEACH CIR | E | AC | 5 | 700 | 36 | 25,200 | 5/6/24 | 98 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1933 | 14503 | SURFRIDER LN | PLAYA DR | CHRISTINE DR | E | AC | 9 | 549 | 36 | 20,764 | 4/17/24 | 74 | 74 | 26 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1934 | 15025 | SURFWOOD LN | ATLANTA AVE | BURLINGTON LN | E | AC | 9 | 1,159 | 36 | 41,724 | 8/24/23 | 60 | 78 | 14 | 8 | New Construction - Initial | 1/1/80 |
| 1935 | 15531 | SURGE LN | EL CAPITAN DR | ATLANTA AVE | E | AAC | 8 | 624 | 36 | 22,464 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1936 | 14432 | SURVEYOR CIR | HAMILTON AVE | END | E | AC | 9 | 496 | 41 | 22,336 | 8/30/23 | 86 | 63 | 15 | 22 | New Construction - Initial | 1/1/80 |
| 1937 | 14499 | SUSAN LN | BANNING AVE | CHRISTINE DR | E | AC | 9 | 563 | 36 | 20,268 | 4/17/24 | 65 | 84 | 16 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1938 | 13796 | SUSSEX CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 17,260 | 4/8/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1939 | 15836 | SUTTON LN | ADAMS AVE | CHASING CROSS DR | E | AAC | 8 | 215 | 24 | 5,160 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1940 | 14005 | SUVA LN | GARFILED AVE | SAMOA DR | E | AC | 8 | 188 | 36 | 6,768 | 3/7/22 | 72 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1940 | 14006 | SUVA LN | SAMOA DR | MAIKAI DR | E | AC | 8 | 281 | 36 | 10,116 | 3/7/22 | 81 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1941 | 13814 | SWAN LN | DOVEWOOD DR | ROBINWOOD DR | E | AC | 1 | 1,040 | 36 | 37,440 | 3/21/22 | 60 | 69 | 31 | 0 | New Construction - Initial | 1/1/80 |
| 1942 | 16021 | SWANSEA LN | BURLCREST DR | CDS | E | AC | 7 | 956 | 36 | 35,916 | 4/16/26 | 80 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1943 | 15345 | SWEETBRIAR LN | SKYVIEW DR | GLEN DR | E | AC | 3 | 492 | 36 | 17,424 | 12/12/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1944 | 13566 | SYCAMORE AVE | OAK LN | ASH ST | E | AC | 4 | 447 | 36 | 16,092 | 5/30/24 | 81 | 10 | 87 | 3 | New Construction - Initial | 1/1/80 |
| 1944 | 13577 | SYCAMORE AVE | ASH ST | ELM ST | E | AC | 4 | 436 | 36 | 15,696 | 5/30/24 | 56 | 80 | 17 | 3 | New Construction - Initial | 1/1/80 |
| 1945 | 13755 | SYDNEY DR | BOLSA PARK LN | END | E | AAC | 1 | 294 | 36 | 12,084 | 4/27/26 | 85 | 0 | 72 | 28 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1945 | 13765 | SYDNEY DR | BOLSA PARK LN | BAYSIDE LN | E | AC | 1 | 769 | 36 | 28,184 | 4/27/26 | 88 | 0 | 80 | 20 | New Construction - Initial | 1/1/80 |
| 1946 | 15137 | SYLVIA DR | DIANE LN | KETTLER LN | E | AC | 3 | 521 | 36 | 18,756 | 3/18/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1947 | 13824 | SYSTEM DR | CHEMICAL LN | MANUFACTURE LN | E | AC | 1 | 614 | 40 | 25,060 | 4/1/22 | 65 | 61 | 39 | 0 | New Construction - Initial | 1/1/80 |
| 1948 | 15333 | TAFT LN | RENO CIR | CROSS DR | E | AAC | 1 | 284 | 36 | 12,024 | 1/7/25 | 56 | 63 | 37 | 0 | Overlay - AC Structural | 5/11/18 |
| 1949 | 14509 | TAHITI CIR | MALIBU LN | CDS | E | AAC | 9 | 266 | 32 | 10,012 | 4/22/26 | 88 | 50 | 50 | 0 | Overlay - AC Structural | 5/11/19 |
| 1838 | 14461 | TALBERT AVE | GOTHARD ST | END | E | AC | 4 | 747 | 40 | 31,380 | 5/9/24 | 88 | 57 | 43 | 0 | New Construction - Initial | 1/1/80 |
| 1950 | 13456 | TALEGATE DR | FIELDBURY LN | END | E | AAC | 5 | 265 | 36 | 9,252 | 5/29/24 | 66 | 43 | 53 | 4 | Overlay - AC Structural | 10/1/12 |
| 1951 | 14546 | TALISMAN LN | SAYBROOK LN | PICKWICK CIR | E | AAC | 2 | 348 | 36 | 12,528 | 5/10/24 | 86 | 51 | 49 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1952 | 15751 | TAMARU DR | MINORU LN | NEWLAND ST | E | AAC | 4 | 505 | 36 | 18,180 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1953 | 14932 | TAMIKO CIR | PRICE DR | END | E | AC | 5 | 385 | 36 | 15,360 | 3/30/26 | 88 | 15 | 85 | 0 | New Construction - Initial | 1/1/80 |
| 1954 | 14015 | TANA DR | BIKINI LN | WARD ST | E | AAC | 8 | 170 | 36 | 6,120 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1955 | 14206 | TANBARK CIR | MEREDITH DR | CDS | E | AC | 8 | 84 | 63 | 7,292 | 2/28/22 | 72 | 48 | 27 | 25 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1956 | 14466 | TANGIERS DR | SPA DR | NEVEDA DR | E | AC | 1 | 621 | 36 | 22,356 | 4/13/26 | 67 | 30 | 47 | 23 | New Construction - Initial | 1/1/80 |
| 1957 | 15901 | TARPON DR | WEAKFISH LN | SALMON LN | E | AC | 8 | 1,020 | 36 | 36,720 | 3/7/22 | 79 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1958 | 13708 | TASMAN DR | BAFFIN CIR | CAMBAY LN | E | AC | 1 | 260 | 36 | 9,360 | 3/21/22 | 75 | 63 | 26 | 11 | New Construction - Initial | 1/1/80 |
| 1958 | 15302 | TASMAN DR | BOLSA CHICA ST | BAFFIN CIR | E | AC | 1 | 930 | 36 | 33,480 | 3/21/22 | 68 | 66 | 27 | 7 | New Construction - Initial | 1/1/80 |
| 1959 | 15159 | TAURUS LN | ROCK DR | CAPSTONE DR | E | AC | 3 | 573 | 36 | 21,628 | 5/20/24 | 50 | 59 | 36 | 5 | New Construction - Initial | 1/1/80 |
| 1960 | 15273 | TAYLOR DR | CAMABY LN | DELAWARE ST | E | AC | 4 | 1,371 | 36 | 49,068 | 4/9/24 | 87 | 39 | 51 | 10 | New Construction - Initial | 1/1/80 |
| 1960 | 15280 | TAYLOR DR | BEACH BLVD | LISA LN | E | AAC | 4 | 1,115 | 32 | 35,424 | 4/13/26 | 93 | 40 | 60 | 0 | Overlay - AC Structural | 11/28/19 |
| 1960 | 15813 | TAYLOR DR | DELAWARE ST | BEACH BLVD | E | AAC | 4 | 1,188 | 36 | 42,180 | 4/14/26 | 91 | 25 | 67 | 8 | Overlay - AC Structural | 11/28/19 |
| 1961 | 14384 | TEAKWOOD LN | ALOHA DR | BANNING AVE | E | AC | 9 | 168 | 36 | 6,048 | 3/27/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1962 | 14949 | TELHAN DR | BUSHARD ST FRONTAGE | ELMSFORD LN | E | AC | 8 | 1,132 | 36 | 41,502 | 3/9/22 | 91 | 0 | 72 | 28 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1963 | 13273 | TELLIM LN | WALTON DR | LENNOX DR | E | AC | 3 | 712 | 36 | 25,344 | 12/19/24 | 78 | 61 | 39 | 0 | New Construction - Initial | 1/1/80 |
| 1964 | 14599 | TENOR DR | FANTASIA LN | END | E | AC | 2 | 126 | 36 | 4,536 | 3/24/22 | 74 | 41 | 59 | 0 | New Construction - Initial | 1/1/80 |
| 1965 | 12966 | TENTH ST | PCH | WALNUT AVE | E | AC | 6 | 375 | 50 | 18,750 | 6/22/21 | 75 | 43 | 35 | 22 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1965 | 12967 | TENTH ST | WALNUT AVE | OLIVE AVE | E | AAC | 6 | 395 | 46 | 18,170 | 6/22/21 | 68 | 46 | 29 | 25 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1965 | 12968 | TENTH ST | PECAN AVE | ACACIA AVE | E | AAC | 6 | 376 | 46 | 17,296 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1965 | 12969 | TENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/22/21 | 71 | 37 | 39 | 24 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1965 | 12989 | TENTH ST | MAIN ST | LAKE ST | E | AC | 6 | 648 | 37 | 23,976 | 7/8/21 | 81 | 25 | 73 | 2 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1965 | 13073 | TENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 380 | 46 | 17,480 | 6/22/21 | 72 | 29 | 31 | 40 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1965 | 13074 | TENTH ST | PALM AVE | CREST AVE | E | AC | 6 | 275 | 40 | 12,450 | 6/22/21 | 78 | 17 | 38 | 45 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1965 | 16031 | TENTH ST | ORANGE AVE | PECAN AVE | E | AAC | 6 | 380 | 46 | 17,480 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 1966 | 14234 | TERN CIR | SANDPIPER LN | END | E | AC | 9 | 361 | 36 | 12,996 | 8/24/23 | 71 | 59 | 41 | 0 | New Construction - Initial | 1/1/80 |
| 1967 | 13391 | TERRIER DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 35,892 | 3/30/26 | 67 | 29 | 71 | 0 | New Construction - Initial | 1/1/80 |
| 1968 | 14839 | TERRY DR | LEAFWOOD CIR | HERITAGE LN | E | AC | 4 | 256 | 36 | 9,216 | 4/6/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1968 | 14995 | TERRY DR | BEACH BLVD | LEAFWOOD CIR | E | AAC | 4 | 445 | 36 | 16,020 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1968 | 15756 | TERRY DR | HERITAGE LN | MONTCLAIR LN | E | AC | 4 | 788 | 36 | 28,368 | 4/6/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1968 | 15757 | TERRY DR | MONTCLAIR LN | IRBY LN | E | AC | 4 | 750 | 36 | 27,000 | 4/6/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1968 | 9001 | TERRY DR | VIEWPOINT LN | BEACH BLVD | E | AAC | 4 | 530 | 40 | 21,200 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1969 | 13525 | THAMES LN | SEINE DR | RHINE DR | E | AC | 4 | 406 | 36 | 14,616 | 3/18/22 | 82 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1969 | 15242 | THAMES LN | HEIL AVE | SEINE DR | E | AC | 4 | 382 | 36 | 13,752 | 3/18/22 | 71 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1970 | 14300 | THESEUS DR | SUBURBIA LN | LAVONNE LN | E | AAC | 8 | 962 | 36 | 34,632 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1971 | 12945 | THIRD ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 375 | 36 | 13,500 | 6/30/21 | 77 | 58 | 32 | 10 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1971 | 12946 | THIRD ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 355 | 36 | 12,780 | 6/30/21 | 80 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1972 | 12979 | THIRTEENTH ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 390 | 46 | 17,940 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1972 | 12980 | THIRTEENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/22/21 | 74 | 0 | 81 | 19 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1972 | 12981 | THIRTEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 71 | 8 | 91 | 1 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1972 | 12982 | THIRTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 375 | 46 | 17,250 | 6/22/21 | 68 | 0 | 86 | 14 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1972 | 12983 | THIRTEENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 73 | 0 | 89 | 11 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1972 | 12984 | THIRTEENTH ST | PALM AVE | CREST AVE | E | AC | 6 | 610 | 42 | 25,620 | 7/8/21 | 84 | 20 | 32 | 48 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1972 | 12985 | THIRTEENTH ST | CREST AVE | MAIN ST | E | AAC | 6 | 465 | 42 | 19,530 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1972 | 13081 | THIRTEENTH ST | PCH | WALNUT AVE | E | AC | 6 | 365 | 50 | 18,570 | 6/22/21 | 77 | 41 | 38 | 21 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1972 | 13123 | THIRTEENTH ST | PARK ST | LAKE ST | E | AAC | 6 | 625 | 37 | 23,125 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1972 | 50000 | THIRTEENTH ST | MAIN ST | PARK ST | E | AAC | 6 | 350 | 37 | 12,950 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1973 | 13652 | THOMAS CIR | TAYLOR DR | END | E | AC | 4 | 232 | 32 | 8,924 | 4/8/24 | 54 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 2302 | 60790 | THOMPSON DR | HANSEN LN | LAMB LN | E | AC | 8 | 400 | 36 | 14,400 | 3/2/22 | 95 | 0 | 100 | 0 | New Construction - AC | 1/1/15 |
| 1974 | 15306 | THOR DR | SPRINGDALE ST | END | E | AC | 1 | 624 | 36 | 24,264 | 12/26/24 | 91 | 0 | 43 | 57 | New Construction - Initial | 1/1/80 |
| 1975 | 13660 | THUNDERBIRD CIR | STARDUST DR | END | E | AAC | 1 | 310 | 36 | 12,410 | 5/8/24 | 72 | 44 | 56 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1976 | 14077 | TIBBETT LN | INNSBRUCK DR | WOODLAWN DR | E | AAC | 8 | 245 | 36 | 9,570 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1977 | 13521 | TIBER LN | SEINE DR | RHINE DR | E | AC | 4 | 758 | 36 | 28,038 | 3/31/22 | 91 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1978 | 14495 | TIDE LN | HIGHTIDE DR | BANNING AVE | E | AAC | 9 | 167 | 36 | 6,012 | 5/5/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 1979 | 15478 | TIDELAND LN | CLIFFWOOD DR | CLOUDHAVEN DR | E | AC | 7 | 350 | 36 | 14,100 | 4/21/26 | 83 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1980 | 14336 | TIDEWATER CIR | FLEET LN | CDS | E | AC | 9 | 385 | 36 | 15,360 | 4/1/24 | 62 | 72 | 20 | 8 | Surface Treatment - Slurry Seal | 5/11/18 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1981 | 14884 | TIFFANY CIR | KERN DR | CDS | E | AC | 5 | 542 | 36 | 20,762 | 4/1/26 | 73 | 28 | 72 | 0 | New Construction - Initial | 1/1/80 |
| 1982 | 13977 | TIGERFISH CIR | VELARDO DR | CDS | E | AC | 8 | 450 | 36 | 18,200 | 3/7/22 | 83 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1983 | 14515 | TIKI CIR | LUAU LN | CDS | E | AAC | 9 | 345 | 32 | 12,540 | 4/22/26 | 86 | 45 | 55 | 0 | Overlay - AC Structural | 5/11/19 |
| 1984 | 15790 | TILBURG DR | APEL LN | FORBES LN | E | AC | 5 | 775 | 36 | 27,900 | 5/8/26 | 54 | 62 | 38 | 0 | New Construction - Initial | 1/1/80 |
| 1985 | 14289 | TILLER CIR | SILVER STRAND DR | CDS | E | AC | 8 | 529 | 36 | 20,244 | 3/6/24 | 70 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1986 | 15714 | TIMBER CIR | DELAWARE ST | CDS | E | AC | 4 | 319 | 17 | 6,673 | 4/9/24 | 78 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1987 | 13156 | TISBURY CIR | MISTRAL DR | CDS | E | AC | 2 | 428 | 32 | 15,196 | 4/7/22 | 78 | 47 | 53 | 0 | New Construction - Initial | 1/1/80 |
| 1988 | 14170 | TITAN LN | CLOUDHAVEN DR | INDIANAPOLIS AVE | E | AC | 7 | 156 | 36 | 5,616 | 4/21/26 | 89 | 22 | 78 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1989 | 14016 | TOBAGO LN | KAMUELA DR | SUNDAY DR | E | AAC | 8 | 254 | 36 | 9,144 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1989 | 15402 | TOBAGO LN | SUNDAY DR | CHRISTMAS DR | E | AAC | 8 | 765 | 36 | 27,540 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1990 | 14251 | TOBERMORY CIR | COLBREGGAN DR | CDS | E | AAC | 9 | 205 | 32 | 8,060 | 5/10/24 | 79 | 51 | 46 | 3 | Overlay - AC Structural | 5/11/18 |
| 1991 | 13140 | TOMAS LN | CHERYL DR | SISSON DR | E | AAC | 2 | 268 | 36 | 9,648 | 5/21/24 | 90 | 0 | 89 | 11 | Overlay - AC Fabric | 10/1/16 |
| 1991 | 15032 | TOMAS LN | AUDREY DR | CHERYL DR | E | AAC | 2 | 533 | 36 | 19,938 | 5/21/24 | 86 | 32 | 61 | 7 | Overlay - AC Fabric | 10/1/16 |
| 1992 | 14003 | TONGA LN | KAIMU DR | MAIKAI DR | E | AAC | 8 | 270 | 36 | 9,720 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1993 | 15972 | TOPEKA LN | SALT LAKE DR | DOLPHIN DR | E | AC | 7 | 1,026 | 36 | 37,686 | 4/20/26 | 86 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1996 | 13945 | TOPSIDE CIR | LOOKOUT LN | CDS | E | AAC | 7 | 543 | 32 | 17,376 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1998 | 13396 | TORIN DR | PRESCOTT LN | FLINTSTONE LN | E | AC | 5 | 260 | 36 | 9,360 | 5/20/24 | 68 | 80 | 19 | 1 | New Construction - Initial | 1/1/80 |
| 1999 | 14442 | TORJIAN LN | HEIL AVE | GLORIA DR | E | AC | 3 | 248 | 36 | 8,928 | 4/6/26 | 90 | 56 | 44 | 0 | New Construction - Initial | 1/1/80 |
| 2000 | 14722 | TORONTO AVE | CALIFORNIA ST | DELAWARE ST | E | AAC | 6 | 285 | 36 | 9,479 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2000 | 15700 | TORONTO AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 298 | 36 | 9,896 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2000 | 15854 | TORONTO AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 450 | 36 | 15,435 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2001 | 15234 | TOULOUSE DR | ALLEY GOTHARD ST | CDS | E | AAC | 3 | 378 | 36 | 16,908 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2001 | 15236 | TOULOUSE DR | GOTHARD ST | ALLEY GOTHARD ST | E | AAC | 3 | 151 | 36 | 5,436 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2002 | 16011 | TOWAY LN | DOWN DR | END | E | AC | 1 | 1,100 | 36 | 40,850 | 12/20/24 | 90 | 0 | 38 | 62 | New Construction - Initial | 1/1/80 |
| 2004 | 13640 | TRADEWIND CIR | GULF LN | CDS | E | AAC | 4 | 233 | 32 | 8,956 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2005 | 15459 | TRANQUIL LN | ADAMS AVE | GALLANT DR | E | AAC | 7 | 990 | 36 | 36,390 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2006 | 13725 | TRANSISTOR LN | ENGINEER DR | MACHINE DR | E | AC | 1 | 1,141 | 40 | 45,640 | 4/8/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2008 | 14123 | TREASURE CIR | ADAMS AVE | CDS | E | AAC | 7 | 116 | 34 | 5,444 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2009 | 14893 | TREEHAVEN LN | SUMMERDALE DR | ROSEMONT DR | E | AC | 5 | 595 | 36 | 23,676 | 5/28/24 | 58 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2010 | 13311 | TREETOP CIR | GREENVIEW LN | END | E | AC | 3 | 360 | 32 | 13,320 | 4/2/26 | 77 | 0 | 97 | 3 | New Construction - Initial | 1/1/80 |
| 2011 | 14087 | TRENTON LN | FORRESTAL DR | VALLEY FORGE DR | E | AC | 8 | 260 | 36 | 10,360 | 2/25/22 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2012 | 14048 | TRIDENT LN | DOLPHIN DR | CLIPPER DR | E | AC | 7 | 807 | 36 | 29,052 | 4/20/26 | 74 | 83 | 14 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2012 | 15414 | TRIDENT LN | ANCHORAGE DR | DOLPHIN DR | E | AC | 7 | 757 | 36 | 28,002 | 4/20/26 | 72 | 90 | 7 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2013 | 14976 | TRINIDAD LN | EDINGER AVE | AQUARIUS DR | E | AAC | 2 | 1,508 | 46 | 56,810 | 5/7/24 | 90 | 29 | 56 | 15 | Overlay - AC Fabric | 12/1/17 |
| 2014 | 14857 | TRIPP CIR | BRUSH DR | CDS | E | AAC | 4 | 424 | 32 | 14,818 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2015 | 13707 | TRITON LN | OCEANUS DR | ARGOSY AVE | E | AC | 1 | 563 | 40 | 22,520 | 4/8/22 | 69 | 84 | 16 | 0 | New Construction - Initial | 1/1/80 |
| 2016 | 13705 | TROJAN CIR | MAR VISTA DR | END | E | AAC | 1 | 481 | 36 | 19,116 | 5/7/24 | 69 | 28 | 68 | 4 | Overlay - AC Fabric | 10/1/16 |
| 2017 | 14280 | TROON LN | ZETLAND DR | DUMBRECK DR | E | AAC | 8 | 236 | 36 | 9,876 | 3/18/24 | 79 | 0 | 58 | 42 | Overlay - AC Structural | 5/11/18 |
| 2018 | 13319 | TROPHY DR | LARK LN | GREENVIEW LN | E | AC | 3 | 540 | 36 | 20,440 | 4/2/26 | 70 | 41 | 59 | 0 | New Construction - Initial | 1/1/80 |
| 2019 | 13664 | TROPICANA LN | CHINOOK DR | SANDS DR | E | AC | 1 | 275 | 36 | 13,900 | 4/13/26 | 79 | 50 | 50 | 0 | New Construction - Initial | 1/1/80 |
| 2020 | 15128 | TRUDY LN | JEAN DR | SHIELDS DR | E | AC | 3 | 1,282 | 36 | 46,152 | 4/6/26 | 76 | 43 | 55 | 2 | New Construction - Initial | 1/1/80 |
| 2020 | 15816 | TRUDY LN | HEIL AVE | JEAN DR | E | AC | 3 | 438 | 36 | 15,768 | 4/6/26 | 73 | 83 | 17 | 0 | New Construction - Initial | 1/1/80 |
| 2021 | 15940 | TRUMBULL DR | PHELPS LN | SAYBROOK LN | E | AC | 2 | 1,026 | 36 | 36,936 | 3/24/22 | 57 | 53 | 47 | 0 | New Construction - Initial | 1/1/80 |
| 2022 | 15886 | TRUXTON DR | ALLPORT LN | CAMFIELD LN | E | AAC | 7 | 764 | 36 | 27,504 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2023 | 13378 | TUCANA DR | TAURUS LN | GOLDENWEST ST | E | AC | 3 | 317 | 36 | 10,824 | 5/28/24 | 59 | 56 | 38 | 6 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2024 | 14074 | TUCKAHOE CIR | INNSBRUCK DR | CDS | E | AC | 8 | 365 | 32 | 13,180 | 3/9/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2025 | 13286 | TUFTS LN | LOYOLA DR | DEFIANCE DR | E | AC | 3 | 257 | 36 | 10,252 | 12/19/24 | 73 | 64 | 36 | 0 | New Construction - Initial | 1/1/80 |
| 2026 | 15021 | TULLOW LN | STARSHINE DR | GLEN DR | E | AC | 3 | 254 | 36 | 9,144 | 4/7/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2026 | 16008 | TULLOW LN | GLEN DR | LIMERICK DR | E | AC | 3 | 1,030 | 36 | 36,792 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2027 | 13618 | TUNSTALL LN | MADDOX DR | NORMA DR | E | AC | 3 | 792 | 36 | 28,512 | 3/18/22 | 86 | 0 | 91 | 9 | New Construction - Initial | 1/1/80 |
| 2028 | 14920 | TUSCAN CIR | ALLSTONE DR | END | E | AC | 5 | 144 | 36 | 6,984 | 3/31/26 | 73 | 27 | 67 | 6 | New Construction - Initial | 1/1/80 |
| 2029 | 14891 | TWAIN LN | ROGERS DR | KERN DR | E | AC | 5 | 989 | 36 | 35,604 | 4/1/26 | 73 | 55 | 45 | 0 | New Construction - Initial | 1/1/80 |
| 2030 | 12976 | TWELFTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/22/21 | 67 | 65 | 35 | 0 | New Construction - Initial | 1/1/80 |
| 2030 | 12977 | TWELFTH ST | PECAN AVE | ACACIA AVE | E | AAC | 6 | 375 | 46 | 17,250 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/17/21 |
| 2030 | 12978 | TWELFTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 375 | 48 | 19,680 | 6/22/21 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2030 | 13079 | TWELFTH ST | PCH | WALNUT AVE | E | AC | 6 | 340 | 50 | 17,142 | 6/22/21 | 80 | 0 | 59 | 41 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2030 | 13080 | TWELFTH ST | PALM AVE | CREST AVE | E | AC | 6 | 298 | 46 | 13,708 | 7/8/21 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2030 | 13082 | TWELFTH ST | CREST AVE | MAIN ST | E | AC | 6 | 415 | 43 | 17,845 | 7/8/21 | 80 | 54 | 46 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2030 | 13083 | TWELFTH ST | MAIN ST | LAKE ST | E | AAC | 6 | 885 | 47 | 41,595 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 2030 | 16027 | TWELFTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 365 | 46 | 16,790 | 6/22/21 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2030 | 50100 | TWELFTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 375 | 46 | 17,250 | 6/22/21 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2031 | 13014 | TWENTIETH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 386 | 46 | 17,756 | 6/30/21 | 86 | 61 | 33 | 6 | Surface Treatment - Slurry Seal | 2/13/24 |
| 2031 | 13015 | TWENTIETH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 415 | 46 | 19,090 | 6/30/21 | 91 | 0 | 61 | 39 | Surface Treatment - Slurry Seal | 7/27/22 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2031 | 13016 | TWENTIETH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 405 | 46 | 18,630 | 6/30/21 | 91 | 0 | 43 | 57 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2031 | 13017 | TWENTIETH ST | PCH | WALNUT AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/30/21 | 91 | 0 | 94 | 6 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2031 | 13018 | TWENTIETH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 74 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2031 | 13096 | TWENTIETH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/30/21 | 92 | 0 | 85 | 15 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2032 | 13019 | TWENTY-FIRST ST | ACACIA AVE | PALM AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 67 | 49 | 18 | 33 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2032 | 13020 | TWENTY-FIRST ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/30/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2032 | 13021 | TWENTY-FIRST ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 415 | 46 | 19,090 | 6/30/21 | 68 | 71 | 8 | 21 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2032 | 13022 | TWENTY-FIRST ST | PCH | WALNUT AVE | E | AAC | 6 | 370 | 50 | 18,500 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 2032 | 13023 | TWENTY-FIRST ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 83 | 79 | 16 | 5 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2032 | 13097 | TWENTY-FIRST ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 84 | 68 | 21 | 11 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2033 | 13024 | TWENTY-SECOND ST | ACACIA AVE | PALM AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 91 | 0 | 48 | 52 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2033 | 13025 | TWENTY-SECOND ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/30/21 | 92 | 0 | 69 | 31 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2033 | 13026 | TWENTY-SECOND ST | WALNUT AVE | OLIVE AVE | E | AAC | 6 | 395 | 46 | 18,860 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 2033 | 13027 | TWENTY-SECOND ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 70 | 64 | 14 | 22 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2033 | 13028 | TWENTY-SECOND ST | PCH | WALNUT AVE | E | AC | 6 | 355 | 46 | 16,960 | 6/30/21 | 90 | 0 | 41 | 59 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2033 | 13098 | TWENTY-SECOND ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 77 | 40 | 14 | 46 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2034 | 15204 | TWINFORD LN | NORBOOK DR | MANOFIELD DR | E | AAC | 5 | 511 | 36 | 18,396 | 5/23/24 | 74 | 24 | 76 | 0 | Overlay - AC Structural | 10/1/12 |
| 2035 | 13277 | TYEE LN | NYANZA DR | LAURELHURST DR | E | AC | 3 | 260 | 36 | 10,110 | 1/6/25 | 82 | 35 | 65 | 0 | New Construction - Initial | 1/1/80 |
| 2036 | 13922 | TYLER CIR | HARDING LN | CDS | E | AC | 7 | 520 | 37 | 22,860 | 4/2/24 | 92 | 28 | 72 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 2037 | 13738 | TYNDALL DR | BOLSA PARK LN | END | E | AC | 1 | 294 | 36 | 12,084 | 4/27/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2037 | 13746 | TYNDALL DR | FIELDSTONE LN | BOLSA PARK LN | E | AC | 1 | 769 | 36 | 28,184 | 4/27/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2038 | 13150 | TYPHOON LN | SAGAMORE DR | VENTURE DR | E | AAC | 2 | 762 | 36 | 28,182 | 5/7/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2039 | 13854 | TYRONE CIR | TOWAY LN | END | E | AC | 1 | 419 | 36 | 16,334 | 1/3/25 | 31 | 91 | 4 | 5 | New Construction - Initial | 1/1/80 |
| 2040 | 13255 | UNDERHILL LN | MYRTLE DR | SHAYNE DR | E | AC | 3 | 1,020 | 36 | 36,720 | 4/6/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2041 | 14460 | UPLAND DR | QUEENS PARK LN | SPARKMAN LN | E | AAC | 8 | 253 | 36 | 9,108 | 3/19/24 | 88 | 43 | 57 | 0 | Overlay - AC Structural | 5/11/18 |
| 2042 | 13467 | UPPERLAKE CIR | LAKEVIEW DR | END | E | AC | 5 | 375 | 36 | 15,000 | 5/29/24 | 57 | 56 | 43 | 1 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2043 | 14715 | UTICA AVE | DELAWARE ST | FLORIDA ST | E | AAC | 6 | 625 | 36 | 22,500 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2043 | 14716 | UTICA AVE | FLORIDA ST | BEACH BLVD | E | AAC | 6 | 625 | 36 | 22,500 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2043 | 14717 | UTICA AVE | LAKE ST | PARK ST | E | AC | 6 | 650 | 36 | 23,400 | 7/8/21 | 79 | 19 | 37 | 44 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2043 | 14720 | UTICA AVE | MAIN ST | END | E | AC | 6 | 185 | 36 | 6,660 | 7/8/21 | 97 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 6/1/21 |
| 2043 | 14721 | UTICA AVE | ALABAMA ST | CDS | E | AAC | 6 | 133 | 36 | 4,348 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2043 | 15001 | UTICA AVE | LAKE ST | CDS | E | AC | 6 | 184 | 36 | 7,040 | 7/8/21 | 67 | 64 | 36 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2043 | 15697 | UTICA AVE | HUNTINGTON ST | DELAWARE ST | E | AAC | 6 | 620 | 36 | 22,320 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2043 | 15698 | UTICA AVE | PARK ST | MAIN ST | E | AC | 6 | 365 | 36 | 13,140 | 7/8/21 | 82 | 13 | 36 | 51 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2043 | 15853 | UTICA AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 465 | 36 | 16,740 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2044 | 14492 | VACATION LN | SURFCREST DR | HIGHTIDE DR | E | AC | 9 | 560 | 36 | 20,910 | 5/5/26 | 83 | 51 | 46 | 3 | New Construction - Initial | 1/1/80 |
| 2045 | 14134 | VAIL DR | NEWLAND ST | ALLPORT LN | E | AAC | 7 | 173 | 36 | 6,228 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2046 | 14821 | VALENCIA DR | HAGUE LN | CDS | E | AAC | 4 | 553 | 36 | 21,158 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2046 | 15739 | VALENCIA DR | GRANADA LN | ROTTERDAM LN | E | AAC | 4 | 1,020 | 36 | 36,970 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2046 | 15740 | VALENCIA DR | ROTTERDAM LN | HAGUE LN | E | AAC | 4 | 535 | 36 | 19,260 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2047 | 13480 | VALENTINE DR | GOLDENWEST ST | WISHINGWELL LN | E | AAC | 3 | 671 | 36 | 24,156 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2047 | 13600 | VALENTINE DR | WHITTIER LN | GOLDENWEST ST | E | AC | 3 | 180 | 48 | 7,140 | 4/16/26 | 81 | 0 | 29 | 71 | New Construction - Initial | 1/1/80 |
| 2048 | 14911 | VALEWORTH CIR | GLENSTONE DR | CDS | E | AC | 5 | 198 | 36 | 8,378 | 4/2/26 | 55 | 89 | 11 | 0 | New Construction - Initial | 1/1/80 |
| 2049 | 13645 | VALLEA CIR | STERLING AVE | END | E | AC | 4 | 130 | 32 | 5,660 | 4/8/24 | 59 | 62 | 26 | 12 | New Construction - Initial | 1/1/80 |
| 2050 | 13909 | VALLEY CIR | GARFIELD AVE | CDS | E | AAC | 7 | 549 | 34 | 19,916 | 4/14/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2051 | 15434 | VALLEY FORGE DR | BROOKHURST ST | CANBERRA LN | E | AC | 8 | 1,156 | 36 | 41,616 | 3/3/22 | 77 | 17 | 80 | 3 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2052 | 14795 | VAN BUREN LN | MICHAEL DR | NEWMAN AVE | E | AC | 4 | 781 | 36 | 27,828 | 5/13/24 | 76 | 76 | 24 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 2052 | 15863 | VAN BUREN LN | SLATER AVE | MICHAEL DR | E | AAC | 4 | 541 | 36 | 18,888 | 5/13/24 | 81 | 33 | 66 | 1 | New Construction - Initial | 1/1/80 |
| 2053 | 14825 | VAN DYKE LN | AMSTERDAM DR | REMBRANDT DR | E | AC | 4 | 491 | 36 | 17,676 | 3/31/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2054 | 13829 | VANE CIR | AULNAY LN | END | E | AC | 1 | 397 | 36 | 15,542 | 1/3/25 | 47 | 82 | 18 | 0 | New Construction - Initial | 1/1/80 |
| 2055 | 13697 | VANGUARD LN | CORTEZ DR | SHEMAN DR | E | AC | 1 | 272 | 36 | 12,292 | 4/28/26 | 80 | 52 | 48 | 0 | New Construction - Initial | 1/1/80 |
| 2056 | 15239 | VANTAGE DR | RHONE LN | CDS | E | AAC | 4 | 682 | 36 | 27,052 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2057 | 14239 | VARAS CIR | MATARO LN | END | E | AC | 9 | 149 | 42 | 6,258 | 8/23/23 | 77 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2058 | 13415 | VARSITY DR | HIGHLAND LN | CDS | E | AC | 5 | 383 | 36 | 13,788 | 5/29/24 | 45 | 91 | 9 | 0 | New Construction - Initial | 1/1/80 |
| 2058 | 14413 | VARSITY DR | HALLCROFT LN | IVORYCREST LN | E | AC | 5 | 345 | 36 | 12,420 | 5/23/24 | 39 | 91 | 9 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2058 | 15578 | VARSITY DR | HALLCROFT LN | EDWARDS ST | E | AC | 5 | 1,418 | 36 | 51,048 | 5/23/24 | 59 | 57 | 41 | 2 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2060 | 15177 | VATCHER DR | FLINTSTONE LN | EDWARDS ST | E | AC | 5 | 1,335 | 36 | 48,060 | 5/28/24 | 54 | 85 | 15 | 0 | New Construction - Initial | 1/1/80 |
| 2061 | 13041 | VEERING CIR | SEVENTEENTH ST | CDS | E | AC | 6 | 286 | 36 | 12,435 | 7/8/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2062 | 15587 | VELARDO DR | WOODWARD LN | BUSHARD ST | E | AC | 8 | 1,153 | 36 | 42,258 | 4/15/26 | 91 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2062 | 15906 | VELARDO DR | BUSHARD ST | STINGRAY LN | E | AC | 8 | 1,075 | 36 | 39,700 | 3/7/22 | 91 | 50 | 42 | 8 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2063 | 14033 | VELVET CIR | FLAGSTONE LN | END | E | AC | 7 | 466 | 34 | 15,844 | 8/21/23 | 34 | 88 | 6 | 6 | Surface Treatment - Slurry Seal | 3/1/11 |
| 2064 | 15852 | VENICE AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 6 | 450 | 36 | 16,100 | 7/8/21 | 82 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2065 | 13160 | VENTURE DR | TYPHOON LN | WALRUS LN | E | AC | 2 | 254 | 36 | 9,894 | 4/7/22 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2065 | 13184 | VENTURE DR | WALRUS LN | SUNDANCER LN | E | AC | 2 | 1,520 | 36 | 54,720 | 4/7/22 | 86 | 16 | 78 | 6 | New Construction - Initial | 1/1/80 |
| 2065 | 13187 | VENTURE DR | SUNDANCER LN | CDS | E | AC | 2 | 189 | 32 | 7,848 | 4/7/22 | 88 | 0 | 50 | 50 | New Construction - Initial | 1/1/80 |
| 2066 | 15090 | VENTURI DR | BIRDIE LN | NASSAU LN | E | AC | 3 | 1,421 | 36 | 51,156 | 3/23/22 | 64 | 48 | 27 | 25 | New Construction - Initial | 1/1/80 |
| 2067 | 14169 | VENUS CIR | CLOUDHAVEN DR | CDS | E | AAC | 7 | 342 | 32 | 12,444 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2068 | 14190 | VERDANT DR | GRAYSTONE LN | EVERGLADES LN | E | AAC | 8 | 269 | 36 | 10,184 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2069 | 13344 | VERLENE CIR | MARIE LN | CDS | E | AAC | 3 | 229 | 36 | 9,934 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2070 | 14567 | VERMONT LN | CORNWALL DR | END | E | AAC | 8 | 228 | 24 | 5,472 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 2070 | 15635 | VERMONT LN | KENISINGTON DR | CORNWALL DR | E | AAC | 8 | 338 | 24 | 8,112 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 2071 | 15422 | VERONICA DR | RODERICK LN | OCCIDENTAL LN | E | AAC | 7 | 941 | 36 | 35,376 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2072 | 13861 | VESPER CIR | WHITEOAK LN | END | E | AC | 3 | 213 | 32 | 8,316 | 4/7/26 | 92 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2073 | 13446 | VESTRY CIR | PACEMONT DR | END | E | AAC | 5 | 362 | 36 | 14,532 | 5/29/24 | 68 | 16 | 76 | 8 | Overlay - AC Structural | 10/1/12 |
| 2074 | 15185 | VIA ANGELINA DR | AVILLA LN | EL NOPAL LN | E | AAC | 5 | 1,141 | 36 | 42,076 | 5/22/24 | 70 | 25 | 74 | 1 | Overlay - AC Structural | 10/1/12 |
| 2075 | 13423 | VIA CARONA DR | AVILLA LN | EL NOPAL LN | E | AAC | 5 | 1,142 | 36 | 41,112 | 5/22/24 | 70 | 33 | 66 | 1 | Overlay - AC Structural | 10/1/12 |
| 2076 | 13629 | VIA ESPANA LN | SPICKARD DR | SLATER AVE | E | AC | 3 | 166 | 36 | 5,400 | 5/22/24 | 71 | 51 | 49 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2076 | 15184 | VIA ESPANA LN | SLATER AVE | VIA ANGELINA DR | E | AAC | 5 | 418 | 36 | 15,048 | 5/22/24 | 75 | 14 | 84 | 2 | Overlay - AC Structural | 10/1/12 |
| 2078 | 13548 | VICEROY CIR | ROSS LN | CDS | E | AAC | 4 | 205 | 32 | 7,810 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2079 | 14196 | VICKSBURG DR | EVERGLADES LN | REDWOOD LN | E | AAC | 8 | 753 | 36 | 27,858 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2080 | 13776 | VICTORIA LN | BOLSA AVE | ALEXANDRIA DR | E | AC | 1 | 569 | 36 | 20,484 | 12/12/24 | 90 | 43 | 57 | 0 | New Construction - Initial | 1/1/80 |
| 2080 | 13787 | VICTORIA LN | ALEXANDRIA DR | OXFORD DR | E | AC | 1 | 260 | 36 | 9,072 | 12/12/24 | 93 | 0 | 83 | 17 | New Construction - Initial | 1/1/80 |
| 2080 | 13788 | VICTORIA LN | CUMBERLAND DR | HALIFAX DR | E | AC | 1 | 520 | 36 | 18,720 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2080 | 13791 | VICTORIA LN | MELBOURNE DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/8/26 | 71 | 33 | 67 | 0 | New Construction - Initial | 1/1/80 |
| 2080 | 13805 | VICTORIA LN | HALIFAX DR | MELBOURNE DR | E | AC | 1 | 260 | 36 | 9,072 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2080 | 15318 | VICTORIA LN | OXFORD DR | CUMBERLAND DR | E | AC | 1 | 520 | 36 | 18,720 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2083 | 13317 | VIEW CIR | LARK LN | END | E | AC | 3 | 252 | 36 | 10,572 | 4/2/26 | 73 | 46 | 54 | 0 | New Construction - Initial | 1/1/80 |
| 2084 | 14994 | VIEWPOINT LN | CHRYSLER CIR | TERRY DR | E | AC | 4 | 689 | 36 | 24,804 | 4/6/22 | 83 | 64 | 36 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2084 | 15653 | VIEWPOINT LN | TERRY DR | DAMASK DR | E | AC | 4 | 549 | 36 | 20,264 | 4/6/22 | 73 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2085 | 13692 | VIKING CIR | SUNNYCREST LN | END | E | AAC | 1 | 352 | 32 | 13,064 | 5/7/24 | 76 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 2086 | 14418 | VILLA NUEVA DR | ALTAMIRANO LN | CARRANZA LN | E | AC | 5 | 256 | 36 | 9,966 | 5/23/24 | 88 | 33 | 67 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2086 | 15579 | VILLA NUEVA DR | CARRANZA NL | QUINTANA LN | E | AC | 5 | 512 | 36 | 18,432 | 5/23/24 | 81 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2086 | 15580 | VILLA NUEVA DR | QUINTANA LN | END | E | AC | 5 | 381 | 36 | 13,428 | 5/20/24 | 82 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2087 | 15650 | VILLAGE DR | JETT DR | MAGNOLIA ST | E | AC | 7 | 743 | 36 | 26,748 | 4/21/26 | 86 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2088 | 14403 | VIM LN | SAGAMORE DR | AQUARIUS DR | E | AAC | 2 | 257 | 36 | 9,252 | 5/7/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2089 | 14779 | VINCENT CIR | GOTHARD ST | END | E | AC | 4 | 422 | 40 | 18,680 | 5/9/24 | 87 | 48 | 52 | 0 | New Construction - Initial | 1/1/80 |
| 2090 | 15774 | VINELAND DR | NEWQUIST LN | END | E | AC | 2 | 304 | 36 | 10,944 | 4/1/26 | 79 | 37 | 63 | 0 | New Construction - Initial | 1/1/80 |
| 2091 | 14124 | VINTAGE DR | ADAMS AVE | AFTON CIR | E | AC | 7 | 105 | 36 | 3,780 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2091 | 15455 | VINTAGE DR | AFTON CIR | KELSO DR | E | AC | 7 | 750 | 36 | 27,750 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2092 | 14126 | VISCOUNT DR | IMPERIAL COVE LN | CROWN REEK LN | E | AC | 7 | 250 | 36 | 9,750 | 4/20/26 | 100 | 0 | 0 | 0 | Surface Treament- Single Chip Seal | 7/15/21 |
| 2093 | 13422 | VISTA DEL SOL DR | AVILLA LN | EL NOPAL LN | E | AAC | 5 | 1,142 | 36 | 41,112 | 5/22/24 | 71 | 40 | 60 | 0 | Overlay - AC Structural | 10/1/12 |
| 2094 | 13613 | VISTA DR | GREEN ST | ISLAND CIR | E | AC | 2 | 184 | 36 | 7,650 | 4/7/22 | 76 | 68 | 32 | 0 | New Construction - Initial | 1/1/80 |
| 2095 | 15490 | VIVA CIR | CDS (S) | CDS (N) | E | AAC | 8 | 237 | 32 | 11,584 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2096 | 14349 | VOLANTE DR | CHUBASCO LN | INFERNO LN | E | AC | 8 | 254 | 36 | 9,894 | 4/1/24 | 68 | 28 | 72 | 0 | New Construction - Initial | 1/1/80 |
| 2097 | 13486 | VOLGA DR | ALLEY GANGES LN | SHER LN | E | AC | 4 | 817 | 36 | 29,412 | 3/18/22 | 78 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2098 | 14290 | VOYAGER CIR | HORIZON LN | CDS | E | AC | 8 | 510 | 36 | 18,360 | 3/6/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2099 | 14819 | WAAL CIR | HOLLAND DR | CDS | E | AC | 4 | 560 | 36 | 21,410 | 4/6/22 | 89 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2100 | 13917 | WADEBRIDGE CIR | COLCHESTER LN | CDS | E | AC | 7 | 332 | 32 | 10,624 | 4/2/24 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 2101 | 13541 | WAGERS CIR | ROSS LN | CDS | E | AAC | 4 | 244 | 32 | 9,058 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2102 | 13568 | WAGON DR | NICHOLS ST | DAIRYVIEW CIR | E | AAC | 4 | 181 | 36 | 6,516 | 5/28/24 | 91 | 2 | 98 | 0 | Overlay - AC Structural | 10/1/12 |
| 2103 | 13128 | WAIKIKI LN | EDINGER AVE | TRAVELWAY | E | AC | 2 | 140 | 36 | 5,040 | 3/24/22 | 63 | 73 | 27 | 0 | New Construction - Initial | 1/1/80 |
| 2103 | 15031 | WAIKIKI LN | TRAVELWAY | KONA DR | E | AC | 2 | 587 | 36 | 21,132 | 3/24/22 | 83 | 54 | 46 | 0 | New Construction - Initial | 1/1/80 |
| 2103 | 15035 | WAIKIKI LN | KONA DR | HILO CIR | E | AAC | 2 | 272 | 36 | 9,792 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 2103 | 15041 | WAIKIKI LN | HILO CIR | SCENARIO DR | E | AAC | 2 | 816 | 36 | 29,376 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 2104 | 14853 | WAITE LN | HEIL AVE | BRUSH DR | E | AAC | 4 | 526 | 36 | 19,436 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2105 | 13997 | WALLEYE LN | BASS DR | VELARDO DR | E | AC | 8 | 450 | 36 | 16,950 | 3/7/22 | 85 | 60 | 33 | 7 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2106 | 14518 | WALLINGFORD LN | GATESHEAD DR | HARWICH LN | E | AAC | 9 | 696 | 36 | 25,806 | 4/22/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 1994 | 12929 | WALNUT AVE | ELEVENTH ST | FOURTEENTH ST | E | AC | 6 | 930 | 39 | 36,270 | 6/23/21 | 74 | 36 | 38 | 26 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1994 | 12933 | WALNUT AVE | EIGHTH ST | ELEVENTH ST | E | AAC | 6 | 880 | 38 | 33,440 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 1994 | 12939 | WALNUT AVE | SIXTH ST | EIGHTH ST | E | AC | 6 | 560 | 37 | 20,720 | 7/8/21 | 78 | 47 | 52 | 1 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1994 | 13108 | WALNUT AVE | TWENTIETH ST | GOLDENWEST ST | E | AAC | 6 | 915 | 36 | 32,940 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1994 | 13109 | WALNUT AVE | SEVENTEENTH ST | TWENTIETH ST | E | AAC | 6 | 875 | 36 | 31,500 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1994 | 13114 | WALNUT AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AC | 6 | 875 | 36 | 31,500 | 6/23/21 | 67 | 42 | 14 | 44 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2107 | 13159 | WALRUS LN | AQUARIUS DR | VENTURE DR | E | AAC | 2 | 677 | 36 | 25,122 | 5/7/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2108 | 16004 | WALTON DR | GIARC LN | MARJAN LN | E | AC | 3 | 1,291 | 36 | 47,226 | 12/18/24 | 84 | 20 | 72 | 8 | New Construction - Initial | 1/1/80 |
| 2109 | 13132 | WALTZ CIR | PRELUDE DR | CDS | E | AC | 2 | 412 | 36 | 16,332 | 3/24/22 | 92 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2110 | 13340 | WANDA CIR | MARILYN DR | END | E | AAC | 3 | 320 | 36 | 13,070 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2111 | 13201 | WANDERER LN | HUMBOLDT DR | CAROUSEL LN | E | AC | 2 | 631 | 36 | 23,716 | 4/7/22 | 86 | 47 | 50 | 3 | New Construction - Initial | 1/1/80 |
| 2111 | 15055 | WANDERER LN | CAROUSEL LN | HUMBOLDT DR | E | AC | 2 | 578 | 36 | 20,520 | 4/7/22 | 90 | 0 | 38 | 62 | New Construction - Initial | 1/1/80 |
| 2112 | 15430 | WARBURTON DR | BUSHARD ST FRONTAGE | ELMSFORD LN | E | AC | 8 | 1,124 | 36 | 40,464 | 3/9/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2295 | 60720 | WARDLOW LN | PIONEER DR | SHERIDAN DR | E | AC | 7 | 480 | 36 | 17,280 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - AC | 1/1/14 |
| 2113 | 15424 | WARFIELD DR | SANDERSON LN | OCCIDENTAL LN | E | AC | 7 | 681 | 36 | 25,266 | 4/20/26 | 85 | 74 | 19 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1997 | 14535 | WARNER AVE | WEATHERLY LN | SCEPTRE LN | E | AC | 2 | 720 | 63 | 45,360 | 4/9/22 | 89 | 41 | 59 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 14986 | WARNER AVE | WARNER AVE | PINEHURST LN | E | AC | 5 | 751 | 36 | 27,036 | 5/22/24 | 49 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2114 | 13141 | WARREN LN | AUDREY DR | SISSON DR | E | AC | 2 | 850 | 36 | 30,600 | 5/21/24 | 86 | 63 | 37 | 0 | New Construction - Initial | 1/1/80 |
| 2114 | 15027 | WARREN LN | EDINGER AVE | AUDREY DR | E | AAC | 2 | 300 | 36 | 10,800 | 4/7/26 | 72 | 44 | 56 | 0 | Overlay - AC Fabric | 10/1/16 |
| 2115 | 14217 | WARWICK DR | CRAIMER LN | RAVENWOOD LN | E | AAC | 8 | 254 | 36 | 9,144 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 2116 | 13529 | WASHINGTON AVE | LYNDON ST | NICHOLS ST | E | ACT | 4 | 530 | 36 | 19,080 | 3/31/22 | 85 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2117 | 14525 | WATCH HARBOR DR | BUSHARD ST | WOOD ISLAND LN | E | AC | 9 | 167 | 36 | 5,724 | 4/24/24 | 85 | 35 | 65 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 2118 | 14068 | WATERBURY LN | YORKTOWN AVE | GREENWICH DR | E | AC | 7 | 172 | 36 | 6,192 | 4/16/26 | 94 | 0 | 60 | 40 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2118 | 14069 | WATERBURY LN | HYANNIS PORT DR | CAPE COD DR | E | AC | 7 | 262 | 36 | 10,182 | 4/16/26 | 87 | 61 | 32 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2118 | 15389 | WATERBURY LN | KNEEP DR | YORKTOWN AVE | E | AC | 8 | 1,190 | 36 | 43,590 | 4/15/26 | 76 | 95 | 5 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2118 | 15425 | WATERBURY LN | GREENWICH DR | HYANNIS PORT DR | E | AC | 7 | 792 | 36 | 28,512 | 4/16/26 | 90 | 34 | 54 | 12 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2119 | 14360 | WATERFRONT DR | BUSHARD ST | PINETREE LN | E | AAC | 8 | 169 | 36 | 5,796 | 5/20/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 2119 | 15553 | WATERFRONT DR | BOWSPRIT LN | BUSHARD ST | E | AC | 9 | 517 | 36 | 19,362 | 3/20/24 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2120 | 14543 | WATERWAY CIR | HEIL AVE | CDS | E | AAC | 2 | 446 | 34 | 16,414 | 5/21/24 | 91 | 39 | 53 | 8 | Overlay - AC Fabric | 12/1/17 |
| 2121 | 13941 | WAVE CIR | PLUM TREE LN | CDS | E | AAC | 7 | 434 | 32 | 15,138 | 7/14/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/14/21 |
| 2122 | 13304 | WAVERIDER CIR | BOLSA CHICA ST | CDS | E | AC | 2 | 203 | 36 | 8,558 | 4/2/26 | 72 | 69 | 31 | 0 | New Construction - Initial | 1/1/80 |
| 2123 | 13229 | WAVERLY LN | ROUNDHILL DR | EDGEWATER LN | E | AC | 2 | 262 | 36 | 9,432 | 4/7/22 | 70 | 34 | 66 | 0 | New Construction - Initial | 1/1/80 |
| 2124 | 15040 | WAYFARER LN | HUMBOLDT DR | CDS | E | AC | 2 | 980 | 36 | 36,780 | 4/7/22 | 89 | 0 | 79 | 21 | New Construction - Initial | 1/1/80 |
| 2125 | 13985 | WEAKFISH LN | FLOUNDER DR | POLLACK DR | E | AAC | 8 | 260 | 36 | 9,072 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 2125 | 15392 | WEAKFISH LN | POLLACK DR | CDS | E | AAC | 8 | 830 | 32 | 26,560 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 2126 | 15079 | WEATHERLY LN | WARNER AVE | ALADDIN DR | E | AC | 2 | 291 | 36 | 10,476 | 4/9/22 | 81 | 68 | 32 | 0 | New Construction - Initial | 1/1/80 |
| 2127 | 13329 | WEBER CIR | MYTINGER LN | CDS | E | AC | 3 | 419 | 36 | 16,434 | 4/6/26 | 68 | 54 | 46 | 0 | New Construction - Initial | 1/1/80 |
| 2128 | 15410 | WEEMS LN | KINGSDALE DR | END | E | AAC | 7 | 649 | 36 | 23,364 | 8/21/23 | 74 | 49 | 51 | 0 | Overlay - AC Structural | 3/1/11 |
| 2129 | 13835 | WELDE CIR | AULNAY LN | END | E | AC | 1 | 397 | 36 | 15,542 | 12/18/24 | 89 | 72 | 28 | 0 | New Construction - Initial | 1/1/80 |
| 2130 | 13631 | WELLBANK LN | LANCEFIELD DR | WOODBORO DR | E | AC | 5 | 353 | 36 | 14,208 | 3/31/26 | 69 | 30 | 70 | 0 | New Construction - Initial | 1/1/80 |
| 2131 | 13463 | WELLBROOK CIR | GLENFOX DR | END | E | AAC | 5 | 267 | 36 | 11,112 | 5/29/24 | 62 | 23 | 60 | 17 | Overlay - AC Structural | 10/1/12 |
| 2132 | 14435 | WELLINGTON CIR | MARIANA CIR | CDS | E | AAC | 2 | 500 | 32 | 11,836 | 5/6/24 | 84 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2133 | 14437 | WELLINGTON DR | MARIANA CIR | PEALE LN | E | AC | 2 | 198 | 32 | 6,336 | 4/9/22 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2134 | 14905 | WENDY CIR | FRANS LN | CDS | E | AC | 5 | 263 | 36 | 10,718 | 4/2/26 | 86 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 2135 | 13926 | WENLOCK CIR | WORCHESTER LN | CDS | E | AAC | 7 | 116 | 31 | 7,008 | 4/14/26 | 87 | 0 | 91 | 9 | Overlay - AC Structural | 11/28/19 |
| 2136 | 14203 | WESLEY CIR | LAWSON LN | CDS | E | AAC | 8 | 410 | 32 | 15,120 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2138 | 14276 | WESTCLIFF DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 954 | 36 | 34,344 | 5/7/24 | 59 | 80 | 19 | 1 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2139 | 13466 | WESTLAKE CIR | INLET DR | END | E | AC | 5 | 478 | 36 | 19,208 | 5/29/24 | 45 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2140 | 13231 | WESTPORT DR | LOWELL CIR | COURTNEY LN | E | AC | 2 | 647 | 36 | 23,292 | 3/29/22 | 66 | 55 | 45 | 0 | New Construction - Initial | 1/1/80 |
| 2140 | 15076 | WESTPORT DR | DAVENPORT DR | BLAIR LN | E | AC | 2 | 1,135 | 36 | 40,660 | 3/29/22 | 64 | 55 | 45 | 0 | New Construction - Initial | 1/1/80 |
| 2140 | 15077 | WESTPORT DR | BLAIR LN | LOWELL CIR | E | AC | 2 | 644 | 36 | 23,184 | 3/29/22 | 60 | 73 | 26 | 1 | New Construction - Initial | 1/1/80 |
| 2141 | 14046 | WESTWINDS LN | ALBATROSS DR | SHORE CIR | E | AC | 7 | 260 | 36 | 10,110 | 4/20/26 | 83 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2141 | 14052 | WESTWINDS LN | SKIFF CIR | CLIPPER DR | E | AAC | 7 | 260 | 36 | 9,360 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2141 | 15415 | WESTWINDS LN | SHORE CIR | BREAKERS DR | E | AC | 7 | 520 | 36 | 18,720 | 4/20/26 | 75 | 97 | 0 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2141 | 15416 | WESTWINDS LN | BREAKERS DR | SKIFF CIR | E | AC | 7 | 780 | 36 | 28,080 | 4/20/26 | 75 | 97 | 0 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2142 | 15916 | WEYMOUTH LN | FALMOUTH DR | BURNHAM CIR | E | AAC | 7 | 926 | 36 | 33,336 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2143 | 15277 | WHARTON ST | GLADYS AVE | KINER AVE | E | AAC | 4 | 864 | 33 | 29,512 | 4/14/26 | 91 | 46 | 54 | 0 | Overlay - AC Structural | 11/28/19 |
| 2144 | 14856 | WHEELER CIR | BRUSH DR | CDS | E | AAC | 4 | 424 | 32 | 14,818 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2145 | 15158 | WHETMORE LN | CAPSTONE DR | SPICKARD DR | E | AC | 3 | 950 | 36 | 36,700 | 5/22/24 | 84 | 26 | 74 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2146 | 14866 | WHISTLER CIR | HERBERT LN | CDS | E | AC | 5 | 193 | 36 | 8,198 | 4/1/26 | 78 | 10 | 90 | 0 | New Construction - Initial | 1/1/80 |
| 2147 | 13924 | WHITBURN CIR | WEYMOUTH LN | CDS | E | AAC | 7 | 150 | 32 | 8,212 | 4/14/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2148 | 14316 | WHITE HORSE LN | MARTINIQUE DR | SABLE DR | E | AC | 9 | 1,022 | 36 | 36,792 | 8/30/23 | 95 | 0 | 90 | 10 | New Construction - Initial | 1/1/80 |
| 2149 | 16012 | WHITEOAK LN | RED COACH DR | STARSHINE DR | E | AC | 3 | 776 | 36 | 28,686 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2150 | 13943 | WHITESAILS DR | YACHT LN | CDS | E | AAC | 7 | 439 | 32 | 15,298 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2151 | 15707 | WHITESANDS DR | YORKTOWN AVE | END | E | AAC | 6 | 345 | 36 | 13,120 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2152 | 14192 | WHITETREE CIR | BAY MEADOW DR | END | E | AC | 8 | 426 | 34 | 16,284 | 2/23/22 | 79 | 53 | 15 | 32 | Surface Treatment - Slurry Seal | 2/13/23 |
| 2153 | 15975 | WHITFORD LN | BRIGHTON DR | BERSHIRE DR | E | AC | 5 | 1,100 | 36 | 40,350 | 3/30/26 | 80 | 37 | 49 | 14 | New Construction - Initial | 1/1/80 |
| 2154 | 13469 | WHITNEY DR | RUSHMOOR LN | END | E | AC | 4 | 535 | 36 | 22,860 | 5/13/24 | 89 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2154 | 15210 | WHITNEY DR | CASCADE LN | RUSHMOOR LN | E | AC | 4 | 550 | 36 | 19,800 | 5/13/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2155 | 15999 | WHITTIER LN | AUBURN DR | BRIDGEWATER DR | E | AC | 3 | 780 | 36 | 30,080 | 12/19/24 | 82 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2156 | 15699 | WICHITA AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 450 | 36 | 16,200 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2157 | 13872 | WICKLOW LN | LIMERICK DR | END | E | AC | 3 | 291 | 36 | 12,276 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2157 | 15346 | WICKLOW LN | GLEN DR | LIMERICK DR | E | AC | 3 | 1,039 | 36 | 37,404 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2158 | 13863 | WILD CHERRY CIR | RED COACH DR | END | E | AC | 3 | 227 | 32 | 8,764 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2159 | 13864 | WILD PLUM CIR | RED COACH DR | END | E | AC | 3 | 227 | 32 | 9,064 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2160 | 14889 | WILD ROSE LN | BRANNEN DR | LIEGE DR | E | AC | 5 | 256 | 36 | 9,216 | 4/2/26 | 71 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 2160 | 15788 | WILD ROSE LN | LIEGE DR | NORDINA DR | E | AC | 5 | 1,380 | 36 | 49,930 | 5/8/26 | 62 | 48 | 50 | 2 | New Construction - Initial | 1/1/80 |
| 2161 | 13161 | WILDFIRE CIR | AQUARIUS DR | CDS | E | AAC | 2 | 411 | 36 | 16,596 | 5/7/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2163 | 13848 | WILLETT LN | ROYALIST DR | END | E | AC | 1 | 530 | 36 | 20,330 | 12/18/24 | 87 | 33 | 63 | 4 | New Construction - Initial | 1/1/80 |
| 2163 | 15339 | WILLETT LN | PRISCILLA DR | ROYALIST DR | E | AC | 1 | 1,040 | 36 | 37,440 | 12/18/24 | 90 | 51 | 49 | 0 | New Construction - Initial | 1/1/80 |
| 2164 | 13969 | WILLHELM CIR | RANDI LN | CDS | E | AC | 8 | 330 | 32 | 12,360 | 4/15/26 | 85 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2165 | 14956 | WILLIAMS AVE | FLORIDA ST | BEACH BLVD | E | AC | 7 | 660 | 36 | 23,760 | 4/9/24 | 80 | 45 | 39 | 16 | Surface Treatment - Slurry Seal | 11/28/19 |
| 2166 | 14953 | WILLOW LN | CHINOOK AVE | END | E | AC | 1 | 397 | 36 | 14,292 | 4/8/22 | 82 | 26 | 74 | 0 | New Construction - Initial | 1/1/80 |
| 2167 | 14187 | WIND CAVE LN | MAMMOTH DR | BIG SUR DR | E | AC | 8 | 833 | 36 | 30,488 | 3/1/22 | 82 | 31 | 57 | 12 | Surface Treatment - Slurry Seal | 2/13/23 |
| 2168 | 14935 | WINDCROFT DR | CRESTMOOR LN | HELENBROOK LN | E | AC | 5 | 494 | 36 | 18,534 | 3/31/26 | 84 | 29 | 66 | 5 | New Construction - Initial | 1/1/80 |
| 2169 | 13280 | WINDEMEIR LN | LAURELHURST DR | LAFAYETTE DR | E | AC | 3 | 258 | 36 | 10,038 | 1/6/25 | 61 | 81 | 19 | 0 | New Construction - Initial | 1/1/80 |
| 2169 | 15105 | WINDEMEIR LN | WALTON DR | LAURELHURST DR | E | AC | 3 | 1,010 | 36 | 36,072 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2170 | 15722 | WINDFIELD DR | JAMESTOWN LN | GEORGETOWN LN | E | AC | 4 | 283 | 40 | 11,320 | 5/13/24 | 82 | 44 | 51 | 5 | Surface Treatment - Slurry Seal | 11/1/19 |
| 2171 | 13942 | WINDLASS DR | YACHT LN | PLUM TREE LN | E | AAC | 7 | 366 | 36 | 13,426 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2172 | 14486 | WINDSONG CIR | SURFCREST DR | CDS | E | AC | 9 | 475 | 36 | 18,600 | 3/26/24 | 71 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 2173 | 14441 | WINDSOR DR | CONCORD LN | BEDFORD LN | E | AC | 2 | 267 | 36 | 9,862 | 4/5/22 | 57 | 84 | 16 | 0 | New Construction - Initial | 1/1/80 |
| 2174 | 15413 | WINDWARD LN | YORKTOWN AVE | ANCHORAGE DR | E | AC | 7 | 432 | 36 | 15,552 | 4/20/26 | 94 | 0 | 81 | 19 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2175 | 13830 | WINSLOW DR | AULNAY LN | END | E | AC | 1 | 397 | 36 | 15,542 | 1/3/25 | 38 | 93 | 7 | 0 | New Construction - Initial | 1/1/80 |
| 2175 | 13841 | WINSLOW DR | ALDEN LN | MAYFLOWER LN | E | AC | 1 | 260 | 36 | 9,360 | 12/20/24 | 93 | 0 | 61 | 39 | New Construction - Initial | 1/1/80 |
| 2175 | 16010 | WINSLOW DR | ALDEN LN | AULNAY LN | E | AC | 1 | 1,041 | 36 | 37,476 | 12/20/24 | 91 | 62 | 38 | 0 | New Construction - Initial | 1/1/80 |
| 2176 | 13633 | WINTERGREEN DR | STILL HARBOR LN | LEWIS LN | E | AC | 5 | 599 | 36 | 22,314 | 5/28/24 | 35 | 92 | 8 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2177 | 14272 | WINTERWOOD CIR | CHARWOOD LN | CDS | E | AC | 9 | 440 | 34 | 16,460 | 5/7/24 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2178 | 13475 | WISHINGWELL LN | STONEWOOD DR | CANDLELIGHT CIR | E | AAC | 3 | 260 | 36 | 9,360 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2178 | 13476 | WISHINGWELL LN | VALENTINE DR | SUNLIGHT DR | E | AAC | 3 | 260 | 36 | 9,360 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2178 | 15215 | WISHINGWELL LN | CANDLELIGHT CIR | VALENTINE DR | E | AAC | 3 | 780 | 36 | 28,080 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2179 | 15617 | WOOD ISLAND LN | CAPE MAY LN | CASTINE DR | E | AC | 9 | 956 | 36 | 35,416 | 4/24/24 | 87 | 0 | 73 | 27 | Surface Treatment - Slurry Seal | 5/11/19 |
| 2180 | 13384 | WOODBORO DR | WHITFORD LN | BOLTON CIR | E | AC | 5 | 340 | 36 | 11,952 | 3/31/26 | 82 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2180 | 15165 | WOODBORO DR | BOLTON CIR | WELLBANK LN | E | AC | 5 | 1,214 | 36 | 44,704 | 3/30/26 | 80 | 7 | 83 | 10 | New Construction - Initial | 1/1/80 |
| 2181 | 15509 | WOODCREST DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 955 | 36 | 34,380 | 5/6/24 | 55 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2182 | 15796 | WOODFERN LN | SLATER AVE | SERENE DR | E | AC | 5 | 455 | 36 | 16,380 | 3/30/26 | 77 | 100 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2183 | 15823 | WOODLAWN DR | BUSHARD ST | TIBBETT LN | E | AC | 8 | 1,199 | 36 | 42,943 | 3/9/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2184 | 14286 | WOODLEA LN | FRIARSCOURT DR | JURA DR | E | AC | 8 | 783 | 36 | 28,188 | 3/19/24 | 79 | 62 | 37 | 1 | New Construction - Initial | 1/1/80 |
| 2185 | 14521 | WOODS HOLE DR | ROCKPORT LN | JONESPORT LN | E | AC | 9 | 254 | 36 | 8,856 | 4/17/24 | 83 | 11 | 89 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 2186 | 13862 | WOODSIDE CIR | WHITEOAK LN | END | E | AC | 3 | 213 | 32 | 8,316 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2187 | 13249 | WOODSTOCK LN | SOFTWIND DR | MONTECITO DR | E | AC | 3 | 260 | 36 | 9,610 | 4/7/26 | 73 | 66 | 34 | 0 | New Construction - Initial | 1/1/80 |
| 2187 | 15097 | WOODSTOCK LN | MONTECITO DR | CHRISTY DR | E | AC | 3 | 1,420 | 36 | 51,370 | 4/7/26 | 59 | 91 | 9 | 0 | New Construction - Initial | 1/1/80 |
| 2188 | 15387 | WOODWARD LN | VELARDO DR | CDS | E | AC | 8 | 770 | 36 | 29,520 | 4/15/26 | 78 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2189 | 15723 | WOODWIND DR | SAMPSON LN | GEORGETOWN LN | E | AC | 4 | 911 | 40 | 37,190 | 5/13/24 | 75 | 67 | 33 | 0 | Surface Treatment - Slurry Seal | 11/1/19 |
| 2190 | 13927 | WORCHESTER LN | WENLOCK CIR | YORKTOWN AVE | E | AAC | 7 | 174 | 36 | 6,264 | 4/14/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2190 | 15368 | WORCHESTER LN | FALMOUTH DR | WENLOCK CIR | E | AAC | 7 | 1,180 | 36 | 43,639 | 4/14/26 | 82 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2191 | 15152 | WRENFIELD DR | EDWARDS ST | COBRA LN | E | AC | 3 | 1,067 | 36 | 39,412 | 5/21/24 | 69 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2192 | 14922 | WRIGHTWOOD LN | PRICE DR | MOSS DR | E | AC | 5 | 225 | 36 | 9,100 | 3/30/26 | 74 | 30 | 65 | 5 | New Construction - Initial | 1/1/80 |
| 2192 | 15169 | WRIGHTWOOD LN | PINON DR | PADUA DR | E | AC | 5 | 520 | 36 | 18,720 | 3/30/26 | 71 | 71 | 29 | 0 | New Construction - Initial | 1/1/80 |
| 2192 | 15803 | WRIGHTWOOD LN | MOSS DR | PINON DR | E | AC | 5 | 940 | 36 | 33,840 | 3/30/26 | 68 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 2193 | 15373 | YACHT LN | WINDLASS DR | KEEL DR | E | AAC | 7 | 509 | 36 | 18,574 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2194 | 13757 | YALE CIR | COLUMBIA LN | END | E | AC | 1 | 543 | 36 | 21,048 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2195 | 14326 | YARMOUTH LN | ST AUGUSTINE DR | HATTERAS DR | E | AC | 9 | 833 | 36 | 29,412 | 8/30/23 | 81 | 33 | 67 | 0 | New Construction - Initial | 1/1/80 |
| 2196 | 14182 | YELLOWSTONE DR | BUSHARD ST | BIG BEND LN | E | AAC | 8 | 167 | 42 | 6,794 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2196 | 15484 | YELLOWSTONE DR | BIG BEND LN | INTERIOR LN | E | AAC | 8 | 1,012 | 36 | 36,932 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2197 | 13797 | YORKSHIRE LN | OXFORD DR | CANTERBURY DR | E | AC | 1 | 276 | 36 | 9,936 | 1/6/25 | 76 | 56 | 44 | 0 | New Construction - Initial | 1/1/80 |
| 2197 | 13798 | YORKSHIRE LN | CANTERBURY DR | CUMBERLAND DR | E | AC | 1 | 276 | 36 | 9,936 | 1/6/25 | 79 | 26 | 38 | 36 | New Construction - Initial | 1/1/80 |
| 2197 | 13800 | YORKSHIRE LN | BRUNSWICK DR | MELBOURNE DR | E | AC | 1 | 228 | 36 | 8,208 | 12/12/24 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2197 | 15321 | YORKSHIRE LN | CUMBERLAND DR | BRUNSWICK DR | E | AC | 1 | 552 | 36 | 19,872 | 12/12/24 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 14431 | YORKTOWN AVE | BROOKHURST ST | MAUNA LN | E | AC | 8 | 250 | 26 | 6,500 | 3/2/22 | 73 | 49 | 44 | 7 | New Construction - Initial | 1/1/80 |
| 2198 | 13354 | YOSEMITE CIR | SONOMA DR | CDS | E | AC | 5 | 250 | 36 | 10,350 | 5/28/24 | 49 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2199 | 13689 | YUCCA CIR | ROYAL OAK DR | END | E | AC | 1 | 334 | 32 | 12,488 | 4/29/26 | 73 | 66 | 34 | 0 | New Construction - Initial | 1/1/80 |
| 2200 | 14766 | YUKON DR | HUNTINGTON ST | MANITOBA LN | E | AC | 4 | 478 | 45 | 22,260 | 5/13/24 | 81 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2201 | 14102 | YVONNE DR | ALLEY MALLOY DR | INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/23/23 | 64 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 3/1/11 |
| 2201 | 14103 | YVONNE DR | MALLOY DR | ALLEY MALLOY DR | E | AAC | 9 | 139 | 36 | 5,004 | 8/23/23 | 84 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 2202 | 14390 | ZAMORA LN | NEOLANI DR | KEOKI CIR | E | AAC | 9 | 251 | 36 | 9,036 | 5/20/24 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2202 | 15575 | ZAMORA LN | KEOKI CIR | MOKIHANA DR | E | AAC | 9 | 761 | 36 | 27,396 | 5/20/24 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 2203 | 13687 | ZANE CIR | ROYAL OAK DR | END | E | AC | 1 | 350 | 32 | 13,200 | 5/6/26 | 86 | 37 | 63 | 0 | New Construction - Initial | 1/1/80 |
| 2204 | 14811 | ZEIDER LN | FRIESLAND DR | SLATER AVE | E | AC | 4 | 1,180 | 36 | 42,480 | 3/25/24 | 67 | 54 | 38 | 8 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2205 | 14279 | ZETLAND DR | PAISLEY LN | TROON LN | E | AC | 8 | 783 | 36 | 28,188 | 3/18/24 | 87 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2206 | 14189 | ZION CIR | CARLSBAD LN | END | E | AC | 8 | 363 | 36 | 14,568 | 2/23/22 | 85 | 0 | 33 | 67 | Surface Treatment - Slurry Seal | 2/13/23 |
| | | | | | | | | **318.6** | | ######### | | | | | | | |
| | | ***Alleys*** | | | | | | | | | | | | | | | |
| 5080 | 60240 | ALLEY - BTWN 10th & 11th | PACIFIC N | PCH | O | AC | 2 | 163 | 18 | 2,934 | 2/6/25 | 93 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5090 | 60250 | ALLEY - BTWN 11th & 12th | PACIFIC N | PCH | O | AC | 2 | 162 | 16 | 2,592 | 2/6/25 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5100 | 60260 | ALLEY - BTWN 12th & BROADWAY | PACIFIC N | PCH | O | AC | 2 | 158 | 15 | 2,370 | 6/19/25 | 86 | 0 | 29 | 71 | New Construction - Initial | 1/1/80 |
| 5120 | 60280 | ALLEY - BTWN 14th & 15th | PACIFIC N | PCH | O | AC | 2 | 154 | 16 | 2,464 | 2/6/25 | 93 | 0 | 52 | 48 | New Construction - Initial | 1/1/80 |
| 5110 | 60270 | ALLEY - BTWN 14th & BROADWAY | PACIFIC N | PCH | O | AC | 2 | 165 | 15 | 2,475 | 2/6/25 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5130 | 60290 | ALLEY - BTWN 15th & 16th | PACIFIC N | PCH | O | AC | 2 | 154 | 18 | 2,772 | 2/6/25 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5140 | 60300 | ALLEY - BTWN 16th & 17th | PACIFIC N | PCH | O | AC | 2 | 154 | 15 | 2,310 | 2/6/25 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5150 | 60310 | ALLEY - BTWN 22nd & 23rd | PACIFIC N | PCH | O | AC | 2 | 207 | 16 | 3,312 | 2/6/25 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5160 | 60320 | ALLEY - BTWN 23rd & 24th | PACIFIC N | PCH | O | AC | 2 | 211 | 15 | 3,165 | 2/6/25 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5170 | 60330 | ALLEY - BTWN 24th & 25th | PACIFIC N | PCH | O | AC | 2 | 206 | 17 | 3,502 | 2/6/25 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 5180 | 60340 | ALLEY - BTWN 25th & 26th | PACIFIC N | PCH | O | AC | 2 | 227 | 19 | 4,313 | 2/6/25 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5190 | 60355 | ALLEY - BTWN 26th & ANDERSON ST | PACIFIC N | PCH | O | AC | 2 | 233 | 18 | 4,194 | 2/6/25 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5020 | 60180 | ALLEY - BTWN 3rd & 4th | PACIFIC N | PCH | O | AC | 2 | 106 | 15 | 1,590 | 2/6/25 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5030 | 60190 | ALLEY - BTWN 4th & 5th | PACIFIC N | PCH | O | AC | 2 | 195 | 15 | 2,925 | 2/6/25 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5040 | 60200 | ALLEY - BTWN 6th & 7th | PACIFIC N | PCH | O | AC | 2 | 194 | 17 | 3,298 | 2/6/25 | 92 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5050 | 60210 | ALLEY - BTWN 7th & 8th | PACIFIC N | PCH | O | AC | 2 | 178 | 18 | 3,204 | 2/6/25 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5060 | 60220 | ALLEY - BTWN 8th & 9th | PACIFIC N | PCH | O | AC | 2 | 167 | 14 | 2,338 | 2/6/25 | 67 | 86 | 14 | 0 | New Construction - Initial | 1/1/80 |
| 5070 | 60230 | ALLEY - BTWN 9th & 10th | PACIFIC N | PCH | O | AC | 2 | 148 | 20 | 2,960 | 2/6/25 | 93 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 33 | 10424 | ALLEY ADAMS AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 345 | 20 | 5,520 | 6/12/25 | 33 | 50 | 25 | 25 | New Construction | 1/1/80 |
| 33 | 10521 | ALLEY ADAMS AVE | LAKE ST | ALLEY PINE ST | O | AC | 6 | 170 | 20 | 3,400 | 2/7/25 | 59 | 40 | 60 | 0 | New Construction | 1/1/80 |
| 33 | 10522 | ALLEY ADAMS AVE | ALLEY PINE ST | PINE ST | O | AC | 6 | 155 | 20 | 3,100 | 2/7/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 33 | 10523 | ALLEY ADAMS AVE | PINE ST | ALLEY PARK ST | O | AC | 6 | 180 | 20 | 3,600 | 2/7/25 | 65 | 0 | 32 | 68 | New Construction | 1/1/80 |
| 33 | 10524 | ALLEY ADAMS AVE | ALLEY PARK ST | PARK ST | O | AC | 6 | 180 | 20 | 3,600 | 2/7/25 | 50 | 30 | 38 | 32 | New Construction | 1/1/80 |
| 34 | 10389 | ALLEY ALABAMA ST | ATLANTA AVE | ALLEY BALTIMORE AVE | O | AC | 9 | 169 | 20 | 3,380 | 6/6/25 | 41 | 43 | 16 | 41 | New Construction | 1/1/80 |
| 34 | 10390 | ALLEY ALABAMA ST | ALLEY BALTIMORE AVE | BALTIMORE AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 65 | 0 | 35 | 65 | New Construction | 1/1/80 |
| 34 | 10391 | ALLEY ALABAMA ST | BALTIMORE AVE | ALLEY CHICAGO AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 82 | 32 | 60 | 8 | New Construction | 1/1/80 |
| 34 | 10392 | ALLEY ALABAMA ST | ALLEY CHICAGO AVE | CHICAGO AVE | O | AC | 9 | 164 | 20 | 3,280 | 6/6/25 | 81 | 67 | 24 | 9 | New Construction | 1/1/80 |
| 34 | 10393 | ALLEY ALABAMA ST | CHICAGO AVE | ALLEY DETROIT AVE | O | AC | 9 | 166 | 20 | 3,320 | 6/6/25 | 56 | 95 | 5 | 0 | New Construction | 1/1/80 |
| 34 | 10394 | ALLEY ALABAMA ST | ALLEY DETROIT AVE | DETROIT AVE | O | AC | 9 | 164 | 20 | 3,280 | 6/6/25 | 74 | 50 | 31 | 19 | New Construction | 1/1/80 |
| 34 | 10395 | ALLEY ALABAMA ST | ALLEY INDIANAPOLIS AVE | INDIANAPOLIS AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 51 | 14 | 29 | 57 | New Construction | 1/1/80 |
| 34 | 10396 | ALLEY ALABAMA ST | HARTFORD AVE. | ALLEY INDIANAPOLIS AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 72 | 0 | 21 | 79 | New Construction | 1/1/80 |
| 34 | 10397 | ALLEY ALABAMA ST | ALLEY HARTFORD AVE | HARTFORD AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 65 | 27 | 30 | 43 | New Construction | 1/1/80 |
| 34 | 10398 | ALLEY ALABAMA ST | GENEVA AVE | ALLEY HARTFORD AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 66 | 12 | 33 | 55 | New Construction | 1/1/80 |
| 34 | 10399 | ALLEY ALABAMA ST | ALLEY GENEVA AVE | GENEVA AVE | O | AC | 9 | 164 | 20 | 3,280 | 6/6/25 | 58 | 15 | 30 | 55 | New Construction | 1/1/80 |
| 34 | 10400 | ALLEY ALABAMA ST | FRANFORT AVE | ALLEY GENEVA AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/17/25 | 43 | 17 | 34 | 49 | New Construction | 1/1/80 |
| 34 | 10421 | ALLEY ALABAMA ST | ALLEY OSWEGO AVE | OSWEGO AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/13/25 | 23 | 52 | 23 | 25 | New Construction | 1/1/80 |
| 34 | 10422 | ALLEY ALABAMA ST | NASHVILLE AVE | ALLEY OSWEGO AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/13/25 | 30 | 44 | 26 | 30 | New Construction | 1/1/80 |
| 34 | 10425 | ALLEY ALABAMA ST | PORTLAND AVE | ALLEY ADAMS AVE | O | AC | 6 | 140 | 20 | 2,240 | 6/12/25 | 18 | 60 | 18 | 22 | New Construction | 1/1/80 |
| 34 | 10426 | ALLEY ALABAMA ST | ALLEY PORTLAND AVE | PORTLAND AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/13/25 | 40 | 49 | 34 | 17 | New Construction | 1/1/80 |
| 34 | 10427 | ALLEY ALABAMA ST | OSWEGO AVE | ALLEY PORTLAND AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/13/25 | 46 | 56 | 28 | 16 | New Construction | 1/1/80 |
| 34 | 10430 | ALLEY ALABAMA ST | ALLEY MEMPHIS AVE | MEMPHIS AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 34 | 10431 | ALLEY ALABAMA ST | LINCOLN AVE | ALLEY MEMPHIS AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 34 | 10435 | ALLEY ALABAMA ST | ALLEY LINCOLN AVE | LINCOLN AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 34 | 10436 | ALLEY ALABAMA ST | KNOXVILLE AVE | ALLEY LINCOLN AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 34 | 10437 | ALLEY ALABAMA ST | ALLEY KNOXVILLE AVE | KNOXVILLE AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 53 | 28 | 33 | 39 | New Construction | 1/1/80 |
| 34 | 10438 | ALLEY ALABAMA ST | JOILET AVE | ALLEY KNOXVILLE AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 53 | 27 | 19 | 54 | New Construction | 1/1/80 |
| 34 | 10439 | ALLEY ALABAMA ST | ALLEY JOILET AVE | JOLIET AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 61 | 13 | 32 | 55 | New Construction | 1/1/80 |
| 34 | 10453 | ALLEY ALABAMA ST | INDIANAPOLIS AVE | ALLEY JOILET AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 67 | 23 | 36 | 41 | New Construction | 1/1/80 |
| 34 | 10475 | ALLEY ALABAMA ST | ALLEY WITCHITA AVE | WITCHITA AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/12/25 | 48 | 51 | 31 | 18 | New Construction | 1/1/80 |
| 34 | 10476 | ALLEY ALABAMA ST | VENICE AVE | ALLEY WITCHITA AVE | O | AC | 6 | 165 | 20 | 2,700 | 6/12/25 | 38 | 33 | 43 | 24 | New Construction | 1/1/80 |
| 34 | 10477 | ALLEY ALABAMA ST | ALLEY VENICE AVE | VENICE AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 27 | 57 | 34 | 9 | New Construction | 1/1/80 |
| 34 | 10478 | ALLEY ALABAMA ST | UTICA AVE | ALLEY VENICE AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 21 | 53 | 17 | 30 | New Construction | 1/1/80 |
| 34 | 10483 | ALLEY ALABAMA ST | ALLEY UTICA AVE | UTICA AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 36 | 63 | 27 | 10 | New Construction | 1/1/80 |
| 34 | 10484 | ALLEY ALABAMA ST | TORONTO AVE | ALLEY UTICA AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 34 | 49 | 28 | 23 | New Construction | 1/1/80 |
| 34 | 10485 | ALLEY ALABAMA ST | ALLEY TORONTO AVE | TORONTO AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 16 | 34 | 19 | 47 | New Construction | 1/1/80 |
| 34 | 10486 | ALLEY ALABAMA ST | SPRINGFIELD AVE | ALLEY TORONTO AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 40 | 46 | 28 | 26 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 34 | 10492 | ALLEY ALABAMA ST | ALLEY SPRINGFIELD AVE | SPRINGFIELD AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 20 | 46 | 24 | 30 | New Construction | 1/1/80 |
| 34 | 10493 | ALLEY ALABAMA ST | ROCHESTER AVE | ALLEY SPRINGFIELD AVE | O | AC | 6 | 164 | 20 | 2,624 | 6/12/25 | 34 | 2 | 20 | 78 | New Construction | 1/1/80 |
| 34 | 10494 | ALLEY ALABAMA ST | ALLEY ROCHESTER AVE | ROCHESTER AVE | O | AC | 6 | 166 | 20 | 2,656 | 6/12/25 | 40 | 54 | 11 | 35 | New Construction | 1/1/80 |
| 34 | 10496 | ALLEY ALABAMA ST | ADAMS AVE | ALLEY ROCHESTER AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 24 | 56 | 8 | 36 | New Construction | 1/1/80 |
| 35 | 10466 | ALLEY ALSUNA LN | ALLEY ARIANA CIR | ARIANA CIR | O | AC | 6 | 167 | 20 | 2,672 | 5/27/25 | 32 | 47 | 24 | 29 | New Construction | 1/1/80 |
| 35 | 10467 | ALLEY ALSUNA LN | ALTAMAR DR | ALLEY UTICA AVE | O | AC | 6 | 595 | 20 | 9,520 | 5/27/25 | 46 | 35 | 34 | 31 | New Construction | 1/1/80 |
| 35 | 10468 | ALLEY ALSUNA LN | ARIANA CIR | ALTAMAR DR | O | AC | 6 | 330 | 20 | 5,280 | 5/27/25 | 63 | 0 | 48 | 52 | New Construction | 1/1/80 |
| 36 | 10015 | ALLEY AMAZON DR | GANGES LN | SHER LN | O | AC | 4 | 837 | 20 | 13,392 | 3/28/25 | 34 | 48 | 25 | 27 | New Construction | 1/1/80 |
| 2208 | 10149 | ALLEY AMBERLEAF CIR | ALLEY PARK MEADOW LN | DELAWARE ST | O | AC | 4 | 660 | 20 | 10,560 | 1/30/25 | 55 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 2209 | 10460 | ALLEY ARIANA CIR | END | ALLEY ALSUNA LN | O | AC | 6 | 255 | 20 | 4,076 | 5/27/25 | 66 | 24 | 27 | 49 | New Construction | 1/1/80 |
| 2209 | 10461 | ALLEY ARIANA CIR | ALLEY ALSUNA LN | END | O | AC | 6 | 255 | 20 | 4,076 | 5/27/25 | 75 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2210 | 10064 | ALLEY ASPEN CIR | ROYAL OAK DR | END | O | AC | 1 | 127 | 20 | 2,032 | 2/6/25 | 47 | 91 | 9 | 0 | New Construction | 1/1/80 |
| 2211 | 10549 | ALLEY B ST | ROBIDOUX ST | WARNER AVE | O | AC | 4 | 651 | 20 | 12,220 | 1/30/25 | 52 | 40 | 60 | 0 | New Construction | 1/1/80 |
| 2211 | 10551 | ALLEY B ST | WARNER AVE | BLAYLOCK DR | O | AC | 4 | 660 | 20 | 10,560 | 1/30/25 | 60 | 20 | 80 | 0 | New Construction | 1/1/80 |
| 38 | 10374 | ALLEY BALTIMORE AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 322 | 20 | 6,440 | 6/6/25 | 42 | 45 | 7 | 48 | New Construction | 1/1/80 |
| 39 | 10051 | ALLEY BARDON LN | ALLEY LA MANCHA CIR | LA MANCHA CIR | O | AC | 3 | 140 | 20 | 2,240 | 3/20/25 | 44 | 51 | 19 | 30 | New Construction | 1/1/80 |
| 39 | 10052 | ALLEY BARDON LN | LA MANCHA CIR | ALLEY SATUM DR | O | AC | 3 | 139 | 20 | 2,224 | 3/20/25 | 49 | 37 | 24 | 39 | New Construction | 1/1/80 |
| 39 | 10053 | ALLEY BARDON LN | ALLEY CORSICAN DR | CORSICAN DR | O | AC | 3 | 137 | 20 | 2,192 | 3/20/25 | 35 | 11 | 31 | 58 | New Construction | 1/1/80 |
| 39 | 10054 | ALLEY BARDON LN | CORSICAN DR | ALLEY LA MANCHA CIR | O | AC | 3 | 135 | 20 | 2,160 | 3/20/25 | 28 | 49 | 23 | 28 | New Construction | 1/1/80 |
| 40 | 10025 | ALLEY BARTLETT LN | ALLEY HEIL AVE | MADDOX DR | O | AC | 3 | 368 | 20 | 5,888 | 3/20/25 | 55 | 43 | 27 | 30 | New Construction - Initial | 1/1/80 |
| 40 | 10049 | ALLEY BARTLETT LN | MADDOX DR | ALLEY NORMA DR | O | AC | 3 | 682 | 20 | 10,912 | 3/20/25 | 32 | 53 | 21 | 26 | New Construction - Initial | 1/1/80 |
| 41 | 10039 | ALLEY BARTON DR | ALLEY DAIRYVIEW CIR | JACQUELYN LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 61 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 41 | 10040 | ALLEY BARTON DR | ALLEY KOLEDO LN | QUEENS LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 76 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 41 | 10041 | ALLEY BARTON DR | ALLEY JACQUELYN LN | ALLEY OAK LN | O | AC | 4 | 20 | 20 | 320 | 1/30/25 | 76 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 41 | 10042 | ALLEY BARTON DR | ALLEY OAK LN | KOLEDO LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 71 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 41 | 10044 | ALLEY BARTON DR | KEELSON LN | KEELSON LN | O | AC | 4 | 615 | 20 | 12,300 | 1/30/25 | 43 | 42 | 58 | 0 | New Construction | 1/1/80 |
| 41 | 10604 | ALLEY BARTON DR | ALLEY JACQUELYN LN | JACQUELYN LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 69 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 41 | 10605 | ALLEY BARTON DR | ALLEY KOLEDO LN | KOLEDO LN | O | AC | 4 | 175 | 20 | 2,800 | 1/30/25 | 69 | 7 | 93 | 0 | New Construction | 1/1/80 |
| 41 | 10609 | ALLEY BARTON DR | ALLEY QUEENS LN | QUEENS LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 41 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 42 | 10107 | ALLEY BAY VIEW 1 | BAY VIEW DR | END | O | AC | 2 | 83 | 20 | 1,328 | 2/6/25 | 79 | 23 | 57 | 20 | New Construction | 1/1/80 |
| 42 | 10109 | ALLEY BAY VIEW 1 | BAY VIEW DR | END | O | AC | 2 | 58 | 20 | 928 | 2/6/25 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 43 | 10108 | ALLEY BAY VIEW 2 | BAY VIEW DR | END | O | AC | 2 | 73 | 20 | 1,168 | 2/6/25 | 77 | 0 | 53 | 47 | New Construction | 1/1/80 |
| 2212 | 10110 | ALLEY BAY VIEW 3 | BAY VIEW DR | END | O | AC | 2 | 86 | 20 | 1,376 | 2/6/25 | 79 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 2213 | 10111 | ALLEY BAY VIEW 4 | BAY VIEW DR | END | O | AC | 2 | 86 | 20 | 1,376 | 2/6/25 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 32 | 10550 | ALLEY BEACH BLVD | WARNER AVE | BLAYLOCK DR | O | AC | 4 | 660 | 20 | 10,560 | 1/30/25 | 46 | 24 | 76 | 0 | New Construction | 1/1/80 |
| 32 | 50470 | ALLEY BEACH BLVD | HEIL AVE | CDS | O | AC | 4 | 657 | 20 | 10,512 | 3/19/25 | 28 | 65 | 5 | 30 | New Construction | 1/1/80 |
| 2214 | 10541 | ALLEY BELL CIR EAST | ALLEY RONALD RD | BELL CIR | O | AC | 4 | 579 | 20 | 9,264 | 1/30/25 | 63 | 91 | 9 | 0 | New Construction | 1/1/80 |
| 44 | 10096 | ALLEY BUSHARD ST | MOKIHANA DR | RAMBLER DR | O | AC | 9 | 655 | 20 | 10,480 | 3/19/25 | 39 | 30 | 27 | 43 | New Construction | 1/1/80 |
| 45 | 10376 | ALLEY CALIFORNIA ST | ELMIRA AVE | FRANKFORT AVE | O | AC | 9 | 329 | 20 | 6,580 | 1/31/25 | 46 | 34 | 37 | 29 | New Construction | 1/1/80 |
| 45 | 10378 | ALLEY CALIFORNIA ST | DETROIT AVE | ELMIRA AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 66 | 33 | 27 | 40 | New Construction | 1/1/80 |
| 45 | 10402 | ALLEY CALIFORNIA ST | HARTFORD AVE | INDIANAPOLIS AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 64 | 32 | 44 | 24 | New Construction | 1/1/80 |
| 45 | 10406 | ALLEY CALIFORNIA ST | GENEVA AVE | HARTFORD AVE | O | AC | 9 | 331 | 20 | 6,620 | 1/31/25 | 50 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 45 | 10410 | ALLEY CALIFORNIA ST | FRANKFORT AVE | GENEVA AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 60 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 45 | 10419 | ALLEY CALIFORNIA ST | NASHVILLE AVE | OSWEGO AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/6/25 | 34 | 34 | 25 | 41 | New Construction | 1/1/80 |
| 45 | 10441 | ALLEY CALIFORNIA ST | LINCOLN AVE | MEMPHIS AVE | O | AC | 6 | 330 | 20 | 5,280 | 1/31/25 | 78 | 0 | 56 | 44 | New Construction | 1/1/80 |
| 45 | 10443 | ALLEY CALIFORNIA ST | KNOXVILLE AVE | LINCOLN AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 75 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 45 | 10449 | ALLEY CALIFORNIA ST | JOILET AVE | KNOXVILLE AVE | O | AC | 6 | 330 | 20 | 5,280 | 1/31/25 | 76 | 0 | 87 | 13 | New Construction | 1/1/80 |
| 45 | 10455 | ALLEY CALIFORNIA ST | INDIANAPOLIS AVE | JOILET AVE | O | AC | 6 | 330 | 20 | 5,280 | 1/31/25 | 75 | 0 | 73 | 27 | New Construction | 1/1/80 |
| 45 | 10488 | ALLEY CALIFORNIA ST | TORONTO AVE | UTICA AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/9/25 | 21 | 32 | 8 | 60 | New Construction | 1/1/80 |
| 45 | 10489 | ALLEY CALIFORNIA ST | SPRINGFIELD AVE | TORONTO AVE | O | AC | 6 | 330 | 20 | 5,280 | 5/27/25 | 64 | 56 | 35 | 9 | New Construction | 1/1/80 |
| 45 | 10498 | ALLEY CALIFORNIA ST | ADAMS AVE | ROCHESTER AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/9/25 | 67 | 33 | 48 | 19 | New Construction | 1/1/80 |
| 2215 | 10373 | ALLEY CHICAGO AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 322 | 20 | 6,440 | 6/6/25 | 84 | 0 | 74 | 26 | New Construction | 1/1/80 |
| 2216 | 10029 | ALLEY CORSICAN DR | END | ALLEY BARDON LN | O | AC | 3 | 337 | 20 | 5,392 | 3/20/25 | 39 | 57 | 20 | 23 | New Construction | 1/1/80 |
| 2216 | 10030 | ALLEY CORSICAN DR | GOTHARD ST | ALLEY BARDON LN | O | AC | 3 | 337 | 20 | 5,392 | 3/20/25 | 45 | 22 | 51 | 27 | New Construction | 1/1/80 |
| 2216 | 10031 | ALLEY CORSICAN DR | ALLEY BARDON LN | END | O | AC | 3 | 323 | 20 | 5,168 | 3/20/25 | 37 | 48 | 37 | 15 | New Construction | 1/1/80 |
| 46 | 10348 | ALLEY CREST AVE | ALLEY FOURTEENTH ST | FOURTEENTH ST | O | AC | 6 | 214 | 20 | 4,280 | 6/9/25 | 77 | 0 | 33 | 67 | New Construction | 1/1/80 |
| 46 | 10349 | ALLEY CREST AVE | THIRTEENTH ST | ALLEY FOURTEENTH ST | O | AC | 6 | 171 | 20 | 2,736 | 6/9/25 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 46 | 10356 | ALLEY CREST AVE | ALLEY THIRTEENTH ST | THIRTEENTH ST | O | AC | 6 | 171 | 20 | 3,420 | 6/9/25 | 88 | 0 | 34 | 66 | New Construction | 1/1/80 |
| 46 | 10357 | ALLEY CREST AVE | TWELTH ST | ALLEY THIRTEENTH ST | O | AC | 6 | 148 | 20 | 2,960 | 6/9/25 | 47 | 32 | 29 | 39 | New Construction | 1/1/80 |
| 46 | 10359 | ALLEY CREST AVE | CREST AVE | ELEVENTH ST | O | AC | 6 | 452 | 20 | 9,040 | 3/28/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 46 | 10362 | ALLEY CREST AVE | PALM AVE | ALLEY PALM AVE | O | AC | 6 | 443 | 20 | 7,088 | 5/30/25 | 60 | 22 | 22 | 56 | New Construction | 1/1/80 |
| 2217 | 10615 | ALLEY CROSS DR | END | TAFT LN | O | AC | 1 | 295 | 20 | 4,720 | 3/21/25 | 53 | 29 | 57 | 14 | New Construction | 1/1/80 |
| 37 | 10035 | ALLEY CYPRESS DR | OAK LN | ASH ST | O | AC | 4 | 447 | 20 | 7,152 | 1/30/25 | 55 | 36 | 64 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2218 | 10601 | ALLEY DAIRYVIEW CIR | ALLEY SLATER AVE | ALLEY BARTON DR | O | AC | 4 | 500 | 20 | 8,000 | 1/30/25 | 57 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 2219 | 10073 | ALLEY DAMION LN | ALLEY ELLIS AVE | ALLEY LINDENWOOD DR | O | AC | 7 | 781 | 20 | 12,496 | 1/30/25 | 45 | 81 | 19 | 0 | New Construction | 1/1/80 |
| 2219 | 10077 | ALLEY DAMION LN | ALLEY LINDENWOOD DR | ALLEY DAMION LN | O | AC | 7 | 275 | 20 | 4,400 | 1/30/25 | 48 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2219 | 10080 | ALLEY DAMION LN | END | ALLEY DAMION LN | O | AC | 7 | 25 | 20 | 400 | 1/30/25 | 63 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2219 | 10081 | ALLEY DAMION LN | ALLEY DAMION LN | END | O | AC | 7 | 26 | 20 | 416 | 1/30/25 | 44 | 43 | 57 | 0 | New Construction | 1/1/80 |
| 47 | 10403 | ALLEY DELAWARE ST | ALLEY INDIANAPOLIS AVE | INDIANAPOLIS AVE | O | AC | 9 | 165 | 20 | 3,300 | 1/31/25 | 88 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 47 | 10404 | ALLEY DELAWARE ST | HARTFORD AVE | ALLEY INDIANAPOLIS AVE | O | AC | 9 | 165 | 20 | 3,300 | 1/31/25 | 40 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 47 | 10407 | ALLEY DELAWARE ST | ALLEY HARTFORD AVE | HARTFORD AVE | O | AC | 9 | 164 | 20 | 3,280 | 1/31/25 | 65 | 0 | 31 | 69 | New Construction | 1/1/80 |
| 47 | 10408 | ALLEY DELAWARE ST | GENEVA AVE | ALLEY HARTFORD AVE | O | AC | 9 | 166 | 20 | 2,656 | 1/31/25 | 65 | 0 | 31 | 69 | New Construction | 1/1/80 |
| 47 | 10411 | ALLEY DELAWARE ST | ALLEY GENEVA AVE | GENEVA AVE | O | AC | 9 | 163 | 20 | 2,608 | 1/31/25 | 89 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 47 | 10412 | ALLEY DELAWARE ST | FRANKFORT AVE | ALLEY GENEVA AVE | O | AC | 9 | 168 | 20 | 2,688 | 1/31/25 | 83 | 12 | 53 | 35 | New Construction | 1/1/80 |
| 47 | 10444 | ALLEY DELAWARE ST | KNOXVILLE AVE | LINCOLN AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 60 | 28 | 20 | 52 | New Construction | 1/1/80 |
| 47 | 10445 | ALLEY DELAWARE ST | LINCOLN AVE | MEMPHIS AVE | O | AC | 6 | 331 | 20 | 6,620 | 1/31/25 | 65 | 0 | 14 | 86 | New Construction | 1/1/80 |
| 47 | 10450 | ALLEY DELAWARE ST | JOILET AVE | KNOXVILLE AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 52 | 30 | 32 | 38 | New Construction | 1/1/80 |
| 47 | 10456 | ALLEY DELAWARE ST | INDIANAPOLIS AVE | JOILET AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 48 | 47 | 19 | 34 | New Construction | 1/1/80 |
| 47 | 10462 | ALLEY DELAWARE ST | AHSANTE DR | ALLEY UTICA AVE | O | AC | 6 | 415 | 20 | 6,640 | 5/27/25 | 57 | 20 | 51 | 29 | New Construction | 1/1/80 |
| 47 | 10465 | ALLEY DELAWARE ST | ARIANA CIR | AHSANTE DR | O | AC | 6 | 511 | 20 | 8,176 | 5/27/25 | 70 | 0 | 47 | 53 | New Construction | 1/1/80 |
| 2220 | 10046 | ALLEY DELTON CIR | ALLEY HEIL AVE | ALLEY MADDOX DR | O | AC | 3 | 353 | 20 | 5,648 | 3/20/25 | 36 | 50 | 38 | 12 | New Construction | 1/1/80 |
| 2221 | 10372 | ALLEY DETRIOT AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 322 | 20 | 6,440 | 6/6/25 | 53 | 67 | 11 | 22 | New Construction | 1/1/80 |
| 48 | 10094 | ALLEY DONCASTER DR | LOCHELA LN | NEWLAND ST | O | AC | 9 | 660 | 20 | 10,560 | 3/19/25 | 33 | 57 | 14 | 29 | New Construction | 1/1/80 |
| 2222 | 10592 | ALLEY DUNBAR AVE | HARBOR BLUFFS CIR | END | O | AC | 2 | 351 | 20 | 5,616 | 4/1/26 | 61 | 56 | 31 | 13 | New Construction | 1/1/80 |
| 49 | 10000 | ALLEY EDINGER AVE | END | LILES LN | O | AC | 2 | 681 | 20 | 10,896 | 3/21/25 | 22 | 58 | 7 | 35 | New Construction | 1/1/80 |
| 49 | 10001 | ALLEY EDINGER AVE | LILES LN | END | O | AC | 2 | 586 | 20 | 9,376 | 3/21/25 | 22 | 48 | 12 | 40 | New Construction | 1/1/80 |
| 49 | 10002 | ALLEY EDINGER AVE | BOLSA CHICA ST | WARREN LN | O | AC | 2 | 1,200 | 20 | 16,800 | 3/21/25 | 20 | 46 | 9 | 45 | New Construction | 1/1/80 |
| 49 | 10006 | ALLEY EDINGER AVE | GRAHAM ST | CLUBHOUSE LN | O | AC | 3 | 1,212 | 20 | 19,392 | 3/20/25 | 34 | 30 | 16 | 54 | New Construction | 1/1/80 |
| 49 | 10007 | ALLEY EDINGER AVE | CLUBHOUSE LN | END | O | AC | 3 | 423 | 20 | 6,768 | 3/20/25 | 36 | 36 | 8 | 56 | New Construction | 1/1/80 |
| 2223 | 10200 | ALLEY EIGHTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 8,180 | 6/2/25 | 32 | 26 | 27 | 47 | New Construction | 1/1/80 |
| 2223 | 10207 | ALLEY EIGHTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/2/25 | 22 | 15 | 30 | 55 | New Construction | 1/1/80 |
| 2223 | 10223 | ALLEY EIGHTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 7,550 | 6/17/25 | 86 | 0 | 41 | 59 | New Construction | 1/1/80 |
| 2223 | 10224 | ALLEY EIGHTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 6,688 | 6/17/25 | 42 | 31 | 21 | 48 | New Construction | 1/1/80 |
| 2223 | 10232 | ALLEY EIGHTEENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 185 | 20 | 2,960 | 5/27/25 | 65 | 0 | 80 | 20 | New Construction | 1/1/80 |
| 2224 | 10303 | ALLEY EIGHTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 262 | 20 | 5,240 | 2/7/25 | 73 | 0 | 64 | 36 | New Construction | 1/1/80 |
| 2224 | 10304 | ALLEY EIGHTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 2/7/25 | 67 | 0 | 33 | 67 | New Construction | 1/1/80 |
| 2224 | 10305 | ALLEY EIGHTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 2/7/25 | 64 | 0 | 50 | 50 | New Construction | 1/1/80 |
| 2224 | 10306 | ALLEY EIGHTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 417 | 20 | 8,340 | 2/7/25 | 66 | 23 | 40 | 37 | New Construction | 1/1/80 |
| 2224 | 10307 | ALLEY EIGHTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 2/7/25 | 63 | 27 | 40 | 33 | New Construction | 1/1/80 |
| 2224 | 10317 | ALLEY EIGHTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 2/7/25 | 53 | 37 | 45 | 18 | New Construction | 1/1/80 |
| 2225 | 10280 | ALLEY ELEVENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 212 | 20 | 3,392 | 5/29/25 | 58 | 41 | 15 | 44 | New Construction | 1/1/80 |
| 2225 | 10281 | ALLEY ELEVENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 60 | 79 | 7 | 14 | New Construction | 1/1/80 |
| 2225 | 10283 | ALLEY ELEVENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/30/25 | 16 | 48 | 21 | 31 | New Construction | 1/1/80 |
| 2225 | 10284 | ALLEY ELEVENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 5/30/25 | 37 | 27 | 13 | 60 | New Construction | 1/1/80 |
| 2225 | 10285 | ALLEY ELEVENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 49 | 26 | 29 | 45 | New Construction | 1/1/80 |
| 2225 | 10286 | ALLEY ELEVENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 41 | 24 | 29 | 47 | New Construction | 1/1/80 |
| 2225 | 10343 | ALLEY ELEVENTH | ALLEY MAIN ST | LAKE ST | O | AC | 6 | 565 | 20 | 9,040 | 2/7/25 | 89 | 0 | 37 | 63 | New Construction | 1/1/80 |
| 2225 | 10355 | ALLEY ELEVENTH | PALM AVE | ELEVENTH ST | O | AC | 6 | 338 | 20 | 6,760 | 5/30/25 | 79 | 37 | 35 | 28 | New Construction | 1/1/80 |
| 2226 | 10119 | ALLEY ELK CIR | ALLEY LILAC LN | LILAC LN | O | AC | 3 | 363 | 20 | 5,808 | 3/20/25 | 22 | 44 | 27 | 29 | New Construction | 1/1/80 |
| 2227 | 10070 | ALLEY ELLIS AVE | ALLEY LIBRA CIR | DEMION LN | O | AC | 7 | 157 | 20 | 2,512 | 1/30/25 | 55 | 30 | 70 | 0 | New Construction | 1/1/80 |
| 2227 | 10071 | ALLEY ELLIS AVE | DEMION LN | ALLEY DEMION LN | O | AC | 7 | 153 | 20 | 2,448 | 1/30/25 | 41 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 2227 | 10531 | ALLEY ELLIS AVE | DELAWARE ST | STEEP LN | O | AC | 4 | 759 | 20 | 12,144 | 1/30/25 | 43 | 46 | 51 | 3 | New Construction | 1/1/80 |
| 2227 | 10532 | ALLEY ELLIS AVE | ALLEY ELLIS AVE | END | O | AC | 4 | 148 | 20 | 2,368 | 1/30/25 | 56 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 2228 | 10371 | ALLEY ELMIRA AVE | ALABAMA ST | HUNTINGTON ST | O | AC | 9 | 485 | 20 | 9,700 | 6/6/25 | 38 | 39 | 15 | 46 | New Construction | 1/1/80 |
| 2229 | 10033 | ALLEY EMERALD LN | FIR DR | CYPRESS AVE | O | AC | 4 | 669 | 20 | 13,380 | 1/30/25 | 49 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 50 | 10446 | ALLEY ENGLAND ST | LINCOLN AVE | MEMPHIS AVE | O | AC | 6 | 331 | 20 | 6,620 | 1/31/25 | 87 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 50 | 10447 | ALLEY ENGLAND ST | KNOXVILLE AVE | LINCOLN AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 50 | 10451 | ALLEY ENGLAND ST | JOILET AVE | KNOXVILLE AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 50 | 10457 | ALLEY ENGLAND ST | INDIANAPOLIS AVE | JOILET AVE | O | AC | 6 | 330 | 20 | 6,300 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 50 | 10501 | ALLEY ENGLAND ST | YORKTOWN AVE | END | O | AC | 6 | 430 | 20 | 8,600 | 6/9/25 | 17 | 44 | 8 | 48 | New Construction | 1/1/80 |
| 2230 | 10591 | ALLEY EVERGREEN CIR | ALLEY WARNER AVE | SUMMERDALE DR | O | AC | 5 | 381 | 20 | 9,144 | 3/21/25 | 43 | 74 | 15 | 11 | New Construction | 1/1/80 |
| 2231 | 10244 | ALLEY FIFTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 24 | 21 | 23 | 56 | New Construction | 1/1/80 |
| 2231 | 10246 | ALLEY FIFTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 36 | 19 | 19 | 62 | New Construction | 1/1/80 |
| 2231 | 10255 | ALLEY FIFTEENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,008 | 6/4/25 | 40 | 15 | 24 | 61 | New Construction | 1/1/80 |
| 2231 | 10256 | ALLEY FIFTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 41 | 29 | 14 | 57 | New Construction | 1/1/80 |
| 2231 | 10257 | ALLEY FIFTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 6/4/25 | 42 | 46 | 14 | 40 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2231 | 10258 | ALLEY FIFTEENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/4/25 | 21 | 27 | 14 | 59 | New Construction | 1/1/80 |
| 51 | 10322 | ALLEY FIFTH | ORANGE AVE | END | O | AC | 6 | 260 | 20 | 4,160 | 6/4/25 | 91 | 0 | 50 | 50 | New Construction | 1/1/80 |
| 51 | 10328 | ALLEY FIFTH | WALNUT AVE | OLIVE AVE | O | PCC | 6 | 410 | 20 | 8,200 | 6/13/25 | 89 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 51 | 10333 | ALLEY FIFTH | FIFTH ST | WALNUT AVE | O | AC | 6 | 310 | 20 | 6,200 | 6/9/25 | 79 | 0 | 27 | 73 | New Construction | 1/1/80 |
| 2232 | 10563 | ALLEY FIRE 8 | ALLEY HEIL AVE | HEIL AVE | O | AC | 3 | 155 | 20 | 2,480 | 3/20/25 | 93 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 2233 | 10458 | ALLEY FLORIDA ST | INDIANAPOLIS AVE | JOILET AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 34 | 44 | 31 | 25 | New Construction | 1/1/80 |
| 2233 | 10459 | ALLEY FLORIDA ST | JOLIET AVE | KNOXVILLE AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 57 | 47 | 20 | 33 | New Construction | 1/1/80 |
| 2234 | 10061 | ALLEY FORELLE DR | FORELLE DR | FORELLE DR | O | AC | 4 | 781 | 20 | 12,496 | 1/30/25 | 33 | 68 | 32 | 0 | New Construction | 1/1/80 |
| 2235 | 10245 | ALLEY FOURTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 37 | 23 | 25 | 52 | New Construction | 1/1/80 |
| 2235 | 10261 | ALLEY FOURTEENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,760 | 6/4/25 | 27 | 36 | 8 | 56 | New Construction | 1/1/80 |
| 2235 | 10262 | ALLEY FOURTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 20 | 48 | 18 | 34 | New Construction | 1/1/80 |
| 2235 | 10263 | ALLEY FOURTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/30/25 | 61 | 28 | 14 | 58 | New Construction | 1/1/80 |
| 2235 | 10264 | ALLEY FOURTEENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 5/30/25 | 25 | 35 | 13 | 52 | New Construction | 1/1/80 |
| 2235 | 10265 | ALLEY FOURTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 7,400 | 5/30/25 | 73 | 21 | 13 | 66 | New Construction | 1/1/80 |
| 2235 | 10347 | ALLEY FOURTEENTH | PALM AVE | CREST AVE | O | AC | 6 | 620 | 20 | 9,920 | 3/28/25 | 92 | 0 | 61 | 39 | New Construction | 1/1/80 |
| 2235 | 10350 | ALLEY FOURTEENTH | CREST AVE | ALLEY CREST AVE | O | AC | 6 | 391 | 20 | 6,256 | 3/28/25 | 88 | 0 | 38 | 62 | New Construction | 1/1/80 |
| 52 | 10370 | ALLEY FRANKFORT AVE | ALABAMA ST | HUNTINGTON ST | O | AC | 9 | 485 | 20 | 9,700 | 6/6/25 | 54 | 49 | 17 | 34 | New Construction | 1/1/80 |
| 53 | 10013 | ALLEY GANGES LN | ALLEY VOLGA DR | VOLGA DR | O | AC | 4 | 154 | 20 | 2,464 | 3/21/25 | 75 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 53 | 10014 | ALLEY GANGES LN | AMAZONE DR | ALLEY RHONE LN | O | AC | 4 | 195 | 20 | 3,120 | 3/21/25 | 35 | 39 | 43 | 18 | New Construction | 1/1/80 |
| 53 | 10055 | ALLEY GANGES LN | ALLEY VOLGA DR | ALLEY RHONE LN | O | AC | 4 | 662 | 20 | 10,592 | 3/21/25 | 29 | 13 | 76 | 11 | New Construction | 1/1/80 |
| 2236 | 10527 | ALLEY GARFIELD AVE | HOLLY ST | END | O | AC | 7 | 300 | 20 | 7,200 | 1/30/25 | 50 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 54 | 10384 | ALLEY GENEVA AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 323 | 20 | 6,460 | 6/6/25 | 66 | 0 | 44 | 56 | New Construction | 1/1/80 |
| 54 | 10387 | ALLEY GENEVA AVE | ALLEY DELAWARE ST | HILL ST | O | AC | 9 | 644 | 20 | 10,304 | 1/31/25 | 88 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 54 | 10388 | ALLEY GENEVA AVE | HILL ST | INDIANAPOLIS AVE | O | AC | 9 | 644 | 20 | 10,304 | 1/31/25 | 87 | 0 | 67 | 33 | New Construction | 1/1/80 |
| 55 | 10084 | ALLEY GILFORD CIR | NEWHAVEN LN | END | O | AC | 7 | 400 | 20 | 6,400 | 1/31/25 | 60 | 48 | 18 | 34 | New Construction | 1/1/80 |
| 56 | 10022 | ALLEY GOLDENWEST ST | ALLEY HEIL AVE | MADDOX DR | O | AC | 3 | 368 | 20 | 5,888 | 3/20/25 | 34 | 60 | 24 | 16 | New Construction | 1/1/80 |
| 56 | 10032 | ALLEY GOLDENWEST ST | END | FORD DR | O | AC | 3 | 382 | 20 | 6,112 | 3/21/25 | 56 | 45 | 10 | 45 | New Construction | 1/1/80 |
| 56 | 10047 | ALLEY GOLDENWEST ST | MADDOX DR | ALLEY NORMA DR | O | AC | 3 | 682 | 20 | 10,912 | 3/28/25 | 54 | 13 | 30 | 57 | New Construction | 1/1/80 |
| 56 | 10189 | ALLEY GOLDENWEST ST | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 6,544 | 5/27/25 | 82 | 0 | 73 | 27 | New Construction | 1/1/80 |
| 56 | 10190 | ALLEY GOLDENWEST ST | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 6,560 | 5/27/25 | 76 | 0 | 99 | 1 | New Construction | 1/1/80 |
| 56 | 10191 | ALLEY GOLDENWEST ST | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 6,688 | 5/27/25 | 78 | 0 | 98 | 2 | New Construction | 1/1/80 |
| 56 | 10192 | ALLEY GOLDENWEST ST | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 6,688 | 5/27/25 | 77 | 0 | 97 | 3 | New Construction | 1/1/80 |
| 56 | 10215 | ALLEY GOLDENWEST ST | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 6,560 | 5/27/25 | 77 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 56 | 10221 | ALLEY GOLDENWEST ST | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,008 | 5/27/25 | 49 | 67 | 16 | 17 | New Construction | 1/1/80 |
| 57 | 10118 | ALLEY GOTHARD ST | TOULOUSE DR | ALLEY GOTHARD ST | O | AC | 3 | 255 | 20 | 4,080 | 3/20/25 | 23 | 78 | 14 | 8 | New Construction | 1/1/80 |
| 57 | 10120 | ALLEY GOTHARD ST | LILAC LN | ALLEY GOTHARD ST | O | AC | 3 | 136 | 20 | 2,176 | 3/20/25 | 12 | 42 | 20 | 38 | New Construction | 1/1/80 |
| 57 | 8 | ALLEY GOTHARD ST | CORSICAN DR | ALLEY SATURN DR | O | AC | 3 | 373 | 26 | 9,698 | 3/20/25 | 60 | 37 | 59 | 4 | New Construction - AC | 1/1/80 |
| 2237 | 10069 | ALLEY GRAHAM ST | ALLEY RESEARCH DR | ALLEY CROSS DR | O | AC | 1 | 262 | 20 | 4,192 | 3/21/25 | 47 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 2238 | 10621 | ALLEY GREENLEAF LN | END | END | O | AC | 2 | 352 | 20 | 5,632 | 4/1/26 | 59 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 59 | 10590 | ALLEY GROVE CIR | ALLEY WARNER AVE | SUMMERDALE DR | O | AC | 5 | 381 | 20 | 6,096 | 3/21/25 | 47 | 48 | 35 | 17 | New Construction | 1/1/80 |
| 2239 | 10593 | ALLEY HARBOR BLUFFS CIR | HARBOR BLUFF CIR | ALLEY GREENLEAF LN | O | AC | 2 | 179 | 20 | 2,864 | 4/1/26 | 81 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 60 | 10383 | ALLEY HARTFORD AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 323 | 20 | 6,460 | 6/6/25 | 44 | 25 | 21 | 54 | New Construction | 1/1/80 |
| 60 | 10386 | ALLEY HARTFORD AVE | ALLEY DELAWARE ST | GENEVA AVE | O | AC | 9 | 297 | 20 | 5,940 | 1/31/25 | 45 | 37 | 39 | 24 | New Construction | 1/1/80 |
| 61 | 10003 | ALLEY HEIL AVE | ALLEY OSLO | DEL MAR LN | O | AC | 2 | 894 | 20 | 14,304 | 3/21/25 | 20 | 48 | 9 | 43 | New Construction | 1/1/80 |
| 61 | 10005 | ALLEY HEIL AVE | DEL MAR LN | GRAHAM ST | O | AC | 2 | 987 | 20 | 15,792 | 3/20/25 | 96 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 61 | 10008 | ALLEY HEIL AVE | GRAHAM ST | CLUBHOUSE LN | O | AC | 3 | 1,257 | 20 | 20,112 | 3/20/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 61 | 10017 | ALLEY HEIL AVE | END | ALLEY GOLDENWEST ST | O | AC | 3 | 54 | 20 | 864 | 3/20/25 | 9 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 61 | 10018 | ALLEY HEIL AVE | ALLEY GOLDENWEST ST | ALLEY BARTLETT LN | O | AC | 3 | 232 | 20 | 3,712 | 3/20/25 | 37 | 54 | 23 | 23 | New Construction | 1/1/80 |
| 61 | 10019 | ALLEY HEIL AVE | ALLEY BARTLETT LN | ALLEY KELLOG CIR | O | AC | 3 | 300 | 20 | 4,800 | 3/28/25 | 34 | 63 | 20 | 17 | New Construction | 1/1/80 |
| 61 | 10020 | ALLEY HEIL AVE | ALLEY KELLOG CIR | SABOT LN | O | AC | 3 | 135 | 20 | 2,160 | 3/28/25 | 38 | 58 | 10 | 32 | New Construction | 1/1/80 |
| 61 | 10021 | ALLEY HEIL AVE | SABOT LN | ALLEY SABOT LN | O | AC | 3 | 169 | 20 | 2,704 | 3/28/25 | 51 | 52 | 25 | 23 | New Construction | 1/1/80 |
| 61 | 10045 | ALLEY HEIL AVE | ALLEY SABOT LN | ALLEY DELTON CIR | O | AC | 3 | 300 | 20 | 4,800 | 3/28/25 | 56 | 32 | 21 | 47 | New Construction | 1/1/80 |
| 61 | 10562 | ALLEY HEIL AVE | CLUBHOUSE LN | ALLEY FIRE 8 | O | AC | 3 | 998 | 20 | 15,968 | 3/20/25 | 89 | 0 | 32 | 68 | New Construction | 1/1/80 |
| 2240 | 10499 | ALLEY HESS CIR | ALLEY HESS CIR | END | O | AC | 6 | 99 | 20 | 1,584 | 6/12/25 | 49 | 33 | 47 | 20 | New Construction | 1/1/80 |
| 2240 | 10500 | ALLEY HESS CIR | ALLEY HESS CIR | HESS CIR | O | AC | 6 | 145 | 20 | 2,900 | 6/12/25 | 43 | 38 | 54 | 8 | New Construction | 1/1/80 |
| 2307 | 60950 | ALLEY HILO CIR | WAIKIKI LN | KONA DR | O | AC | 2 | 587 | 20 | 11,740 | 2/6/25 | 31 | 50 | 50 | 0 | New Construction - AC | 1/1/80 |
| 62 | 10375 | ALLEY HUNTINGTON ST | ELMIRA AVE | FRANKFORT AVE | O | AC | 9 | 329 | 20 | 6,364 | 1/31/25 | 35 | 33 | 48 | 19 | New Construction | 1/1/80 |
| 62 | 10377 | ALLEY HUNTINGTON ST | DETROIT AVE | ELMIRA AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 42 | 31 | 13 | 56 | New Construction | 1/1/80 |
| 62 | 10379 | ALLEY HUNTINGTON ST | CHICAGO AVE | DETROIT AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 51 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 62 | 10380 | ALLEY HUNTINGTON ST | ATLANTA AVE | BALTIMORE AVE | O | AC | 9 | 337 | 20 | 6,740 | 1/31/25 | 67 | 0 | 85 | 15 | New Construction | 1/1/80 |
| 62 | 10381 | ALLEY HUNTINGTON ST | BALTIMORE AVE | CHICAGO AVE | O | AC | 9 | 339 | 20 | 6,780 | 1/31/25 | 47 | 75 | 8 | 17 | New Construction | 1/1/80 |
| 62 | 10401 | ALLEY HUNTINGTON ST | HARTFORD AVE | INDIANAPOLIS AVE | O | AC | 9 | 329 | 20 | 6,580 | 1/31/25 | 32 | 29 | 33 | 38 | New Construction | 1/1/80 |
| 62 | 10405 | ALLEY HUNTINGTON ST | GENEVA AVE | HARTFORD AVE | O | AC | 9 | 331 | 20 | 6,620 | 1/31/25 | 57 | 0 | 70 | 30 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 62 | 10409 | ALLEY HUNTINGTON ST | FRANKFORT AVE | GENEVA AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 49 | 34 | 44 | 22 | New Construction | 1/1/80 |
| 62 | 10420 | ALLEY HUNTINGTON ST | NASHVILLE AVE | OSWEGO AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/6/25 | 17 | 36 | 30 | 34 | New Construction | 1/1/80 |
| 62 | 10440 | ALLEY HUNTINGTON ST | LINCOLN AVE | MEMPHIS AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 43 | 26 | 46 | 28 | New Construction | 1/1/80 |
| 62 | 10442 | ALLEY HUNTINGTON ST | KNOXVILLE AVE | LINCOLN AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 47 | 0 | 73 | 27 | New Construction | 1/1/80 |
| 62 | 10448 | ALLEY HUNTINGTON ST | JOLIET AVE | KNOXVILLE AVE | O | AC | 6 | 330 | 20 | 5,280 | 1/31/25 | 78 | 0 | 82 | 18 | New Construction | 1/1/80 |
| 62 | 10454 | ALLEY HUNTINGTON ST | INDIANAPOLIS AVE | JOLIET AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 46 | 0 | 72 | 28 | New Construction | 1/1/80 |
| 62 | 10487 | ALLEY HUNTINGTON ST | TORONTO AVE | UTIICA AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/9/25 | 45 | 53 | 39 | 8 | New Construction | 1/1/80 |
| 62 | 10495 | ALLEY HUNTINGTON ST | ROCHESTER AVE | SPRINGFIELD AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/9/25 | 29 | 46 | 39 | 15 | New Construction | 1/1/80 |
| 62 | 10497 | ALLEY HUNTINGTON ST | ADAMS AVE | ROCHESTER AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/9/25 | 30 | 59 | 14 | 27 | New Construction | 1/1/80 |
| 63 | 10090 | ALLEY INDIANAPOLIS AVE | END | FARNSWORTH LN | O | AC | 9 | 721 | 20 | 14,420 | 1/31/25 | 3 | 11 | 56 | 33 | New Construction | 1/1/80 |
| 63 | 10091 | ALLEY INDIANAPOLIS AVE | FARNSWORTH LN | SANDPIPER LN | O | AC | 9 | 801 | 20 | 16,020 | 1/31/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 63 | 10092 | ALLEY INDIANAPOLIS AVE | SANDPIPER LN | END | O | AC | 9 | 265 | 20 | 5,300 | 1/31/25 | 11 | 21 | 67 | 12 | New Construction | 1/1/80 |
| 63 | 10382 | ALLEY INDIANAPOLIS AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 323 | 20 | 6,460 | 6/6/25 | 41 | 12 | 21 | 67 | New Construction | 1/1/80 |
| 63 | 10385 | ALLEY INDIANAPOLIS AVE | ALLEY DELAWARE ST | FLORIDA ST | O | AC | 9 | 491 | 20 | 9,820 | 1/31/25 | 58 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 2241 | 10547 | ALLEY JACQUELYN LN | SPEER AVE | LIBERTY AVE | O | AC | 4 | 330 | 20 | 5,280 | 1/30/25 | 29 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 2241 | 10606 | ALLEY JACQUELYN LN | ALLEY SLATER AVE | ALLEY BARTON DR | O | AC | 4 | 500 | 20 | 8,000 | 1/30/25 | 65 | 33 | 67 | 0 | New Construction | 1/1/80 |
| 2242 | 10452 | ALLEY JOLIET AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 6,460 | 6/6/25 | 60 | 18 | 32 | 50 | New Construction | 1/1/80 |
| 2243 | 10023 | ALLEY KELLOG CIR | ALLEY HEIL AVE | MADDOX DR | O | AC | 3 | 363 | 20 | 5,808 | 3/20/25 | 25 | 22 | 20 | 58 | New Construction | 1/1/80 |
| 65 | 10434 | ALLEY KNOXVILLE AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 6,460 | 6/6/25 | 26 | 40 | 17 | 43 | New Construction | 1/1/80 |
| 2244 | 10608 | ALLEY KOLEDO LN | ALLEY SLATER AVE | ALLEY BARTON DR | O | AC | 4 | 500 | 20 | 8,000 | 1/30/25 | 71 | 17 | 83 | 0 | New Construction | 1/1/80 |
| 2308 | 60960 | ALLEY KONA DR | WAIKIKI LN | KONA DR | O | AC | 2 | 605 | 20 | 12,100 | 2/6/25 | 34 | 53 | 47 | 0 | New Construction - AC | 1/1/80 |
| 2246 | 10147 | ALLEY LA PAZ DR | ALLEY LA PAZ DR | ALLEY MALAGA LN | O | AC | 4 | 187 | 20 | 2,956 | 3/28/25 | 36 | 57 | 29 | 14 | New Construction | 1/1/80 |
| 2246 | 10148 | ALLEY LA PAZ DR | ALLEY LA PAZ DR | ALLEY VILLA YORBA | O | AC | 4 | 178 | 20 | 2,848 | 3/28/25 | 48 | 43 | 24 | 33 | New Construction | 1/1/80 |
| 2247 | 10413 | ALLEY LAKE ST | ADAMS AVE | SPRINGFIELD AVE | O | AC | 6 | 661 | 20 | 13,220 | 2/7/25 | 43 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 2247 | 10512 | ALLEY LAKE ST | LAKE ST | ALLEY LAKE ST | O | AC | 6 | 207 | 20 | 3,312 | 2/7/25 | 77 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2247 | 10526 | ALLEY LAKE ST | UTICA AVE | SPRINGFIELD AVE | O | AC | 6 | 705 | 20 | 11,280 | 2/7/25 | 20 | 34 | 62 | 4 | New Construction | 1/1/80 |
| 2247 | 10599 | ALLEY LAKE ST | PECAN AVE | SIXTH ST | O | PCC | 9 | 347 | 20 | 6,940 | 6/6/25 | 97 | 60 | 40 | 0 | New Construction - PCC | 1/1/80 |
| 2247 | 60930 | ALLEY LAKE ST | ALLEY LAKE ST | UTICA AVE | O | AC | 6 | 672 | 20 | 13,440 | 2/7/25 | 80 | 0 | 96 | 4 | New Construction - AC | 1/1/80 |
| 66 | 10010 | ALLEY LE GRAND LN | ALLEY SELL CIR | PRAIRIE DR | O | AC | 2 | 491 | 20 | 7,856 | 3/21/25 | 58 | 34 | 34 | 32 | New Construction | 1/1/80 |
| 67 | 10546 | ALLEY LIBERTY AVE | LIBERTY AVE | LIBERTY AVE | O | AC | 4 | 611 | 20 | 14,664 | 1/30/25 | 6 | 35 | 65 | 0 | New Construction | 1/1/80 |
| 2248 | 10072 | ALLEY LIBRA CIR | ALLEY ELLIS AVE | ALLEY LINDENWOOD DR | O | AC | 7 | 781 | 20 | 12,496 | 1/30/25 | 48 | 0 | 93 | 7 | New Construction | 1/1/80 |
| 2248 | 10076 | ALLEY LIBRA CIR | ALLEY LINDENWOOD DR | ALLEY LIBRA CIR | O | AC | 7 | 275 | 20 | 4,400 | 1/30/25 | 58 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2248 | 10078 | ALLEY LIBRA CIR | ALLEY LIBRA CIR | END | O | AC | 7 | 23 | 20 | 460 | 1/30/25 | 52 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2248 | 10079 | ALLEY LIBRA CIR | ALLEY LIBRA CIR | END | O | AC | 7 | 21 | 20 | 420 | 1/30/25 | 59 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2249 | 10121 | ALLEY LILAC LN | ALLEY TOULOUSE DR | ALLEY ELK CIR | O | AC | 3 | 273 | 20 | 4,488 | 3/19/25 | 49 | 41 | 51 | 8 | New Construction | 1/1/80 |
| 2249 | 10122 | ALLEY LILAC LN | ALLEY ELK CIR | ALLEY WARNER AVE | O | AC | 3 | 277 | 20 | 4,432 | 3/19/25 | 43 | 53 | 24 | 23 | New Construction | 1/1/80 |
| 68 | 10433 | ALLEY LINCOLN AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 6,460 | 6/6/25 | 50 | 16 | 6 | 78 | New Construction | 1/1/80 |
| 2250 | 10074 | ALLEY LINDENWOOD DR | DEMION LN | ALLEY DEMION LN | O | AC | 7 | 153 | 20 | 2,448 | 1/30/25 | 63 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2250 | 10075 | ALLEY LINDENWOOD DR | ALLEY LIBRA CIR | DEMION LN | O | AC | 7 | 157 | 20 | 2,512 | 1/30/25 | 41 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 2251 | 10166 | ALLEY LOCHLEA LN | LOCHLEA LN | END | O | AC | 9 | 488 | 20 | 7,808 | 3/19/25 | 30 | 55 | 37 | 8 | New Construction | 1/1/80 |
| 2252 | 10513 | ALLEY LOMA AVE | FOURTEENTH ST | LOMA AVE | O | AC | 6 | 567 | 20 | 9,072 | 6/9/25 | 50 | 53 | 35 | 12 | New Construction | 1/1/80 |
| 69 | 10095 | ALLEY LOMOND DR | LOCHLEA LN | NEWLAND ST | O | AC | 9 | 660 | 20 | 10,560 | 3/19/25 | 31 | 51 | 22 | 27 | New Construction | 1/1/80 |
| 71 | 10026 | ALLEY MADDOX DR | DELTON CIR | ALLEY DELTON CIR | O | AC | 3 | 150 | 20 | 2,400 | 3/20/25 | 44 | 9 | 63 | 28 | New Construction | 1/1/80 |
| 72 | 10320 | ALLEY MAIN ST | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 6,672 | 2/7/25 | 85 | 35 | 31 | 34 | New Construction | 1/1/80 |
| 72 | 10323 | ALLEY MAIN ST | ORANGE AVE | ALLEY ORANGE AVE | O | AC | 6 | 267 | 20 | 5,340 | 2/7/25 | 82 | 0 | 68 | 32 | New Construction | 1/1/80 |
| 72 | 10324 | ALLEY MAIN ST | ALLEY ORANGE AVE | PECAN AVE | O | AC | 6 | 343 | 20 | 6,860 | 2/7/25 | 85 | 0 | 63 | 37 | New Construction | 1/1/80 |
| 72 | 10341 | ALLEY MAIN ST | TENTH ST | ALLEY ELEVENTH ST | O | AC | 6 | 212 | 20 | 4,240 | 2/7/25 | 48 | 27 | 44 | 29 | New Construction | 1/1/80 |
| 72 | 10342 | ALLEY MAIN ST | ALLEY ELVENTH ST | ELEVENTH ST | O | AC | 6 | 212 | 20 | 3,392 | 2/7/25 | 87 | 0 | 90 | 10 | New Construction | 1/1/80 |
| 72 | 10344 | ALLEY MAIN ST | CREST AVE | ALLEY TENTH ST | O | AC | 6 | 147 | 20 | 2,352 | 2/7/25 | 89 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 72 | 10345 | ALLEY MAIN ST | ALLEY TENTH ST | TENTH ST | O | AC | 6 | 212 | 20 | 4,240 | 2/7/25 | 40 | 44 | 54 | 2 | New Construction | 1/1/80 |
| 72 | 10363 | ALLEY MAIN ST | TWELTH ST | THIRTEENTH ST | O | AC | 6 | 532 | 20 | 10,640 | 2/7/25 | 41 | 81 | 18 | 1 | New Construction | 1/1/80 |
| 72 | 10364 | ALLEY MAIN ST | PALM AVE | CREST AVE | O | AC | 6 | 805 | 20 | 15,900 | 2/7/25 | 36 | 52 | 21 | 27 | New Construction | 1/1/80 |
| 72 | 10365 | ALLEY MAIN ST | PALM AVE | ACACIA AVE | O | PCC | 6 | 553 | 20 | 11,060 | 6/19/25 | 93 | 50 | 48 | 2 | New Construction | 1/1/80 |
| 72 | 10366 | ALLEY MAIN ST | SIXTH ST | ACACIA AVE | O | AC | 6 | 307 | 20 | 4,912 | 2/7/25 | 79 | 0 | 92 | 8 | New Construction | 1/1/80 |
| 72 | 10368 | ALLEY MAIN ST | PECAN AVE | SIXTH ST | O | AC | 6 | 239 | 20 | 4,780 | 2/7/25 | 85 | 0 | 58 | 42 | New Construction | 1/1/80 |
| 72 | 10503 | ALLEY MAIN ST | ADAMS AVE | SPRINGFIELD AVE | O | AC | 6 | 661 | 20 | 10,576 | 2/7/25 | 76 | 0 | 62 | 38 | New Construction | 1/1/80 |
| 72 | 10504 | ALLEY MAIN ST | SPRINGFIELD AVE | UTICA AVE | O | AC | 6 | 660 | 20 | 10,556 | 2/7/25 | 77 | 0 | 70 | 30 | New Construction | 1/1/80 |
| 72 | 10514 | ALLEY MAIN ST | ALLEY ADAMS AVE | ADAMS AVE | O | AC | 6 | 162 | 20 | 3,240 | 2/7/25 | 56 | 39 | 22 | 39 | New Construction | 1/1/80 |
| 72 | 10515 | ALLEY MAIN ST | LOMA AVE | ALLEY ADAMS AVE | O | AC | 6 | 187 | 20 | 3,740 | 2/7/25 | 77 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 72 | 10517 | ALLEY MAIN ST | THIRTEENTH ST | LOMA AVE | O | AC | 6 | 336 | 20 | 6,720 | 2/7/25 | 77 | 0 | 46 | 54 | New Construction | 1/1/80 |
| 72 | 10600 | ALLEY MAIN ST | WALNUT AVE | END | O | AC | 6 | 204 | 20 | 3,264 | 6/13/25 | 64 | 38 | 23 | 39 | New Construction | 1/1/80 |
| 72 | 60940 | ALLEY MAIN ST | UTICA AVE | PARK ST | O | AC | 6 | 495 | 20 | 7,340 | 2/7/25 | 74 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 73 | 10140 | ALLEY MALAGA LN | ALLEY SAN ANGELO DR | STARK ST | O | AC | 4 | 756 | 20 | 12,096 | 3/28/25 | 64 | 23 | 10 | 67 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 73 | 10142 | ALLEY MALAGA LN | ALLEY LA PAZ DR | STARK ST | O | AC | 4 | 409 | 20 | 6,544 | 3/28/25 | 24 | 31 | 22 | 47 | New Construction | 1/1/80 |
| 74 | 10085 | ALLEY MALLOY DR | YVONNE DR | END | O | AC | 9 | 421 | 20 | 8,420 | 1/31/25 | 29 | 24 | 76 | 0 | New Construction | 1/1/80 |
| 74 | 10086 | ALLEY MALLOY DR | YVONNE DR | KILKENNY LN | O | AC | 9 | 790 | 20 | 15,800 | 1/31/25 | 15 | 35 | 56 | 9 | New Construction | 1/1/80 |
| 74 | 10087 | ALLEY MALLOY DR | KILKENNY LN | ALLEY NEWLAND ST | O | AC | 9 | 682 | 20 | 13,640 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 74 | 10088 | ALLEY MALLOY DR | ALLEY NEWLAND ST | END | O | AC | 9 | 70 | 20 | 1,400 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2253 | 10043 | ALLEY MANDRELL DR | KOLEDO LN | END | O | AC | 4 | 275 | 20 | 4,400 | 1/30/25 | 56 | 30 | 70 | 0 | New Construction | 1/1/80 |
| 75 | 10065 | ALLEY MC FADDEN AVE | ANDAMAN LN | END | O | AC | 1 | 537 | 20 | 8,592 | 2/6/25 | 18 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 75 | 10066 | ALLEY MC FADDEN AVE | ANDAMAN LN | CAMBAY LN | O | AC | 1 | 520 | 20 | 8,320 | 2/6/25 | 21 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 75 | 10067 | ALLEY MC FADDEN AVE | BOLSA CHICA ST | PELICAN LN | O | AC | 1 | 520 | 20 | 8,320 | 2/6/25 | 28 | 56 | 28 | 16 | New Construction | 1/1/80 |
| 76 | 10432 | ALLEY MEMPHIS AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 6,460 | 6/6/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 2254 | 10553 | ALLEY MINORU LN | ALLEY SARU CIR | WARNER AVE | O | AC | 4 | 644 | 20 | 10,304 | 6/13/25 | 21 | 72 | 12 | 16 | New Construction | 1/1/80 |
| 77 | 10059 | ALLEY NEWLAND ST | END | ALLEY TALBERT AVE. | O | AC | 4 | 30 | 20 | 480 | 1/30/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 77 | 10060 | ALLEY NEWLAND ST | ALLEY TALBERT AVE | END | O | AC | 4 | 499 | 20 | 7,984 | 1/30/25 | 63 | 72 | 28 | 0 | New Construction | 1/1/80 |
| 77 | 10083 | ALLEY NEWLAND ST | NEWLAND ST | BRIDGEPORT DR | O | AC | 7 | 1,223 | 20 | 19,568 | 1/31/25 | 37 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 77 | 10089 | ALLEY NEWLAND ST | NEWLAND ST | ALLEY MALLOY DR | O | AC | 9 | 651 | 20 | 13,020 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 77 | 10548 | ALLEY NEWLAND ST | FRIESLAND DR | SLATER AVE | O | AC | 4 | 1,180 | 20 | 18,880 | 3/19/25 | 26 | 20 | 20 | 60 | New Construction | 1/1/80 |
| 77 | 10555 | ALLEY NEWLAND ST | ALLEY TAMARU DR | TAMARU DR | O | AC | 4 | 163 | 20 | 2,608 | 6/12/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 77 | 10556 | ALLEY NEWLAND ST | ALLEY SARU CIR | ALLEY TAMARU DR | O | AC | 4 | 175 | 20 | 2,800 | 6/12/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 77 | 10559 | ALLEY NEWLAND ST | BRUSH DR | ARNETT DR | O | AC | 4 | 1,250 | 20 | 20,000 | 3/19/25 | 28 | 26 | 53 | 21 | New Construction | 1/1/80 |
| 77 | 10560 | ALLEY NEWLAND ST | IRBY LN | BRUSH DR | O | AC | 4 | 491 | 20 | 7,856 | 3/19/25 | 40 | 27 | 56 | 17 | New Construction | 1/1/80 |
| 2255 | 10199 | ALLEY NINETEENETH | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 8,180 | 6/3/25 | 44 | 16 | 39 | 45 | New Construction | 1/1/80 |
| 2255 | 10206 | ALLEY NINETEENETH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 7,800 | 6/3/25 | 62 | 72 | 21 | 7 | New Construction | 1/1/80 |
| 2255 | 10211 | ALLEY NINETEENETH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/3/25 | 57 | 27 | 20 | 53 | New Construction | 1/1/80 |
| 2255 | 10214 | ALLEY NINETEENETH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 8,360 | 5/30/25 | 32 | 21 | 28 | 51 | New Construction | 1/1/80 |
| 2255 | 10222 | ALLEY NINETEENETH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 7,200 | 5/30/25 | 9 | 37 | 14 | 49 | New Construction | 1/1/80 |
| 2255 | 10231 | ALLEY NINETEENETH | ALLEY WALNUT | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,760 | 5/27/25 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2256 | 10296 | ALLEY NINTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 220 | 20 | 4,400 | 5/29/25 | 47 | 46 | 19 | 35 | New Construction | 1/1/80 |
| 2256 | 10297 | ALLEY NINTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 30 | 31 | 23 | 46 | New Construction | 1/1/80 |
| 2256 | 10298 | ALLEY NINTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/29/25 | 82 | 0 | 52 | 48 | New Construction | 1/1/80 |
| 2256 | 10299 | ALLEY NINTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 60 | 31 | 27 | 42 | New Construction | 1/1/80 |
| 2256 | 10300 | ALLEY NINTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/29/25 | 69 | 36 | 15 | 49 | New Construction | 1/1/80 |
| 2256 | 10316 | ALLEY NINTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 42 | 28 | 26 | 46 | New Construction | 1/1/80 |
| 78 | 10048 | ALLEY NORMA DR | ALLEY GOLDENWEST ST | BARTLETT LN | O | AC | 3 | 157 | 20 | 2,512 | 3/20/25 | 51 | 49 | 24 | 27 | New Construction | 1/1/80 |
| 78 | 10050 | ALLEY NORMA DR | ALLEY BARTLETT LN | BARTLETT LN | O | AC | 3 | 157 | 20 | 2,512 | 3/28/25 | 37 | 37 | 10 | 53 | New Construction | 1/1/80 |
| 79 | 10612 | ALLEY OAK LN | ALLEY BARTON DR | OAK LN | O | AC | 4 | 495 | 20 | 7,920 | 1/30/25 | 69 | 21 | 79 | 0 | New Construction | 1/1/80 |
| 2257 | 10325 | ALLEY ORANGE AVE | THIRD ST | ALLEY MAIN ST | O | AC | 6 | 149 | 20 | 2,980 | 2/7/25 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2258 | 10097 | ALLEY OSLO | ALLEY HEIL AVE | HEIL AVE | O | AC | 2 | 152 | 20 | 2,432 | 3/21/25 | 25 | 69 | 9 | 22 | New Construction | 1/1/80 |
| 2259 | 10423 | ALLEY OSWEGO AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 5,168 | 6/9/25 | 30 | 39 | 13 | 48 | New Construction | 1/1/80 |
| 2310 | 60980 | ALLEY PACIFIC COAST HWY | PARK AVE | END | O | AC | 2 | 120 | 13 | 1,560 | 2/6/25 | 43 | 55 | 45 | 0 | New Construction - AC | 1/1/80 |
| 81 | 10352 | ALLEY PALM AVE | ALLEY TWELTH ST | TWELTH ST | O | AC | 6 | 162 | 20 | 3,240 | 5/29/25 | 55 | 40 | 15 | 45 | New Construction | 1/1/80 |
| 81 | 10353 | ALLEY PALM AVE | ALLEY ELEVENTH ST | ALLEY TWELTH ST | O | AC | 6 | 163 | 20 | 3,260 | 5/29/25 | 62 | 23 | 23 | 54 | New Construction | 1/1/80 |
| 80 | 10360 | ALLEY PALM AVE. | ALLEY CREST AVE | TENTH ST | O | AC | 6 | 354 | 20 | 7,080 | 5/30/25 | 30 | 36 | 15 | 49 | New Construction | 1/1/80 |
| 80 | 10361 | ALLEY PALM AVE. | ALLEY CREST AVE | MAIN ST | O | AC | 6 | 195 | 20 | 3,900 | 5/30/25 | 68 | 39 | 36 | 25 | New Construction | 1/1/80 |
| 2260 | 10530 | ALLEY PARK MEADOW LN | ALLEY WHITEWATER DR | ALLEY AMBERLEAF CIR | O | AC | 4 | 295 | 20 | 5,900 | 1/30/25 | 73 | 20 | 53 | 27 | New Construction | 1/1/80 |
| 82 | 10505 | ALLEY PARK ST | ADAMS AVE | SPRINGFIELD AVE | O | AC | 6 | 661 | 20 | 13,220 | 2/7/25 | 83 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 82 | 10506 | ALLEY PARK ST | SPRINGFIELD AVE | UTICA AVE | O | AC | 6 | 660 | 20 | 13,200 | 2/7/25 | 43 | 57 | 43 | 0 | New Construction | 1/1/80 |
| 82 | 10509 | ALLEY PARK ST | UTICA AVE | PARK ST | O | AC | 6 | 512 | 20 | 8,192 | 2/7/25 | 64 | 0 | 66 | 34 | New Construction | 1/1/80 |
| 82 | 10516 | ALLEY PARK ST | LOMA AVE | ALLEY ADAMS AVE | O | AC | 6 | 188 | 20 | 3,760 | 2/7/25 | 33 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 82 | 10518 | ALLEY PARK ST | THIRTEENTH ST | LOMA AVE | O | AC | 6 | 336 | 20 | 6,720 | 2/7/25 | 65 | 0 | 28 | 72 | New Construction | 1/1/80 |
| 2261 | 10062 | ALLEY PATTERSON LN | PATTERSON LN | PATTERSON LN | O | AC | 4 | 486 | 20 | 9,720 | 1/30/25 | 12 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 2261 | 10063 | ALLEY PATTERSON LN | PATTERSON LN | FORELLE DR | O | AC | 4 | 636 | 20 | 10,176 | 1/30/25 | 14 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 83 | 10507 | ALLEY PINE ST | SPRINGFIELD AVE | UTICA AVE | O | AC | 6 | 660 | 20 | 13,200 | 2/7/25 | 55 | 35 | 44 | 21 | New Construction | 1/1/80 |
| 83 | 10508 | ALLEY PINE ST | ADAMS AVE | SPRINGFIELD AVE | O | AC | 6 | 661 | 20 | 13,220 | 2/7/25 | 45 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 83 | 10511 | ALLEY PINE ST | UTICA AVE | PARK ST | O | AC | 6 | 695 | 20 | 11,120 | 2/7/25 | 78 | 33 | 67 | 0 | New Construction | 1/1/80 |
| 83 | 10519 | ALLEY PINE ST | LOMA AVE | ALLEY ADAMS AVE | O | AC | 6 | 188 | 20 | 3,760 | 2/7/25 | 22 | 10 | 76 | 14 | New Construction | 1/1/80 |
| 83 | 10520 | ALLEY PINE ST | THIRTEENTH ST | LOMA AVE | O | AC | 6 | 335 | 20 | 6,700 | 6/19/25 | 43 | 45 | 6 | 49 | New Construction | 1/1/80 |
| 84 | 10583 | ALLEY PINEHURST LN | WARNER AVE | PINEHURST LN | O | AC | 5 | 585 | 20 | 9,360 | 3/21/25 | 56 | 42 | 36 | 22 | New Construction | 1/1/80 |
| 84 | 10589 | ALLEY PINEHURST LN | ALLEY WARNER AVE | SUMMERDALE DR | O | AC | 5 | 381 | 20 | 6,096 | 3/21/25 | 29 | 47 | 32 | 21 | New Construction | 1/1/80 |
| 2262 | 10082 | ALLEY POLK CIR | HARDING LN | END | O | AC | 7 | 672 | 20 | 10,752 | 1/31/25 | 55 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 2263 | 10428 | ALLEY PORTLAND AVE | ALABAMBA ST | ALLEY ALABAMA ST | O | AC | 6 | 322 | 20 | 5,152 | 6/13/25 | 31 | 59 | 10 | 31 | New Construction | 1/1/80 |
| 2264 | 10610 | ALLEY QUEENS LN | ALLEY SLATER AVE | ALLEY BARTON DR | O | AC | 4 | 501 | 20 | 8,016 | 1/30/25 | 35 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 2265 | 10068 | ALLEY RESEARCH DR | ALLEY GRAHAM ST | ALLEY TAFT LN | O | AC | 1 | 383 | 20 | 6,128 | 3/21/25 | 53 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 86 | 10016 | ALLEY RHONE LN | ALLEY GANGES LN | SHER LN | O | AC | 4 | 821 | 20 | 13,136 | 3/21/25 | 56 | 28 | 33 | 39 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 86 | 10056 | ALLEY RHONE LN | ALLEY GANGES LN | ALLEY GANGES LN | O | AC | 4 | 177 | 20 | 2,832 | 3/21/25 | 35 | 5 | 76 | 19 | New Construction | 1/1/80 |
| 2266 | 10491 | ALLEY ROCHESTER AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 322 | 20 | 5,152 | 6/12/25 | 21 | 37 | 11 | 52 | New Construction | 1/1/80 |
| 87 | 10535 | ALLEY RONALD RD | RONALD RD | ALLEY RONALD RD | O | AC | 4 | 210 | 20 | 3,360 | 1/30/25 | 35 | 43 | 57 | 0 | New Construction | 1/1/80 |
| 87 | 10536 | ALLEY RONALD RD | ALLEY RONALD RD | TRAVELWAY | O | AC | 4 | 325 | 20 | 5,200 | 1/30/25 | 23 | 52 | 48 | 0 | New Construction | 1/1/80 |
| 87 | 10537 | ALLEY RONALD RD | TRAVELWAY | TRAVELWAY | O | AC | 4 | 269 | 20 | 4,304 | 1/30/25 | 20 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 87 | 10538 | ALLEY RONALD RD | TRAVELWAY | ALLEY BELL CIR WEST | O | AC | 4 | 99 | 20 | 1,584 | 1/30/25 | 10 | 31 | 69 | 0 | New Construction | 1/1/80 |
| 87 | 10539 | ALLEY RONALD RD | ALLEY BELL CIR WEST | ALLEY BELL CIR EAST | O | AC | 4 | 287 | 20 | 4,592 | 1/30/25 | 15 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 87 | 10540 | ALLEY RONALD RD | ALLEY RONALD RD | RONALD RD | O | AC | 4 | 218 | 20 | 3,488 | 1/30/25 | 48 | 32 | 57 | 11 | New Construction | 1/1/80 |
| 88 | 10024 | ALLEY SABOT LN | ALLEY HEIL AVE | MADDOX DR | O | AC | 3 | 363 | 20 | 5,808 | 3/28/25 | 33 | 67 | 11 | 22 | New Construction | 1/1/80 |
| 89 | 10141 | ALLEY SAN ANGELO DR | SAN ANGELO DR | ALLEY SAN ANGELO DR | O | AC | 4 | 150 | 20 | 2,400 | 3/28/25 | 48 | 49 | 15 | 36 | New Construction | 1/1/80 |
| 89 | 10145 | ALLEY SAN ANGELO DR | ALLEY SAN ANGELO DR | ALLEY MALAGA LN | O | AC | 4 | 242 | 20 | 3,872 | 3/28/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 89 | 10146 | ALLEY SAN ANGELO DR | ALLEY SAN ANGELO DR | ALLEY SAN ANGELO DR | O | AC | 4 | 184 | 20 | 2,944 | 3/28/25 | 10 | 35 | 6 | 59 | New Construction | 1/1/80 |
| 2267 | 10586 | ALLEY SANDRA LEE LN | ORION AVE | END | O | AC | 2 | 575 | 20 | 9,200 | 3/21/25 | 33 | 44 | 29 | 27 | New Construction | 1/1/80 |
| 90 | 10557 | ALLEY SARU CIR | SARU CIR | ALLEY NEWLAND ST | O | AC | 4 | 139 | 20 | 2,224 | 6/12/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 90 | 10558 | ALLEY SARU CIR | ALLEY MINORU LN | MINORU LN | O | AC | 4 | 148 | 20 | 2,368 | 6/12/25 | 37 | 79 | 13 | 8 | New Construction | 1/1/80 |
| 2245 | 10027 | ALLEY SATURN DR | GOTHARD ST | ALLEY BARDON LN | O | AC | 3 | 339 | 20 | 5,424 | 3/20/25 | 22 | 57 | 24 | 19 | New Construction | 1/1/80 |
| 2245 | 10028 | ALLEY SATURN DR | ALLEY BARDON LN | END | O | AC | 3 | 321 | 20 | 5,136 | 3/20/25 | 43 | 12 | 88 | 0 | New Construction | 1/1/80 |
| 91 | 10622 | ALLEY SAYBROOK LN | FISHER DR | END | O | AC | 2 | 781 | 20 | 12,496 | 2/6/25 | 96 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 92 | 10326 | ALLEY SECOND ST | OLIVE AVE | END | O | PCC | 6 | 239 | 20 | 4,780 | 6/9/25 | 93 | 48 | 50 | 2 | New Construction | 1/1/80 |
| 92 | 10336 | ALLEY SECOND ST | WALNUT AVE | OLIVE AVE | O | PCC | 6 | 507 | 20 | 10,140 | 6/9/25 | 95 | 34 | 36 | 30 | New Construction | 1/1/80 |
| 92 | 10337 | ALLEY SECOND ST | ALLEY WALNUT AVE | WALNUT AVE | O | PCC | 6 | 165 | 20 | 3,300 | 6/9/25 | 96 | 0 | 45 | 55 | New Construction - PCC | 1/1/80 |
| 2268 | 10009 | ALLEY SELL CIR | SELL CIR | ALLEY LE GRAND LN | O | AC | 2 | 267 | 20 | 4,272 | 3/21/25 | 60 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 2269 | 10201 | ALLEY SEVENTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2269 | 10208 | ALLEY SEVENTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2269 | 10219 | ALLEY SEVENTEENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 6,688 | 6/4/25 | 11 | 32 | 17 | 51 | New Construction | 1/1/80 |
| 2269 | 10225 | ALLEY SEVENTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 6/2/25 | 86 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2269 | 10243 | ALLEY SEVENTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 7,800 | 6/2/25 | 22 | 23 | 16 | 61 | New Construction | 1/1/80 |
| 2269 | 10250 | ALLEY SEVENTEENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 186 | 20 | 2,976 | 6/2/25 | 40 | 29 | 22 | 49 | New Construction | 1/1/80 |
| 2270 | 10309 | ALLEY SEVENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 263 | 20 | 4,208 | 2/7/25 | 80 | 0 | 92 | 8 | New Construction | 1/1/80 |
| 2270 | 10310 | ALLEY SEVENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 6,560 | 2/7/25 | 81 | 0 | 86 | 14 | New Construction | 1/1/80 |
| 2270 | 10311 | ALLEY SEVENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 6,672 | 2/7/25 | 79 | 0 | 73 | 27 | New Construction | 1/1/80 |
| 2270 | 10312 | ALLEY SEVENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 417 | 20 | 8,340 | 2/7/25 | 83 | 0 | 95 | 5 | New Construction | 1/1/80 |
| 2270 | 10313 | ALLEY SEVENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 2/7/25 | 79 | 0 | 46 | 54 | New Construction | 1/1/80 |
| 2270 | 10340 | ALLEY SEVENTH | ACACIA AVE | SEVENTH ST | O | AC | 6 | 298 | 20 | 4,768 | 2/7/25 | 83 | 0 | 78 | 22 | New Construction | 1/1/80 |
| 93 | 10502 | ALLEY SHIPLEY ST | ADAMS AVE | SEVENTEENTH ST | O | AC | 6 | 926 | 20 | 14,816 | 3/28/25 | 67 | 64 | 33 | 3 | New Construction | 1/1/80 |
| 2271 | 10202 | ALLEY SIXTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 60 | 37 | 11 | 52 | New Construction | 1/1/80 |
| 2271 | 10203 | ALLEY SIXTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 26 | 0 | 8 | 92 | New Construction | 1/1/80 |
| 2271 | 10226 | ALLEY SIXTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 7,473 | 6/4/25 | 11 | 40 | 10 | 50 | New Construction | 1/1/80 |
| 2271 | 10227 | ALLEY SIXTEENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/4/25 | 24 | 19 | 5 | 76 | New Construction | 1/1/80 |
| 2271 | 10251 | ALLEY SIXTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 42 | 27 | 15 | 58 | New Construction | 1/1/80 |
| 2271 | 50390 | ALLEY SIXTEENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 187 | 20 | 3,740 | 6/4/25 | 45 | 49 | 22 | 29 | New Construction - Initial | 1/1/80 |
| 94 | 10318 | ALLEY SIXTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 6,672 | 6/4/25 | 88 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 94 | 10327 | ALLEY SIXTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 6,560 | 6/9/25 | 78 | 12 | 21 | 67 | New Construction | 1/1/80 |
| 94 | 10332 | ALLEY SIXTH | WALNUT AVE | END | O | AC | 6 | 263 | 20 | 5,260 | 6/9/25 | 87 | 0 | 51 | 49 | New Construction | 1/1/80 |
| 95 | 10036 | ALLEY SLATER AVE | JACQUELYN LN | ALLEY JACQUELYN LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 62 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 95 | 10037 | ALLEY SLATER AVE | KOLEDO LN | ALLEY KOLEDO LN | O | AC | 4 | 175 | 20 | 2,800 | 1/30/25 | 71 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 95 | 10038 | ALLEY SLATER AVE | QUEENS LN | ALLEY QUEENS LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 69 | 16 | 84 | 0 | New Construction | 1/1/80 |
| 95 | 10544 | ALLEY SLATER AVE | END | VAN BUREN ST | O | AC | 4 | 325 | 20 | 5,200 | 3/19/25 | 47 | 21 | 62 | 17 | New Construction | 1/1/80 |
| 95 | 10545 | ALLEY SLATER AVE | VAN BUREN ST | END | O | AC | 4 | 275 | 20 | 4,400 | 3/19/25 | 43 | 21 | 51 | 28 | New Construction | 1/1/80 |
| 95 | 10602 | ALLEY SLATER AVE | JAQUELYN LN | ALLEY DAIRYVIEW CIR | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 44 | 36 | 64 | 0 | New Construction | 1/1/80 |
| 95 | 10603 | ALLEY SLATER AVE | KOLEDO LN | ALLEY JACQUELYN LN | O | AC | 4 | 175 | 20 | 2,800 | 1/30/25 | 57 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 95 | 10607 | ALLEY SLATER AVE | QUEENS LN | ALLEY KOLEDO LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 70 | 18 | 82 | 0 | New Construction | 1/1/80 |
| 95 | 10611 | ALLEY SLATER AVE | KEELSON LN | ALLEY QUEENS LN | O | AC | 4 | 177 | 20 | 2,832 | 1/30/25 | 71 | 17 | 83 | 0 | New Construction | 1/1/80 |
| 2272 | 10093 | ALLEY SNOWBIRD DR | SCHOONER LN | END | O | AC | 9 | 176 | 20 | 2,816 | 3/19/25 | 25 | 26 | 40 | 34 | New Construction | 1/1/80 |
| 96 | 10490 | ALLEY SPRINGFIELD AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 5,168 | 6/12/25 | 17 | 32 | 7 | 61 | New Construction | 1/1/80 |
| 97 | 10614 | ALLEY TAFT LN | ALLEY RESEARCH DR | CROSS DR | O | AC | 1 | 434 | 20 | 6,944 | 3/21/25 | 51 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 98 | 10057 | ALLEY TALBERT AVE | HARTLUND ST | END | O | AC | 4 | 523 | 20 | 10,460 | 1/30/25 | 60 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 98 | 10058 | ALLEY TALBERT AVE | GULF LN | ALLEY NEWLAND ST | O | AC | 4 | 378 | 20 | 6,048 | 1/30/25 | 54 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 2273 | 10552 | ALLEY TAMARU DR | MINORU LN | ALLEY NEWLAND ST | O | AC | 4 | 340 | 20 | 5,440 | 6/12/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 2274 | 10287 | ALLEY TENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 212 | 20 | 4,240 | 5/29/25 | 87 | 0 | 85 | 15 | New Construction | 1/1/80 |
| 2274 | 10290 | ALLEY TENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 37 | 30 | 21 | 49 | New Construction | 1/1/80 |
| 2274 | 10291 | ALLEY TENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/29/25 | 29 | 29 | 17 | 54 | New Construction | 1/1/80 |
| 2274 | 10292 | ALLEY TENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 5/29/25 | 53 | 33 | 33 | 34 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2274 | 10293 | ALLEY TENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 7,800 | 5/30/25 | 66 | 6 | 54 | 40 | New Construction | 1/1/80 |
| 2274 | 10315 | ALLEY TENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 40 | 39 | 26 | 35 | New Construction | 1/1/80 |
| 2274 | 10346 | ALLEY TENTH | ALLEY MAIN ST | LAKE ST | O | AC | 6 | 431 | 20 | 6,896 | 2/7/25 | 80 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 99 | 10321 | ALLEY THIRD | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 6,688 | 6/9/25 | 85 | 0 | 22 | 78 | New Construction | 1/1/80 |
| 99 | 10329 | ALLEY THIRD | WALNUT AVE | OLIVE AVE | O | AC | 6 | 409 | 20 | 6,548 | 6/9/25 | 87 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 99 | 10367 | ALLEY THIRD | LAKE ST | END | O | AC | 6 | 214 | 20 | 4,280 | 2/7/25 | 79 | 42 | 51 | 7 | New Construction | 1/1/80 |
| 2275 | 10266 | ALLEY THIRTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 51 | 17 | 16 | 67 | New Construction | 1/1/80 |
| 2275 | 10267 | ALLEY THIRTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 99 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2275 | 10269 | ALLEY THIRTEENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 6,688 | 5/29/25 | 25 | 59 | 17 | 24 | New Construction | 1/1/80 |
| 2275 | 10270 | ALLEY THIRTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/29/25 | 37 | 52 | 13 | 35 | New Construction | 1/1/80 |
| 2275 | 10271 | ALLEY THIRTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 63 | 57 | 25 | 18 | New Construction | 1/1/80 |
| 2275 | 10351 | ALLEY THIRTEENTH | PALM AVE | CREST AVE | O | AC | 6 | 453 | 20 | 9,060 | 5/29/25 | 39 | 47 | 10 | 43 | New Construction | 1/1/80 |
| 2275 | 10358 | ALLEY THIRTEENTH | CREST AVE | ALLEY CREST AVE | O | AC | 6 | 232 | 20 | 4,640 | 6/9/25 | 58 | 47 | 18 | 35 | New Construction | 1/1/80 |
| 2275 | 10369 | ALLEY THIRTEENTH | PARK ST | LAKE ST | O | AC | 6 | 615 | 20 | 12,300 | 2/7/25 | 51 | 44 | 53 | 3 | New Construction | 1/1/80 |
| 2276 | 10528 | ALLEY TIMBER CIR | TIMBER CIR | ALLEY TIMBER CIR | O | AC | 4 | 160 | 20 | 2,560 | 1/30/25 | 34 | 58 | 42 | 0 | New Construction | 1/1/80 |
| 2276 | 10529 | ALLEY TIMBER CIR | ALLEY TIMBER CIR | END | O | AC | 4 | 76 | 33 | 2,508 | 1/30/25 | 31 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 2277 | 10482 | ALLEY TORONTO AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 5,168 | 6/12/25 | 62 | 30 | 20 | 50 | New Construction | 1/1/80 |
| 2278 | 10116 | ALLEY TOULOUSE DR | ALLEY LILAC LN | ALLEY TOULOUSE DR | O | AC | 3 | 536 | 20 | 8,576 | 3/19/25 | 16 | 52 | 42 | 6 | New Construction | 1/1/80 |
| 2278 | 10117 | ALLEY TOULOUSE DR | ALLEY TOULOUSE DR | TOULOUSE DR | O | AC | 3 | 141 | 20 | 2,256 | 3/20/25 | 20 | 29 | 22 | 49 | New Construction | 1/1/80 |
| 2279 | 10268 | ALLEY TWELFTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 39 | 31 | 14 | 55 | New Construction | 1/1/80 |
| 2279 | 10274 | ALLEY TWELFTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,008 | 5/29/25 | 64 | 50 | 12 | 38 | New Construction | 1/1/80 |
| 2279 | 10275 | ALLEY TWELFTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 55 | 50 | 12 | 38 | New Construction | 1/1/80 |
| 2279 | 10276 | ALLEY TWELFTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,140 | 5/29/25 | 30 | 23 | 26 | 51 | New Construction | 1/1/80 |
| 2279 | 10277 | ALLEY TWELFTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 5/29/25 | 52 | 29 | 13 | 58 | New Construction | 1/1/80 |
| 2279 | 10278 | ALLEY TWELFTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 44 | 18 | 19 | 63 | New Construction | 1/1/80 |
| 2279 | 10354 | ALLEY TWELFTH | PALM AVE | ALLEY PALM AVE | O | AC | 6 | 209 | 20 | 4,180 | 5/29/25 | 55 | 25 | 17 | 58 | New Construction | 1/1/80 |
| 2280 | 10198 | ALLEY TWENTIETH | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 8,180 | 6/3/25 | 56 | 66 | 13 | 21 | New Construction | 1/1/80 |
| 2280 | 10205 | ALLEY TWENTIETH | PECAN AVE | ACACIA AVE | O | ACT | 6 | 410 | 20 | 8,200 | 6/3/25 | 42 | 19 | 12 | 69 | New Construction | 1/1/80 |
| 2280 | 10210 | ALLEY TWENTIETH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/3/25 | 29 | 23 | 21 | 56 | New Construction | 1/1/80 |
| 2280 | 10213 | ALLEY TWENTIETH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 8,160 | 5/30/25 | 16 | 37 | 17 | 46 | New Construction | 1/1/80 |
| 2280 | 10218 | ALLEY TWENTIETH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 32 | 24 | 25 | 51 | New Construction | 1/1/80 |
| 2280 | 10230 | ALLEY TWENTIETH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,008 | 5/30/25 | 61 | 7 | 93 | 0 | New Construction | 1/1/80 |
| 2281 | 10197 | ALLEY TWENTY-FIRST | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 8,180 | 6/3/25 | 32 | 0 | 19 | 81 | New Construction | 1/1/80 |
| 2281 | 10204 | ALLEY TWENTY-FIRST | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 6,560 | 6/3/25 | 64 | 69 | 17 | 14 | New Construction | 1/1/80 |
| 2281 | 10209 | ALLEY TWENTY-FIRST | ORANGE AVE | PECAN AVE | O | AC | 6 | 417 | 20 | 8,340 | 6/3/25 | 29 | 24 | 11 | 65 | New Construction | 1/1/80 |
| 2281 | 10212 | ALLEY TWENTY-FIRST | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/3/25 | 20 | 41 | 18 | 41 | New Construction | 1/1/80 |
| 2281 | 10217 | ALLEY TWENTY-FIRST | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 6,560 | 6/3/25 | 31 | 32 | 12 | 56 | New Construction | 1/1/80 |
| 2281 | 10229 | ALLEY TWENTY-FIRST | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,008 | 5/27/25 | 49 | 41 | 47 | 12 | New Construction | 1/1/80 |
| 2282 | 10193 | ALLEY TWENTY-SECOND | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 6,544 | 6/3/25 | 64 | 14 | 59 | 27 | New Construction | 1/1/80 |
| 2282 | 10194 | ALLEY TWENTY-SECOND | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 6,560 | 6/3/25 | 83 | 14 | 83 | 3 | New Construction | 1/1/80 |
| 2282 | 10195 | ALLEY TWENTY-SECOND | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/3/25 | 37 | 30 | 22 | 48 | New Construction | 1/1/80 |
| 2282 | 10196 | ALLEY TWENTY-SECOND | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 6/3/25 | 21 | 16 | 18 | 66 | New Construction | 1/1/80 |
| 2282 | 10216 | ALLEY TWENTY-SECOND | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,100 | 5/27/25 | 47 | 27 | 35 | 38 | New Construction | 1/1/80 |
| 2282 | 10228 | ALLEY TWENTY-SECOND | ALLEY WALNUT AVE | WALNUT AVE | O | PCC | 6 | 188 | 20 | 3,760 | 5/27/25 | 97 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 100 | 10463 | ALLEY UTICA AVE | ALLEY DELAWARE ST | END | O | AC | 6 | 64 | 20 | 1,024 | 6/12/25 | 61 | 17 | 31 | 52 | New Construction | 1/1/80 |
| 100 | 10464 | ALLEY UTICA AVE | ALLEY DELAWARE ST | ALSUNA LN | O | AC | 6 | 162 | 20 | 2,592 | 6/12/25 | 48 | 49 | 31 | 20 | New Construction | 1/1/80 |
| 100 | 10469 | ALLEY UTICA AVE | ALSUNA LN | ALLEY ALSUNA LN | O | AC | 6 | 162 | 20 | 2,592 | 5/27/25 | 49 | 34 | 43 | 23 | New Construction | 1/1/80 |
| 100 | 10470 | ALLEY UTICA AVE | ALLEY ALSUNA LN | END | O | AC | 6 | 64 | 20 | 1,024 | 5/27/25 | 77 | 0 | 40 | 60 | New Construction | 1/1/80 |
| 100 | 10481 | ALLEY UTICA AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 5,168 | 6/12/25 | 37 | 70 | 24 | 6 | New Construction | 1/1/80 |
| 2283 | 10480 | ALLEY VENICE AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 322 | 20 | 5,152 | 6/12/25 | 23 | 50 | 19 | 31 | New Construction | 1/1/80 |
| 101 | 10143 | ALLEY VILLA YORBA | TRAVELWAY | ALLEY LA PAZ DR | O | AC | 4 | 150 | 20 | 2,400 | 3/28/25 | 60 | 37 | 28 | 35 | New Construction | 1/1/80 |
| 101 | 10144 | ALLEY VILLA YORBA | SAN ANDGELO DR | LA PAZ DR | O | AC | 4 | 764 | 20 | 12,224 | 3/28/25 | 25 | 65 | 23 | 12 | New Construction | 1/1/80 |
| 102 | 10011 | ALLEY VOLGA DR | ALLEY GANGES LN | ALLEY GANGES LN | O | AC | 4 | 174 | 20 | 2,784 | 3/28/25 | 43 | 72 | 28 | 0 | New Construction | 1/1/80 |
| 102 | 10012 | ALLEY VOLGA DR | ALLEY GANGES LN | TRAVELWAY | O | AC | 4 | 817 | 20 | 13,072 | 3/28/25 | 44 | 36 | 35 | 29 | New Construction | 1/1/80 |
| 2309 | 60970 | ALLEY WAIKIKI LN | ALLEY KONA DR | WAIKIKI LN | O | AC | 2 | 537 | 20 | 10,740 | 2/6/25 | 24 | 66 | 34 | 0 | New Construction - AC | 1/1/80 |
| 4010 | 40000 | ALLEY WALNUT AVE | FIRST ST | SECOND ST | O | PCC | 6 | 318 | 20 | 6,360 | 6/9/25 | 94 | 34 | 66 | 0 | New Construction - Initial | 1/1/80 |
| 4010 | 40010 | ALLEY WALNUT AVE | SIXTH ST | SEVENTH ST | O | AC | 6 | 318 | 20 | 5,088 | 2/7/25 | 80 | 42 | 58 | 0 | New Construction - Initial | 1/1/80 |
| 4010 | 40020 | ALLEY WALNUT AVE | SEVENTH ST | EIGHTH ST | O | AC | 6 | 318 | 29 | 7,950 | 2/7/25 | 83 | 0 | 95 | 5 | New Construction - Initial | 1/1/80 |
| 4010 | 40030 | ALLEY WALNUT AVE | EIGHTH ST | NINTH ST | O | AC | 6 | 318 | 20 | 7,632 | 5/29/25 | 67 | 24 | 33 | 43 | New Construction - Initial | 1/1/80 |
| 4010 | 40040 | ALLEY WALNUT AVE | NINTH ST | TENTH ST | O | AC | 6 | 318 | 20 | 5,088 | 5/29/25 | 66 | 43 | 38 | 19 | New Construction - Initial | 1/1/80 |
| 4010 | 40050 | ALLEY WALNUT AVE | TENTH ST | ELEVENTH ST | O | AC | 6 | 318 | 20 | 5,088 | 5/29/25 | 87 | 0 | 68 | 32 | New Construction - Initial | 1/1/80 |
| 4010 | 40060 | ALLEY WALNUT AVE | ELEVENTH ST | TWELFTH ST | O | AC | 6 | 318 | 20 | 6,360 | 5/29/25 | 69 | 0 | 21 | 79 | New Construction - Initial | 1/1/80 |
| 4010 | 40070 | ALLEY WALNUT AVE | THIRTEENTH ST | FOURTEENTH ST | O | AC | 6 | 318 | 20 | 6,360 | 6/4/25 | 39 | 39 | 14 | 47 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 4010 | 40080 | ALLEY WALNUT AVE | FOURTEENTH ST | FIFTEENTH ST | O | AC | 6 | 318 | 20 | 5,088 | 6/4/25 | 69 | 6 | 37 | 57 | New Construction - Initial | 1/1/80 |
| 4010 | 40090 | ALLEY WALNUT AVE | FIFTEENTH ST | ALLEY SIXTEENTH ST | O | AC | 6 | 162 | 20 | 2,592 | 6/4/25 | 66 | 4 | 30 | 66 | New Construction - Initial | 1/1/80 |
| 4010 | 40100 | ALLEY WALNUT AVE | SIXTEENTH ST | SEVENTEENTH ST | O | AC | 6 | 318 | 20 | 5,724 | 6/2/25 | 80 | 0 | 50 | 50 | New Construction - Initial | 1/1/80 |
| 4010 | 40110 | ALLEY WALNUT AVE | SEVENTEETH ST | EIGHTEENTH ST | O | AC | 6 | 318 | 20 | 6,360 | 6/2/25 | 66 | 0 | 22 | 78 | New Construction - Initial | 1/1/80 |
| 4010 | 40120 | ALLEY WALNUT AVE | EIGHTEENTH ST | NINTEENTH ST | O | AC | 6 | 318 | 20 | 6,360 | 5/27/25 | 93 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 4010 | 40130 | ALLEY WALNUT AVE | NINTEENTH ST | TWENTIETH ST | O | AC | 6 | 318 | 20 | 5,088 | 5/27/25 | 68 | 0 | 91 | 9 | New Construction - Initial | 1/1/80 |
| 4010 | 40140 | ALLEY WALNUT AVE | TWENTIETH ST | TWENTY-FIRST ST | O | AC | 6 | 318 | 20 | 6,360 | 6/3/25 | 53 | 0 | 46 | 54 | New Construction - Initial | 1/1/80 |
| 4010 | 40150 | ALLEY WALNUT AVE | TWENTY FIRST | TWENTY SECOND | O | PCC | 6 | 318 | 20 | 5,088 | 5/27/25 | 94 | 93 | 7 | 0 | New Construction - Initial | 1/1/80 |
| 4010 | 40160 | ALLEY WALNUT AVE | TWENTY-SECOND ST | GOLDENWEST ST | O | AC | 6 | 318 | 20 | 5,088 | 6/4/25 | 66 | 45 | 17 | 38 | New Construction - Initial | 1/1/80 |
| 104 | 10004 | ALLEY WARNER AVE | WEATHERLY LN | SCEPTRE LN | O | AC | 2 | 721 | 20 | 11,536 | 2/6/25 | 82 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 104 | 10034 | ALLEY WARNER AVE | OAK LN | END | O | PCC | 4 | 150 | 20 | 3,000 | 6/12/25 | 90 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 104 | 10123 | ALLEY WARNER AVE | ALLEY LILAC LN | LILAC LN | O | AC | 3 | 385 | 20 | 6,160 | 3/19/25 | 34 | 59 | 39 | 2 | New Construction | 1/1/80 |
| 104 | 10554 | ALLEY WARNER AVE | MINORU LN | END | O | AC | 4 | 311 | 20 | 4,976 | 3/19/25 | 99 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 104 | 10566 | ALLEY WARNER AVE | PINEHURST LN | ALLEY PINEHURST LN | O | AC | 5 | 131 | 20 | 2,096 | 3/28/25 | 36 | 54 | 19 | 27 | New Construction | 1/1/80 |
| 104 | 10567 | ALLEY WARNER AVE | ALLEY PINEHURST LN | ALLEY GROVE CIR | O | AC | 5 | 257 | 20 | 4,112 | 3/28/25 | 32 | 49 | 31 | 20 | New Construction | 1/1/80 |
| 104 | 10568 | ALLEY WARNER AVE | ALLEY GROVE CIR | ALLEY EVERGREEN CIR | O | AC | 5 | 257 | 20 | 4,112 | 3/28/25 | 61 | 36 | 47 | 17 | New Construction | 1/1/80 |
| 2285 | 10472 | ALLEY WHITESANDS DR | ALLEY YORKTOWN AVE | END | O | AC | 6 | 76 | 20 | 1,216 | 6/13/25 | 34 | 68 | 10 | 22 | New Construction | 1/1/80 |
| 2285 | 10473 | ALLEY WHITESANDS DR | END | ALLEY YORKTOWN AVE | O | AC | 6 | 200 | 20 | 3,200 | 5/27/25 | 37 | 86 | 7 | 7 | New Construction | 1/1/80 |
| 4000 | 10150 | ALLEY WHITEWATER DR | ALLEY PARK MEADOW LN | DELAWARE ST | O | AC | 4 | 660 | 20 | 10,560 | 1/30/25 | 58 | 54 | 43 | 3 | New Construction - Initial | 1/1/80 |
| 105 | 10479 | ALLEY WITCHITA AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 322 | 20 | 5,152 | 6/12/25 | 43 | 44 | 50 | 6 | New Construction | 1/1/80 |
| 2286 | 10471 | ALLEY YORKTOWN AVE | WHITESANDS DR | ALLEY WHITESANDS DR | O | AC | 6 | 162 | 20 | 2,592 | 5/27/25 | 56 | 87 | 13 | 0 | New Construction | 1/1/80 |
| 2286 | 10474 | ALLEY YORKTOWN AVE | ENGLAND ST | END | O | AC | 6 | 224 | 20 | 3,680 | 6/9/25 | 25 | 25 | 22 | 53 | New Construction | 1/1/80 |
| 5240 | 60390 | PASCHALLS LN | PACIFIC N | PCH | O | AC | 2 | 238 | 17 | 4,046 | 2/6/25 | 92 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| | | | | | | | | **34.2** | | **3,202,203** | | | | | | | |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | ***Arterials / Collector (MPAH)*** | | | | | | | | | | | | | | | |
| 194 | 15 | BOLSA AVE | GRAHAM ST | TRAVELWAY | A | AC | ~ | 648 | 38 | 24,624 | 4/28/26 | 19 | 52 | 33 | 15 | New Construction - Initial | 1/1/80 |
| 194 | 16 | BOLSA AVE | TRAVELWAY | DAN LN | A | AC | ~ | 609 | 38 | 23,142 | 4/28/26 | 26 | 46 | 38 | 16 | New Construction - Initial | 1/1/80 |
| 194 | 17010 | BOLSA AVE | EDWARDS ST | DRAKE LN | A | AC | ~ | 1,165 | 34 | 39,610 | 4/24/26 | 27 | 66 | 24 | 10 | New Construction - Initial | 1/1/80 |
| 194 | 20 | BOLSA AVE | DRAKE LN | EDWARDS ST | A | AC | ~ | 1,165 | 34 | 39,610 | 4/24/26 | 28 | 81 | 12 | 7 | New Construction - Initial | 1/1/80 |
| 1503 | 79 | RANCHO RD | GRAHAM ST | SPA DR | C | AC | ~ | 777 | 16 | 12,432 | 4/7/26 | 29 | 75 | 25 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 794 | MAGNOLIA ST | CARROLLTOWN DR | INDIANAPOLIS AVE | A | AC | ~ | 1,524 | 40 | 60,960 | 4/14/26 | 30 | 53 | 40 | 7 | New Construction - Initial | 1/1/80 |
| 194 | 615 | BOLSA AVE | DRAKE LN | SPRINGDALE ST | A | AC | ~ | 1,481 | 34 | 50,354 | 4/24/26 | 30 | 64 | 32 | 4 | New Construction - Initial | 1/1/80 |
| 194 | 17 | BOLSA AVE | DAN LN | SPRINGDALE ST | A | AC | ~ | 1,325 | 38 | 50,350 | 4/24/26 | 35 | 85 | 15 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 884 | YORKTOWN AVE | SALMON LN | BUSHARD ST | C | AC | ~ | 1,190 | 33 | 39,270 | 4/24/26 | 39 | 52 | 44 | 4 | Surface Treatment - Slurry Seal | 7/1/11 |
| 1751 | 247 | SPRINGDALE ST | SLATER AVE | FRITCH DR | A | AC | ~ | 1,462 | 40 | 58,480 | 5/4/26 | 40 | 45 | 49 | 6 | New Construction - Initial | 1/1/80 |
| 194 | 173 | BOLSA AVE | SPRINGDALE ST | DRAKE LN | A | AC | ~ | 1,481 | 34 | 50,354 | 4/24/26 | 40 | 72 | 28 | 0 | New Construction - Initial | 1/1/80 |
| 1751 | 248 | SPRINGDALE ST | FRITCH DR | TALBERT AVE | A | AC | ~ | 1,185 | 40 | 47,400 | 5/4/26 | 41 | 43 | 45 | 12 | New Construction - Initial | 1/1/80 |
| 789 | 516 | HAMILTON AVE | POLYNESIAN LN | MAGNOLIA ST | C | AC | ~ | 590 | 31 | 18,290 | 4/27/26 | 42 | 44 | 49 | 7 | New Construction - Initial | 1/1/80 |
| 746 | 683 | GOTHARD ST | CEDAR AVE | WARNER AVE | A | AC | ~ | 990 | 30 | 29,700 | 5/5/26 | 42 | 35 | 56 | 9 | New Construction - Initial | 1/1/80 |
| 746 | 240 | GOTHARD ST | CEDAR AVE | SLATER AVE | A | AC | ~ | 1,652 | 30 | 49,560 | 5/5/26 | 42 | 32 | 58 | 10 | New Construction - Initial | 1/1/80 |
| 1995 | 157 | WARD ST | GARFIELD AVE | TANA DR | C | AC | ~ | 703 | 16 | 11,248 | 4/21/26 | 43 | 57 | 43 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 721 | YORKTOWN AVE | BROOKHURST ST | SALMON LN | C | AC | ~ | 1,450 | 33 | 47,850 | 4/24/26 | 43 | 47 | 46 | 7 | Surface Treatment - Slurry Seal | 7/1/11 |
| 746 | 704 | GOTHARD ST | PRODAN DR | TALBERT AVE | A | AC | ~ | 1,020 | 30 | 30,600 | 5/5/26 | 44 | 47 | 42 | 11 | New Construction - Initial | 1/1/80 |
| 789 | 779 | HAMILTON AVE | BROOKHURST ST | VIA STRAITS LN | C | AC | ~ | 1,573 | 31 | 48,763 | 4/27/26 | 44 | 45 | 52 | 3 | New Construction - Initial | 1/1/80 |
| 746 | 241 | GOTHARD ST | WARNER AVE | CEDAR AVE | A | AC | ~ | 990 | 30 | 31,700 | 5/5/26 | 45 | 40 | 49 | 11 | New Construction - Initial | 1/1/80 |
| 746 | 603 | GOTHARD ST | BELVA DR | SLATER AVE | A | AC | ~ | 1,320 | 30 | 39,600 | 5/5/26 | 46 | 30 | 57 | 13 | New Construction - Initial | 1/1/80 |
| 743 | 103 | GOLDENWEST ST | SUMMIT DR | YORKTOWN AVE | A | AC | ~ | 1,424 | 42 | 66,308 | 4/23/26 | 46 | 41 | 38 | 21 | New Construction - Initial | 1/1/80 |
| 500 | 318 | DELAWARE ST | INDIANAPOLIS AVE | MEMPHIS AVE | C | AC | ~ | 1,319 | 51 | 67,269 | 4/29/26 | 46 | 51 | 38 | 11 | New Construction - Initial | 1/1/80 |
| 500 | 319 | DELAWARE ST | FRANKFORT AVE | INDIANAPOLIS AVE | C | AC | ~ | 991 | 51 | 50,541 | 4/29/26 | 48 | 32 | 49 | 19 | New Construction - Initial | 1/1/80 |
| 569 | 82 | EDWARDS ST | CITY LIMIT NORTH | ROYAL OAK DR | A | AAC | ~ | 394 | 13 | 5,122 | 4/29/26 | 48 | 94 | 6 | 0 | Overlay - AC Structural | 7/1/11 |
| 703 | 713 | GARFIELD AVE | MAIN ST | GOTHARD ST | A | AC | ~ | 1,238 | 45 | 55,710 | 5/4/26 | 48 | 33 | 61 | 6 | New Construction - Initial | 1/1/80 |
| 569 | 449 | EDWARDS ST | HEIL AVE | EDGEMONT DR | A | AC | ~ | 690 | 28 | 19,320 | 4/22/26 | 49 | 51 | 47 | 2 | New Construction - Initial | 1/1/80 |
| 1751 | 690 | SPRINGDALE ST | TALBERT AVE | FRITCH DR | A | AC | ~ | 1,185 | 40 | 47,400 | 5/4/26 | 49 | 35 | 53 | 12 | New Construction - Initial | 1/1/80 |
| 746 | 262 | GOTHARD ST | TALBERT AVE | PRODAN DR | A | AC | ~ | 1,020 | 30 | 30,600 | 5/5/26 | 49 | 38 | 60 | 2 | New Construction - Initial | 1/1/80 |
| 825 | 864 | HEIL AVE | GOTHARD ST | SABOT LN | A | AC | ~ | 1,154 | 61 | 70,394 | 5/4/26 | 49 | 57 | 35 | 8 | New Construction - Initial | 1/1/80 |
| 1670 | 807 | SEVENTEENTH ST | PALM AVE | ORANGE AVE | A | AC | ~ | 1,237 | 28 | 34,636 | 4/13/26 | 49 | 37 | 63 | 0 | New Construction - Initial | 1/1/80 |
| 746 | 705 | GOTHARD ST | MOUNTJOY DR | PRODAN DR | A | AC | ~ | 1,054 | 30 | 31,620 | 5/5/26 | 49 | 33 | 49 | 18 | New Construction - Initial | 1/1/80 |
| 746 | 682 | GOTHARD ST | SLATER AVE | CEDAR AVE | A | AC | ~ | 1,652 | 30 | 49,560 | 5/5/26 | 50 | 35 | 53 | 12 | New Construction - Initial | 1/1/80 |
| 743 | 141 | GOLDENWEST ST | GARFIELD AVE | SUMMIT DR | A | AC | ~ | 1,236 | 41 | 52,676 | 4/23/26 | 50 | 23 | 65 | 12 | New Construction - Initial | 1/1/80 |
| 746 | 162 | GOTHARD ST | BELVA DR | TALBERT AVE | A | AC | ~ | 1,320 | 30 | 39,600 | 5/5/26 | 50 | 26 | 72 | 2 | New Construction - Initial | 1/1/80 |
| 569 | 856 | EDWARDS ST | LENNOX DR | EDINGER AVE | A | AC | ~ | 892 | 28 | 27,226 | 4/22/26 | 50 | 57 | 42 | 1 | New Construction - Initial | 1/1/80 |
| 1290 | 425 | NEWLAND ST | ARNETT DR | WARNER AVE | A | AC | ~ | 866 | 60 | 51,960 | 5/1/26 | 51 | 49 | 39 | 12 | New Construction - Initial | 1/1/80 |
| 194 | 466 | BOLSA AVE | VICTORIA LN | EDWARDS ST | A | AAC | ~ | 1,316 | 46 | 60,536 | 4/21/26 | 51 | 70 | 27 | 3 | Overlay - AC Structural | 7/1/11 |
| 746 | 706 | GOTHARD ST | ELLIS AVE | MOUNTJOY DR | A | AC | ~ | 561 | 30 | 16,830 | 5/5/26 | 51 | 32 | 56 | 12 | New Construction - Initial | 1/1/80 |
| 746 | 604 | GOTHARD ST | TABLERT AVE | BELVA DR | A | AC | ~ | 1,320 | 30 | 39,600 | 5/5/26 | 51 | 44 | 53 | 3 | New Construction - Initial | 1/1/80 |
| 569 | 84 | EDWARDS ST | MAR VISTA DR | BOLSA AVE | A | AAC | ~ | 631 | 13 | 8,203 | 4/29/26 | 52 | 32 | 68 | 0 | Overlay - AC Structural | 7/1/11 |
| 703 | 158 | GARFIELD AVE | WARD ST | END | A | AC | ~ | 1,505 | 22 | 33,110 | 4/21/26 | 52 | 40 | 35 | 25 | New Construction - Initial | 1/1/80 |
| 751 | 402 | GRAHAM ST | EDINGER AVE | MEADOWLARK DR | A | AC | ~ | 1,485 | 60 | 89,100 | 4/28/26 | 52 | 38 | 56 | 6 | New Construction - Initial | 1/1/80 |
| 1997 | 426 | WARNER AVE | MAGNOLIA ST | ROSS LN | A | AC | ~ | 1,450 | 37 | 62,282 | 4/13/26 | 52 | 52 | 44 | 4 | New Construction - Initial | 1/1/80 |
| 569 | 448 | EDWARDS ST | EDGEMONT DR | LENNOX DR | A | AC | ~ | 1,058 | 28 | 30,624 | 4/22/26 | 52 | 57 | 43 | 0 | New Construction - Initial | 1/1/80 |
| 746 | 860 | GOTHARD ST | PRINCE DR | HEIL AVE | A | AC | ~ | 1,330 | 60 | 79,800 | 4/22/26 | 52 | 45 | 53 | 2 | New Construction - Initial | 1/1/80 |
| 1351 | 326 | ORANGE AVE | ATLANTA AVE | THIRD ST | C | AC | ~ | 657 | 25 | 16,425 | 4/27/26 | 53 | 72 | 27 | 1 | New Construction - Initial | 1/1/80 |
| 1995 | 57 | WARD ST | TANA DR | SUNDAY DR | C | AC | ~ | 1,002 | 16 | 16,032 | 4/21/26 | 53 | 51 | 49 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 218 | WARNER AVE | LYNN ST | BOLSA CHICA ST | A | AC | ~ | 1,320 | 42 | 59,940 | 4/29/26 | 53 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 137 | WARNER AVE | GOLDENWEST ST | GOTHARD ST | A | AC | ~ | 1,982 | 43 | 99,988 | 5/8/26 | 53 | 44 | 51 | 5 | New Construction - Initial | 1/1/80 |
| 194 | 24 | BOLSA AVE | EDWARDS ST | VICTORIA LN | A | AAC | ~ | 1,316 | 34 | 44,744 | 4/24/26 | 54 | 87 | 13 | 0 | Overlay - AC Structural | 7/1/11 |
| 1997 | 868 | WARNER AVE | ROSS LN | MAGNOLIA ST | A | AC | ~ | 1,450 | 37 | 53,650 | 4/29/26 | 54 | 54 | 37 | 9 | New Construction - Initial | 1/1/80 |
| 569 | 229 | EDWARDS ST | HEIL AVE | CRANDALL DR | A | AC | ~ | 859 | 28 | 24,052 | 5/4/26 | 54 | 36 | 53 | 11 | New Construction - Initial | 1/1/80 |
| 1290 | 424 | NEWLAND ST | HEIL AVE | LAMAR DR | A | AC | ~ | 931 | 60 | 55,860 | 5/1/26 | 55 | 50 | 44 | 6 | New Construction - Initial | 1/1/80 |
| 746 | 161 | GOTHARD ST | SLATER AVE | BELVA DR | A | AC | ~ | 1,320 | 30 | 39,600 | 5/5/26 | 55 | 41 | 56 | 3 | New Construction - Initial | 1/1/80 |
| 194 | 459 | BOLSA AVE | SPRINGDALE ST | DAN LN | A | AC | ~ | 1,325 | 38 | 50,350 | 4/24/26 | 55 | 66 | 23 | 11 | New Construction - Initial | 1/1/80 |
| 258 | 298 | BUSHARD ST | YELLOWSTONE DR | INDIANAPOLIS AVE | C | AAC | ~ | 1,288 | 60 | 77,280 | 4/14/26 | 55 | 47 | 45 | 8 | Overlay - AC Structural | 9/1/06 |
| 1127 | 795 | MAGNOLIA ST | ATLANTA AVE | CARROLLTOWN DR | A | AC | ~ | 1,117 | 40 | 44,680 | 4/14/26 | 55 | 26 | 66 | 8 | New Construction - Initial | 1/1/80 |
| 1290 | 255 | NEWLAND ST | WARNER AVE | FRIESLAND DR | A | AC | ~ | 1,466 | 30 | 43,980 | 4/30/26 | 55 | 44 | 45 | 11 | New Construction - Initial | 1/1/80 |
| 703 | 271 | GARFIELD AVE | GOTHARD ST | MAIN ST | A | AC | ~ | 1,238 | 45 | 55,710 | 5/8/26 | 55 | 36 | 57 | 7 | New Construction - Initial | 1/1/80 |
| 1351 | 362 | ORANGE AVE | SEVENTEENTH ST | GOLDENWEST ST | C | AC | ~ | 1,965 | 25 | 49,125 | 4/13/26 | 55 | 36 | 52 | 12 | New Construction - Initial | 1/1/80 |
| 746 | 264 | GOTHARD ST | MOUNTJOY DR | ELLIS AVE | A | AC | ~ | 561 | 30 | 16,830 | 5/5/26 | 56 | 41 | 54 | 5 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1997 | 869 | WARNER AVE | NEWLAND ST | ROSS LN | A | AC | ~ | 1,189 | 37 | 43,993 | 4/29/26 | 56 | 39 | 49 | 12 | New Construction - Initial | 1/1/80 |
| 9 | 313 | ADAMS AVE | LAKE ST | DELAWARE ST | A | AC | ~ | 1,517 | 32 | 48,544 | 4/27/26 | 56 | 28 | 68 | 4 | New Construction - Initial | 1/1/80 |
| 743 | 580 | GOLDENWEST ST | CENTRAL PARK | RIO VISTA DR | A | AC | ~ | 1,478 | 40 | 62,620 | 5/6/26 | 56 | 37 | 53 | 10 | New Construction - Initial | 1/1/80 |
| 746 | 263 | GOTHARD ST | PRODAN DR | MOUNTJOY DR | A | AC | ~ | 1,054 | 30 | 31,620 | 5/5/26 | 56 | 41 | 48 | 11 | New Construction - Initial | 1/1/80 |
| 1351 | 804 | ORANGE AVE | GOLDENWEST ST | SEVENTEENTH ST | C | AC | ~ | 1,965 | 25 | 49,125 | 4/13/26 | 56 | 28 | 56 | 16 | New Construction - Initial | 1/1/80 |
| 743 | 581 | GOLDENWEST ST | EQUESTRIAN CENTER | CENTRAL PARK | A | AC | ~ | 1,959 | 40 | 81,860 | 5/6/26 | 57 | 35 | 61 | 4 | New Construction - Initial | 1/1/80 |
| 569 | 670 | EDWARDS ST | SHIELDS DR | CRANDALL DR | A | AC | ~ | 863 | 28 | 24,164 | 5/4/26 | 57 | 30 | 60 | 10 | New Construction - Initial | 1/1/80 |
| 1385 | 363 | PALM AVE | SEVENTEENTH ST | GOLDENWEST ST | C | AC | ~ | 1,965 | 24 | 47,160 | 4/23/26 | 57 | 47 | 49 | 4 | New Construction - Initial | 1/1/80 |
| 1670 | 365 | SEVENTEENTH ST | ORANGE AVE | PALM AVE | A | AC | ~ | 1,237 | 28 | 34,636 | 4/23/26 | 57 | 24 | 75 | 1 | New Construction - Initial | 1/1/80 |
| 569 | 414 | EDWARDS ST | EDINGER AVE | LENNOX DR | A | AC | ~ | 892 | 28 | 26,476 | 4/22/26 | 57 | 40 | 57 | 3 | New Construction - Initial | 1/1/80 |
| 1290 | 429 | NEWLAND ST | LAMAR DR | ARNETT DR | A | AC | ~ | 844 | 60 | 50,640 | 5/1/26 | 57 | 45 | 48 | 7 | New Construction - Initial | 1/1/80 |
| 9 | 305 | ADAMS AVE | DELAWARE ST | BEACH BL | A | AC | ~ | 1,320 | 33 | 43,560 | 4/27/26 | 58 | 30 | 63 | 7 | New Construction - Initial | 1/1/80 |
| 703 | 52 | GARFIELD AVE | BROOKFIELD MANOR | BROOKHURST ST | A | AC | ~ | 839 | 33 | 27,687 | 4/9/26 | 58 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 258 | 297 | BUSHARD ST | ADAMS AVE | YELLOWSTONE DR | C | AAC | ~ | 1,354 | 60 | 81,240 | 4/14/26 | 58 | 53 | 40 | 7 | Overlay - AC Structural | 9/1/06 |
| 9 | 725 | ADAMS AVE | MAGNOLIA ST | CROWN REEF LN | A | AAC | ~ | 1,608 | 40 | 64,320 | 4/28/26 | 58 | 24 | 74 | 2 | Overlay - AC Structural | 8/1/17 |
| 1290 | 123 | NEWLAND ST | FRIESLAND DR.(W) | SLATER AVE | A | AC | ~ | 1,175 | 30 | 35,250 | 4/30/26 | 58 | 35 | 37 | 28 | New Construction - Initial | 1/1/80 |
| 589 | 259 | ELLIS AVE | DELAWARE ST | MAIN ST | A | AAC | ~ | 1,109 | 60 | 66,540 | 4/13/26 | 58 | 54 | 46 | 0 | Overlay - AC Thin | 7/1/06 |
| 2082 | 279 | YORKTOWN AVE | SALMON LN (N) | BROOKHURST ST | C | AC | ~ | 1,450 | 33 | 47,850 | 4/23/26 | 58 | 37 | 63 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 703 | 274 | GARFIELD AVE | BEACH BL | LISTER LN | A | AC | ~ | 1,363 | 38 | 51,794 | 4/28/26 | 58 | 24 | 75 | 1 | New Construction - Initial | 1/1/80 |
| 240 | 737 | BROOKHURST ST | PECK DR | ADAMS AVE | A | AC | ~ | 1,649 | 39 | 64,311 | 4/27/26 | 59 | 39 | 43 | 18 | New Construction - Initial | 1/1/80 |
| 195 | 405 | BOLSA CHICA ST | PEARCE ST | WARNER AVE | A | AAC | ~ | 1,321 | 38 | 50,198 | 4/28/26 | 59 | 17 | 68 | 15 | Overlay - AC Structural | 9/11/07 |
| 569 | 6 | EDWARDS ST | LENNOX DR | EDGEMONT DR | A | AC | ~ | 1,058 | 28 | 29,624 | 5/1/26 | 59 | 53 | 46 | 1 | New Construction - Initial | 1/1/80 |
| 1751 | 32 | SPRINGDALE ST | MC FADDEN AVE | PRISCILLA DR | A | AAC | ~ | 961 | 38 | 36,518 | 4/28/26 | 59 | 100 | 0 | 0 | Overlay - AC Structural | 6/21/12 |
| 703 | 275 | GARFIELD AVE | LISTER LN | NEWLAND ST | A | AC | ~ | 1,281 | 39 | 49,959 | 4/28/26 | 59 | 30 | 69 | 1 | New Construction - Initial | 1/1/80 |
| 1290 | 697 | NEWLAND ST | FRIESLAND DR | WARNER AVE | A | AC | ~ | 1,466 | 27 | 39,582 | 4/30/26 | 59 | 37 | 52 | 11 | New Construction - Initial | 1/1/80 |
| 240 | 344 | BROOKHURST ST | EFFINGHAM DR | HAMILTON AVE | A | AC | ~ | 1,446 | 39 | 56,394 | 4/27/26 | 59 | 29 | 53 | 18 | New Construction - Initial | 1/1/80 |
| 743 | 833 | GOLDENWEST ST | BETTY DR | WARNER AVE | A | AC | ~ | 1,452 | 40 | 60,330 | 5/6/26 | 60 | 44 | 43 | 13 | New Construction - Initial | 1/1/80 |
| 1290 | 567 | NEWLAND ST | GARFIELD AVE | KINGSPORT DR | A | AAC | ~ | 385 | 27 | 10,395 | 4/24/26 | 60 | 29 | 60 | 11 | Overlay - AC Structural | 7/1/11 |
| 240 | 738 | BROOKHURST ST | INDIANAPOLIS AVE | PECK DR | A | AC | ~ | 1,000 | 39 | 39,000 | 4/27/26 | 60 | 29 | 61 | 10 | New Construction - Initial | 1/1/80 |
| 195 | 651 | BOLSA CHICA ST | HEIL AVE | OAHU DR | A | AAC | ~ | 1,098 | 38 | 41,724 | 4/28/26 | 60 | 0 | 93 | 7 | Overlay - AC Structural | 9/11/07 |
| 1290 | 565 | NEWLAND ST | SLATER AVE | FRIESLAND DR | A | AC | ~ | 1,175 | 27 | 31,725 | 4/30/26 | 60 | 36 | 55 | 9 | New Construction - Initial | 1/1/80 |
| 1838 | 691 | TALBERT AVE | SPRINGDALE ST | END | A | AC | ~ | 1,566 | 30 | 46,980 | 4/4/22 | 60 | 77 | 23 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 716 | GARFIELD AVE | LISTER LN | BEACH BL | A | AC | ~ | 1,363 | 38 | 51,794 | 4/28/26 | 60 | 27 | 72 | 1 | New Construction - Initial | 1/1/80 |
| 566 | 638 | EDINGER AVE | GOLDENWEST ST | SHERBECK LN | A | AC | ~ | 1,192 | 39 | 46,488 | 5/8/26 | 60 | 29 | 65 | 6 | New Construction - Initial | 1/1/80 |
| 1290 | 566 | NEWLAND ST | KINGSPORT DR | MODALE DR | A | AAC | ~ | 937 | 27 | 25,299 | 4/24/26 | 61 | 23 | 77 | 0 | Overlay - AC Structural | 7/1/11 |
| 589 | 261 | ELLIS AVE | HUNTINGTON ST | DELAWARE ST | A | AAC | ~ | 699 | 60 | 41,940 | 5/5/26 | 61 | 64 | 35 | 1 | Overlay - AC Structural | 7/1/06 |
| 1290 | 130 | NEWLAND ST | PUERTO DR | ATLANTA AVE | A | AAC | ~ | 720 | 60 | 43,200 | 4/29/26 | 61 | 22 | 78 | 0 | Overlay - AC Structural | 9/11/07 |
| 1751 | 613 | SPRINGDALE ST | SKYLAB RD | BRIARCLIFF DR | A | AAC | ~ | 1,084 | 33 | 35,772 | 4/24/26 | 61 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 569 | 83 | EDWARDS ST | ROYAL OAK DR | MAR VISTA DR | A | AAC | ~ | 1,287 | 13 | 16,731 | 4/29/26 | 61 | 53 | 47 | 0 | Overlay - AC Structural | 7/1/11 |
| 1751 | 689 | SPRINGDALE ST | FRITCH DR | SLATER AVE | A | AC | ~ | 1,462 | 40 | 58,480 | 5/4/26 | 61 | 21 | 77 | 2 | New Construction - Initial | 1/1/80 |
| 1751 | 171 | SPRINGDALE ST | BRIARCLIFF DR | SKYLAB RD | A | AAC | ~ | 1,084 | 33 | 35,772 | 4/24/26 | 61 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 789 | 60890 | HAMILTON AVE | BROOKHURST ST | BRIDGE | C | AC | ~ | 345 | 31 | 10,695 | 5/6/26 | 61 | 30 | 70 | 0 | New Construction - AC | 1/1/80 |
| 500 | 320 | DELAWARE ST | ATLANTA AVE | FRANKFORT AVE | C | AC | ~ | 1,671 | 60 | 100,260 | 4/29/26 | 61 | 39 | 54 | 7 | New Construction - Initial | 1/1/80 |
| 1670 | 364 | SEVENTEENTH ST | PCH | ORANGE AVE | A | AC | ~ | 1,239 | 28 | 34,692 | 4/23/26 | 61 | 21 | 79 | 0 | New Construction - Initial | 1/1/80 |
| 500 | 384 | DELAWARE ST | YORKTOWN AVE | CLAY AVE | C | AAC | ~ | 1,320 | 60 | 79,200 | 4/30/26 | 61 | 29 | 69 | 2 | Overlay - AC Structural | 7/1/11 |
| 1290 | 129 | NEWLAND ST | INDIANAPOLIS AVE | PUERTO DR | A | AAC | ~ | 1,931 | 60 | 115,860 | 4/29/26 | 62 | 23 | 75 | 2 | Overlay - AC Structural | 9/11/07 |
| 1290 | 124 | NEWLAND ST | MODALE DR | KINGSPORT DR | A | AAC | ~ | 937 | 30 | 28,110 | 4/24/26 | 62 | 30 | 67 | 3 | Overlay - AC Structural | 7/1/11 |
| 703 | 51 | GARFIELD AVE | BLUEFIN LN | BROOKFIELD MANOR | A | AC | ~ | 1,213 | 33 | 40,029 | 4/9/26 | 62 | 33 | 60 | 7 | New Construction - Initial | 1/1/80 |
| 743 | 90 | GOLDENWEST ST | HEIL AVE | MADDOX DR | A | AAC | ~ | 533 | 40 | 21,320 | 5/4/26 | 62 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 2082 | 839 | YORKTOWN AVE | DELAWARE ST | LAKE ST | C | AC | ~ | 1,601 | 31 | 49,631 | 4/28/26 | 62 | 19 | 61 | 20 | New Construction - Initial | 1/1/80 |
| 1127 | 789 | MAGNOLIA ST | HAMILTON AVE | STILWELL DR | A | AC | ~ | 1,293 | 40 | 51,720 | 4/16/26 | 62 | 26 | 73 | 1 | New Construction - Initial | 1/1/80 |
| 195 | 843 | BOLSA CHICA ST | OAHU DR | EDINGER AVE | A | AAC | ~ | 1,543 | 37 | 57,091 | 4/28/26 | 62 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 1385 | 809 | PALM AVE | GOLDENWEST ST | OFELIA LN | A | AC | ~ | 1,476 | 31 | 45,756 | 4/23/26 | 62 | 60 | 39 | 1 | New Construction - Initial | 1/1/80 |
| 825 | 447 | HEIL AVE | SABOT LN | GOLDENWEST ST | A | AC | ~ | 828 | 61 | 50,508 | 5/4/26 | 62 | 51 | 30 | 19 | New Construction - Initial | 1/1/80 |
| 1290 | 709 | NEWLAND ST | MODALE DR | ELLIS AVE | A | AAC | ~ | 1,322 | 27 | 35,694 | 4/24/26 | 62 | 21 | 71 | 8 | Overlay - AC Structural | 7/1/11 |
| 1751 | 170 | SPRINGDALE ST | SKYLAB RD | BOLSA AVE | A | AAC | ~ | 1,435 | 33 | 54,855 | 4/24/26 | 62 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 195 | 531 | BOLSA CHICA ST | PEARCE ST | HEIL AVE | A | AAC | ~ | 1,321 | 38 | 50,198 | 5/5/26 | 62 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 1290 | 335 | NEWLAND ST | EDISON AVE | PCH | A | AAC | ~ | 1,524 | 42 | 54,008 | 4/15/26 | 62 | 65 | 35 | 0 | Overlay - AC Structural | 9/11/07 |
| 569 | 677 | EDWARDS ST | FREEBORN DR | WARNER DR | A | AAC | ~ | 1,197 | 30 | 35,910 | 5/7/26 | 63 | 24 | 70 | 6 | Overlay - AC Structural | 7/1/11 |
| 789 | 515 | HAMILTON AVE | NORTHSHORE LN | POLYNESIAN LN | C | AC | ~ | 1,338 | 31 | 41,478 | 4/27/26 | 63 | 35 | 59 | 6 | New Construction - Initial | 1/1/80 |
| 1290 | 128 | NEWLAND ST | ADAMS AVE | KELSO DR | A | AAC | ~ | 959 | 60 | 57,540 | 4/30/26 | 63 | 29 | 70 | 1 | Overlay - AC Structural | 9/11/07 |
| 566 | 182 | EDINGER AVE | SHER LN | BEACH BL | A | AC | ~ | 1,590 | 31 | 49,290 | 4/22/26 | 63 | 24 | 47 | 29 | New Construction - Initial | 1/1/80 |
| 703 | 487 | GARFIELD AVE | MAGNOLIA ST | LINDSAY LN | A | AAC | ~ | 778 | 15 | 11,670 | 4/20/26 | 63 | 51 | 49 | 0 | Overlay - AC Structural | 7/1/10 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 195 | 89 | BOLSA CHICA ST | HEIL AVE | PEARCE ST | A | AC | ~ | 1,321 | 38 | 50,198 | 4/28/26 | 63 | 22 | 68 | 10 | New Construction - Initial | 1/1/80 |
| 1997 | 427 | WARNER AVE | ROSS LN | NEWLAND ST | A | AC | ~ | 1,189 | 37 | 49,641 | 4/13/26 | 63 | 57 | 35 | 8 | New Construction - Initial | 1/1/80 |
| 9 | 755 | ADAMS AVE | DELAWARE ST | LAKE ST | A | AC | ~ | 1,517 | 32 | 48,544 | 4/24/26 | 63 | 23 | 69 | 8 | New Construction - Initial | 1/1/80 |
| 500 | 160 | DELAWARE ST | UTICA AVE | YORKTOWN AVE | C | AC | ~ | 1,321 | 60 | 79,260 | 4/29/26 | 64 | 22 | 71 | 7 | New Construction - Initial | 1/1/80 |
| 195 | 401 | BOLSA CHICA ST | EDINGER AVE | OAHU DR | A | AAC | ~ | 1,543 | 41 | 63,263 | 4/28/26 | 64 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 1995 | 599 | WARD ST | TANA DR | GARFIELD AVE | C | AC | ~ | 703 | 16 | 11,248 | 4/21/26 | 64 | 31 | 58 | 11 | New Construction - Initial | 1/1/80 |
| 9 | 283 | ADAMS AVE | CROWN REEF LN | MAGNOLIA ST | A | AAC | ~ | 1,608 | 40 | 64,320 | 4/27/26 | 64 | 38 | 62 | 0 | Overlay - AC Structural | 8/1/17 |
| 500 | 431 | DELAWARE ST | MEMPHIS AVE | ADAMS AVE | C | AC | ~ | 1,321 | 60 | 79,260 | 4/29/26 | 64 | 26 | 73 | 1 | New Construction - Initial | 1/1/80 |
| 1997 | 135 | WARNER AVE | BEACH BLVD | ASH ST | A | AC | ~ | 874 | 43 | 41,522 | 4/30/26 | 64 | 39 | 61 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 556 | MAGNOLIA ST | INDIANAPOLIS AVE | BEDEL DR | A | AC | ~ | 794 | 33 | 28,202 | 4/8/26 | 64 | 68 | 32 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 127 | NEWLAND ST | DEEPVIEW DR | ADAMS AVE | A | AAC | ~ | 1,193 | 60 | 71,580 | 4/21/26 | 64 | 19 | 81 | 0 | Overlay - AC Structural | 9/11/07 |
| 746 | 861 | GOTHARD ST | WARNER AVE | PRINCE DR | A | AC | ~ | 1,310 | 60 | 78,600 | 5/4/26 | 64 | 28 | 68 | 4 | New Construction - Initial | 1/1/80 |
| 1385 | 805 | PALM AVE | GOLDENWEST ST | SEVENTEENTH ST | C | AC | ~ | 1,965 | 24 | 47,160 | 4/23/26 | 64 | 24 | 75 | 1 | New Construction - Initial | 1/1/80 |
| 789 | 437 | HAMILTON AVE | NORTHSHORE LN | BUSHARD ST | C | AC | ~ | 714 | 31 | 22,134 | 5/6/26 | 64 | 15 | 33 | 52 | New Construction - Initial | 1/1/80 |
| 789 | 778 | HAMILTON AVE | VIA STRAITS LN | BUSHARD ST | C | AC | ~ | 1,067 | 31 | 33,077 | 4/16/26 | 64 | 28 | 72 | 0 | New Construction - Initial | 1/1/80 |
| 9 | 281 | ADAMS AVE | BROOKHURST ST | LAWSON LN | A | AAC | ~ | 1,115 | 40 | 44,600 | 4/27/26 | 64 | 36 | 54 | 10 | Overlay - AC Structural | 9/11/07 |
| 9 | 747 | ADAMS AVE | BEACH BLVD | DELAWARE ST | A | AC | ~ | 1,320 | 33 | 43,560 | 4/24/26 | 65 | 23 | 76 | 1 | New Construction - Initial | 1/1/80 |
| 1127 | 557 | MAGNOLIA ST | STILWELL DR | ATLANTA AVE | A | AC | ~ | 1,346 | 40 | 53,840 | 4/16/26 | 65 | 38 | 61 | 1 | New Construction - Initial | 1/1/80 |
| 1997 | 577 | WARNER AVE | ASH ST | BEACH BLVD | A | AC | ~ | 874 | 38 | 33,212 | 4/30/26 | 65 | 42 | 58 | 0 | New Construction - Initial | 1/1/80 |
| 194 | 17009 | BOLSA AVE | DAN LN | TRAVELWAY | A | AC | ~ | 609 | 38 | 23,142 | 4/24/26 | 65 | 90 | 10 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 450 | GOLDENWEST ST | RIO VISTA DR | SLATER AVE | A | AC | ~ | 1,166 | 40 | 46,640 | 5/6/26 | 65 | 29 | 61 | 10 | New Construction - Initial | 1/1/80 |
| 1290 | 267 | NEWLAND ST | ELLIS AVE | MODALE DR | A | AAC | ~ | 1,322 | 30 | 39,660 | 4/24/26 | 65 | 35 | 65 | 0 | Overlay - AC Structural | 7/1/11 |
| 703 | 270 | GARFIELD AVE | GOLDENWEST ST | GOTHARD ST | A | AC | ~ | 1,320 | 38 | 50,160 | 5/4/26 | 65 | 32 | 65 | 3 | New Construction - Initial | 1/1/80 |
| 703 | 712 | GARFIELD AVE | GOTHARD ST | GOLDENWEST ST | A | AC | ~ | 1,320 | 43 | 56,760 | 5/8/26 | 65 | 36 | 54 | 10 | New Construction - Initial | 1/1/80 |
| 500 | 355 | DELAWARE ST | ADAMS AVE | UTICA AVE | C | AC | ~ | 1,320 | 60 | 79,200 | 4/29/26 | 65 | 21 | 78 | 1 | New Construction - Initial | 1/1/80 |
| 743 | 9908 | GOLDENWEST ST | SLATER AVE | RIO VISTA DR | A | AC | ~ | 1,168 | 40 | 46,720 | 5/5/26 | 65 | 26 | 65 | 9 | New Construction - Initial | 1/1/80 |
| 9 | 504 | ADAMS AVE | BROOKHURST ST | SUTTON LN | A | AAC | ~ | 1,161 | 40 | 46,440 | 4/23/26 | 65 | 34 | 51 | 15 | Overlay - AC Structural | 9/11/07 |
| 1751 | 33 | SPRINGDALE ST | PRISCILLA DR | ROYALIST DR | A | AAC | ~ | 1,040 | 38 | 39,520 | 4/28/26 | 65 | 100 | 0 | 0 | Overlay - AC Structural | 6/21/12 |
| 1997 | 660 | WARNER AVE | BOLSA CHICA ST | LYNN ST | A | AC | ~ | 1,320 | 42 | 55,440 | 4/29/26 | 65 | 18 | 82 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 391 | GOLDENWEST ST | WARNER AVE | BETTY DR | A | AC | ~ | 1,452 | 40 | 58,080 | 5/5/26 | 65 | 61 | 3 | 36 | New Construction - Initial | 1/1/80 |
| 1997 | 694 | WARNER AVE | NICHOLS ST | GOTHARD ST | A | AC | ~ | 1,321 | 50 | 66,050 | 5/4/26 | 65 | 38 | 62 | 0 | New Construction - Initial | 1/1/80 |
| 1503 | 133 | RANCHO RD | ASTRONAUTICS LN | BOLSA CHICA ST | C | AC | ~ | 1,220 | 18 | 21,960 | 4/7/26 | 65 | 48 | 52 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 125 | NEWLAND ST | KINGSPORT DR | GARFIELD AVE | A | AAC | ~ | 385 | 30 | 11,550 | 4/24/26 | 66 | 12 | 87 | 1 | Overlay - AC Structural | 7/1/11 |
| 195 | 472 | BOLSA CHICA ST | EDINGER AVE | ROBINWOOD DR | A | AAC | ~ | 780 | 36 | 28,080 | 4/24/26 | 66 | 40 | 60 | 0 | Overlay - AC Structural | 9/11/07 |
| 1670 | 806 | SEVENTEENTH ST | ORANGE AVE | PCH | A | AC | ~ | 1,239 | 28 | 34,692 | 4/13/26 | 66 | 39 | 61 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 494 | GARFIELD AVE | BROOKHURST ST | BROOKFIELD MANOR | A | AC | ~ | 839 | 33 | 27,687 | 4/20/26 | 66 | 53 | 47 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 781 | BROOKHURST ST | BANNING AVE | TRAVELWAY | A | AC | ~ | 1,578 | 43 | 69,854 | 4/22/26 | 66 | 56 | 44 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 493 | GARFIELD AVE | BROOKFIELD MANOR | BLUEFIN LN | A | AC | ~ | 1,213 | 33 | 40,029 | 4/20/26 | 66 | 22 | 78 | 0 | New Construction - Initial | 1/1/80 |
| 1995 | 499 | WARD ST | SUNDAY DR | TANA DR | C | AC | ~ | 1,002 | 16 | 16,032 | 4/21/26 | 66 | 27 | 70 | 3 | New Construction - Initial | 1/1/80 |
| 1185 | 412 | MC FADDEN AVE | SALISBURY LN | GOLDENWEST ST | A | AC | ~ | 810 | 60 | 48,600 | 5/4/26 | 66 | 41 | 46 | 13 | New Construction - Initial | 1/1/80 |
| 1290 | 354 | NEWLAND ST | KELSO DR | INDIANAPOLIS AVE | A | AAC | ~ | 1,683 | 60 | 100,980 | 4/30/26 | 66 | 26 | 73 | 1 | Overlay - AC Structural | 9/11/07 |
| 240 | 439 | BROOKHURST ST | ATLANTA AVE | EFFINGHAM DR | A | AC | ~ | 1,196 | 39 | 49,644 | 4/27/26 | 66 | 37 | 63 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 196 | EDINGER AVE | SHERBECK LN | GOLDENWEST ST | A | AC | ~ | 1,192 | 39 | 46,488 | 4/27/26 | 66 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 1351 | 758 | ORANGE AVE | SEVENTEENTH ST | THIRTEENTH ST | C | AC | ~ | 1,307 | 25 | 32,675 | 4/27/26 | 66 | 42 | 47 | 11 | New Construction - Initial | 1/1/80 |
| 70 | 2 | ARGOSY AVE | NEWSBOY CIR | GRAHAM ST | C | AAC | ~ | 1,621 | 60 | 97,260 | 4/7/26 | 66 | 23 | 74 | 3 | Overlay - AC Structural | 7/22/14 |
| 789 | 73 | HAMILTON AVE | POLYNESIAN LN | NORTHSHORE LN | A | AC | ~ | 1,338 | 31 | 41,478 | 5/6/26 | 66 | 48 | 27 | 25 | New Construction - Initial | 1/1/80 |
| 569 | 692 | EDWARDS ST | TALBERT AVE | CENTRAL PARK DR | A | AAC | ~ | 1,070 | 30 | 32,100 | 5/7/26 | 66 | 21 | 79 | 0 | Overlay - AC Structural | 7/1/11 |
| 2082 | 822 | YORKTOWN AVE | LAKE ST | MAIN ST | C | AC | ~ | 1,174 | 31 | 36,394 | 4/28/26 | 66 | 56 | 28 | 16 | New Construction - Initial | 1/1/80 |
| 569 | 838 | EDWARDS ST | CENTRAL PARK DR | ARMADA DR | A | AAC | ~ | 1,657 | 30 | 49,710 | 5/7/26 | 67 | 21 | 73 | 6 | Overlay - AC Structural | 7/1/11 |
| 500 | 385 | DELAWARE ST | MAIN ST | GARFIELD AVE | C | AAC | ~ | 1,405 | 60 | 84,300 | 4/20/26 | 67 | 19 | 74 | 7 | Overlay - AC Structural | 7/1/11 |
| 703 | 597 | GARFIELD AVE | BLUEFIN LN | BUSHARD ST | A | AC | ~ | 585 | 33 | 19,305 | 4/20/26 | 67 | 42 | 57 | 1 | New Construction - Initial | 1/1/80 |
| 746 | 163 | GOTHARD ST | ELLIS AVE | PROMENADE PARKWAY DR | A | AC | ~ | 949 | 27 | 27,123 | 5/5/26 | 67 | 43 | 50 | 7 | New Construction - Initial | 1/1/80 |
| 9 | 501 | ADAMS AVE | CROWN REEF LN | NEWLAND ST | A | AAC | ~ | 1,037 | 40 | 41,480 | 4/28/26 | 67 | 31 | 65 | 4 | Overlay - AC Structural | 8/1/17 |
| 789 | 337 | HAMILTON AVE | VIA STRAITS LN | BROOKHURST ST | C | AC | ~ | 1,573 | 31 | 48,763 | 5/6/26 | 67 | 38 | 62 | 0 | New Construction - Initial | 1/1/80 |
| 1130 | 821 | MAIN ST | CLAY AVE | YORKTOWN AVE | A | AAC | ~ | 1,370 | 33 | 48,360 | 4/8/26 | 67 | 19 | 74 | 7 | Overlay - AC Structural | 7/22/14 |
| 1290 | 290 | NEWLAND ST | YORKTOWN AVE | DEEPVIEW DR | A | AAC | ~ | 1,447 | 60 | 86,820 | 4/21/26 | 67 | 23 | 77 | 0 | Overlay - AC Structural | 9/11/07 |
| 566 | 637 | EDINGER AVE | SHERBECK LN | EDWARDS ST | A | AC | ~ | 1,452 | 39 | 56,628 | 4/27/26 | 67 | 0 | 96 | 4 | New Construction - Initial | 1/1/80 |
| 569 | 201 | EDWARDS ST | DOWN DR | EDINGER AVE | A | AC | ~ | 1,431 | 60 | 85,860 | 4/27/26 | 67 | 58 | 42 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 7000 | GOLDENWEST ST | MADDOX DR | HEIL AVE | A | AAC | ~ | 533 | 40 | 21,320 | 5/6/26 | 67 | 13 | 80 | 7 | Overlay - AC Structural | 9/11/07 |
| 789 | 60900 | HAMILTON AVE | BRIDGE | BROOKHURST ST | C | AC | ~ | 345 | 32 | 11,040 | 5/6/26 | 67 | 59 | 41 | 0 | New Construction - AC | 1/1/80 |
| 751 | 406 | GRAHAM ST | OLD PIRATE LN | WARNER AVE | A | AC | ~ | 1,466 | 60 | 61,960 | 4/2/26 | 67 | 74 | 14 | 12 | New Construction - Initial | 1/1/80 |
| 240 | 790 | BROOKHURST ST | CLIFF DR | INDIANAPOLIS AVE | A | AC | ~ | 1,295 | 39 | 53,005 | 4/14/26 | 68 | 50 | 50 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 156 | GARFIELD AVE | BROOKHURST ST | KIPAHULU DR | A | AC | ~ | 681 | 33 | 22,473 | 4/21/26 | 68 | 22 | 63 | 15 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 743 | 27 | GOLDENWEST ST | OXFORD DR | BRUNSWICK DR | A | AC | ~ | 1,104 | 40 | 44,160 | 4/27/26 | 68 | 52 | 48 | 0 | New Construction - Initial | 1/1/80 |
| 1351 | 756 | ORANGE AVE | THIRTEENTH ST | NINTH ST | C | AC | ~ | 1,302 | 25 | 32,550 | 4/27/26 | 68 | 23 | 57 | 20 | New Construction - Initial | 1/1/80 |
| 240 | 295 | BROOKHURST ST | ADAMS AVE | PECK AVE | A | AC | ~ | 1,649 | 39 | 66,811 | 4/8/26 | 68 | 29 | 58 | 13 | New Construction - Initial | 1/1/80 |
| 589 | 266 | ELLIS AVE | CHAPEL LN | NEWLAND ST | A | AC | ~ | 1,321 | 47 | 62,087 | 5/5/26 | 68 | 28 | 70 | 2 | New Construction - Initial | 1/1/80 |
| 566 | 195 | EDINGER AVE | EDWARDS ST | SHERBECK LN | A | AC | ~ | 1,452 | 39 | 56,628 | 4/27/26 | 68 | 0 | 98 | 2 | New Construction - Initial | 1/1/80 |
| 569 | 7 | EDWARDS ST | EDGEMONT DR | HEIL AVE | A | AC | ~ | 690 | 28 | 25,820 | 5/1/26 | 68 | 40 | 59 | 1 | New Construction - Initial | 1/1/80 |
| 1351 | 314 | ORANGE AVE | NINTH ST | THIRTEENTH ST | C | AC | ~ | 1,302 | 25 | 32,550 | 4/27/26 | 68 | 27 | 40 | 33 | New Construction - Initial | 1/1/80 |
| 1130 | 372 | MAIN ST | SEVENTEENTH ST | YORKTOWN AVE | A | AAC | ~ | 1,445 | 33 | 50,185 | 4/23/26 | 68 | 46 | 54 | 0 | Overlay - AC Structural | 6/13/12 |
| 566 | 625 | EDINGER AVE | SHER LN | GOTHARD ST | A | AC | ~ | 1,711 | 31 | 53,041 | 4/16/26 | 68 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 403 | GRAHAM ST | MEADOWLARK DR | HEIL AVE | A | AC | ~ | 1,161 | 60 | 69,660 | 4/28/26 | 68 | 29 | 71 | 0 | New Construction - Initial | 1/1/80 |
| 1751 | 475 | SPRINGDALE ST | ROYALIST DR | PRISCILLA DR | A | AAC | ~ | 1,040 | 38 | 39,520 | 4/28/26 | 69 | 83 | 0 | 17 | Overlay - AC Structural | 6/21/13 |
| 569 | 200 | EDWARDS ST | MCFADDEN AVE | DOWN DR | A | AC | ~ | 1,210 | 60 | 72,600 | 4/27/26 | 69 | 48 | 49 | 3 | New Construction - Initial | 1/1/80 |
| 1127 | 352 | MAGNOLIA ST | INDIANAPOLIS AVE | CARROLTOWN DR | A | AC | ~ | 1,524 | 40 | 60,960 | 5/6/26 | 69 | 56 | 44 | 0 | New Construction - Initial | 1/1/80 |
| 500 | 383 | DELAWARE ST | GARFIELD AVE | CLAY AVE | C | AAC | ~ | 1,320 | 60 | 79,200 | 4/13/26 | 69 | 27 | 62 | 11 | Overlay - AC Structural | 7/1/11 |
| 1017 | 765 | LAKE ST | SIXTH ST | ALLEY ORANGE AVE | A | AAC | ~ | 1,015 | 29 | 29,435 | 4/15/26 | 69 | 42 | 58 | 0 | Overlay - AC Structural | 11/1/06 |
| 1017 | 764 | LAKE ST | INDIANAPOLIS AVE | SIXTH ST | A | AC | ~ | 1,107 | 29 | 32,103 | 4/15/26 | 69 | 31 | 56 | 13 | New Construction - Initial | 1/1/80 |
| 569 | 235 | EDWARDS ST | WARNER AVE | WRENFIELD DR | A | AAC | ~ | 1,197 | 30 | 35,910 | 5/6/26 | 69 | 20 | 66 | 14 | Overlay - AC Structural | 7/1/11 |
| 1751 | 640 | SPRINGDALE ST | HEIL AVE | MEADOWLARK DR | A | AAC | ~ | 1,185 | 39 | 46,215 | 4/28/26 | 69 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 653 | 876 | FIRST ST | ORANGE AVE | PCH | A | AC | ~ | 1,132 | 36 | 43,252 | 5/1/26 | 69 | 53 | 46 | 1 | New Construction - Initial | 1/1/80 |
| 743 | 863 | GOLDENWEST ST | WARNER AVE | NORMA DR | A | AAC | ~ | 1,316 | 40 | 52,640 | 5/6/26 | 69 | 27 | 53 | 20 | Overlay - AC Structural | 9/11/07 |
| 746 | 626 | GOTHARD ST | HEIL AVE | 390' S/O MURDY | A | AAC | ~ | 1,085 | 60 | 65,100 | 4/22/26 | 69 | 26 | 69 | 5 | Overlay - AC Structural | 7/1/10 |
| 1997 | 70000 | WARNER AVE | PCH | LOOP | A | AC | ~ | 375 | 40 | 13,500 | 5/13/24 | 69 | 91 | 9 | 0 | New Construction - AC | 1/1/80 |
| 789 | 74 | HAMILTON AVE | MAGNOLIA ST | POLYNESIAN LN | C | AC | ~ | 590 | 31 | 18,290 | 5/6/26 | 69 | 62 | 38 | 0 | New Construction - Initial | 1/1/80 |
| 1751 | 225 | SPRINGDALE ST | HEIL AVE | DOYLE DR | A | AAC | ~ | 1,450 | 33 | 49,100 | 4/28/26 | 69 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 569 | 375 | EDWARDS ST | ELLIS AVE | OVERLOOK DR | A | AC | ~ | 691 | 30 | 20,730 | 5/6/26 | 69 | 6 | 53 | 41 | New Construction - Initial | 1/1/80 |
| 1751 | 614 | SPRINGDALE ST | BRIARCLIFF DR (W) | CHINOOK DR | A | AAC | ~ | 1,048 | 42 | 44,016 | 4/13/26 | 70 | 0 | 100 | 0 | Overlay - AC Structural | 6/12/12 |
| 240 | 50510 | BROOKHURST ST | TRAVELWAY | HAMILTON AVE | A | AC | ~ | 1,316 | 41 | 56,956 | 5/6/26 | 70 | 21 | 67 | 12 | New Construction - Initial | 1/1/80 |
| 569 | 538 | EDWARDS ST | ARMADA DR | SLATER AVE | A | AAC | ~ | 990 | 30 | 29,700 | 5/7/26 | 70 | 24 | 76 | 0 | Overlay - AC Structural | 7/1/11 |
| 703 | 717 | GARFIELD AVE | NEWLAND ST | LISTER LN | A | AC | ~ | 1,281 | 38 | 48,678 | 4/28/26 | 70 | 24 | 76 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 421 | GOLDENWEST ST | NORMA DR | WARNER AVE | A | AAC | ~ | 1,316 | 40 | 52,640 | 5/8/26 | 70 | 30 | 50 | 20 | Overlay - AC Structural | 9/11/07 |
| 1997 | 252 | WARNER AVE | GOTHARD ST | NICHOLS ST | A | AC | ~ | 1,321 | 50 | 60,492 | 5/4/26 | 70 | 38 | 62 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 339 | BROOKHURST ST | TRAVELWAY | BANNING AVE | A | AC | ~ | 1,578 | 43 | 69,854 | 4/22/26 | 70 | 32 | 56 | 12 | New Construction - Initial | 1/1/80 |
| 9 | 59 | ADAMS AVE | NEWLAND ST | CROWN REEF LN | A | AAC | ~ | 1,037 | 40 | 41,480 | 4/27/26 | 70 | 29 | 71 | 0 | Overlay - AC Structural | 8/1/17 |
| 9 | 722 | ADAMS AVE | CITY LIMIT | LAWSON LN | A | AAC | ~ | 1,229 | 40 | 49,160 | 4/14/26 | 70 | 48 | 43 | 9 | Overlay - AC Structural | 9/11/07 |
| 789 | 336 | HAMILTON AVE | BUSHARD ST | VIA STRAITS LN | C | AC | ~ | 1,067 | 31 | 33,077 | 5/6/26 | 70 | 32 | 67 | 1 | New Construction - Initial | 1/1/80 |
| 1127 | 115 | MAGNOLIA ST | ATLANTA AVE | STILWELL DR | A | AC | ~ | 1,346 | 33 | 49,668 | 5/6/26 | 70 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 228 | EDWARDS ST | CRANDALL DR | SHIELDS DR | A | AC | ~ | 863 | 28 | 24,164 | 5/4/26 | 70 | 37 | 51 | 12 | New Construction - Initial | 1/1/80 |
| 1351 | 315 | ORANGE AVE | SIXTH ST | NINTH ST | C | AC | ~ | 974 | 25 | 24,350 | 4/27/26 | 70 | 33 | 40 | 27 | New Construction - Initial | 1/1/80 |
| 1127 | 147 | MAGNOLIA ST | MEDITERRANEAN DR | BEDEL DR | A | AAC | ~ | 955 | 33 | 33,515 | 4/8/26 | 70 | 55 | 40 | 5 | Overlay - AC Structural | 6/13/12 |
| 1127 | 110 | MAGNOLIA ST | SEAHURST DR | YORKTOWN AVE | A | AC | ~ | 845 | 40 | 33,800 | 4/15/26 | 70 | 57 | 43 | 0 | New Construction - Initial | 1/1/80 |
| 9 | 724 | ADAMS AVE | HARBOR ISLE LN | MAGNOLIA ST | A | AAC | ~ | 1,116 | 40 | 44,640 | 4/23/26 | 70 | 20 | 79 | 1 | Overlay - AC Structural | 9/11/07 |
| 569 | 23 | EDWARDS ST | CORNELL DR | HALIFAX DR | A | AC | ~ | 520 | 60 | 31,200 | 4/29/26 | 70 | 65 | 35 | 0 | New Construction - Initial | 1/1/80 |
| 9 | 723 | ADAMS AVE | LAWSON LN | BROOKHURST ST | A | AAC | ~ | 1,115 | 40 | 44,600 | 4/14/26 | 70 | 62 | 29 | 9 | Overlay - AC Structural | 9/11/07 |
| 1127 | 353 | MAGNOLIA ST | CARROLLTOWN DR | ATLANTA DR | A | AC | ~ | 1,117 | 40 | 44,680 | 5/6/26 | 71 | 42 | 58 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 183 | EDINGER AVE | GOTHARD ST | SHER LN | A | AC | ~ | 1,711 | 31 | 53,041 | 4/16/26 | 71 | 31 | 58 | 11 | New Construction - Initial | 1/1/80 |
| 703 | 155 | GARFIELD AVE | BUSHARD ST (N) | BLUEFIN LN | A | AC | ~ | 585 | 33 | 19,305 | 4/9/26 | 71 | 30 | 70 | 0 | New Construction - Initial | 1/1/80 |
| 825 | 627 | HEIL AVE | RHONE LN | GOTHARD ST | A | AC | ~ | 815 | 61 | 49,715 | 4/22/26 | 71 | 42 | 56 | 2 | New Construction - Initial | 1/1/80 |
| 569 | 250 | EDWARDS ST | CENTRAL PARK DR | TALBERT AVE | A | AAC | ~ | 1,070 | 30 | 32,100 | 5/6/26 | 71 | 29 | 66 | 5 | Overlay - AC Structural | 7/1/11 |
| 743 | 534 | GOLDENWEST ST | NORMA DR | MADDOX DR | A | AAC | ~ | 787 | 40 | 31,480 | 5/6/26 | 71 | 34 | 66 | 0 | Overlay - AC Structural | 9/11/07 |
| 1716 | 763 | SIXTH ST | LAKE ST | ORANGE AVE | C | AC | ~ | 1,068 | 25 | 26,100 | 5/1/26 | 71 | 20 | 67 | 13 | New Construction - Initial | 1/1/80 |
| 1751 | 667 | SPRINGDALE ST | DOYLE DR | HEIL AVE | A | AAC | ~ | 1,450 | 33 | 51,350 | 4/28/26 | 71 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 1997 | 672 | WARNER AVE | LYNN ST | SANDRA LEE LN | A | AAC | ~ | 1,185 | 42 | 49,770 | 4/23/26 | 71 | 15 | 83 | 2 | Overlay - AC Structural | 9/1/06 |
| 1995 | 276 | WARD ST | SUNDAY DR | YORKTOWN AVE | C | AC | ~ | 935 | 25 | 23,375 | 4/21/26 | 71 | 38 | 62 | 0 | New Construction - Initial | 1/1/80 |
| 1751 | 172 | SPRINGDALE ST | CHINOOK DR | BRIARCLIFF DR | A | AAC | ~ | 1,048 | 42 | 44,016 | 4/13/26 | 71 | 0 | 99 | 1 | Overlay - AC Structural | 6/21/12 |
| 569 | 22 | EDWARDS ST | ALEXANDRA DR | CORNELL DR | A | AC | ~ | 781 | 60 | 46,860 | 4/29/26 | 71 | 74 | 22 | 4 | New Construction - Initial | 1/1/80 |
| 789 | 879 | HAMILTON AVE | BUSHARD ST | NORTHSHORE LN | C | AC | ~ | 714 | 31 | 22,134 | 4/27/26 | 71 | 34 | 66 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 230 | WARNER AVE | SANDRA LEE LN | LYNN ST | A | AC | ~ | 1,185 | 42 | 52,770 | 4/23/26 | 71 | 27 | 73 | 0 | New Construction - Initial | 1/1/80 |
| 825 | 628 | HEIL AVE | BEACH BLVD | SILVER LN | A | AAC | ~ | 1,320 | 61 | 80,520 | 4/22/26 | 71 | 40 | 58 | 2 | Overlay - AC Structural | 9/11/07 |
| 9 | 282 | ADAMS AVE | MAGNOLIA ST | HARBOR ISLE LN | A | AAC | ~ | 1,116 | 40 | 44,640 | 4/24/26 | 71 | 33 | 61 | 6 | Overlay - AC Structural | 9/11/07 |
| 1503 | 802 | RANCHO RD | ASTRONAUTICS LN | SPA DR | C | AC | ~ | 1,445 | 22 | 31,790 | 4/7/26 | 72 | 24 | 76 | 0 | New Construction - Initial | 1/1/80 |
| 1655 | 591 | SEAPOINT AVE | PALM AVE | CHERRHILL LN | A | AC | ~ | 1,218 | 32 | 38,976 | 4/9/26 | 72 | 73 | 10 | 17 | New Construction - Initial | 1/1/80 |
| 589 | 828 | ELLIS AVE | ASHLEY DR | GOLDENWEST ST | A | AC | ~ | 763 | 36 | 27,468 | 5/6/26 | 72 | 9 | 78 | 13 | New Construction - Initial | 1/1/80 |
| 589 | 386 | ELLIS AVE | GOLDENWEST ST | ASHLEY DR | A | AC | ~ | 763 | 36 | 27,468 | 5/6/26 | 72 | 13 | 79 | 8 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2082 | 397 | YORKTOWN AVE | LAKE ST | DELAWARE ST | C | AC | ~ | 1,601 | 31 | 49,631 | 4/8/26 | 72 | 24 | 75 | 1 | New Construction - Initial | 1/1/80 |
| 70 | 408 | ARGOSY AVE | BOLSA CHICA ST | NEWSBOY CIR | C | AAC | ~ | 1,096 | 60 | 65,760 | 4/7/26 | 72 | 26 | 73 | 1 | Overlay - AC Structural | 7/22/14 |
| 240 | 296 | BROOKHURST ST | PECK DR | INDIANAPOLIS AVE | A | AC | ~ | 1,000 | 39 | 40,250 | 4/8/26 | 72 | 26 | 66 | 8 | New Construction - Initial | 1/1/80 |
| 258 | 350 | BUSHARD ST | INDIANAPOLIS AVE | ERSKINE DR | C | AAC | ~ | 1,182 | 60 | 70,920 | 4/14/26 | 72 | 45 | 41 | 14 | Overlay - AC Structural | 9/1/06 |
| 1503 | 360 | RANCHO RD | SPA DR | ASTRONAUTICS LN | C | AC | ~ | 1,445 | 18 | 26,010 | 4/7/26 | 72 | 57 | 43 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 166 | SLATER AVE | GRAHAM ST | WOODFERN LN | A | AAC | ~ | 646 | 30 | 19,380 | 5/1/26 | 72 | 14 | 86 | 0 | Overlay - AC Structural | 7/1/10 |
| 1751 | 197 | SPRINGDALE ST | EDINGER AVE | MEADOWLARK DR | A | AAC | ~ | 1,455 | 39 | 56,745 | 4/28/26 | 72 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 589 | 829 | ELLIS AVE | GOTHARD ST | REPAIR LN | A | AC | ~ | 545 | 36 | 19,620 | 5/6/26 | 72 | 15 | 43 | 42 | New Construction - Initial | 1/1/80 |
| 825 | 631 | HEIL AVE | MONROE LN | BEACH BL | A | AC | ~ | 1,240 | 60 | 74,400 | 4/22/26 | 72 | 38 | 39 | 23 | New Construction - Initial | 1/1/80 |
| 1751 | 476 | SPRINGDALE ST | EDINGER AVE | ROYALIST DR | A | AAC | ~ | 641 | 39 | 24,999 | 4/28/26 | 72 | 71 | 29 | 0 | Overlay - AC Structural | 6/21/13 |
| 194 | 12 | BOLSA AVE | BOLSA CHICA ST | GRAHAM ST | A | AC | ~ | 2,718 | 38 | 103,284 | 4/24/26 | 72 | 26 | 67 | 7 | New Construction - Initial | 1/1/80 |
| 1017 | 307 | LAKE ST | UTICA AVE | YORKTOWN AVE | A | AC | ~ | 1,012 | 29 | 29,348 | 4/8/26 | 72 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 7/22/14 |
| 589 | 702 | ELLIS AVE | HUNTINGTON ST | GOTHARD ST | A | AAC | ~ | 1,346 | 36 | 48,456 | 5/5/26 | 72 | 36 | 54 | 10 | Overlay - AC Structural | 7/1/06 |
| 1751 | 198 | SPRINGDALE ST | MEADOWLARK DR | HEIL AVE | A | AAC | ~ | 1,185 | 39 | 46,215 | 4/28/26 | 73 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 240 | 519 | BROOKHURST ST | BUSHARD ST | BANNING AVE | A | AC | ~ | 2,434 | 43 | 106,662 | 4/22/26 | 73 | 30 | 70 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 678 | EDWARDS ST | SLATER AVE | FREEBORN DR | A | AAC | ~ | 1,444 | 30 | 43,320 | 5/7/26 | 73 | 12 | 84 | 4 | Overlay - AC Structural | 7/1/11 |
| 9 | 61 | ADAMS AVE | BUSHARD ST | DERBYSHIRE LN | A | AAC | ~ | 818 | 40 | 32,720 | 4/24/26 | 73 | 38 | 62 | 0 | Overlay - AC Structural | 10/29/07 |
| 569 | 377 | EDWARDS ST | OVERLOOK DR | CROSSWIND DR | A | AC | ~ | 880 | 30 | 26,400 | 5/6/26 | 73 | 16 | 66 | 18 | New Construction - Initial | 1/1/80 |
| 1351 | 757 | ORANGE AVE | NINTH ST | SIXTH ST | C | AC | ~ | 974 | 25 | 24,350 | 4/27/26 | 73 | 21 | 40 | 39 | New Construction - Initial | 1/1/80 |
| 2082 | 142 | YORKTOWN AVE | GOLDENWEST ST | MAIN ST | C | AAC | ~ | 1,417 | 40 | 56,680 | 4/13/26 | 73 | 9 | 89 | 2 | Overlay - AC Structural | 7/22/14 |
| 194 | 467 | BOLSA AVE | GOLDENWEST ST | VICTORIA LN | A | AAC | ~ | 1,330 | 46 | 61,180 | 4/21/26 | 73 | 71 | 29 | 0 | Overlay - AC Structural | 7/1/11 |
| 589 | 265 | ELLIS AVE | MAIN ST | CHAPEL LN | A | AC | ~ | 1,321 | 47 | 62,087 | 5/6/26 | 73 | 26 | 64 | 10 | New Construction - Initial | 1/1/80 |
| 500 | 14998 | DELAWARE ST | ATLANTA AVE | END | C | AC | ~ | 874 | 30 | 26,220 | 4/9/26 | 73 | 7 | 53 | 40 | New Construction | 1/1/80 |
| 566 | 206 | EDINGER AVE | MELODY LN | BOLSA CHICA ST | A | AC | ~ | 1,451 | 60 | 87,060 | 4/28/26 | 73 | 78 | 17 | 5 | New Construction - Initial | 1/1/80 |
| 703 | 496 | GARFIELD AVE | SUVA LN | KIPAHULU DR | A | AC | ~ | 1,118 | 33 | 36,894 | 4/21/26 | 73 | 23 | 74 | 3 | New Construction - Initial | 1/1/80 |
| 743 | 859 | GOLDENWEST ST | HEIL AVE | LAURELHURST DR | A | AAC | ~ | 1,450 | 40 | 58,000 | 5/6/26 | 73 | 32 | 68 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 847 | BOLSA CHICA ST | WARNER AVE | PEARCE ST | A | AAC | ~ | 1,321 | 38 | 50,198 | 5/5/26 | 73 | 5 | 95 | 0 | Overlay - AC Structural | 3/1/07 |
| 2082 | 492 | YORKTOWN AVE | BUSHARD ST (N) | WATERBURY LN | C | AC | ~ | 1,123 | 33 | 37,059 | 4/24/26 | 73 | 38 | 62 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 589 | 10 | ELLIS AVE | ASHLEY DR | REPAIR LN | A | AC | ~ | 674 | 36 | 24,264 | 5/6/26 | 73 | 11 | 89 | 0 | New Construction - Initial | 1/1/80 |
| 195 | 209 | BOLSA CHICA ST | OAHU DR | HEIL AVE | A | AAC | ~ | 1,098 | 38 | 41,724 | 4/28/26 | 73 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 240 | 791 | BROOKHURST ST | ATLANTA AVE | CLIFF DR | A | AC | ~ | 1,345 | 39 | 52,455 | 4/14/26 | 74 | 24 | 76 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 327 | ATLANTA AVE | ORANGE AVE | HUNTINGTON ST | A | AC | ~ | 726 | 19 | 13,794 | 4/9/26 | 74 | 12 | 77 | 11 | New Construction - Initial | 1/1/80 |
| 9 | 13122 | ADAMS AVE | SUTTON LN | BROOKHURST ST | A | AC | ~ | 1,161 | 40 | 46,440 | 4/24/26 | 74 | 38 | 52 | 10 | New Construction - Initial | 1/1/80 |
| 566 | 88 | EDINGER AVE | FANTASIA LN | MELODY AVE | A | AC | ~ | 1,060 | 60 | 63,600 | 4/28/26 | 74 | 46 | 45 | 9 | New Construction - Initial | 1/1/80 |
| 703 | 105 | GARFIELD AVE | SADDLEBACK LN | GOLDENWEST ST | A | AC | ~ | 1,320 | 40 | 52,800 | 5/4/26 | 74 | 32 | 57 | 11 | New Construction - Initial | 1/1/80 |
| 743 | 470 | GOLDENWEST ST | MC FADDEN AVE | BRUNSWICK DR | A | AC | ~ | 740 | 40 | 28,750 | 4/27/26 | 74 | 61 | 39 | 0 | New Construction - Initial | 1/1/80 |
| 1716 | 766 | SIXTH ST | ORANGE AVE | PCH | C | AC | ~ | 1,260 | 25 | 31,500 | 5/1/26 | 74 | 35 | 65 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 138 | GOLDENWEST ST | RIO VISTA DR | CENTRAL PARK | A | AC | ~ | 1,478 | 40 | 62,870 | 5/5/26 | 74 | 0 | 74 | 26 | New Construction - Initial | 1/1/80 |
| 1838 | 595 | TALBERT AVE | CEMETERY | BEACH BLVD | A | AAC | ~ | 1,411 | 29 | 40,919 | 4/20/26 | 74 | 31 | 59 | 10 | Overlay - AC Structural | 11/1/16 |
| 1385 | 367 | PALM AVE | OFELIA LN | GOLDENWEST ST | C | AC | ~ | 1,476 | 29 | 48,804 | 4/23/26 | 74 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 96 | EDWARDS ST | SLATER AVE | ARMADA DR | A | AAC | ~ | 990 | 30 | 29,700 | 5/6/26 | 74 | 12 | 83 | 5 | Overlay - AC Structural | 7/1/11 |
| 569 | 21 | EDWARDS ST | BOLSA AVE | ALEXANDRIA DR | A | AC | ~ | 569 | 60 | 35,390 | 4/29/26 | 74 | 58 | 41 | 1 | New Construction - Initial | 1/1/80 |
| 1127 | 558 | MAGNOLIA ST | BERMUDA DR | HAMILTON AVE | A | AC | ~ | 1,447 | 33 | 47,751 | 4/15/26 | 74 | 17 | 82 | 1 | New Construction - Initial | 1/1/80 |
| 1997 | 134 | WARNER AVE | GOLDENWEST ST | SCULPIN LN | A | AC | ~ | 1,123 | 43 | 56,763 | 4/29/26 | 74 | 53 | 47 | 0 | New Construction - Initial | 1/1/80 |
| 589 | 452 | ELLIS AVE | REPAIR LN | ASHLEY DR | A | AC | ~ | 674 | 36 | 24,264 | 5/6/26 | 74 | 24 | 76 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 416 | GOLDENWEST ST | EDINGER AVE | LAURELHURST DR | A | AAC | ~ | 1,190 | 40 | 47,600 | 5/4/26 | 74 | 7 | 88 | 5 | Overlay - AC Structural | 9/11/07 |
| 746 | 857 | GOTHARD ST | 390' S/O MURDY | EDINGER AVE | A | AAC | ~ | 1,556 | 60 | 93,360 | 4/22/26 | 74 | 38 | 57 | 5 | Overlay - AC Structural | 7/1/10 |
| 9 | 60 | ADAMS AVE | DERBYSHIRE LN | SUTTON LN | A | AC | ~ | 663 | 40 | 26,520 | 4/24/26 | 74 | 20 | 80 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 338 | BROOKHURST ST | HAMILTON AVE | TRAVELWAY | A | AC | ~ | 1,316 | 39 | 54,824 | 5/6/26 | 74 | 25 | 59 | 16 | New Construction - Initial | 1/1/80 |
| 569 | 671 | EDWARDS ST | CRANDALL DR | HEIL AVE | A | AC | ~ | 859 | 28 | 30,552 | 5/4/26 | 74 | 35 | 65 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 139 | GOLDENWEST ST | CENTRAL PARK | EQUESTRIAN CENTER | A | AC | ~ | 1,959 | 40 | 82,360 | 5/5/26 | 75 | 18 | 58 | 24 | New Construction - Initial | 1/1/80 |
| 2082 | 746 | YORKTOWN AVE | MAGNOLIA ST | WINDWARD LN | C | AAC | ~ | 1,192 | 33 | 39,336 | 4/24/26 | 75 | 37 | 63 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 569 | 236 | EDWARDS ST | FREEBORN DR | SLATER AVE | A | AAC | ~ | 1,444 | 30 | 43,320 | 5/6/26 | 75 | 11 | 89 | 0 | Overlay - AC Structural | 7/1/11 |
| 1997 | 231 | WARNER AVE | PCH | SCEPTRE LN | A | AC | ~ | 1,807 | 67 | 121,069 | 4/23/26 | 75 | 71 | 22 | 7 | New Construction - Initial | 1/1/80 |
| 1997 | 392 | WARNER AVE | BEACH BLVD | ROTTERDAM LN | A | AAC | ~ | 1,449 | 37 | 59,771 | 4/30/26 | 75 | 45 | 55 | 0 | Overlay - AC Structural | 6/21/16 |
| 2082 | 584 | YORKTOWN AVE | MAIN ST | GOLDENWEST ST | C | AC | ~ | 1,417 | 40 | 56,680 | 4/30/26 | 75 | 28 | 64 | 8 | Surface Treatment - Slurry Seal | 7/22/14 |
| 1724 | 167 | SLATER AVE | WOODFERN LN | MISTY LN | A | AAC | ~ | 807 | 30 | 24,210 | 5/1/26 | 75 | 23 | 77 | 0 | Overlay - AC Structural | 7/1/10 |
| 1716 | 321 | SIXTH ST | ORANGE AVE | LAKE ST | C | AC | ~ | 1,068 | 25 | 26,100 | 5/1/26 | 75 | 27 | 68 | 5 | New Construction - Initial | 1/1/80 |
| 1997 | 835 | WARNER AVE | NEWLAND ST | ROTTERDAM LN | A | AAC | ~ | 1,188 | 37 | 43,956 | 4/22/26 | 75 | 29 | 66 | 5 | Overlay - AC Structural | 6/21/16 |
| 703 | 104 | GARFIELD AVE | EDWARDS ST(S) | SADDLEBACK LN | A | AC | ~ | 1,320 | 40 | 52,800 | 5/4/26 | 75 | 31 | 65 | 4 | New Construction - Initial | 1/1/80 |
| 746 | 593 | GOTHARD ST | GARFIELD AVE | ERNEST AVE | A | AC | ~ | 1,053 | 32 | 33,696 | 5/4/26 | 75 | 39 | 36 | 25 | New Construction - Initial | 1/1/80 |
| 2082 | 798 | YORKTOWN AVE | VASILE CIR | BEACH BLVD | C | AAC | ~ | 927 | 33 | 30,591 | 4/28/26 | 75 | 15 | 63 | 22 | Surface Treatment - Slurry Seal | 7/1/11 |
| 1290 | 435 | NEWLAND ST | ST AUGUSTINE DR | HAMILTON AVE | A | AC | ~ | 1,185 | 60 | 71,100 | 4/15/26 | 75 | 28 | 62 | 10 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 330 | 181 | CENTER AVE | HUNTINGTON VILLAGE | ONE PACIFIC PLAZA | C | AAC | ~ | 667 | 61 | 40,687 | 4/9/26 | 75 | 22 | 76 | 2 | Overlay - AC Structural | 4/1/12 |
| 1724 | 536 | SLATER AVE | CORONADO LN | SPRINGDALE ST | A | AAC | ~ | 1,173 | 30 | 35,190 | 5/4/26 | 75 | 34 | 64 | 2 | Overlay - AC Structural | 7/1/10 |
| 743 | 681 | GOLDENWEST ST | SLATER AVE | BETTY DR | A | AC | ~ | 1,193 | 39 | 46,527 | 5/6/26 | 75 | 41 | 56 | 3 | New Construction - Initial | 1/1/80 |
| 1997 | 661 | WARNER AVE | BOLSA CHICA ST | PLAZA LN | A | AC | ~ | 1,454 | 42 | 61,068 | 4/29/26 | 75 | 39 | 41 | 20 | New Construction - Initial | 1/1/80 |
| 258 | 345 | BUSHARD ST | ATLANTA AVE | PANACEA DR | C | AAC | ~ | 1,190 | 60 | 71,400 | 4/16/26 | 75 | 36 | 61 | 3 | Overlay - AC Structural | 9/1/06 |
| 569 | 853 | EDWARDS ST | MC FADDEN AVE | HALIFAX DR | A | AC | ~ | 772 | 60 | 46,320 | 4/29/26 | 76 | 42 | 58 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 733 | YORKTOWN AVE | NEWLAND ST | HARDING LN | C | AAC | ~ | 782 | 33 | 25,806 | 4/28/26 | 76 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 1185 | 410 | MC FADDEN AVE | EDWARDS ST | SALISBURY LN | A | AC | ~ | 1,835 | 60 | 110,100 | 5/4/26 | 76 | 57 | 33 | 10 | New Construction - Initial | 1/1/80 |
| 703 | 486 | GARFIELD AVE | LINDSAY LN | PLUM TREE LN | A | AAC | ~ | 1,335 | 15 | 20,025 | 4/20/26 | 76 | 44 | 56 | 0 | Overlay - AC Structural | 7/1/10 |
| 825 | 630 | HEIL AVE | NEWLAND ST | MONROE LN | A | AC | ~ | 1,397 | 60 | 83,820 | 4/22/26 | 76 | 29 | 62 | 9 | New Construction - Initial | 1/1/80 |
| 1290 | 152 | NEWLAND ST | HAMILTON AVE | EDISON AVE | A | AAC | ~ | 848 | 48 | 40,704 | 4/15/26 | 76 | 37 | 62 | 1 | Overlay - AC Structural | 9/11/07 |
| 1127 | 117 | MAGNOLIA ST | BERMUDA DR | BANNING AVE | A | AC | ~ | 1,150 | 32 | 38,550 | 4/22/26 | 76 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 858 | GOLDENWEST ST | LAURELHURST DR | EDINGER AVE | A | AAC | ~ | 1,190 | 40 | 47,600 | 5/4/26 | 76 | 15 | 74 | 11 | Overlay - AC Structural | 9/11/07 |
| 743 | 9909 | GOLDENWEST ST | EQUESTRIAN CENTER | ELLIS AVE | A | AC | ~ | 681 | 40 | 30,740 | 5/5/26 | 76 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 9 | 289 | ADAMS AVE | HARBOR ISLE LN | BUSHARD ST | A | AAC | ~ | 1,527 | 40 | 65,960 | 4/24/26 | 76 | 39 | 56 | 5 | Overlay - AC Structural | 9/11/07 |
| 1724 | 94 | SLATER AVE | SPRINGDALE ST | CORONADO LN | A | AAC | ~ | 1,173 | 30 | 35,190 | 5/1/26 | 76 | 13 | 87 | 0 | Overlay - AC Structural | 7/1/10 |
| 1751 | 612 | SPRINGDALE ST | BOLSA AVE | SKYLAB RD | A | AAC | ~ | 1,435 | 33 | 50,855 | 4/24/26 | 76 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1997 | 234 | WARNER AVE | EDWARDS ST | SCULPIN LN | A | AC | ~ | 1,518 | 43 | 71,606 | 5/4/26 | 76 | 0 | 98 | 2 | New Construction - Initial | 1/1/80 |
| 743 | 417 | GOLDENWEST ST | LAURELHURST DR | HEIL AVE | A | AAC | ~ | 1,450 | 40 | 58,000 | 5/4/26 | 76 | 0 | 97 | 3 | Overlay - AC Structural | 9/11/07 |
| 1838 | 153 | TALBERT AVE | BEACH BLVD | CEMETERY | A | AAC | ~ | 1,411 | 33 | 46,563 | 4/20/26 | 76 | 39 | 61 | 0 | Overlay - AC Structural | 11/1/16 |
| 2082 | 720 | YORKTOWN AVE | CANBERRA LN | BROOKHURST ST | C | AC | ~ | 1,236 | 33 | 40,788 | 4/21/26 | 76 | 50 | 50 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 233 | WARNER AVE | SCULPIN LN | EDWARDS ST | A | AC | ~ | 1,290 | 42 | 61,914 | 5/4/26 | 76 | 44 | 56 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 396 | EDWARDS ST | ARMADA DR | CENTRAL PARK DR | A | AAC | ~ | 1,657 | 30 | 49,710 | 5/6/26 | 76 | 16 | 82 | 2 | Overlay - AC Structural | 7/1/11 |
| 9 | 280 | ADAMS AVE | LAWSON LN | CITY LIMIT | A | AAC | ~ | 1,229 | 40 | 49,160 | 4/27/26 | 76 | 29 | 66 | 5 | Overlay - AC Structural | 9/11/07 |
| 258 | 346 | BUSHARD ST | PANACEA DR | HAMILTON AVE | C | AC | ~ | 1,450 | 60 | 87,000 | 4/16/26 | 76 | 33 | 60 | 7 | New Construction - Initial | 1/1/80 |
| 1724 | 684 | SLATER AVE | EDWARDS ST | CORONADO LN | A | AAC | ~ | 1,466 | 30 | 43,980 | 5/4/26 | 76 | 44 | 56 | 0 | Overlay - AC Structural | 7/1/10 |
| 1838 | 388 | TALBERT AVE | GOTHARD ST | KOVACS LN | A | AAC | ~ | 1,663 | 40 | 66,520 | 4/20/26 | 76 | 46 | 54 | 0 | Overlay - AC Structural | 6/21/16 |
| 566 | 205 | EDINGER AVE | SAYBROOK LN | FANTASIA LN | A | AC | ~ | 1,491 | 72 | 107,352 | 4/28/26 | 76 | 27 | 55 | 18 | New Construction - Initial | 1/1/80 |
| 825 | 865 | HEIL AVE | SILVER LN | RHONE LN | A | AC | ~ | 1,165 | 61 | 71,065 | 4/22/26 | 76 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 1351 | 768 | ORANGE AVE | THIRD ST | ATLANTA AVE | C | AC | ~ | 657 | 25 | 16,425 | 4/27/26 | 76 | 39 | 61 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 442 | YORKTOWN AVE | BUSHARD ST | SALMON LN | C | AC | ~ | 1,190 | 33 | 39,270 | 4/23/26 | 76 | 36 | 64 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 799 | YORKTOWN AVE | HARDING LN | VASILE CIR | C | AAC | ~ | 936 | 33 | 30,888 | 4/28/26 | 76 | 24 | 66 | 10 | Surface Treatment - Slurry Seal | 7/1/11 |
| 4060 | 50400 | TWIN DOLPHIN DR | PCH | PACIFIC VIEW AVE | C | AC | ~ | 490 | 65 | 24,500 | 5/1/26 | 76 | 9 | 91 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 109 | MAGNOLIA ST | HYDE PARK DR | SEAHURST DR | A | AC | ~ | 825 | 40 | 33,000 | 4/15/26 | 77 | 26 | 73 | 1 | New Construction - Initial | 1/1/80 |
| 1724 | 242 | SLATER AVE | CORONADO LN | EDWARDS ST | A | AAC | ~ | 1,466 | 30 | 43,980 | 5/4/26 | 77 | 17 | 83 | 0 | Overlay - AC Structural | 7/1/10 |
| 2082 | 744 | YORKTOWN AVE | BEACH BLVD | DELAWARE ST | C | AC | ~ | 1,321 | 33 | 43,593 | 4/28/26 | 77 | 54 | 27 | 19 | Surface Treatment - Slurry Seal | 7/1/11 |
| 2082 | 730 | YORKTOWN AVE | WATERBURY LN | MAGNOLIA ST | C | AC | ~ | 1,521 | 33 | 50,193 | 4/24/26 | 77 | 37 | 63 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 1127 | 553 | MAGNOLIA ST | MADELINE DR | YORKTOWN AVE | A | AC | ~ | 998 | 40 | 39,920 | 4/14/26 | 77 | 71 | 28 | 1 | New Construction - Initial | 1/1/80 |
| 1997 | 693 | WARNER AVE | ASH ST | NICHOLS ST | A | AC | ~ | 1,106 | 50 | 55,300 | 5/4/26 | 77 | 31 | 67 | 2 | New Construction - Initial | 1/1/80 |
| 703 | 497 | GARFIELD AVE | WARD ST | SUVA LN | A | AC | ~ | 844 | 33 | 27,852 | 4/21/26 | 77 | 15 | 85 | 0 | New Construction - Initial | 1/1/80 |
| 1351 | 316 | ORANGE AVE | THIRTEENTH ST | SEVENTEENTH ST | C | AC | ~ | 1,307 | 25 | 32,675 | 4/27/26 | 77 | 48 | 52 | 0 | New Construction - Initial | 1/1/80 |
| 195 | 81 | BOLSA CHICA ST | SKYLAB WEST | BOLSA AVE | A | AAC | ~ | 1,432 | 36 | 51,552 | 4/24/26 | 77 | 80 | 20 | 0 | Overlay - AC Structural | 9/11/07 |
| 2082 | 7002 | YORKTOWN AVE | WINDWARD LN | NEWLAND ST | A | AAC | ~ | 1,452 | 33 | 47,916 | 4/24/26 | 77 | 37 | 63 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 746 | 151 | GOTHARD ST | ERNEST AVE | GARFIELD AVE | A | AC | ~ | 1,053 | 32 | 33,696 | 5/5/26 | 77 | 17 | 56 | 27 | New Construction - Initial | 1/1/80 |
| 1185 | 99 | MC FADDEN AVE | GOLDENWEST ST | GOTHARD ST | A | AC | ~ | 2,341 | 60 | 140,460 | 4/29/26 | 77 | 63 | 32 | 5 | New Construction - Initial | 1/1/80 |
| 746 | 813 | GOTHARD ST | MAIN ST | GARFIELD AVE | A | AC | ~ | 1,320 | 32 | 42,240 | 5/4/26 | 77 | 0 | 61 | 39 | New Construction - Initial | 1/1/80 |
| 746 | 371 | GOTHARD ST | GARFIELD AVE | MAIN ST | A | AC | ~ | 1,320 | 32 | 42,240 | 5/5/26 | 77 | 30 | 68 | 2 | New Construction - Initial | 1/1/80 |
| 9 | 731 | ADAMS AVE | BUSHARD ST | HARBOR ISLE LN | A | AAC | ~ | 1,527 | 40 | 61,080 | 4/23/26 | 77 | 18 | 81 | 1 | Overlay - AC Structural | 9/11/07 |
| 258 | 340 | BUSHARD ST | BANNING AVE | BROOKHURST ST | C | AC | ~ | 1,968 | 60 | 118,080 | 4/22/26 | 77 | 7 | 92 | 1 | New Construction - Initial | 1/1/80 |
| 1997 | 834 | WARNER AVE | ROTTERDAM LN | BEACH BLVD | A | AAC | ~ | 1,449 | 37 | 53,613 | 4/30/26 | 77 | 31 | 69 | 0 | Overlay - AC Structural | 6/21/16 |
| 1724 | 395 | SLATER AVE | JEFFERSON LN | NEWLAND ST | A | AC | ~ | 1,088 | 30 | 32,640 | 4/29/26 | 77 | 26 | 74 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 28 | GOLDENWEST ST | BRUNSWICK DR | MCFADDEN AVE | A | AC | ~ | 740 | 40 | 29,600 | 4/27/26 | 77 | 41 | 59 | 0 | New Construction - Initial | 1/1/80 |
| 9 | 13120 | ADAMS AVE | DERBYSHIRE LN | BUSHARD ST | A | AC | ~ | 818 | 40 | 32,720 | 4/23/26 | 77 | 28 | 70 | 2 | New Construction - Initial | 1/1/80 |
| 1127 | 589 | MAGNOLIA ST | BEDEL DR | MEDITERRANEAN DR | A | AAC | ~ | 955 | 33 | 33,015 | 4/8/26 | 78 | 59 | 41 | 0 | Overlay - AC Structural | 6/13/12 |
| 1724 | 390 | SLATER AVE | BEACH BLVD | JEFFERSON LN | A | AC | ~ | 1,550 | 30 | 46,500 | 4/29/26 | 78 | 13 | 87 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 837 | SLATER AVE | NEWLAND ST | JEFFERSON LN | A | AC | ~ | 1,088 | 30 | 32,640 | 4/29/26 | 78 | 18 | 81 | 1 | New Construction - Initial | 1/1/80 |
| 1724 | 244 | SLATER AVE | MAYOR LN | GOLDENWEST ST | A | AAC | ~ | 1,345 | 30 | 40,350 | 5/4/26 | 78 | 6 | 94 | 0 | Overlay - AC Structural | 7/1/10 |
| 240 | 77 | BROOKHURST ST | BANNING AVE | BUSHARD ST | A | AC | ~ | 2,434 | 43 | 108,412 | 4/22/26 | 78 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 825 | 629 | HEIL AVE | LANDAU LN | NEWLAND ST | C | AC | ~ | 1,332 | 34 | 45,288 | 4/22/26 | 78 | 43 | 54 | 3 | New Construction - Initial | 1/1/80 |
| 703 | 598 | GARFIELD AVE | KIPAHULU DR | BROOKHURST ST | A | AC | ~ | 681 | 33 | 22,473 | 4/21/26 | 78 | 13 | 87 | 0 | New Construction - Initial | 1/1/80 |
| 330 | 50490 | CENTER AVE | ONE PACIFIC PLAZA | FITNESS CENTER ENTRANCE | C | AAC | ~ | 333 | 60 | 19,980 | 4/9/26 | 78 | 38 | 61 | 1 | Overlay - AC Structural | 4/1/12 |
| 703 | 547 | GARFIELD AVE | GOLDENWEST ST | SADDLEBACK LN | A | AC | ~ | 1,320 | 40 | 52,800 | 5/7/26 | 78 | 33 | 67 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 579 | WARNER AVE | GOTHARD ST | GOLDENWEST ST | A | AC | ~ | 1,982 | 43 | 85,226 | 5/4/26 | 78 | 47 | 51 | 2 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 589 | 260 | ELLIS AVE | GOTHARD ST | HUNTINGTON ST | A | AAC | ~ | 1,346 | 36 | 48,456 | 5/6/26 | 78 | 32 | 68 | 0 | Overlay - AC Structural | 7/1/06 |
| 1838 | 831 | TALBERT AVE | BEACH BLVD | KOVACS LN | A | AAC | ~ | 1,637 | 40 | 65,480 | 4/20/26 | 78 | 39 | 61 | 0 | Overlay - AC Structural | 6/21/16 |
| 1838 | 389 | TALBERT AVE | KOVACS LN | BEACH BLVD | A | AAC | ~ | 1,637 | 40 | 65,480 | 4/20/26 | 78 | 41 | 52 | 7 | Overlay - AC Structural | 6/21/16 |
| 746 | 592 | GOTHARD ST | ERNEST AVE | PROMENADE PARKWAY DR | A | AC | ~ | 819 | 27 | 23,863 | 5/4/26 | 78 | 17 | 83 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 576 | WARNER AVE | SCULPIN LN | GOLDENWEST ST | A | AC | ~ | 1,123 | 43 | 48,289 | 5/4/26 | 78 | 0 | 84 | 16 | New Construction - Initial | 1/1/80 |
| 1724 | 7003 | SLATER AVE | WOODFERN LN | GRAHAM ST | A | AAC | ~ | 646 | 24 | 15,504 | 5/4/26 | 79 | 12 | 88 | 0 | Overlay - AC Structural | 7/1/10 |
| 751 | 199 | GRAHAM ST | RESEARCH DR | EDINGER AVE | A | AC | ~ | 1,525 | 28 | 47,700 | 5/7/26 | 79 | 9 | 65 | 26 | New Construction - Initial | 1/1/80 |
| 703 | 546 | GARFIELD AVE | SADDLEBACK LN | EDWARDS ST | A | AC | ~ | 1,320 | 40 | 52,800 | 5/7/26 | 79 | 16 | 80 | 4 | New Construction - Initial | 1/1/80 |
| 743 | 7001 | GOLDENWEST ST | EDINGER AVE | BREELAND DR | A | AAC | ~ | 643 | 40 | 25,720 | 4/27/26 | 79 | 13 | 87 | 0 | Overlay - AC Structural | 9/11/07 |
| 2082 | 357 | YORKTOWN AVE | VASILE CIR (S) | HARDING LN | C | AAC | ~ | 936 | 33 | 30,888 | 4/29/26 | 79 | 10 | 90 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 1724 | 93 | SLATER AVE | MISTY LN | SPRINGDALE ST | A | AAC | ~ | 1,193 | 30 | 35,790 | 5/1/26 | 79 | 20 | 78 | 2 | Overlay - AC Structural | 7/1/10 |
| 703 | 485 | GARFIELD AVE | PLUM TREE LN | NEWLAND ST | A | AAC | ~ | 532 | 15 | 7,980 | 4/20/26 | 79 | 12 | 88 | 0 | Overlay - AC Structural | 7/1/10 |
| 1017 | 323 | LAKE ST | ALLEY ORANGE AVE | SIXTH ST | A | AC | ~ | 1,015 | 29 | 29,435 | 4/15/26 | 79 | 32 | 56 | 12 | New Construction - Initial | 1/1/80 |
| 1724 | 609 | SLATER AVE | MISTY LN | WOODFERN LN | A | AAC | ~ | 807 | 24 | 19,368 | 5/4/26 | 79 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/10 |
| 743 | 41 | GOLDENWEST ST | ELLIS AVE | ERNEST AVE | A | AC | ~ | 1,585 | 40 | 65,650 | 5/5/26 | 79 | 12 | 73 | 15 | New Construction - Initial | 1/1/80 |
| 751 | 176 | GRAHAM ST | ARGOSY AVE | MC FADDEN AVE | A | AC | ~ | 1,441 | 60 | 86,460 | 4/28/26 | 79 | 20 | 59 | 21 | New Construction - Initial | 1/1/80 |
| 1290 | 432 | NEWLAND ST | ATLANTA AVE | ST AUGUSTINE DR | A | AC | ~ | 1,454 | 60 | 87,240 | 4/15/26 | 79 | 34 | 55 | 11 | New Construction - Initial | 1/1/80 |
| 9 | 502 | ADAMS AVE | SUTTON LN (N) | DERBYSHIRE LN | A | AAC | ~ | 663 | 40 | 26,520 | 4/23/26 | 79 | 20 | 80 | 0 | Overlay - AC Structural | 9/11/07 |
| 1127 | 108 | MAGNOLIA ST | GARFIELD AVE | HYDE PARK DR | A | AC | ~ | 970 | 40 | 38,800 | 4/15/26 | 79 | 9 | 64 | 27 | New Construction - Initial | 1/1/80 |
| 2082 | 356 | YORKTOWN AVE | BEACH BLVD (S) | VASILE CIR | C | AAC | ~ | 927 | 33 | 30,591 | 4/29/26 | 79 | 10 | 64 | 26 | Surface Treatment - Slurry Seal | 7/1/11 |
| 1724 | 832 | SLATER AVE | JEFFERSON LN | BEACH BLVD | A | AC | ~ | 1,550 | 30 | 46,500 | 4/29/26 | 79 | 11 | 89 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 165 | WARNER AVE | SCEPTRE LN | LOS PATOS AVE | A | AC | ~ | 1,714 | 67 | 114,838 | 4/23/26 | 79 | 85 | 15 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 175 | GRAHAM ST | BOLSA AVE | ARGOSY AVE | A | AC | ~ | 1,200 | 60 | 72,000 | 4/28/26 | 79 | 9 | 74 | 17 | New Construction - Initial | 1/1/80 |
| 751 | 31 | GRAHAM ST | MC FADDEN AVE | RESEARCH DR | A | AC | ~ | 1,116 | 28 | 35,248 | 5/7/26 | 79 | 0 | 71 | 29 | New Construction - Initial | 1/1/80 |
| 1751 | 639 | SPRINGDALE ST | MEADOWLARK DR | EDINGER AVE | A | AAC | ~ | 1,455 | 39 | 56,745 | 4/28/26 | 80 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 751 | 404 | GRAHAM ST | HEIL AVE | OLD PIRATE LN | A | AC | ~ | 1,178 | 60 | 55,680 | 4/2/26 | 80 | 28 | 44 | 28 | New Construction - Initial | 1/1/80 |
| 1724 | 535 | SLATER AVE | SPRINGDALE ST | MISTY LN | A | AAC | ~ | 1,193 | 24 | 28,632 | 5/4/26 | 80 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/10 |
| 743 | 583 | GOLDENWEST ST | SUMMIT DR | GARFIELD AVE | A | AC | ~ | 1,236 | 42 | 59,012 | 5/5/26 | 80 | 6 | 94 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 545 | GOLDENWEST ST | YORKTOWN AVE | SUMMIT DR | A | AC | ~ | 1,424 | 42 | 61,808 | 5/5/26 | 80 | 51 | 49 | 0 | New Construction - Initial | 1/1/80 |
| 330 | 145 | CENTER AVE | GOTHARD ST | HUNTINGTON VILLAGE | C | AAC | ~ | 1,355 | 61 | 82,655 | 4/9/26 | 80 | 9 | 89 | 2 | Overlay - AC Structural | 6/21/16 |
| 569 | 376 | EDWARDS ST | CROSSWIND DR | GARFIELD AVE | A | AC | ~ | 1,068 | 30 | 32,040 | 5/6/26 | 80 | 0 | 81 | 19 | New Construction - Initial | 1/1/80 |
| 751 | 473 | GRAHAM ST | RESEARCH DR | MCFADDEN AVE | A | AC | ~ | 1,116 | 28 | 34,248 | 4/28/26 | 80 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 817 | EDWARDS ST | OVERLOOK DR | ELLIS AVE | A | AC | ~ | 691 | 30 | 20,730 | 5/6/26 | 80 | 0 | 58 | 42 | New Construction - Initial | 1/1/80 |
| 2082 | 380 | YORKTOWN AVE | MAIN ST | LAKE ST | A | AC | ~ | 1,174 | 31 | 36,394 | 4/30/26 | 80 | 11 | 73 | 16 | New Construction - Initial | 1/1/80 |
| 1351 | 325 | ORANGE AVE | THIRD ST | SIXTH ST | C | AC | ~ | 952 | 25 | 23,800 | 4/27/26 | 80 | 18 | 51 | 31 | New Construction - Initial | 1/1/80 |
| 2082 | 50 | YORKTOWN AVE | WATERBURY LN (S) | BUSHARD ST | C | AC | ~ | 1,123 | 33 | 37,059 | 4/23/26 | 80 | 12 | 88 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 1997 | 662 | WARNER AVE | GRAHAM ST | PLAZA LN | A | AC | ~ | 1,202 | 42 | 50,484 | 4/29/26 | 80 | 45 | 45 | 10 | New Construction - Initial | 1/1/80 |
| 1997 | 219 | WARNER AVE | PLAZA LN | BOLSA CHICA ST | A | AC | ~ | 1,454 | 42 | 64,068 | 4/29/26 | 80 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 703 | 43 | GARFIELD AVE | NEWLAND ST | PLUM TREE LN | A | AAC | ~ | 532 | 33 | 17,556 | 4/9/26 | 80 | 17 | 83 | 0 | Overlay - AC Structural | 7/1/10 |
| 1127 | 118 | MAGNOLIA ST | BANNING AVE | PCH | C | AC | ~ | 1,468 | 33 | 48,444 | 4/22/26 | 80 | 34 | 66 | 0 | New Construction - Initial | 1/1/80 |
| 258 | 294 | BUSHARD ST | PETTSWOOD DR | ADAMS AVE | C | AAC | ~ | 903 | 60 | 54,180 | 4/14/26 | 80 | 17 | 64 | 19 | Overlay - AC Structural | 2/1/07 |
| 825 | 632 | HEIL AVE | GOLDENWEST ST | FOUNTAIN LN | A | AAC | ~ | 1,452 | 61 | 88,572 | 4/22/26 | 80 | 14 | 86 | 0 | Overlay - AC Structural | 6/21/16 |
| 1724 | 686 | SLATER AVE | GOLDENWEST ST | MAYOR LN | A | AAC | ~ | 1,345 | 30 | 40,350 | 5/4/26 | 80 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/10 |
| 589 | 387 | ELLIS AVE | REPAIR LN | GOTHARD ST | A | AC | ~ | 545 | 36 | 19,620 | 5/6/26 | 80 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 37 | GOLDENWEST ST | BREELAND DR | EDINGER AVE | A | AAC | ~ | 643 | 40 | 25,720 | 4/27/26 | 80 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 825 | 862 | HEIL AVE | FOUNTAIN LN | EDWARDS ST | A | AAC | ~ | 1,191 | 61 | 72,651 | 4/22/26 | 80 | 37 | 59 | 4 | Overlay - AC Structural | 6/21/16 |
| 1385 | 841 | PALM AVE | SURF DR | SEAPOINT DR | C | AC | ~ | 665 | 31 | 22,865 | 4/9/26 | 80 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 1017 | 322 | LAKE ST | SIXTH ST | INDIANAPOLIS AVE | A | AC | ~ | 1,107 | 29 | 32,103 | 4/15/26 | 81 | 32 | 68 | 0 | New Construction - Initial | 1/1/80 |
| 194 | 25 | BOLSA AVE | VICTORIA LN | GOLDENWEST ST | A | AAC | ~ | 1,330 | 36 | 47,880 | 4/24/26 | 81 | 32 | 68 | 0 | Overlay - AC Structural | 7/1/11 |
| 2082 | 278 | YORKTOWN AVE | BROOKHURST ST (S) | CANBERRA LN | C | AC | ~ | 1,236 | 33 | 40,788 | 4/21/26 | 81 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 1017 | 308 | LAKE ST | ADAMS AVE | UTICA AVE | A | AC | ~ | 1,321 | 29 | 38,309 | 4/8/26 | 81 | 13 | 87 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 830 | TALBERT AVE | KOVACS LN | GOTHARD ST | A | AAC | ~ | 1,663 | 40 | 66,520 | 4/20/26 | 81 | 17 | 83 | 0 | Overlay - AC Structural | 6/21/16 |
| 240 | 786 | BROOKHURST ST | HAMILTON AVE | EFFINGHAM DR | A | AC | ~ | 1,446 | 41 | 61,786 | 5/5/26 | 81 | 0 | 87 | 13 | New Construction - Initial | 1/1/80 |
| 703 | 55 | GARFIELD AVE | SUVA LN | WARD ST | A | AC | ~ | 844 | 33 | 27,852 | 4/21/26 | 81 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 292 | MAGNOLIA ST | PIONEER DR | ADAMS AVE | A | AC | ~ | 880 | 40 | 35,200 | 4/15/26 | 81 | 0 | 81 | 19 | New Construction - Initial | 1/1/80 |
| 1127 | 347 | MAGNOLIA ST | STILWELL DR | HAMILTON AVE | A | AC | ~ | 1,293 | 40 | 51,720 | 5/6/26 | 81 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1385 | 582 | PALM AVE | CHERRYHILL LN | SURF DR | C | AC | ~ | 2,090 | 22 | 48,480 | 4/9/26 | 81 | 23 | 77 | 0 | New Construction - Initial | 1/1/80 |
| 258 | 293 | BUSHARD ST | WOODLAWN DR | PETTSWOOD DR | C | AAC | ~ | 1,025 | 60 | 61,500 | 4/14/26 | 81 | 13 | 58 | 29 | Overlay - AC Structural | 2/1/07 |
| 1385 | 368 | PALM AVE | CHERRYHILL LN (N) | OFELIA LN | C | AC | ~ | 2,210 | 29 | 66,840 | 4/9/26 | 81 | 26 | 74 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 641 | GRAHAM ST | EDINGER AVE | RESEARCH DR | A | AC | ~ | 1,525 | 28 | 43,950 | 4/7/26 | 81 | 44 | 56 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 304 | YORKTOWN AVE | WINDWARD LN (S) | MAGNOLIA ST | C | AAC | ~ | 1,192 | 33 | 39,336 | 4/29/26 | 81 | 12 | 88 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 258 | 441 | BUSHARD ST | YORKTOWN AVE | WOODLAWN DR | C | AAC | ~ | 712 | 60 | 42,720 | 4/14/26 | 81 | 31 | 42 | 27 | Overlay - AC Structural | 2/1/07 |
| 1751 | 474 | SPRINGDALE ST | PRISCILLA (E) | MC FADDEN AVE | A | AAC | ~ | 961 | 38 | 36,518 | 4/28/26 | 81 | 68 | 32 | 0 | Overlay - AC Structural | 6/21/12 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1997 | 136 | WARNER AVE | LARK LN | SPRINGDALE ST | A | AC | ~ | 1,173 | 42 | 51,516 | 4/29/26 | 81 | 21 | 79 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 299 | INDIANAPOLIS AVE | TITAN LN | BUSHARD ST | C | AC | ~ | 988 | 24 | 23,712 | 4/14/26 | 81 | 16 | 84 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 111 | MAGNOLIA ST | YORKTOWN AVE | MADELINE DR | A | AC | ~ | 998 | 40 | 39,920 | 4/15/26 | 81 | 11 | 89 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 291 | YORKTOWN AVE | HARDING LN (S) | NEWLAND ST | C | AAC | ~ | 782 | 33 | 25,806 | 4/29/26 | 82 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 1751 | 616 | SPRINGDALE ST | ENGINEER DR | BOLSA AVE | A | AAC | ~ | 685 | 39 | 26,715 | 4/28/26 | 82 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1838 | 258 | TALBERT AVE | CEMETERY | NEWLAND ST | A | AAC | ~ | 1,228 | 33 | 40,524 | 4/20/26 | 82 | 19 | 81 | 0 | Overlay - AC Structural | 11/1/16 |
| 887 | 436 | INDIANAPOLIS AVE | KELVINGROVE LN | TITAN LN | C | AC | ~ | 775 | 24 | 18,600 | 4/14/26 | 82 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1751 | 460 | SPRINGDALE ST | MACHINE DR | ENGINEER DR | A | AAC | ~ | 1,142 | 39 | 44,538 | 4/28/26 | 82 | 29 | 71 | 0 | Overlay - AC Structural | 6/21/12 |
| 703 | 273 | GARFIELD AVE | DELAWARE ST | BEACH BL | A | AAC | ~ | 1,321 | 40 | 52,840 | 4/6/26 | 82 | 0 | 65 | 35 | Overlay - AC Structural | 6/12/12 |
| 1716 | 324 | SIXTH ST | PCH | ORANGE AVE | C | AC | ~ | 1,260 | 25 | 32,400 | 5/1/26 | 82 | 20 | 80 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 878 | INDIANAPOLIS AVE | TITAN LN | KELVINGROVE LN | C | AC | ~ | 775 | 24 | 18,600 | 4/8/26 | 82 | 0 | 74 | 26 | New Construction - Initial | 1/1/80 |
| 195 | 453 | BOLSA CHICA ST | ARGOSY AVE | BOLSA AVE | A | AAC | ~ | 1,200 | 36 | 43,200 | 4/24/26 | 82 | 46 | 54 | 0 | Overlay - AC Structural | 9/11/07 |
| 1997 | 40200 | WARNER AVE | SEA AIRA | EDWARDS ST | A | AC | ~ | 1,351 | 42 | 56,742 | 4/29/26 | 82 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 825 | 17015 | HEIL AVE | BOLSA CHICA ST | BLACKBEARD LN | A | AC | ~ | 1,282 | 61 | 78,202 | 4/23/26 | 82 | 69 | 29 | 2 | New Construction - Initial | 1/1/80 |
| 1472 | 50540 | PACIFIC VIEW | BEACH BLVD | TWIN DOLPHIN DR | A | AC | ~ | 1,262 | 30 | 37,860 | 5/1/26 | 82 | 13 | 62 | 25 | New Construction - Initial | 1/1/80 |
| 2082 | 288 | YORKTOWN AVE | MAGNOLIA ST (S) | WATERBURY LN | A | AC | ~ | 1,521 | 33 | 50,193 | 4/23/26 | 82 | 16 | 84 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 240 | 881 | BROOKHURST ST | EFFINGHAM DR | ATLANTA AVE | A | AC | ~ | 1,196 | 41 | 51,036 | 5/5/26 | 82 | 0 | 90 | 10 | New Construction - Initial | 1/1/80 |
| 569 | 819 | EDWARDS ST | CROSSWIND DR | OVERLOOK DR | A | AC | ~ | 880 | 30 | 26,400 | 5/6/26 | 82 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 239 | GOLDENWEST ST | BETTY DR | SLATER AVE | A | AC | ~ | 1,193 | 39 | 46,527 | 5/5/26 | 82 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 251 | WARNER AVE | NICHOLS ST | ASH ST | A | AC | ~ | 1,106 | 50 | 49,192 | 5/4/26 | 82 | 36 | 64 | 0 | New Construction - Initial | 1/1/80 |
| 258 | 351 | BUSHARD ST | ERSKINE DR | ATLANTA AVE | C | AAC | ~ | 1,460 | 60 | 87,600 | 4/14/26 | 82 | 15 | 85 | 0 | Overlay - AC Structural | 9/1/06 |
| 258 | 341 | BUSHARD ST | MOKIHANA DR | BANNING AVE | C | AC | ~ | 1,450 | 60 | 87,000 | 4/22/26 | 82 | 48 | 51 | 1 | New Construction - Initial | 1/1/80 |
| 1655 | 370 | SEAPOINT AVE | GARFIELD AVE | DORAL DR | A | AC | ~ | 1,637 | 32 | 54,384 | 4/9/26 | 83 | 78 | 20 | 2 | New Construction - Initial | 1/1/80 |
| 1997 | 220 | WARNER AVE | PLAZA LN | GRAHAM ST | A | AC | ~ | 1,202 | 42 | 52,984 | 4/29/26 | 83 | 37 | 63 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 451 | GOLDENWEST ST | ELLIS AVE | EQUESTRIAN CENTER | A | AC | ~ | 681 | 40 | 27,240 | 5/5/26 | 83 | 28 | 67 | 5 | New Construction - Initial | 1/1/80 |
| 746 | 605 | GOTHARD ST | PROMENADE PARKWAY DR | ELLIS AVE | A | AC | ~ | 949 | 27 | 27,873 | 5/4/26 | 83 | 15 | 85 | 0 | New Construction - Initial | 1/1/80 |
| 1655 | 149 | SEAPOINT AVE | CHERRHILL LN | PALM AVE | A | AC | ~ | 1,218 | 32 | 41,476 | 4/9/26 | 83 | 88 | 12 | 0 | New Construction - Initial | 1/1/80 |
| 1472 | 50530 | PACIFIC VIEW | TWIN DOLPHIN DR (W) | HUNTINGTON ST | A | AC | ~ | 972 | 30 | 29,160 | 5/1/26 | 83 | 33 | 67 | 0 | New Construction - Initial | 1/1/80 |
| 825 | 658 | HEIL AVE | DEL MAR LN | BOLSA CHICA ST | A | AC | ~ | 1,654 | 61 | 100,894 | 4/20/26 | 83 | 0 | 96 | 4 | Overlay-Rubber Hot Mix | 2/14/19 |
| 1503 | 575 | RANCHO RD | BOLSA CHICA ST | ASTRONAUTICS LN | C | AC | ~ | 1,220 | 22 | 26,840 | 4/7/26 | 83 | 11 | 86 | 3 | New Construction - Initial | 1/1/80 |
| 1130 | 359 | MAIN ST | GARFIELD AVE | HOLLY ST | A | AC | ~ | 819 | 40 | 33,510 | 4/8/26 | 83 | 23 | 55 | 22 | New Construction - Initial | 1/1/80 |
| 1472 | 14610 | PACIFIC VIEW | TWIN DOLPHIN DR | BEACH BLVD | A | AC | ~ | 1,262 | 30 | 37,860 | 5/1/26 | 83 | 16 | 84 | 0 | New Construction | 1/1/80 |
| 1472 | 17003 | PACIFIC VIEW | HUNTINGTON ST | TWIN DOLPHIN DR | A | AC | ~ | 972 | 30 | 29,160 | 5/1/26 | 83 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1127 | 113 | MAGNOLIA ST | ADAMS AVE | MEDITERRANEAN DR | A | AAC | ~ | 895 | 33 | 31,535 | 4/8/26 | 83 | 49 | 51 | 0 | Overlay - AC Structural | 6/13/12 |
| 1185 | 413 | MC FADDEN AVE | GOTHARD ST | SUGAR AVE | A | AC | ~ | 1,787 | 40 | 71,480 | 4/9/26 | 83 | 73 | 20 | 7 | New Construction - Initial | 1/1/80 |
| 1997 | 393 | WARNER AVE | ROTTERDAM LN | NEWLAND ST | A | AAC | ~ | 1,188 | 37 | 49,516 | 4/30/26 | 83 | 26 | 74 | 0 | Overlay - AC Structural | 6/21/16 |
| 703 | 45 | GARFIELD AVE | LINDSAY LN | MAGNOLIA ST | A | AAC | ~ | 778 | 33 | 25,674 | 4/9/26 | 83 | 14 | 71 | 15 | Overlay - AC Structural | 7/1/10 |
| 743 | 469 | GOLDENWEST ST | BRUNSWICK DR | OXFORD DR | A | AC | ~ | 1,104 | 40 | 44,160 | 4/27/26 | 83 | 50 | 50 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 555 | MAGNOLIA ST | MEDITERRANEAN DR | ADAMS DR | A | AAC | ~ | 895 | 33 | 31,785 | 4/8/26 | 84 | 37 | 63 | 0 | Overlay - AC Structural | 6/13/12 |
| 746 | 150 | GOTHARD ST | PROMENADE PARKWAY DR | ERNEST DR | A | AC | ~ | 819 | 27 | 22,113 | 5/5/26 | 84 | 15 | 85 | 0 | New Construction - Initial | 1/1/80 |
| 330 | 146 | CENTER AVE | FITNESS CENTER ENTRANCE | BEACH BLVD | C | AAC | ~ | 1,322 | 61 | 80,642 | 4/9/26 | 84 | 0 | 100 | 0 | Overlay - AC Structural | 4/1/12 |
| 1997 | 675 | WARNER AVE | EDWARDS ST | SEA AIRA | A | AC | ~ | 1,290 | 42 | 54,180 | 4/29/26 | 84 | 40 | 60 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 349 | BROOKHURST ST | CLIFF DR | ATLANTA AVE | A | AC | ~ | 1,348 | 39 | 55,072 | 4/14/26 | 84 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 348 | BROOKHURST ST | INDIANAPOLIS AVE | CLIFF DR | A | AC | ~ | 1,295 | 39 | 53,005 | 4/14/26 | 84 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 232 | WARNER AVE | SPRINGDALE ST | SEA AIRA | A | AC | ~ | 1,351 | 42 | 60,376 | 4/29/26 | 84 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 300 | INDIANAPOLIS AVE | BUSHARD ST | EVERGLADES LN | C | AC | ~ | 1,451 | 24 | 34,824 | 4/14/26 | 84 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 674 | WARNER AVE | SEA AIRA | SPRINGDALE ST | A | AC | ~ | 1,351 | 42 | 56,742 | 4/29/26 | 84 | 14 | 86 | 0 | New Construction - Initial | 1/1/80 |
| 1385 | 399 | PALM AVE | SEAPOINT DR | SURF DR | C | AC | ~ | 665 | 28 | 19,370 | 4/9/26 | 84 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 715 | GARFIELD AVE | BEACH BL | DELWARE ST | A | AAC | ~ | 1,321 | 39 | 51,519 | 4/6/26 | 84 | 0 | 100 | 0 | Overlay - AC Structural | 6/12/12 |
| 1127 | 112 | MAGNOLIA ST | MADELINE DR | PIONEER DR | A | AC | ~ | 763 | 40 | 30,520 | 4/15/26 | 84 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 258 | 438 | BUSHARD ST | HAMILTON AVE | MOKIHANA DR | C | AC | ~ | 1,190 | 60 | 71,400 | 4/22/26 | 84 | 51 | 49 | 0 | New Construction - Initial | 1/1/80 |
| 825 | 17013 | HEIL AVE | SEAVIEW LN | SAYBROOK LN | A | AC | ~ | 1,321 | 61 | 80,581 | 4/28/26 | 84 | 30 | 46 | 24 | New Construction - Initial | 1/1/80 |
| 1994 | 875 | WALNUT AVE | FIRST ST | SIXTH ST | C | AC | ~ | 1,654 | 18 | 34,820 | 5/1/26 | 84 | 14 | 75 | 11 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1995 | 718 | WARD ST | YORKTOWN AVE | SUNDAY DR | C | AC | ~ | 935 | 25 | 23,375 | 4/21/26 | 84 | 16 | 84 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 559 | MAGNOLIA ST | BANNING AVE | BERMUDA DR | A | AC | ~ | 1,150 | 33 | 39,950 | 4/22/26 | 85 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 719 | YORKTOWN AVE | WARD ST | CANBERRA LN | C | AC | ~ | 1,414 | 33 | 46,662 | 4/21/26 | 85 | 0 | 98 | 2 | New Construction - Initial | 1/1/80 |
| 703 | 44 | GARFIELD AVE | PLUM TREE LN | LINDSAY LN | A | AAC | ~ | 1,335 | 33 | 44,055 | 4/9/26 | 85 | 17 | 83 | 0 | Overlay - AC Structural | 7/1/10 |
| 1130 | 143 | MAIN ST | HOLLY ST | CLAY AVE | A | AAC | ~ | 834 | 40 | 35,610 | 4/8/26 | 85 | 18 | 82 | 0 | Overlay - AC Structural | 7/11/14 |
| 1185 | 409 | MC FADDEN AVE | LA SALLE LN | EDWARDS ST | A | AAC | ~ | 1,165 | 60 | 69,900 | 4/29/26 | 85 | 85 | 15 | 0 | Overlay - AC Structural | 9/11/07 |
| 887 | 310 | INDIANAPOLIS AVE | BEACH BLVD | FARNSWORTH LN | C | AC | ~ | 1,325 | 24 | 31,800 | 4/30/26 | 85 | 17 | 83 | 0 | Overlay-Rubber Hot Mix | 2/14/19 |
| 569 | 818 | EDWARDS ST | GARFIELD AVE | CROSSWIND DR | A | AC | ~ | 1,068 | 30 | 32,040 | 5/6/26 | 85 | 14 | 62 | 24 | New Construction - Initial | 1/1/80 |
| 589 | 39 | ELLIS AVE | EDWARDS ST | GOLDENWEST ST | A | AC | ~ | 2,640 | 40 | 105,600 | 5/6/26 | 85 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 743 | 478 | GOLDENWEST ST | BREELAND DR | BLUEBONNET DR | A | AAC | ~ | 1,170 | 40 | 46,800 | 4/27/26 | 85 | 13 | 87 | 0 | Overlay - AC Structural | 9/11/07 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2082 | 277 | YORKTOWN AVE | CANBERRA LN | WARD ST | C | AC | ~ | 1,414 | 33 | 46,662 | 4/21/26 | 85 | 15 | 85 | 0 | New Construction - Initial | 1/1/80 |
| 1385 | 140 | PALM AVE | SURF DR | CHERRYHILL LN | C | AC | ~ | 2,090 | 22 | 47,480 | 4/9/26 | 85 | 66 | 34 | 0 | New Construction - Initial | 1/1/80 |
| 2082 | 302 | YORKTOWN AVE | DELAWARE ST | BEACH BLVD | C | AC | ~ | 1,321 | 33 | 43,593 | 4/29/26 | 85 | 19 | 81 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 1385 | 810 | PALM AVE | OFELIA LN | CHERRYHILL LN | C | AC | ~ | 2,210 | 31 | 68,510 | 4/9/26 | 85 | 21 | 79 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 85 | EDINGER AVE | CLUBHOUSE LN | SPRINGDALE ST | A | AAC | ~ | 1,371 | 64 | 87,744 | 4/7/26 | 85 | 14 | 86 | 0 | Overlay - AC Structural | 6/21/16 |
| 743 | 92 | GOLDENWEST ST | MADDOX DR | NORMA DR | A | AAC | ~ | 787 | 40 | 31,480 | 5/4/26 | 85 | 0 | 93 | 7 | Overlay - AC Structural | 9/11/07 |
| 825 | 645 | HEIL AVE | GRAHAM ST | DEL MAR LN | A | AC | ~ | 997 | 61 | 60,817 | 4/20/26 | 86 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 2/14/19 |
| 887 | 508 | INDIANAPOLIS AVE | KELVINGROVE LN | MAGNOLIA ST | A | AC | ~ | 880 | 24 | 21,120 | 4/8/26 | 86 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 114 | MAGNOLIA ST | BEDEL DR | INDIANAPOLIS AVE | A | AAC | ~ | 794 | 33 | 29,952 | 4/14/26 | 86 | 33 | 67 | 0 | Overlay - AC Structural | 6/13/12 |
| 743 | 36 | GOLDENWEST ST | BLUEBONNET DR | BREELAND DR | A | AAC | ~ | 1,170 | 40 | 46,800 | 4/27/26 | 86 | 0 | 97 | 3 | Overlay - AC Structural | 10/29/07 |
| 2082 | 303 | YORKTOWN AVE | NEWLAND ST (S) | WINDWARD LN | C | AAC | ~ | 1,452 | 33 | 47,916 | 4/29/26 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/1/11 |
| 887 | 66 | INDIANAPOLIS AVE | MAGNOLIA ST | KELVINGROVE LN | C | AC | ~ | 880 | 24 | 21,120 | 4/14/26 | 86 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 753 | INDIANAPOLIS AVE | NEWLAND ST | FARNSWORTH LN | C | AC | ~ | 1,325 | 24 | 31,800 | 4/8/26 | 86 | 18 | 82 | 0 | Overlay-Rubber Hot Mix | 2/14/19 |
| 1751 | 461 | SPRINGDALE ST | MC FADDEN AVE | MACHINE DR | A | AAC | ~ | 817 | 39 | 31,863 | 4/28/26 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1724 | 243 | SLATER AVE | EDWARDS ST | MAYOR LN | A | AAC | ~ | 1,293 | 30 | 38,790 | 5/4/26 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/10 |
| 1655 | 590 | SEAPOINT AVE | CHERRHILL LN | DORAL DR | A | AC | ~ | 830 | 32 | 26,560 | 4/9/26 | 86 | 95 | 0 | 5 | New Construction - Initial | 1/1/80 |
| 240 | 520 | BROOKHURST ST | PCH | BUSHARD ST | A | AC | ~ | 1,235 | 45 | 55,575 | 4/22/26 | 86 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 311 | INDIANAPOLIS AVE | FARNSWORTH LN | NEWLAND ST | C | AC | ~ | 1,325 | 24 | 31,800 | 4/30/26 | 86 | 18 | 82 | 0 | Overlay-Rubber Hot Mix | 2/14/19 |
| 703 | 47 | GARFIELD AVE | RANDI LN | PAULINE LN | A | AAC | ~ | 935 | 33 | 30,855 | 4/9/26 | 86 | 0 | 97 | 3 | Overlay - AC Structural | 6/21/13 |
| 743 | 477 | GOLDENWEST ST | BLUEBONNET DR | MC FADDEN AVE | A | AAC | ~ | 828 | 40 | 33,120 | 4/27/26 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 703 | 106 | GARFIELD AVE | SEAPOINT AVE | EDWARDS ST | A | AC | ~ | 1,261 | 40 | 50,440 | 4/9/26 | 87 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 703 | 54 | GARFIELD AVE | KIPAHULU DR | SUVA LN | A | AC | ~ | 1,118 | 33 | 36,894 | 4/21/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1130 | 814 | MAIN ST | YORKTOWN AVE | SEVENTEENTH ST | A | AAC | ~ | 1,445 | 33 | 49,185 | 4/30/26 | 87 | 16 | 81 | 3 | Overlay - AC Structural | 6/13/12 |
| 1751 | 18 | SPRINGDALE ST | ENGINEER DR | MACHINE DR | A | AAC | ~ | 1,142 | 39 | 44,538 | 4/28/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 703 | 46 | GARFIELD AVE | MAGNOLIA ST | RANDI LN | A | AAC | ~ | 820 | 33 | 27,060 | 4/9/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 887 | 301 | INDIANAPOLIS AVE | EVERGLADES LN | BROOKHURST LN | A | AC | ~ | 1,190 | 24 | 28,560 | 4/14/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1017 | 749 | LAKE ST | YORKTOWN AVE | UTICA AVE | A | AC | ~ | 1,012 | 29 | 29,348 | 4/8/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 513 | ATLANTA AVE | KIMBERWICK LN | BEACHWOOD LN | A | AC | ~ | 978 | 33 | 32,274 | 4/6/26 | 87 | 0 | 14 | 86 | Overlay-Rubber Hot Mix | 7/1/19 |
| 1185 | 179 | MC FADDEN AVE | ELECTRONIC LN | SPRINGDALE ST | A | AAC | ~ | 734 | 60 | 44,040 | 4/29/26 | 87 | 29 | 43 | 28 | Overlay - AC Structural | 9/11/07 |
| 1994 | 433 | WALNUT AVE | SIXTH ST | FIRST ST | C | AC | ~ | 1,654 | 18 | 34,552 | 5/1/26 | 87 | 19 | 58 | 23 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1655 | 812 | SEAPOINT AVE | DORAL DR | GARFIELD AVE | A | AC | ~ | 1,637 | 32 | 54,134 | 4/9/26 | 87 | 76 | 18 | 6 | New Construction - Initial | 1/1/80 |
| 195 | 80 | BOLSA CHICA ST | RANCHO RD | SKYLAB WEST | A | AAC | ~ | 702 | 36 | 25,272 | 4/24/26 | 87 | 45 | 55 | 0 | Overlay - AC Structural | 9/11/07 |
| 703 | 490 | GARFIELD AVE | BUSHARD ST | PAULINE LN | A | AAC | ~ | 890 | 21 | 18,690 | 4/20/26 | 87 | 0 | 51 | 49 | Overlay - AC Structural | 6/21/13 |
| 1127 | 550 | MAGNOLIA ST | HYDE PARK DR | GARFIELD AVE | A | AC | ~ | 970 | 40 | 38,800 | 4/14/26 | 87 | 19 | 78 | 3 | New Construction - Initial | 1/1/80 |
| 566 | 86 | EDINGER AVE | GRAHAM ST | CLUBHOUSE LN | A | AAC | ~ | 1,210 | 65 | 78,650 | 4/7/26 | 88 | 0 | 98 | 2 | Overlay - AC Structural | 6/21/16 |
| 195 | 456 | BOLSA CHICA ST | MCFADDEN AVE | TASMAN DR | A | AAC | ~ | 854 | 36 | 30,744 | 4/24/26 | 88 | 22 | 78 | 0 | Overlay - AC Structural | 9/11/07 |
| 1130 | 269 | MAIN ST | DELAWARE ST | PROMENADE PKWY | A | AC | ~ | 1,243 | 40 | 49,720 | 4/6/26 | 88 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 685 | SLATER AVE | MAYOR LN | EDWARDS ST | A | AAC | ~ | 1,293 | 30 | 38,790 | 5/4/26 | 88 | 14 | 86 | 0 | Overlay - AC Structural | 7/1/10 |
| 1127 | 560 | MAGNOLIA ST | PCH | BANNING AVE | C | AC | ~ | 1,468 | 33 | 48,444 | 4/22/26 | 88 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 742 | INDIANAPOLIS AVE | EVERGLADES LN | BUSHARD ST | C | AC | ~ | 1,451 | 24 | 34,824 | 4/8/26 | 88 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 552 | MAGNOLIA ST | YORKTOWN AVE | SEAHURST DR | A | AC | ~ | 845 | 40 | 33,800 | 4/14/26 | 88 | 0 | 70 | 30 | New Construction - Initial | 1/1/80 |
| 703 | 48 | GARFIELD AVE | PAULINE LN | BUSHARD ST | A | AAC | ~ | 890 | 33 | 29,370 | 4/9/26 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 1351 | 767 | ORANGE AVE | SIXTH ST | THIRD ST | C | AAC | ~ | 952 | 25 | 22,390 | 4/27/26 | 88 | 20 | 80 | 0 | Overlay - AC Structural | 9/11/07 |
| 195 | 30 | BOLSA CHICA ST | ROBINWOOD DR | EDINGER AVE | A | AAC | ~ | 780 | 36 | 28,080 | 4/24/26 | 88 | 0 | 96 | 4 | Overlay - AC Structural | 9/11/07 |
| 825 | 17014 | HEIL AVE | BLACKBEARD LN | SEAVIEW LN | A | AC | ~ | 1,358 | 61 | 82,838 | 4/23/26 | 88 | 0 | 70 | 30 | New Construction - Initial | 1/1/80 |
| 1185 | 177 | MC FADDEN AVE | GRAHAM ST | COMPUTER LN | A | AAC | ~ | 925 | 60 | 55,500 | 4/29/26 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 825 | 646 | HEIL AVE | SPRINGDALE ST | CLUBHOUSE LN | A | AC | ~ | 1,391 | 61 | 84,851 | 4/6/26 | 88 | 0 | 81 | 19 | Surface Treatment - Slurry Seal | 2/14/19 |
| 85 | 71 | ATLANTA AVE | BEACHWOOD LN | KIMBERWICK LN | A | AC | ~ | 978 | 33 | 32,274 | 4/9/26 | 88 | 0 | 40 | 60 | Overlay-Rubber Hot Mix | 7/1/19 |
| 1130 | 358 | MAIN ST | PROMENADE PKWY | GARFIELD AVE | A | AAC | ~ | 742 | 39 | 31,188 | 4/6/26 | 88 | 22 | 78 | 0 | Overlay - AC Structural | 6/21/16 |
| 1751 | 19 | SPRINGDALE ST | MACHINE DR | MC FADDEN AVE | A | AAC | ~ | 817 | 39 | 31,863 | 4/28/26 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 566 | 91 | EDINGER AVE | GOLDENWEST ST | GOTHARD ST | A | AC | ~ | 1,982 | 39 | 77,298 | 4/16/26 | 88 | 19 | 81 | 0 | New Construction - Initial | 1/1/80 |
| 500 | 50240 | DELAWARE ST | ELLIS AVE | MAIN ST | C | AC | ~ | 1,240 | 60 | 74,400 | 4/13/26 | 89 | 0 | 75 | 25 | Overlay-Rubber Hot Mix | 12/2/19 |
| 1017 | 750 | LAKE ST | UTICA AVE | ADAMS AVE | A | AC | ~ | 1,321 | 29 | 38,309 | 4/8/26 | 89 | 24 | 76 | 0 | Surface Treatment - Slurry Seal | 7/22/14 |
| 1751 | 226 | SPRINGDALE ST | DOYLE DR | WARNER AVE | A | AAC | ~ | 1,191 | 40 | 53,140 | 4/15/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 195 | 523 | BOLSA CHICA ST | BOLSA AVE | SKYLAB WEST | A | AAC | ~ | 1,432 | 36 | 51,552 | 4/24/26 | 89 | 33 | 38 | 29 | Overlay - AC Structural | 9/11/07 |
| 240 | 78 | BROOKHURST ST | BUSHARD ST | PCH | A | AC | ~ | 1,235 | 45 | 55,575 | 4/22/26 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 554 | MAGNOLIA ST | PIONEER DR | MADELINE DR | A | AC | ~ | 763 | 40 | 30,520 | 4/14/26 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1655 | 811 | SEAPOINT AVE | PCH | PALM AVE | A | AC | ~ | 1,206 | 33 | 42,048 | 4/9/26 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1130 | 711 | MAIN ST | PROMENADE PKWY | DELAWARE ST | A | AAC | ~ | 1,243 | 40 | 51,220 | 4/6/26 | 89 | 21 | 79 | 0 | Overlay - AC Structural | 6/21/16 |
| 195 | 13 | BOLSA CHICA ST | ARGOSY AVE | TASMAN AVE | A | AAC | ~ | 587 | 36 | 21,132 | 4/24/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 743 | 361 | GOLDENWEST ST | PCH | ORANGE AVE | A | AAC | ~ | 1,239 | 44 | 58,516 | 4/13/26 | 89 | 20 | 75 | 5 | Overlay - AC Structural | 6/21/13 |
| 195 | 471 | BOLSA CHICA ST | ROBINWOOD DR | DOVEWOOD DR | A | AAC | ~ | 1,040 | 36 | 37,440 | 4/24/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 703 | 548 | GARFIELD AVE | EDWARDS ST | SEAPOINT AVE | A | AC | ~ | 1,261 | 40 | 50,440 | 4/9/26 | 89 | 0 | 81 | 19 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1751 | 174 | SPRINGDALE ST | BOLSA AVE | ENGINEER DR | A | AAC | ~ | 685 | 39 | 26,715 | 4/28/26 | 90 | 25 | 75 | 0 | Overlay - AC Structural | 6/21/12 |
| 566 | 533 | EDINGER AVE | GOTHARD ST | GOLDENWEST ST | A | AC | ~ | 1,982 | 39 | 77,298 | 4/16/26 | 90 | 42 | 44 | 14 | New Construction - Initial | 1/1/80 |
| 1655 | 369 | SEAPOINT AVE | PALM AVE | PCH | A | AC | ~ | 1,206 | 33 | 42,798 | 4/9/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 484 | GOLDENWEST ST | GARFIELD AVE | ERNEST AVE | A | AC | ~ | 1,055 | 38 | 40,090 | 5/5/26 | 90 | 0 | 88 | 12 | New Construction - Initial | 1/1/80 |
| 1017 | 50420 | LAKE ST | ORANGE AVE | ALLEY ORANGE AVE | A | AC | ~ | 322 | 40 | 12,880 | 4/15/26 | 90 | 22 | 65 | 13 | New Construction - Initial | 1/1/80 |
| 887 | 741 | INDIANAPOLIS AVE | BUSHARD ST | TITAN LN | A | AC | ~ | 988 | 24 | 23,712 | 4/8/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 116 | MAGNOLIA ST | HAMILTION AVE | BERMUDA DR | A | AC | ~ | 1,447 | 32 | 46,304 | 5/6/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1751 | 34 | SPRINGDALE ST | ROYALIST DR (E) | EDINGER AVE | A | AAC | ~ | 641 | 39 | 24,999 | 4/28/26 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 743 | 366 | GOLDENWEST ST | ORANGE AVE | PALM AVE | A | AAC | ~ | 1,236 | 44 | 57,884 | 4/13/26 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 85 | 331 | ATLANTA AVE | SCHOONER LN | NEWLAND ST | A | AAC | ~ | 1,497 | 33 | 49,401 | 4/9/26 | 90 | 0 | 67 | 33 | Overlay - AC Structural | 6/21/16 |
| 85 | 769 | ATLANTA AVE | HUNTINGTON ST | ORANGE AVE | A | AC | ~ | 726 | 19 | 13,794 | 4/27/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 195 | 29 | BOLSA CHICA ST | DOVEWOOD DR | ROBINWOOD DR | A | AAC | ~ | 1,040 | 36 | 37,440 | 4/24/26 | 90 | 0 | 96 | 4 | Overlay - AC Structural | 9/11/07 |
| 743 | 35 | GOLDENWEST ST | MCFADDEN AVE | BLUEBONNET DR | A | AAC | ~ | 828 | 40 | 33,120 | 4/27/26 | 91 | 0 | 94 | 6 | Overlay - AC Structural | 10/29/07 |
| 85 | 330 | ATLANTA AVE | BEACH BL | SCHOONER LN | A | AAC | ~ | 1,145 | 33 | 37,785 | 4/9/26 | 91 | 0 | 47 | 53 | Overlay - AC Structural | 6/21/16 |
| 1503 | 521 | RANCHO RD | SPA DR | GRAHAM ST | C | AC | ~ | 777 | 26 | 20,202 | 4/7/26 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 624 | EDINGER AVE | BEACH BLVD | SHER LN | A | AC | ~ | 1,590 | 31 | 49,290 | 4/16/26 | 91 | 40 | 60 | 0 | New Construction - Initial | 1/1/80 |
| 653 | 434 | FIRST ST | PCH | ORANGE AVE | A | AAC | ~ | 1,132 | 36 | 40,752 | 5/1/26 | 91 | 23 | 77 | 0 | Overlay - AC Structural | 3/1/10 |
| 85 | 70 | ATLANTA AVE | MAGNOLIA ST | BEACHWOOD LN | A | AC | ~ | 868 | 33 | 28,644 | 4/9/26 | 91 | 0 | 57 | 43 | Overlay-Rubber Hot Mix | 7/1/19 |
| 746 | 443 | GOTHARD ST | CENTER AVE | MC FADDEN AVE | A | AAC | ~ | 1,425 | 60 | 85,500 | 4/9/26 | 91 | 22 | 74 | 4 | Overlay - AC Structural | 3/21/16 |
| 746 | 586 | GOTHARD ST | EDINGER AVE | CENTER AVE | A | AAC | ~ | 1,321 | 60 | 79,260 | 4/9/26 | 91 | 21 | 79 | 0 | Overlay - AC Structural | 3/21/16 |
| 1127 | 551 | MAGNOLIA ST | SEAHURST DR | HYDE PARK DR | A | AC | ~ | 825 | 40 | 33,000 | 4/14/26 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 489 | GARFIELD AVE | PAULINE LN | RANDI LN | A | AAC | ~ | 935 | 21 | 19,635 | 4/20/26 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 566 | 194 | EDINGER AVE | BALLANTINE LN | EDWARDS ST | A | AC | ~ | 1,201 | 39 | 46,839 | 4/7/26 | 91 | 38 | 62 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 1185 | 180 | MC FADDEN AVE | SPRINGDALE ST | LA SALLE LN | A | AAC | ~ | 1,481 | 60 | 88,860 | 4/29/26 | 91 | 24 | 75 | 1 | Overlay - AC Structural | 9/11/07 |
| 195 | 11 | BOLSA CHICA ST | BOLSA AVE | ARGOSY AVE | A | AAC | ~ | 1,200 | 36 | 43,200 | 4/24/26 | 91 | 17 | 83 | 0 | Overlay - AC Structural | 9/11/07 |
| 569 | 601 | EDWARDS ST | ELLIS AVE | TALBERT AVE | A | AC | ~ | 1,576 | 25 | 39,400 | 5/7/26 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 272 | GARFIELD AVE | MAIN ST | DELAWARE ST | A | AC | ~ | 1,403 | 45 | 63,135 | 4/6/26 | 91 | 48 | 42 | 10 | New Construction - Initial | 1/1/80 |
| 743 | 483 | GOLDENWEST ST | ERNEST AVE | ELLIS AVE | A | AC | ~ | 1,585 | 40 | 65,900 | 5/5/26 | 91 | 0 | 85 | 15 | New Construction - Initial | 1/1/80 |
| 743 | 824 | GOLDENWEST ST | PALM AVE | DEEP HARBOR LN | A | AAC | ~ | 1,360 | 44 | 62,840 | 4/13/26 | 91 | 0 | 95 | 5 | Overlay - AC Structural | 6/21/13 |
| 1130 | 379 | MAIN ST | YORKTOWN AVE | CLAY AVE | A | AAC | ~ | 1,370 | 33 | 49,210 | 4/13/26 | 92 | 0 | 69 | 31 | Overlay - AC Structural | 6/1/15 |
| 1185 | 178 | MC FADDEN AVE | COMPUTER LN | ELECTRONIC LN | A | AAC | ~ | 923 | 60 | 55,380 | 4/29/26 | 92 | 0 | 89 | 11 | Overlay - AC Structural | 9/11/07 |
| 1997 | 666 | WARNER AVE | LARK LN | GRAHAM ST | A | AC | ~ | 1,473 | 42 | 61,866 | 4/29/26 | 92 | 58 | 42 | 0 | New Construction - Initial | 1/1/80 |
| 1655 | 148 | SEAPOINT AVE | DORAL DR | CHERRHILL LN | A | AC | ~ | 830 | 32 | 28,060 | 4/9/26 | 92 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 195 | 14 | BOLSA CHICA ST | TASMAN DR | MCFADDEN AVE | A | AAC | ~ | 854 | 36 | 30,744 | 4/24/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 1838 | 700 | TALBERT AVE | NEWLAND ST | CEMETERY | A | AAC | ~ | 1,228 | 33 | 40,524 | 4/20/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/1/16 |
| 887 | 309 | INDIANAPOLIS AVE | DELAWARE ST | BEACH BLVD | C | AC | ~ | 1,320 | 33 | 43,560 | 4/15/26 | 92 | 0 | 93 | 7 | New Construction - Initial | 1/1/80 |
| 85 | 509 | ATLANTA AVE | MIRAMAR LN | NEWLAND ST | A | AAC | ~ | 929 | 33 | 30,657 | 4/6/26 | 92 | 34 | 66 | 0 | Overlay - AC Structural | 10/1/17 |
| 566 | 193 | EDINGER AVE | SPRINGDALE ST | BALLANTINE LN | A | AC | ~ | 1,444 | 39 | 56,316 | 4/7/26 | 92 | 0 | 68 | 32 | Overlay-Rubber Hot Mix | 7/1/19 |
| 195 | 522 | BOLSA CHICA ST | SKYLAB WEST | RANCHO RD | A | AAC | ~ | 702 | 36 | 25,272 | 4/24/26 | 92 | 28 | 72 | 0 | Overlay - AC Structural | 9/11/07 |
| 887 | 752 | INDIANAPOLIS AVE | FARNSWORTH LN | BEACH BLVD | C | AC | ~ | 1,325 | 24 | 31,800 | 4/8/26 | 92 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 2/14/19 |
| 703 | 488 | GARFIELD AVE | RANDI LN (S) | MAGNOLIA ST | A | AAC | ~ | 820 | 21 | 17,220 | 4/20/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 743 | 823 | GOLDENWEST ST | DEEP HARBOR LN | YORKTOWN AVE | A | AAC | ~ | 1,393 | 42 | 60,756 | 4/13/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 887 | 743 | INDIANAPOLIS AVE | BROOKHURST ST | EVERGLADES LN | A | AC | ~ | 1,190 | 24 | 28,560 | 4/8/26 | 93 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 60920 | WARNER AVE | LOOP | LOOP | A | AC | ~ | 275 | 28 | 11,300 | 5/13/24 | 93 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 569 | 227 | EDWARDS ST | SHIELDS DR | WARNER DR | A | AC | ~ | 917 | 60 | 55,020 | 5/4/26 | 93 | 22 | 78 | 0 | New Construction - Initial | 1/1/80 |
| 1127 | 734 | MAGNOLIA ST | ADAMS AVE | PIONEER DR | A | AC | ~ | 880 | 40 | 35,200 | 4/14/26 | 93 | 0 | 69 | 31 | New Construction - Initial | 1/1/80 |
| 195 | 407 | BOLSA CHICA ST | MCFADDEN AVE | DOVEWOOD DR | A | AAC | ~ | 822 | 36 | 29,592 | 4/24/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 85 | 510 | ATLANTA AVE | LEASURE LN | MIRAMAR LN | A | AAC | ~ | 849 | 33 | 28,017 | 4/6/26 | 93 | 37 | 63 | 0 | Overlay - AC Structural | 10/1/17 |
| 1724 | 253 | SLATER AVE | GOTHARD ST | NICHOLS ST | A | AC | ~ | 1,320 | 30 | 39,600 | 4/20/26 | 93 | 0 | 89 | 11 | New Construction - Initial | 1/1/80 |
| 566 | 87 | EDINGER AVE | BOLSA CHICA ST | WARREN LN | A | AC | ~ | 1,194 | 62 | 74,028 | 4/7/26 | 93 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 12/2/19 |
| 85 | 512 | ATLANTA AVE | BEACHWOOD LN | MAGNOLIA ST | A | AC | ~ | 868 | 33 | 28,644 | 4/6/26 | 93 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 1130 | 50230 | MAIN ST | ELLIS AVE | BEACH BLVD | A | AAC | ~ | 251 | 60 | 15,060 | 4/24/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 8/6/18 |
| 1997 | 578 | WARNER AVE | SPRINGDALE ST | LARK LN | A | AC | ~ | 1,173 | 42 | 49,266 | 4/29/26 | 93 | 42 | 58 | 0 | New Construction - Initial | 1/1/80 |
| 887 | 596 | INDIANAPOLIS AVE | IVES LN | NEWLAND ST | C | AAC | ~ | 1,362 | 24 | 32,688 | 4/8/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/17 |
| 743 | 381 | GOLDENWEST ST | YORKTOWN AVE | DEEP HARBOR LN | A | AAC | ~ | 1,393 | 42 | 60,756 | 4/23/26 | 94 | 0 | 76 | 24 | Overlay - AC Structural | 6/21/13 |
| 195 | 849 | BOLSA CHICA ST | DOVEWOOD DR | MCFADDEN AVE | A | AAC | ~ | 822 | 36 | 29,592 | 4/24/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/07 |
| 743 | 808 | GOLDENWEST ST | PALM AVE | ORANGE AVE | A | AAC | ~ | 1,236 | 42 | 54,412 | 4/23/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/13 |
| 85 | 328 | ATLANTA AVE | HUNTINGTON ST | DELAWARE ST | A | AC | ~ | 701 | 21 | 14,721 | 4/9/26 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 72 | ATLANTA AVE | KIMBERWICK LN | BUSHARD ST | A | AC | ~ | 797 | 33 | 26,301 | 4/9/26 | 94 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 743 | 382 | GOLDENWEST ST | DEEP HARBOR LN | PALM AVE | A | AAC | ~ | 1,360 | 42 | 59,370 | 4/23/26 | 94 | 0 | 85 | 15 | Overlay - AC Structural | 6/21/13 |
| 240 | 506 | BROOKHURST ST | ADAMS AVE | CONTINENTAL DR | A | AC | ~ | 917 | 39 | 36,763 | 4/9/26 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 224 | WARNER AVE | GRAHAM ST | LARK LN | A | AC | ~ | 1,473 | 42 | 63,366 | 4/29/26 | 94 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 1130 | 800 | MAIN ST | GARFIELD AVE | PROMENADE PKWY | A | AAC | ~ | 742 | 37 | 27,454 | 4/6/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/16 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 887 | 65 | INDIANAPOLIS AVE | IVES LN | MAGNOLIA ST | A | AAC | ~ | 1,281 | 24 | 30,744 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/17 |
| 1472 | 60830 | PACIFIC VIEW | HUNTINGTON ST | FIRST ST | C | AC | ~ | 1,334 | 22 | 34,400 | 5/1/26 | 95 | 0 | 100 | 0 | New Construction - AC | 1/1/16 |
| 1724 | 254 | SLATER AVE | NICHOLS ST | QUEENS LN | A | AC | ~ | 1,155 | 30 | 34,650 | 4/13/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 696 | SLATER AVE | QUEENS LN | NICHOLS ST | A | AC | ~ | 1,155 | 30 | 34,650 | 4/13/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 195 | 455 | BOLSA CHICA ST | TASMAN DR | ARGOSY AVE | A | AAC | ~ | 587 | 36 | 21,132 | 4/24/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 9/11/07 |
| 1751 | 237 | SPRINGDALE ST | WARNER AVE | PALO ALTO DR | A | AC | ~ | 1,450 | 40 | 58,000 | 4/14/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 825 | 446 | HEIL AVE | CLUBHOUSE LN | GRAHAM ST | A | AC | ~ | 1,257 | 61 | 76,677 | 4/6/26 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/14/19 |
| 887 | 507 | INDIANAPOLIS AVE | MAGNOLIA ST | IVES LN | A | AAC | ~ | 1,281 | 24 | 30,744 | 4/8/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/17 |
| 1130 | 801 | MAIN ST | HOLLY ST | GARFIELD AVE | A | AAC | ~ | 819 | 41 | 36,579 | 4/13/26 | 95 | 0 | 82 | 18 | Overlay - AC Structural | 7/22/14 |
| 1751 | 679 | SPRINGDALE ST | PALO ALTO DR | WARNER AVE | A | AC | ~ | 1,450 | 40 | 58,000 | 4/14/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1751 | 680 | SPRINGDALE ST | SLATER AVE | PALO ALTO DR | A | AC | ~ | 1,190 | 40 | 47,600 | 4/14/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 202 | EDINGER AVE | WARREN LN | GRAHAM ST | A | AC | ~ | 1,523 | 62 | 94,426 | 4/7/26 | 95 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 12/2/19 |
| 1290 | 126 | NEWLAND ST | BRIDGEPORT DR | YORKTOWN AVE | A | AC | ~ | 1,156 | 60 | 69,360 | 4/21/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 803 | GOLDENWEST ST | ORANGE AVE | PCH | A | AAC | ~ | 1,239 | 42 | 55,038 | 4/23/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/12 |
| 1724 | 394 | SLATER AVE | QUEENS LN | BEACH BLVD | A | AC | ~ | 825 | 30 | 24,750 | 4/29/26 | 95 | 0 | 36 | 64 | New Construction - Initial | 1/1/80 |
| 85 | 770 | ATLANTA AVE | DELAWARE ST | HUNTINGTON ST | A | AC | ~ | 701 | 40 | 28,040 | 4/9/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 17006 | SLATER AVE | GOLDENWEST ST | FLOWER LN | A | AC | ~ | 1,149 | 30 | 34,470 | 4/20/26 | 95 | 0 | 55 | 45 | New Construction - Initial | 1/1/80 |
| 240 | 505 | BROOKHURST ST | CONTINENTAL DR | CONSTITUTION DR | A | AC | ~ | 768 | 39 | 32,952 | 4/9/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1130 | 710 | MAIN ST | DELAWARE ST | ELLIS AVE | A | AAC | ~ | 1,824 | 38 | 69,312 | 4/6/26 | 96 | 0 | 71 | 29 | Overlay - AC Structural | 8/6/18 |
| 85 | 772 | ATLANTA AVE | SCHOONER LN | BEACH BLVD | A | AAC | ~ | 1,145 | 33 | 37,785 | 4/9/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/16 |
| 9 | 748 | ADAMS AVE | ROTHERT LN | BEACH BLVD | A | AAC | ~ | 1,562 | 40 | 62,480 | 4/21/26 | 96 | 0 | 42 | 58 | Overlay - AC Structural | 8/1/17 |
| 1290 | 398 | NEWLAND ST | GARFIELD AVE | BRIDGEPORT DR | A | AC | ~ | 1,485 | 60 | 89,100 | 4/21/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 543 | BROOKHURST ST | CONSTITUTION DR | YORKTOWN DR | A | AC | ~ | 950 | 39 | 39,300 | 4/9/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1130 | 268 | MAIN ST | ELLIS AVE | DELAWARE ST | A | AAC | ~ | 1,824 | 44 | 83,256 | 4/8/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 8/6/18 |
| 1751 | 238 | SPRINGDALE ST | PALO ALTO DR | SLATER AVE | A | AC | ~ | 1,190 | 40 | 47,600 | 4/14/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 703 | 714 | GARFIELD AVE | DELAWARE ST | MAIN ST | A | AC | ~ | 1,403 | 45 | 63,135 | 4/6/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 773 | ATLANTA AVE | NEWLAND ST | SCHOONER LN | A | AAC | ~ | 1,497 | 33 | 49,401 | 4/9/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 6/21/16 |
| 566 | 636 | EDINGER AVE | EDWARDS ST | BALLANTINE LN | A | AC | ~ | 1,201 | 39 | 46,839 | 4/7/26 | 96 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 743 | 42 | GOLDENWEST ST | ERNEST AVE | GARFIELD AVE | A | AC | ~ | 1,055 | 38 | 46,390 | 5/5/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 728 | BROOKHURST ST | TRAVELWAY | GARFIELD AVE | A | AC | ~ | 1,336 | 39 | 55,104 | 4/9/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1130 | 585 | MAIN ST | CLAY AVE | HOLLY ST | A | AAC | ~ | 834 | 39 | 32,526 | 4/13/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 7/21/14 |
| 825 | 634 | HEIL AVE | TRUDY LN | SPRINGDALE ST | A | AC | ~ | 1,334 | 61 | 81,374 | 4/6/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 836 | SLATER AVE | BEACH BLVD | QUEENS LN | A | AC | ~ | 825 | 30 | 24,750 | 4/29/26 | 96 | 0 | 80 | 20 | New Construction - Initial | 1/1/80 |
| 1724 | 687 | SLATER AVE | FLOWER LN | GOLDENWEST ST | A | AC | ~ | 1,149 | 30 | 34,470 | 4/20/26 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 695 | SLATER AVE | NICHOLS ST | GOTHARD ST | A | AC | ~ | 1,320 | 30 | 39,600 | 4/20/26 | 97 | 0 | 48 | 52 | New Construction - Initial | 1/1/80 |
| 887 | 154 | INDIANAPOLIS AVE | NEWLAND ST | IVES LN | C | AAC | ~ | 1,362 | 24 | 32,688 | 4/14/26 | 97 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/17 |
| 240 | 729 | BROOKHURST ST | YORKTOWN AVE | TRAVELWAY | A | AC | ~ | 1,300 | 39 | 51,700 | 4/9/26 | 97 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 635 | EDINGER AVE | BALLANTINE LN | SPRINGDALE ST | A | AC | ~ | 1,444 | 39 | 56,316 | 4/27/24 | 97 | 27 | 73 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 9 | 306 | ADAMS AVE | BEACH BLVD | ROTHERT LN | A | AAC | ~ | 1,562 | 40 | 62,480 | 4/27/26 | 97 | 0 | 68 | 32 | Overlay - AC Structural | 6/21/16 |
| 825 | 633 | HEIL AVE | EDWARDS ST | TRUDY LN | A | AC | ~ | 1,310 | 61 | 79,910 | 4/6/26 | 97 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 9 | 58 | ADAMS AVE | ROTHERT LN | NEWLAND ST | A | AAC | ~ | 1,083 | 40 | 43,320 | 4/27/26 | 97 | 0 | 75 | 25 | Overlay - AC Structural | 6/21/16 |
| 85 | 511 | ATLANTA AVE | MAGNOLIA ST | LEASURE LN | A | AAC | ~ | 863 | 33 | 28,479 | 4/6/26 | 97 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/17 |
| 111 | 343 | BANNING AVE | MAGNOLIA ST | MALIBU LN | C | AC | ~ | 1,658 | 61 | 101,138 | 4/22/26 | 97 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 100 | EDINGER AVE | BEACH BL | NEWLAND ST | A | AC | ~ | 2,638 | 31 | 81,778 | 4/16/26 | 97 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1017 | 759 | LAKE ST | ADAMS AVE | ELEVENTH ST | A | AAC | ~ | 1,320 | 29 | 38,280 | 4/15/26 | 97 | 0 | 100 | 0 | Overlay - AC Structural | 7/22/14 |
| 751 | 221 | GRAHAM ST | WARNER AVE | KENILWORTH DR | A | AC | ~ | 1,190 | 30 | 35,700 | 5/1/26 | 97 | 0 | 85 | 15 | New Construction - Initial | 1/1/80 |
| 111 | 440 | BANNING AVE | BUSHARD ST | TIDE LN | C | AC | ~ | 569 | 61 | 34,709 | 4/22/26 | 97 | 0 | 0 | 100 | New Construction - Initial | 1/1/80 |
| 1838 | 249 | TALBERT AVE | SPRINGDALE ST | END | A | AC | ~ | 1,566 | 30 | 46,980 | 3/30/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 159 | EDWARDS ST | TALBERT AVE | ELLIS AVE | A | AC | ~ | 1,576 | 25 | 39,400 | 5/1/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 663 | GRAHAM ST | KENILWORTH DR | WARNER AVE | A | AC | ~ | 1,190 | 30 | 35,700 | 4/2/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 222 | GRAHAM ST | KENILWORTH DR | SLATER AVE | A | AC | ~ | 1,450 | 30 | 43,500 | 5/1/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 751 | 664 | GRAHAM ST | SLATER AVE | KENILWORTH DR | A | AC | ~ | 1,450 | 30 | 43,500 | 4/2/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1472 | 60840 | PACIFIC VIEW | FIRST ST | HUNTINGTON ST | C | AC | ~ | 1,334 | 15 | 27,150 | 5/1/26 | 98 | 0 | 100 | 0 | New Construction - AC | 1/1/16 |
| 1997 | 164 | WARNER AVE | LOS PATOS AVE | SANDRA LEE LN | A | AC | ~ | 1,238 | 40 | 55,384 | 4/23/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 789 | 776 | HAMILTON AVE | SURVEYOR CIR | NEWLAND ST | C | AC | ~ | 1,070 | 27 | 28,890 | 4/15/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 131 | NEWLAND ST | EDINGER AVE | END | A | AC | ~ | 1,321 | 60 | 79,260 | 4/16/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 789 | 334 | HAMILTON AVE | NEWLAND ST | SURVEYOR CIR | C | AC | ~ | 1,070 | 40 | 42,800 | 4/15/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1724 | 17007 | SLATER AVE | FLOWER LN | GOTHARD ST | A | AC | ~ | 834 | 30 | 25,020 | 4/20/26 | 98 | 0 | 65 | 35 | New Construction - Initial | 1/1/80 |
| 1724 | 17008 | SLATER AVE | GOTHARD ST | FLOWER LN | A | AC | ~ | 834 | 30 | 25,020 | 4/20/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 27 | 659 | ALGONQUIN ST | WARNER AVE | PEARCE DR | C | AC | ~ | 1,575 | 60 | 94,500 | 4/20/26 | 98 | 0 | 91 | 9 | Overlay-Rubber Hot Mix | 12/2/19 |
| 27 | 842 | ALGONQUIN ST | PEARCE DR | HEIL AVE | C | AC | ~ | 1,321 | 60 | 79,260 | 4/20/26 | 98 | 0 | 67 | 33 | Overlay-Rubber Hot Mix | 12/2/19 |
| 1017 | 872 | LAKE ST | ELEVENTH ST | INDIANAPOLIS AVE | A | AAC | ~ | 1,320 | 29 | 38,280 | 4/15/26 | 98 | 0 | 100 | 0 | Overlay - AC Structural | 7/22/14 |
| 240 | 63 | BROOKHURST ST | CONSTITUTION DR | CONTINENTAL DR | A | AC | ~ | 768 | 39 | 29,952 | 4/24/26 | 98 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1017 | 317 | LAKE ST | ELEVENTH ST | ADAMS AVE | A | AAC | ~ | 1,320 | 29 | 38,280 | 4/9/26 | 98 | 0 | 89 | 11 | Overlay - AC Structural | 7/22/14 |
| 85 | 514 | ATLANTA AVE | BUSHARD ST | KIMBERWICK LN | A | AC | ~ | 797 | 33 | 26,301 | 4/6/26 | 98 | 0 | 100 | 0 | Overlay-Rubber Hot Mix | 7/1/19 |
| 85 | 69 | ATLANTA AVE | LEASURE LN | MAGNOLIA ST | A | AAC | ~ | 863 | 33 | 28,479 | 4/9/26 | 99 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/17 |
| 1017 | 430 | LAKE ST | INDIANAPOLIS AVE | ELEVENTH ST | A | AAC | ~ | 1,320 | 29 | 38,280 | 4/9/26 | 99 | 0 | 62 | 38 | Overlay - AC Structural | 7/22/14 |
| 1290 | 564 | NEWLAND ST | ELLIS AVE | NEWGATE DR | A | AC | ~ | 534 | 27 | 14,418 | 4/20/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 563 | NEWLAND ST | NEWGATE DR | SPRINGHURST AVE | A | AC | ~ | 1,207 | 27 | 32,589 | 4/20/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 64 | BROOKHURST ST | CONTINENTAL DR | ADAMS AVE | A | AC | ~ | 917 | 39 | 38,763 | 4/24/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 101 | BROOKHURST ST | YORKTOWN AVE | CONSTITUTION DR | A | AC | ~ | 950 | 39 | 39,050 | 4/24/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 212 | EDINGER AVE | TRINIDAD LN | END | A | AC | ~ | 1,801 | 44 | 79,244 | 4/20/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 775 | ATLANTA AVE | STRATHMOOR LN | BUSHARD LN | A | AC | ~ | 1,450 | 33 | 47,850 | 4/6/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 332 | ATLANTA AVE | STRATHMOOR LN | BROOKHURST ST | A | AC | ~ | 1,190 | 33 | 39,270 | 4/9/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 774 | ATLANTA AVE | BROOKHUST ST | STRATHMOOR LN | A | AC | ~ | 1,190 | 33 | 39,270 | 4/6/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 329 | ATLANTA AVE | DELAWARE ST | BEACH BL | A | AC | ~ | 1,285 | 33 | 42,405 | 4/9/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 789 | 102 | HAMILTON AVE | SURVEYOR CIR | MAGNOLIA ST | C | AC | ~ | 1,570 | 50 | 78,500 | 4/15/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 256 | NEWLAND ST | SLATER AVE | PASEO CIR | A | AC | ~ | 1,346 | 30 | 40,380 | 4/9/26 | 99 | 0 | 23 | 77 | New Construction - Initial | 1/1/80 |
| 85 | 333 | ATLANTA AVE | BUSHARD ST | STRATHMOOR LN | A | AC | ~ | 1,450 | 33 | 47,850 | 4/9/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 257 | NEWLAND ST | PASEO CIR | TALBERT AVE | A | AC | ~ | 1,287 | 30 | 38,610 | 4/30/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 85 | 771 | ATLANTA AVE | BEACH BL | DELAWARE ST | A | AC | ~ | 1,285 | 33 | 42,405 | 4/9/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1631 | 17012 | SAYBROOK LN | SANTA BARBARA LN | EDINGER AVE | A | AC | ~ | 1,326 | 60 | 79,560 | 4/20/26 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 9 | 500 | ADAMS AVE | NEWLAND ST | ROTHERT LN | A | AAC | ~ | 1,083 | 40 | 43,320 | 4/21/26 | 99 | 0 | 100 | 0 | Overlay - AC Structural | 8/1/17 |
| 85 | 67 | ATLANTA AVE | NEWLAND ST | MIRAMAR LN | A | AAC | ~ | 929 | 33 | 30,657 | 4/9/26 | 99 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/17 |
| 1290 | 122 | NEWLAND ST | NEWGATE DR | ELLIS AVE | A | AC | ~ | 534 | 30 | 16,020 | 4/9/26 | 100 | 0 | 4 | 96 | New Construction - Initial | 1/1/80 |
| 1290 | 120 | NEWLAND ST | TALBERT AVE | SPRINGHURST AVE | A | AC | ~ | 900 | 30 | 27,000 | 4/9/26 | 100 | 0 | 0 | 100 | New Construction - Initial | 1/1/80 |
| 887 | 754 | INDIANAPOLIS AVE | DELAWARE ST | LAKE ST | C | AC | ~ | 1,517 | 19 | 28,823 | 4/15/26 | 100 | 0 | 0 | 100 | New Construction - Initial | 1/1/80 |
| 85 | 68 | ATLANTA AVE | MIRAMAR LN | LEASURE LN | A | AAC | ~ | 849 | 33 | 28,017 | 4/9/26 | 100 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/17 |
| 111 | 76 | BANNING AVE | TIDE LN | BROOKHURST LN | C | AC | ~ | 1,086 | 61 | 66,246 | 4/22/26 | 100 | 0 | 0 | 100 | New Construction - Initial | 1/1/80 |
| 1127 | 50550 | MAGNOLIA ST | WARNER AVE | BRIDGE | A | AC | ~ | 1,280 | 60 | 86,600 | 4/13/26 | 100 | 0 | 0 | 0 | New Construction - AC | 1/1/80 |
| 1290 | 698 | NEWLAND ST | PASEO CIR | SLATER AVE | A | AC | ~ | 1,346 | 27 | 36,342 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 121 | NEWLAND ST | SPRINGHURST AVE | NEWGATE DR | A | AC | ~ | 1,207 | 30 | 36,210 | 4/9/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 562 | NEWLAND ST | SPRINGHURST AVE | TALBERT AVE | A | AC | ~ | 900 | 27 | 24,300 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1290 | 699 | NEWLAND ST | TALBERT AVE | PASEO CIR | A | AC | ~ | 1,287 | 27 | 34,749 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1631 | 17011 | SAYBROOK LN | HEIL AVE | SANTA BARBARA LN | A | AC | ~ | 1,317 | 60 | 79,020 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1670 | 373 | SEVENTEENTH ST | ADAMS AVE | MAIN ST | A | AC | ~ | 976 | 26 | 25,376 | 4/13/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1670 | 816 | SEVENTEENTH ST | ADAMS AVE | PALM AVE | A | AC | ~ | 1,625 | 35 | 56,875 | 4/13/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1670 | 815 | SEVENTEENTH ST | MAIN ST | ADAMS AVE | A | AC | ~ | 976 | 38 | 37,088 | 4/13/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1670 | 374 | SEVENTEENTH ST | PALM AVE | ADAMS AVE | A | AC | ~ | 1,625 | 27 | 43,875 | 4/13/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1751 | 668 | SPRINGDALE ST | WARNER AVE | DOYLE DR | A | AAC | ~ | 1,191 | 40 | 47,640 | 4/15/26 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 6/21/13 |
| 1838 | 540 | TALBERT AVE | EDWARDS ST | FIELDBURY LN | A | AC | ~ | 770 | 30 | 23,100 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 98 | TALBERT AVE | FIELDBURY LN | EDWARDS ST | A | AC | ~ | 770 | 30 | 23,100 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 539 | TALBERT AVE | FIELDBURY LN | IVORYCREST LN | A | AC | ~ | 1,106 | 30 | 33,180 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 97 | TALBERT AVE | IVORYCREST LN | FIELDBURY LN | A | AC | ~ | 1,106 | 30 | 33,180 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 537 | TALBERT AVE | IVORYCREST LN | SPRINGDALE ST | A | AC | ~ | 1,036 | 30 | 31,080 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1838 | 95 | TALBERT AVE | SPRINGDALE ST | IVORYCREST LN | A | AC | ~ | 1,036 | 30 | 31,080 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 194 | 454 | BOLSA AVE | GRAHAM ST | BOLSA CHICA ST | A | AC | ~ | 2,718 | 38 | 103,284 | 4/24/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 194 | 457 | BOLSA AVE | TRAVELWAY | GRAHAM ST | A | AC | ~ | 648 | 38 | 24,624 | 4/24/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1997 | 606 | WARNER AVE | SANDRA LEE LN | LOS PATOS AVE | A | AC | ~ | 1,238 | 36 | 44,568 | 4/23/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 286 | BROOKHURST ST | GARFIELD AVE | TRAVELWAY | A | AC | ~ | 1,336 | 39 | 53,354 | 4/24/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 240 | 287 | BROOKHURST ST | TRAVELWAY | YORKTOWN AVE | A | AC | ~ | 1,300 | 39 | 53,200 | 4/24/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 210 | EDINGER AVE | BONAIRE CIR | SAYBROOK LN | A | AC | ~ | 1,417 | 72 | 102,024 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 542 | EDINGER AVE | NEWLAND ST | BEACH BLVD | A | AC | ~ | 2,638 | 31 | 81,778 | 4/16/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 566 | 211 | EDINGER AVE | TRINIDAD LN | BONAIRE CIR | A | AC | ~ | 1,644 | 44 | 72,336 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 26 | GOLDENWEST ST | BOLSA AVE | OXFORD DR | A | AC | ~ | 797 | 40 | 31,880 | 4/27/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 743 | 468 | GOLDENWEST ST | OXFORD DR | BOLSA AVE | A | AC | ~ | 797 | 40 | 36,880 | 4/27/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 111 | 342 | BANNING AVE | MALIBU LN | BUSHARD ST | C | AC | ~ | 1,086 | 61 | 66,246 | 4/22/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 258 | 285 | BUSHARD ST | FLOUNDER DR | YORKTOWN AVE | C | AAC | ~ | 1,190 | 60 | 71,400 | 4/9/26 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/1/07 |
| 258 | 284 | BUSHARD ST | GARFIELD AVE | FLOUNDER DR | C | AAC | ~ | 1,450 | 60 | 87,000 | 4/9/26 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/1/07 |
| 887 | 312 | INDIANAPOLIS AVE | LAKE ST | DELAWARE ST | C | AC | ~ | 1,517 | 19 | 28,823 | 4/15/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| | | | | | | | | **168.2** | | ######### | | | | | | | |
| | | ***Locals*** | | | | | | | | | | | | | | | |
| 451 | 15408 | CLARKDALE DR | EDGEWOOD LN | END | E | AC | 7 | 720 | 34 | 24,480 | 8/21/23 | 23 | 77 | 5 | 18 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1894 | 14334 | STILWELL DR | SHAW LN | MAGNOLIA ST | E | AC | 9 | 179 | 36 | 6,444 | 8/30/23 | 24 | 96 | 4 | 0 | New Construction - Initial | 1/1/80 |
| 188 | 14320 | BARBADOS CIR | DORSETT DR | CDS | E | AC | 9 | 570 | 36 | 22,020 | 8/30/23 | 24 | 94 | 6 | 0 | New Construction | 1/1/80 |
| 1063 | 15782 | KERN DR | BERLIN LN | TIFFANY CIR | E | AC | 5 | 849 | 36 | 30,564 | 5/8/26 | 25 | 84 | 13 | 3 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 686 | 13362 | ENCINO CIR | SANTA YNEZ DR | CDS | E | AC | 5 | 350 | 36 | 13,950 | 5/28/24 | 26 | 87 | 13 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1125 | 13400 | LARCREST CIR | FOXSHIELD DR | CDS | E | AC | 5 | 250 | 36 | 10,250 | 5/21/24 | 26 | 87 | 11 | 2 | New Construction | 1/1/80 |
| 1277 | 14411 | MC CARTHY DR | SPRINGDALE ST | STILL HARBOR LN | E | AC | 5 | 180 | 36 | 6,480 | 5/24/24 | 26 | 96 | 4 | 0 | New Construction | 1/1/80 |
| 113 | 13360 | ALTA VISTA CIR | SANTA YNEZ DR | END | E | AC | 5 | 350 | 36 | 13,950 | 5/28/24 | 27 | 90 | 10 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1646 | 14708 | RIVERVIEW CIR | OCEANHILL DR | CDS | E | AC | 6 | 248 | 32 | 9,436 | 8/15/23 | 27 | 94 | 6 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 147 | 14730 | ARIANA CIR | ALSUNA LN | CDS (E) | E | AC | 6 | 140 | 32 | 6,840 | 6/29/21 | 27 | 73 | 8 | 19 | New Construction | 1/1/80 |
| 785 | 14412 | FRITCH DR | SPRINGDALE ST | STILL HARBOR LN | E | AC | 5 | 180 | 36 | 6,480 | 5/28/24 | 27 | 84 | 10 | 6 | New Construction | 1/1/80 |
| 1063 | 14883 | KERN DR | TIFFANY CIR | RENOIR CIR | E | AC | 5 | 354 | 36 | 12,744 | 5/8/26 | 28 | 83 | 17 | 0 | New Construction | 1/1/80 |
| 923 | 15767 | HERBERT LN | ROGERS DR | RENOIR CIR | E | AC | 5 | 500 | 36 | 18,000 | 5/8/26 | 28 | 80 | 20 | 0 | New Construction | 1/1/80 |
| 1023 | 15882 | JOLIET AVE | FLORIDA ST | GEORGIA ST | E | AC | 6 | 345 | 37 | 12,765 | 8/15/23 | 28 | 89 | 10 | 1 | Surface Treatment - Slurry Seal | 3/1/11 |
| 608 | 13454 | DOLPHINWOOD DR | OXBORO LN | END | E | AC | 5 | 186 | 36 | 6,408 | 5/29/24 | 28 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 344 | 13564 | CAIN AVE | PALMDALE ST | END | E | AC | 3 | 199 | 26 | 5,174 | 5/30/24 | 29 | 82 | 11 | 7 | New Construction | 1/1/80 |
| 1162 | 13621 | LIDO LN | MARIPOSA DR | SANTA YNEZ DR | E | AC | 5 | 320 | 36 | 12,660 | 5/28/24 | 29 | 91 | 6 | 3 | New Construction - Initial | 1/1/80 |
| 1067 | 14105 | KILKENNY LN | ALLEY MALLOY DR | INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/23/23 | 29 | 93 | 7 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 260 | 13627 | BLUE FOX CIR | CAPSTONE DR | END | E | AC | 3 | 321 | 36 | 14,056 | 5/28/24 | 29 | 88 | 12 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1157 | 13634 | LEWIS LN | GALIPEAN DR | WINTERGREEN DR | E | AC | 5 | 531 | 36 | 19,866 | 5/20/24 | 30 | 85 | 4 | 11 | New Construction - Initial | 1/1/80 |
| 620 | 13855 | DOWN DR | TOWAY LN | EDWARDS ST | E | AC | 1 | 531 | 36 | 19,366 | 12/20/24 | 31 | 95 | 5 | 0 | New Construction | 1/1/80 |
| 2039 | 13854 | TYRONE CIR | TOWAY LN | END | E | AC | 1 | 419 | 36 | 16,334 | 1/3/25 | 31 | 91 | 4 | 5 | New Construction - Initial | 1/1/80 |
| 237 | 15777 | BERLIN LN | ROGERS DR | KERN DR | E | AC | 5 | 1,238 | 36 | 44,818 | 5/8/26 | 31 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 654 | 15962 | EDGEWOOD LN | DEEPVIEW DR | CLARKDALE DR | E | AC | 7 | 1,049 | 36 | 37,764 | 8/21/23 | 32 | 85 | 4 | 11 | Surface Treatment - Slurry Seal | 3/1/11 |
| 349 | 14663 | CALIFORNIA ST | NASHVILLE AVE | OSWEGO AVE | E | AC | 6 | 330 | 36 | 11,880 | 8/15/23 | 32 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1869 | 15546 | ST AUGUSTINE DR | SAND DOLLAR LN | BRETON LN | E | AC | 9 | 769 | 36 | 27,684 | 8/30/23 | 32 | 90 | 6 | 4 | New Construction | 1/1/80 |
| 691 | 14741 | ENGLAND ST | YORKTOWN AVE | CDS | E | AAC | 6 | 537 | 36 | 22,365 | 7/8/21 | 33 | 64 | 26 | 10 | Overlay - AC Structural | 11/28/19 |
| 1139 | 15489 | LAWSON LN | NIAGARA DR | MEREDITH DR | E | AC | 8 | 516 | 35 | 18,060 | 2/28/22 | 33 | 81 | 7 | 12 | New Construction - Initial | 1/1/80 |
| 2063 | 14033 | VELVET CIR | FLAGSTONE LN | END | E | AC | 7 | 466 | 34 | 15,844 | 8/21/23 | 34 | 88 | 6 | 6 | Surface Treatment - Slurry Seal | 3/1/11 |
| 392 | 15921 | CARRIE LN | SLIGO CIR | EDINGER AVE | E | AC | 1 | 1,169 | 36 | 42,084 | 12/20/24 | 34 | 85 | 8 | 7 | New Construction | 1/1/80 |
| 1836 | 13856 | SLIGO CIR | CARRIE LN | END | E | AC | 1 | 419 | 36 | 16,334 | 12/20/24 | 34 | 87 | 13 | 0 | New Construction | 1/1/80 |
| 1561 | 13291 | PRAIRIE DR | DOLORES ST | ALLEY LE GRAND LN | E | AC | 2 | 201 | 36 | 8,556 | 3/29/22 | 34 | 93 | 5 | 2 | New Construction | 1/1/80 |
| 477 | 13405 | COLLINS CIR | ARNADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/29/24 | 34 | 91 | 9 | 0 | New Construction | 1/1/80 |
| 2176 | 13633 | WINTERGREEN DR | STILL HARBOR LN | LEWIS LN | E | AC | 5 | 599 | 36 | 22,314 | 5/28/24 | 35 | 92 | 8 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 581 | 15407 | DEEPVIEW DR | EDGEWOOD LN | RUMFORD LN | E | AC | 7 | 588 | 36 | 21,168 | 8/21/23 | 35 | 82 | 10 | 8 | Surface Treatment - Slurry Seal | 3/1/11 |
| 133 | 13853 | ANTRIM CIR | TOWAY LN | END | E | AC | 1 | 419 | 36 | 16,334 | 1/3/25 | 35 | 81 | 4 | 15 | New Construction | 1/1/80 |
| 1274 | 15337 | MAYFLOWER LN | MC FADDEN AVE | PRISCILLA DR | E | AC | 1 | 961 | 36 | 34,846 | 12/20/24 | 35 | 81 | 4 | 15 | New Construction | 1/1/80 |
| 1508 | 13806 | PELICAN LN | MC FADDEN AVE | ALLEY MC FADDEN AVE | E | AC | 1 | 161 | 36 | 5,796 | 3/21/22 | 35 | 84 | 10 | 6 | New Construction | 1/1/80 |
| 1575 | 13827 | PRODUCER LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 35 | 83 | 6 | 11 | New Construction | 1/1/80 |
| 22 | 13843 | ALBION DR | PLYMOUTH LN | ALDEN LN | E | AC | 1 | 780 | 36 | 28,080 | 12/20/24 | 35 | 78 | 13 | 9 | New Construction | 1/1/80 |
| 1319 | 13361 | MIRA LOMA CIR | SANTA YNEZ DR | CDS | E | AC | 5 | 350 | 36 | 13,950 | 5/28/24 | 36 | 85 | 13 | 2 | Surface Treatment - Slurry Seal | 10/1/12 |
| 754 | 16001 | FLINT DR | BALLANTINE LN | EDWARDS ST | E | AC | 3 | 1,201 | 36 | 43,236 | 5/7/26 | 36 | 79 | 19 | 2 | New Construction | 1/1/80 |
| 1792 | 14562 | SHEFFIELD LN | CORNWALL DR | RALEIGH DR | E | AC | 8 | 125 | 24 | 3,000 | 3/9/22 | 37 | 84 | 16 | 0 | New Construction | 1/1/80 |
| 1572 | 15338 | PRISCILLA DR | PLYMOUTH LN | MAYFLOWER LN | E | AC | 1 | 1,040 | 36 | 37,690 | 12/27/24 | 37 | 81 | 13 | 6 | New Construction | 1/1/80 |
| 1680 | 15336 | ROYALIST DR | SPRINGDALE ST | PLYMOUTH LN | E | AC | 1 | 811 | 36 | 29,196 | 12/27/24 | 37 | 79 | 5 | 16 | New Construction | 1/1/80 |
| 381 | 13379 | CARDIFF CIR | MARYPORT DR | END | E | AC | 5 | 75 | 36 | 3,950 | 3/31/26 | 37 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 427 | 13718 | CHEMICAL LN | MC FADDEN AVE. | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 3/21/22 | 38 | 84 | 8 | 8 | New Construction | 1/1/80 |
| 641 | 13852 | DUNN DR | TOWAY LN | EDWARDS ST | E | AC | 1 | 531 | 36 | 19,116 | 12/20/24 | 38 | 94 | 6 | 0 | New Construction | 1/1/80 |
| 2175 | 13830 | WINSLOW DR | AULNAY LN | END | E | AC | 1 | 397 | 36 | 15,542 | 1/3/25 | 38 | 93 | 7 | 0 | New Construction - Initial | 1/1/80 |
| 1779 | 14219 | SEVEN SEAS LN | INDIANAPOLIS AVE | INDIANAPOLIS AVE | E | AC | 9 | 204 | 36 | 7,344 | 8/24/23 | 38 | 85 | 15 | 0 | New Construction | 1/1/80 |
| 1219 | 13623 | MADERA LN | SANTA YNEZ DR | CDS | E | AC | 5 | 485 | 36 | 19,020 | 5/28/24 | 38 | 84 | 16 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2058 | 14413 | VARSITY DR | HALLCROFT LN | IVORYCREST LN | E | AC | 5 | 345 | 36 | 12,420 | 5/23/24 | 39 | 91 | 9 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 681 | 15880 | ELMIRA AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 39 | 69 | 26 | 5 | New Construction | 1/1/80 |
| 1246 | 15150 | MARCELLENA DR | LIDO LN | GURNEY LN | E | AC | 5 | 529 | 36 | 20,184 | 5/28/24 | 39 | 74 | 22 | 4 | Surface Treatment - Slurry Seal | 10/1/12 |
| 683 | 13355 | ELSINORE CIR | SONOMA DR | CDS | E | AC | 5 | 179 | 36 | 7,994 | 5/28/24 | 39 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1089 | 13570 | KOLEDO LN | ALLEY SLATER AVE | SLATER AVE | E | AC | 4 | 150 | 36 | 5,400 | 5/30/24 | 39 | 72 | 25 | 3 | New Construction | 1/1/80 |
| 1909 | 15771 | SUMMERDALE DR | PINEHURST LN | ALLEY PINEHURST LN | E | AC | 5 | 125 | 36 | 4,500 | 5/30/24 | 40 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 595 | 13363 | DESTRY CIR | MARCELLENA DR | CDS | E | AC | 5 | 135 | 36 | 6,300 | 5/28/24 | 40 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1144 | 15542 | LEASURE LN | ATLANTA AVE | SATTERFIELD DR | E | AC | 9 | 433 | 36 | 16,338 | 8/30/23 | 40 | 73 | 22 | 5 | New Construction - Initial | 1/1/80 |
| 1562 | 13838 | PRATT CIR | WINSLOW DR | END | E | AC | 1 | 339 | 36 | 13,454 | 1/3/25 | 41 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 1153 | 13598 | LENNOX DR | BRIMHALL LN | EDWARDS ST | E | AC | 3 | 180 | 36 | 6,480 | 4/22/26 | 41 | 65 | 30 | 5 | New Construction - Initial | 1/1/80 |
| 1893 | 13393 | STILL HARBOR LN | FENLEY DR | MC CARTHY DR | E | AC | 5 | 460 | 36 | 17,310 | 5/28/24 | 42 | 80 | 17 | 3 | Surface Treatment - Slurry Seal | 10/1/12 |
| 141 | 14332 | ARCEL CIR | KROLL LN | END | E | AC | 9 | 167 | 32 | 7,844 | 8/30/23 | 42 | 91 | 6 | 3 | New Construction | 1/1/80 |
| 869 | 13622 | GURNEY LN | ATHENA DR | MARCELLENA DR | E | AC | 5 | 400 | 36 | 15,540 | 5/28/24 | 42 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 970 | 14977 | HUNTINGTON VILLAGE | MC FADDEN AVE | CENTER AVE | E | AC | 4 | 1,711 | 44 | 75,284 | 4/1/22 | 42 | 65 | 30 | 5 | New Construction | 1/1/80 |
| 1023 | 15876 | JOLIET AVE | DELAWARE ST | ENGLAND ST | E | AC | 6 | 331 | 37 | 12,247 | 8/15/23 | 43 | 81 | 19 | 0 | New Construction | 1/1/80 |
| 1623 | 14862 | REMINGTON LN | WARNER AVE | ROGERS DR | E | AC | 5 | 191 | 36 | 6,876 | 4/29/26 | 43 | 100 | 0 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 341 | 13837 | CABOT CIR | WINSLOW DR | END | E | AC | 1 | 339 | 36 | 13,454 | 1/3/25 | 43 | 64 | 13 | 23 | New Construction | 1/1/80 |
| 732 | 15202 | FIELDBURY LN | TALEGATE DR | NORBROOK DR | E | AC | 5 | 875 | 36 | 31,212 | 5/29/24 | 43 | 90 | 10 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1032 | 14887 | JUNE DR | FRASER LN | ERWIN LN | E | AC | 5 | 251 | 36 | 9,338 | 5/22/24 | 43 | 69 | 29 | 2 | Surface Treatment - Slurry Seal | 10/1/12 |
| 247 | 15401 | BIKINI LN | SAMOA DR | KUKUI DR | E | AC | 8 | 802 | 36 | 30,372 | 3/3/22 | 44 | 86 | 9 | 5 | New Construction | 1/1/80 |
| 344 | 13563 | CAIN AVE | GOTHARD ST | PALMDALE ST | E | AC | 3 | 345 | 36 | 12,420 | 5/30/24 | 44 | 91 | 8 | 1 | New Construction | 1/1/80 |
| 969 | 14648 | HUNTINGTON ST | BALTIMORE AVE | CHICAGO AVE | E | AC | 9 | 329 | 37 | 12,173 | 8/14/23 | 44 | 79 | 10 | 11 | New Construction | 1/1/80 |
| 1680 | 16009 | ROYALIST DR | WILLET LN | STANDISH LN | E | AC | 1 | 780 | 36 | 28,080 | 12/27/24 | 45 | 83 | 13 | 4 | New Construction | 1/1/80 |
| 2058 | 13415 | VARSITY DR | HIGHLAND LN | CDS | E | AC | 5 | 383 | 36 | 13,788 | 5/29/24 | 45 | 91 | 9 | 0 | New Construction - Initial | 1/1/80 |
| 1529 | 15269 | PINEHURST LN | SUMMERDALE DR | PALO ALTO DR | E | AC | 5 | 860 | 36 | 32,100 | 5/21/24 | 45 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1259 | 15091 | MARSHALL DR | ACE LN | NASSAU LN | E | AC | 3 | 1,165 | 36 | 42,440 | 3/23/22 | 45 | 84 | 15 | 1 | New Construction | 1/1/80 |
| 1082 | 15271 | KISER DR | STILL HARBOR LN | PRESCOTT LN | E | AC | 5 | 858 | 36 | 32,388 | 5/28/24 | 45 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 476 | 15171 | COLLIE LN | FENLEY DR | ARROWHEAD DR | E | AC | 5 | 1,125 | 36 | 40,500 | 5/24/24 | 45 | 65 | 29 | 6 | New Construction | 1/1/80 |
| 1542 | 13836 | PLYMOUTH LN | ROYALIST DR | EDINGER AVE | E | AC | 1 | 640 | 36 | 23,040 | 1/3/25 | 45 | 76 | 16 | 8 | New Construction | 1/1/80 |
| 714 | 13238 | FAIRWAY LN | SNEAD DR | MEADOWLARK DR | E | AC | 3 | 737 | 36 | 26,782 | 3/23/22 | 45 | 80 | 9 | 11 | New Construction | 1/1/80 |
| 126 | 13712 | ANDAMAN LN | CASPIAN CIR | ALLEY MCFADDEN AVE | E | AC | 1 | 147 | 36 | 5,292 | 3/21/22 | 45 | 93 | 7 | 0 | New Construction | 1/1/80 |
| 227 | 15103 | BELLINGER DR | BALLANTINE LN | CDS | E | AC | 3 | 880 | 36 | 32,930 | 4/7/26 | 45 | 76 | 8 | 16 | New Construction | 1/1/80 |
| 2139 | 13466 | WESTLAKE CIR | INLET DR | END | E | AC | 5 | 478 | 36 | 19,208 | 5/29/24 | 45 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 537 | 15330 | CROSS DR | GRAHAM ST | ALLEY TAFT LN | E | AC | 1 | 548 | 36 | 19,728 | 1/7/25 | 45 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 1063 | 14902 | KERN DR | BERLIN LN | CDS | E | AC | 5 | 105 | 36 | 5,030 | 4/1/26 | 46 | 80 | 20 | 0 | New Construction | 1/1/80 |
| 169 | 13350 | AUTUMN CIR | CDS | ROSEMONT DR | E | AC | 5 | 320 | 36 | 13,020 | 5/28/24 | 46 | 78 | 21 | 1 | New Construction | 1/1/80 |
| 347 | 13203 | CALHOUN DR | PHELPS LN | SAYBROOK LN | E | AC | 2 | 621 | 36 | 22,356 | 3/24/22 | 46 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 581 | 14030 | DEEPVIEW DR | RUMFORD LN | DOREMERE DR | E | AC | 7 | 171 | 36 | 6,156 | 8/21/23 | 46 | 91 | 9 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 626 | 13375 | DREY LN | CAPSTONE DR | MANHATTAN DR | E | AC | 3 | 697 | 36 | 25,092 | 5/22/24 | 46 | 56 | 36 | 8 | Surface Treatment - Slurry Seal | 10/1/12 |
| 558 | 14402 | DAN LN | BOLSA AVE | BUCKINGHAM DR | E | AC | 1 | 314 | 40 | 12,560 | 4/7/26 | 46 | 63 | 30 | 7 | New Construction | 1/1/80 |
| 881 | 15287 | HAMMON LN | HAROLD PL | SANDS DR | E | AC | 1 | 690 | 36 | 24,840 | 4/7/26 | 46 | 57 | 30 | 13 | New Construction | 1/1/80 |
| 617 | 15541 | DORSETT DR | MIRAMAR LN | POSTON LN | E | AC | 9 | 1,279 | 36 | 46,794 | 8/30/23 | 47 | 78 | 18 | 4 | New Construction | 1/1/80 |
| 1629 | 15933 | RESEARCH DR | CHEMICAL LN | GRAHAM ST | E | AC | 1 | 1,170 | 40 | 46,800 | 3/21/22 | 47 | 79 | 17 | 4 | New Construction | 1/1/80 |
| 1185 | 15591 | MC FADDEN AVE | PELICAN LN | CHEMICAL LN | E | AC | 1 | 1,028 | 60 | 61,030 | 3/21/22 | 47 | 80 | 12 | 8 | New Construction | 1/1/80 |
| 1253 | 14405 | MARIPOSA DR | CORONADO LN | LIDO LN | E | AC | 5 | 262 | 36 | 9,432 | 5/21/24 | 47 | 74 | 21 | 5 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1529 | 15829 | PINEHURST LN | WARNER AVE | SUMMERDALE DR | E | AC | 5 | 595 | 36 | 21,420 | 5/30/24 | 47 | 80 | 20 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2054 | 13829 | VANE CIR | AULNAY LN | END | E | AC | 1 | 397 | 36 | 15,542 | 1/3/25 | 47 | 82 | 18 | 0 | New Construction - Initial | 1/1/80 |
| 1542 | 13846 | PLYMOUTH LN | PRISCILLA DR | ROYALIST DR | E | AC | 1 | 1,040 | 36 | 37,440 | 1/3/25 | 48 | 74 | 17 | 9 | New Construction | 1/1/80 |
| 1426 | 15259 | OAK LN | WARNER AVE | SYCAMORE AVE | E | AC | 4 | 397 | 36 | 14,292 | 5/30/24 | 48 | 90 | 10 | 0 | New Construction | 1/1/80 |
| 312 | 13947 | BRIDGEWAY LN | GARFIELD AVE | BROOKSIDE DR | E | AC | 7 | 410 | 36 | 14,760 | 4/15/26 | 48 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 440 | 15099 | CHRISTY DR | BRADBURY LN | WOODSTOCK LN | E | AC | 3 | 524 | 36 | 19,114 | 5/7/26 | 48 | 65 | 29 | 6 | New Construction | 1/1/80 |
| 5350 | 60990 | 16TH ST | END N | PCH | E | AC | 2 | 77 | 26 | 2,002 | 5/6/24 | 48 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 149 | 13409 | ARMADA DR | COLLINS CIR | EDWARDS ST | E | AC | 5 | 308 | 36 | 11,088 | 5/13/24 | 48 | 74 | 16 | 10 | New Construction | 1/1/80 |
| 1680 | 13847 | ROYALIST DR | PLYMOUTH LN | WILLETT LN | E | AC | 1 | 260 | 36 | 9,360 | 12/27/24 | 48 | 62 | 11 | 27 | New Construction | 1/1/80 |
| 681 | 15867 | ELMIRA AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 48 | 51 | 29 | 20 | New Construction | 1/1/80 |
| 1426 | 15260 | OAK LN | SYCAMORE AVE | ALLEY ASH ST | E | AC | 4 | 933 | 36 | 33,588 | 5/30/24 | 48 | 75 | 16 | 9 | New Construction | 1/1/80 |
| 170 | 13352 | AVALON LN | PALO ALTO DR | POINT LOMA DR | E | AC | 5 | 1,025 | 36 | 36,900 | 5/21/24 | 48 | 69 | 31 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1297 | 13256 | MERCIER LN | MYRTLE DR | SHAYNE DR | E | AC | 3 | 1,020 | 36 | 36,720 | 5/7/26 | 49 | 71 | 28 | 1 | New Construction | 1/1/80 |
| 1909 | 15772 | SUMMERDALE DR | ALLEY PINEHURST LN | ALLEY GROVE CIR | E | AC | 5 | 257 | 36 | 9,252 | 5/30/24 | 49 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1243 | 15925 | MAR VISTA DR | NORTHRIDGE LN | SUNNYCREST LN | E | AC | 1 | 1,300 | 36 | 46,800 | 5/8/26 | 49 | 62 | 36 | 2 | New Construction | 1/1/80 |
| 1558 | 14323 | POSTON LN | DORSETT DR | STILLWELL DR | E | AC | 9 | 659 | 36 | 24,474 | 8/30/23 | 49 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 1997 | 14986 | WARNER AVE | WARNER AVE | PINEHURST LN | E | AC | 5 | 751 | 36 | 27,036 | 5/22/24 | 49 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2198 | 13354 | YOSEMITE CIR | SONOMA DR | CDS | E | AC | 5 | 250 | 36 | 10,350 | 5/28/24 | 49 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 999 | 14032 | IVY CIR | FLAGSTONELN | END | E | AC | 7 | 466 | 34 | 15,844 | 8/21/23 | 50 | 57 | 16 | 27 | Surface Treatment - Slurry Seal | 3/1/11 |
| 2304 | 60810 | KELLEY CIR | PRESCOTT LN | CDS | E | AC | 5 | 410 | 36 | 18,360 | 5/13/24 | 50 | 79 | 21 | 0 | New Construction - AC | 1/1/80 |
| 1090 | 15033 | KONA DR | WAIKIKI LN | BOLSA CHICA ST | E | AC | 2 | 670 | 36 | 24,120 | 3/24/22 | 50 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 1169 | 14692 | LINCOLN AVE | ALLEY ENGLAND ST | FLORIDA ST | E | AC | 6 | 165 | 37 | 6,105 | 8/15/23 | 50 | 40 | 35 | 25 | Surface Treatment - Slurry Seal | 3/1/11 |
| 134 | 15787 | APEL LN | BRANNED DR | TILBURG DR | E | AC | 5 | 1,279 | 36 | 46,294 | 5/8/26 | 50 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 732 | 13450 | FIELDBURY LN | TALBERT AVE | TALEGATE DR | E | AC | 5 | 162 | 48 | 7,392 | 5/29/24 | 50 | 93 | 7 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1959 | 15159 | TAURUS LN | ROCK DR | CAPSTONE DR | E | AC | 3 | 573 | 36 | 21,628 | 5/20/24 | 50 | 59 | 36 | 5 | New Construction - Initial | 1/1/80 |
| 585 | 13180 | DEL MAR LN | MEADOWLARK DR | CALIENTE DR | E | AC | 2 | 863 | 36 | 31,068 | 3/24/22 | 50 | 90 | 10 | 0 | New Construction | 1/1/80 |
| 1296 | 15847 | MEMPHIS AVE | LAKE ST | ALABAMA ST | E | AC | 6 | 372 | 36 | 13,392 | 8/14/23 | 50 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 697 | 15779 | ERWIN LN | FREEBORN DR | CDS | E | AC | 5 | 592 | 36 | 22,662 | 5/30/24 | 50 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1313 | 13611 | MILO ST | LYNN ST | HOSKINS ST | E | AC | 2 | 330 | 36 | 11,664 | 3/22/22 | 50 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 969 | 14649 | HUNTINGTON ST | ATLANTA AVE | BALTIMORE AVE | E | AC | 9 | 335 | 37 | 12,395 | 8/24/23 | 50 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 691 | 14671 | ENGLAND ST | JOILET AVE | KNOXVILLE AVE | E | AC | 6 | 330 | 37 | 11,883 | 8/15/23 | 51 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 717 | 13410 | FALLINGWATER DR | FLINTSTONE LN. | EDWARDS ST | E | AC | 5 | 1,335 | 36 | 48,060 | 5/20/24 | 51 | 81 | 9 | 10 | New Construction | 1/1/80 |
| 1234 | 15264 | MANDRELL DR | ALLEY OAK LN | ASH ST | E | AC | 4 | 437 | 36 | 16,232 | 5/30/24 | 51 | 62 | 31 | 7 | New Construction | 1/1/80 |
| 403 | 15507 | CASTLEGATE DR | LANTERN LN | BUSHARD ST | E | AC | 9 | 548 | 36 | 19,506 | 5/8/24 | 51 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 8 | 13246 | ACE LN | VENTURI DR | MARSHALL DR | E | AC | 3 | 257 | 36 | 9,502 | 3/23/22 | 51 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 692 | 14896 | ENGLEWOOD CIR | FREEBORN DR | CDS | E | AC | 5 | 364 | 36 | 16,704 | 5/30/24 | 51 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1631 | 13222 | SAYBROOK LN | DAVENPORT DR | WESTPORT DR | E | AC | 2 | 472 | 36 | 16,992 | 3/24/22 | 51 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 762 | 15791 | FORBES LN | APEL LN | NORDINA DR | E | AC | 5 | 1,190 | 36 | 43,090 | 5/8/26 | 51 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 936 | 14709 | HILLCREST CIR | OCEANHILL DR | CDS | E | AC | 6 | 248 | 32 | 9,436 | 8/15/23 | 51 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 587 | 13401 | DELLGLEN CIR | FOXSHIELD DR | CDS | E | AC | 5 | 360 | 36 | 14,760 | 5/21/24 | 51 | 76 | 16 | 8 | New Construction | 1/1/80 |
| 1423 | 13394 | NUTWOOD CIR | PRESCOTT LN | CDS | E | AC | 5 | 340 | 36 | 13,490 | 5/21/24 | 52 | 81 | 16 | 3 | Surface Treatment - Slurry Seal | 10/1/12 |
| 714 | 15089 | FAIRWAY LN | MEADOWLARD DR. | MIDDLECOFF DR | E | AC | 3 | 835 | 36 | 30,310 | 3/23/22 | 52 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 1169 | 14687 | LINCOLN AVE | CALIFORNIA ST | ALLEY CALIFORNIA ST | E | AAC | 6 | 160 | 37 | 5,920 | 8/15/23 | 52 | 56 | 44 | 0 | Overlay - AC Structural | 3/1/11 |
| 1169 | 14690 | LINCOLN AVE | ALLEY DELAWARE ST | ENGLAND ST | E | AC | 6 | 160 | 36 | 5,760 | 8/15/23 | 52 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1177 | 13443 | LITTLEFIELD DR | NEWMOON LN | TWINFORD LN | E | AAC | 5 | 328 | 36 | 11,808 | 5/23/24 | 52 | 48 | 38 | 14 | Overlay - AC Structural | 10/1/12 |
| 223 | 15075 | BEDFORD LN | DAVENPORT DR | WESTPORT DR | E | AC | 2 | 573 | 36 | 20,628 | 4/7/22 | 52 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 293 | 15059 | BRANFORD DR | EDGEWATER LN | SAYBROOK LN | E | AC | 2 | 814 | 36 | 29,304 | 3/24/22 | 52 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 4070 | 50440 | EDWARDS ST FRONTAGE | MEADOW CREST DR | FREEBORN DR | E | AC | 5 | 611 | 30 | 18,330 | 5/30/24 | 52 | 81 | 17 | 2 | Surface Treatment - Slurry Seal | 1/10/12 |
| 1162 | 15147 | LIDO LN | FREEBORN DR | MARIPOSA DR | E | AC | 5 | 953 | 36 | 35,240 | 5/28/24 | 52 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 798 | 15588 | GARRETT CIR | CLANCY LN | CDS | E | AC | 8 | 990 | 36 | 37,990 | 3/7/22 | 52 | 94 | 4 | 2 | Surface Treatment - Slurry Seal | 2/8/23 |
| 969 | 14647 | HUNTINGTON ST | CHICAGO AVE | DETROIT AVE | E | AC | 9 | 330 | 37 | 12,210 | 8/14/23 | 52 | 92 | 7 | 1 | New Construction | 1/1/80 |
| 1460 | 15098 | ORLANDO DR | SPRINGDALE ST | BRADBURY LN | E | AC | 3 | 668 | 36 | 24,048 | 5/7/26 | 52 | 51 | 33 | 16 | New Construction | 1/1/80 |
| 1312 | 14329 | MILNE DR | ANTIGUA LN | SAND DOLLAR LN | E | AC | 9 | 252 | 36 | 9,572 | 8/30/23 | 52 | 80 | 17 | 3 | New Construction | 1/1/80 |
| 1088 | 14703 | KNOXVILLE AVE | FLORIDA ST | BEACH BLVD | E | AC | 6 | 660 | 37 | 24,420 | 8/15/23 | 52 | 62 | 31 | 7 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1088 | 14702 | KNOXVILLE AVE | ALLEY ENGLAND ST | FLORIDA ST | E | AC | 6 | 165 | 37 | 6,105 | 8/15/23 | 52 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1525 | 13207 | PIERSON DR | PHELPS LN | SAYBROOK LN | E | AC | 2 | 734 | 36 | 26,424 | 3/24/22 | 52 | 62 | 29 | 9 | New Construction | 1/1/80 |
| 969 | 14659 | HUNTINGTON ST | LINCOLN AVE | MEMPHIS AVE | E | AC | 6 | 330 | 37 | 11,877 | 8/14/23 | 52 | 81 | 13 | 6 | New Construction | 1/1/80 |
| 627 | 15494 | DRIFTWOOD DR | BEACH BLVD | END | E | AC | 9 | 351 | 36 | 12,636 | 8/24/23 | 53 | 52 | 43 | 5 | New Construction | 1/1/80 |
| 1371 | 13358 | NAPA CIR | OJAI LN | CDS | E | AC | 5 | 216 | 36 | 10,266 | 5/28/24 | 53 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1578 | 14757 | PROFESSIONAL CIR | FLORIDA ST | CDS | E | AC | 4 | 314 | 22 | 6,908 | 4/8/24 | 53 | 69 | 17 | 14 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1854 | 13816 | SPARROW DR | ORIOLE LN | HUMMINGBIRD LN | E | AC | 1 | 980 | 36 | 35,280 | 3/21/22 | 53 | 81 | 14 | 5 | New Construction | 1/1/80 |
| 1845 | 15451 | SOMERVILLE LN | MALLOY DR | END | E | AC | 9 | 390 | 36 | 14,040 | 8/23/23 | 53 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1175 | 15907 | LITCHFIELD DR | WOODWARD LN | BUSHARD ST | E | AC | 8 | 1,098 | 36 | 39,528 | 5/7/26 | 53 | 54 | 43 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 275 | 14321 | BOLIN CIR | LEASURE LN | END | E | AC | 9 | 176 | 32 | 7,132 | 8/30/23 | 53 | 67 | 31 | 2 | New Construction - Initial | 1/1/80 |
| 969 | 14661 | HUNTINGTON ST | INDIANAPOLIS AVE | JOILET AVE | E | AC | 6 | 330 | 40 | 13,200 | 8/14/23 | 53 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 1088 | 14699 | KNOXVILLE AVE | DELAWARE ST | ALLEY DELAWARE ST | E | AAC | 6 | 171 | 37 | 6,327 | 8/15/23 | 53 | 52 | 48 | 0 | Overlay - AC Structural | 3/1/11 |
| 672 | 16029 | ELEVENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/30/21 | 53 | 44 | 32 | 24 | New Construction | 1/1/80 |
| 1481 | 15142 | PALO ALTO DR | SPRINGDALE ST | PINEHURST LN | E | AC | 5 | 700 | 36 | 26,340 | 5/22/24 | 53 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 16 | 15659 | ALABAMA ST | HARTFORD AVE | INDIANAPOLIS AVE | E | AC | 9 | 330 | 38 | 12,540 | 8/14/23 | 53 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 1902 | 14351 | STRATHMOOR LN | BLUEFIELD DR | EFFINGHAM DR | E | AC | 8 | 515 | 36 | 18,540 | 4/10/24 | 53 | 35 | 7 | 58 | New Construction - Initial | 1/1/80 |
| 1185 | 15592 | MC FADDEN AVE | CHEMICAL LN | INDUSTRY LN | E | AC | 1 | 914 | 44 | 40,216 | 3/21/22 | 53 | 83 | 6 | 11 | New Construction | 1/1/80 |
| 1240 | 15199 | MANORFIELD DR | OLDGATE LN | OXBORO LN | E | AAC | 5 | 1,032 | 36 | 37,152 | 5/23/24 | 53 | 48 | 28 | 24 | Overlay - AC Structural | 10/1/12 |
| 152 | 15266 | ASH ST | CYPRESS AVE | MANDRELL DR | E | AC | 4 | 675 | 36 | 24,300 | 5/30/24 | 53 | 76 | 19 | 5 | New Construction | 1/1/80 |
| 878 | 15178 | HALLCROFT LN | HAMSHIRE DR | VARSITY DR | E | AC | 5 | 532 | 36 | 19,152 | 5/21/24 | 53 | 86 | 13 | 1 | New Construction | 1/1/80 |
| 1793 | 14264 | SHELL HARBOR CIR | FIVE HARBORS DR | CDS | E | AAC | 9 | 317 | 32 | 11,644 | 5/6/24 | 54 | 57 | 13 | 30 | Overlay - AC Structural | 5/11/18 |
| 1973 | 13652 | THOMAS CIR | TAYLOR DR | END | E | AC | 4 | 232 | 32 | 8,924 | 4/8/24 | 54 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 482 | 13825 | COMMERCE LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 54 | 86 | 10 | 4 | New Construction | 1/1/80 |
| 722 | 14221 | FARNSWORTH LN | KINGFISHER DR | MARY CIR | E | AC | 9 | 262 | 36 | 9,432 | 8/23/23 | 54 | 65 | 35 | 0 | New Construction | 1/1/80 |
| 1226 | 15573 | MALAHINE DR | IMPALA LN | HANAKAI LN | E | AC | 9 | 516 | 36 | 19,326 | 5/20/24 | 54 | 84 | 16 | 0 | New Construction | 1/1/80 |
| 1620 | 13297 | REGINA CIR | HEIL AVE | CDS | E | AC | 2 | 592 | 36 | 22,562 | 4/2/26 | 54 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 427 | 15328 | CHEMICAL LN | RESEARCH DR | PRODUCTION DR | E | AC | 1 | 834 | 40 | 33,360 | 4/1/22 | 54 | 61 | 27 | 12 | New Construction | 1/1/80 |
| 1271 | 13145 | MAUI CIR | WAIKIKI LN | CDS | E | AC | 2 | 535 | 36 | 19,260 | 3/24/22 | 54 | 83 | 17 | 0 | New Construction | 1/1/80 |
| 303 | 13460 | BRENTWELL CIR | GLENFOX DR | END | E | AAC | 5 | 472 | 36 | 18,492 | 5/29/24 | 54 | 58 | 42 | 0 | Overlay - AC Structural | 10/1/12 |
| 16 | 15665 | ALABAMA ST | ALLEY BALTIMORE AVE | CHICAGO AVE | E | AC | 9 | 494 | 37 | 18,278 | 8/14/23 | 54 | 64 | 8 | 28 | New Construction | 1/1/80 |
| 1474 | 15164 | PADUA DR | WHITFORD LN | WRIGHTWOOD LN | E | AC | 5 | 1,295 | 36 | 45,820 | 5/8/26 | 54 | 64 | 35 | 1 | New Construction | 1/1/80 |
| 463 | 13591 | CLUBHOUSE LN | CASTLE DR | MANGRUM DR | E | AC | 3 | 260 | 36 | 9,360 | 4/9/22 | 54 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 693 | 13191 | ENSIGN CIR | HUMBOLDT DR | CDS | E | AC | 2 | 315 | 32 | 11,580 | 4/7/22 | 54 | 65 | 15 | 20 | New Construction | 1/1/80 |
| 774 | 50410 | FRANKFORT AVE | LAKE ST | ALABAMA ST | E | AC | 9 | 390 | 50 | 19,500 | 8/24/23 | 54 | 64 | 35 | 1 | New Construction - Initial | 1/1/80 |
| 1377 | 15801 | NEARGATE DR | RAINGLEN LN | GRAHAM ST | E | AC | 5 | 587 | 36 | 20,844 | 5/8/26 | 54 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 1984 | 15790 | TILBURG DR | APEL LN | FORBES LN | E | AC | 5 | 775 | 36 | 27,900 | 5/8/26 | 54 | 62 | 38 | 0 | New Construction - Initial | 1/1/80 |
| 938 | 14612 | HILLHEAD CIR | LOCHLEA LN | CDS | E | AC | 9 | 576 | 33 | 21,708 | 8/30/23 | 54 | 50 | 38 | 12 | New Construction | 1/1/80 |
| 2060 | 15177 | VATCHER DR | FLINTSTONE LN | EDWARDS ST | E | AC | 5 | 1,335 | 36 | 48,060 | 5/28/24 | 54 | 85 | 15 | 0 | New Construction - Initial | 1/1/80 |
| 320 | 15506 | BROOKDALE LN | CASTLEGATE DR | SUNRIDGE DR | E | AC | 9 | 579 | 36 | 20,844 | 5/6/24 | 54 | 70 | 30 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 410 | 15257 | CEDAR AVE | GOTHARD ST | END | E | AC | 3 | 545 | 36 | 19,620 | 5/30/24 | 54 | 10 | 86 | 4 | New Construction | 1/1/80 |
| 749 | 13811 | FLAMINGO CIR | BLUEBIRD LN | END | E | AC | 1 | 530 | 36 | 20,330 | 3/21/22 | 54 | 92 | 8 | 0 | New Construction | 1/1/80 |
| 2048 | 14911 | VALEWORTH CIR | GLENSTONE DR | CDS | E | AC | 5 | 198 | 36 | 8,378 | 4/2/26 | 55 | 89 | 11 | 0 | New Construction - Initial | 1/1/80 |
| 167 | 14041 | AUSTIN DR | PHOENIX LN | TOPEKA LN | E | AC | 7 | 252 | 36 | 9,072 | 4/20/26 | 55 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 691 | 14672 | ENGLAND ST | INDIANAPOLIS AVE | JOILET AVE | E | AAC | 6 | 330 | 37 | 11,877 | 8/15/23 | 55 | 70 | 30 | 0 | Overlay - AC Structural | 3/1/11 |
| 1787 | 15441 | SHANGRI LA DR | LEXINGTON LN | ARAGON CIR | E | AC | 8 | 824 | 36 | 31,664 | 3/3/22 | 55 | 70 | 27 | 3 | New Construction | 1/1/80 |
| 835 | 13268 | GOLD CIR | FLINT DR | CDS | E | AC | 3 | 168 | 32 | 6,626 | 4/7/26 | 55 | 82 | 18 | 0 | New Construction | 1/1/80 |
| 151 | 15172 | ARROWHEAD DR | STILL HARBOR LN | CDS | E | AC | 5 | 336 | 36 | 13,596 | 5/21/24 | 55 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1887 | 13403 | STEINER CIR | ARMADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/29/24 | 55 | 87 | 12 | 1 | New Construction | 1/1/80 |
| 844 | 13305 | GRAHAM PL | HEIL AVE | CDS | E | AC | 2 | 550 | 36 | 21,050 | 4/2/26 | 55 | 83 | 14 | 3 | New Construction | 1/1/80 |
| 1406 | 13452 | NORBROOK DR | FIELDBURY LN | END | E | AAC | 5 | 104 | 36 | 3,744 | 5/29/24 | 55 | 50 | 49 | 1 | Overlay - AC Structural | 10/1/12 |
| 1229 | 14119 | MALLOY DR | SOMERVILLE LN | YVONNE DR | E | AC | 9 | 291 | 36 | 10,476 | 8/23/23 | 55 | 67 | 25 | 8 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1711 | 14786 | SAMPSON LN | WOODWIND DR | CDS | E | AC | 4 | 540 | 40 | 22,800 | 5/8/24 | 55 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 11/1/19 |
| 596 | 15666 | DETROIT AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/24/23 | 55 | 59 | 41 | 0 | New Construction | 1/1/80 |
| 982 | 14423 | INLET DR | EDWARDS ST | CLEARWATER CIR | E | AC | 5 | 155 | 36 | 5,580 | 5/29/24 | 55 | 76 | 24 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1415 | 14895 | NORTHFIELD LN | MEADOWCREST DR | FREEBORN DR | E | AC | 5 | 610 | 36 | 21,960 | 5/30/24 | 55 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1179 | 15534 | LOCHLEA LN | ATLANTA AVE | GALLEY DR | E | AC | 9 | 573 | 36 | 23,884 | 8/24/23 | 55 | 85 | 11 | 4 | New Construction | 1/1/80 |
| 2181 | 15509 | WOODCREST DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 955 | 36 | 34,380 | 5/6/24 | 55 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 391 | 15188 | CARRANZA LN | VILLA NUEVA DR | COLON CIR | E | AAC | 5 | 813 | 36 | 29,268 | 5/24/24 | 56 | 64 | 36 | 0 | Overlay - AC Structural | 10/1/12 |
| 1572 | 13832 | PRISCILLA DR | SPRINGDALE ST | AULNAY LN | E | AC | 1 | 551 | 36 | 19,836 | 12/27/24 | 56 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 1106 | 15108 | LAFAYETTE DR | WINDEMEIR LN | POMONA LN | E | AC | 3 | 1,196 | 36 | 43,806 | 12/19/24 | 56 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 1166 | 13129 | LILES LN | EDINGER AVE | ALLEY EDINGER AVE | E | AAC | 2 | 158 | 36 | 5,688 | 5/21/24 | 56 | 55 | 14 | 31 | Overlay - AC Fabric | 10/1/16 |
| 1583 | 13850 | PURITAN CIR | ROYALIST DR | END | E | AC | 1 | 530 | 36 | 20,330 | 12/20/24 | 56 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 16 | 14624 | ALABAMA ST | ALLEY FRANKFORT AVE. | FRANKFORT AVE | E | AC | 9 | 167 | 37 | 6,179 | 8/14/23 | 56 | 47 | 22 | 31 | New Construction | 1/1/80 |
| 367 | 13373 | CANIS CIR | TAURUS LN | END | E | AC | 3 | 222 | 28 | 6,216 | 5/28/24 | 56 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 756 | 15175 | FLINTSTONE LN | AMADA DR | VATCHER DR | E | AC | 5 | 866 | 36 | 31,926 | 5/28/24 | 56 | 83 | 17 | 0 | New Construction | 1/1/80 |
| 756 | 13397 | FLINTSTONE LN | FENLEY DR | AMADA DR | E | AC | 5 | 780 | 36 | 28,080 | 5/21/24 | 56 | 81 | 13 | 6 | New Construction | 1/1/80 |
| 1199 | 13226 | LOWELL CIR | WESTPORT DR | CDS | E | AC | 2 | 479 | 36 | 18,744 | 3/24/22 | 56 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 1944 | 13577 | SYCAMORE AVE | ASH ST | ELM ST | E | AC | 4 | 436 | 36 | 15,696 | 5/30/24 | 56 | 80 | 17 | 3 | New Construction - Initial | 1/1/80 |
| 1948 | 15333 | TAFT LN | RENO CIR | CROSS DR | E | AAC | 1 | 284 | 36 | 12,024 | 1/7/25 | 56 | 63 | 37 | 0 | Overlay - AC Structural | 5/11/18 |
| 831 | 15793 | GLENSTONE DR | GRAHAM ST | FRANS LN | E | AC | 5 | 423 | 36 | 15,228 | 5/8/26 | 56 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 1889 | 13648 | STERLING AVE | LISA LN | WHARTON ST | E | AC | 4 | 272 | 33 | 8,712 | 5/9/24 | 56 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 1150 | 15611 | LEILANI DR | MAILBU LN | BUSHARD ST | E | AC | 9 | 894 | 36 | 32,934 | 4/17/24 | 56 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 828 | 13461 | GLENFOX DR | HEATHPOINT LN | WELLBROOK CIR | E | AAC | 5 | 269 | 36 | 10,434 | 5/23/24 | 56 | 47 | 53 | 0 | Overlay - AC Structural | 10/1/12 |
| 1177 | 15195 | LITTLEFIELD DR | SPRINGDALE ST | NEWMOON LN | E | AAC | 5 | 629 | 36 | 22,644 | 5/23/24 | 57 | 64 | 35 | 1 | Overlay - AC Structural | 10/1/12 |
| 2042 | 13467 | UPPERLAKE CIR | LAKEVIEW DR | END | E | AC | 5 | 375 | 36 | 15,000 | 5/29/24 | 57 | 56 | 43 | 1 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1889 | 13647 | STERLING AVE | PEMBERCO CIR | LISA LN | E | AC | 4 | 282 | 33 | 9,306 | 5/9/24 | 57 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 1354 | 13624 | MORRO BAY LN | SANTA YNEZ DR | SLATER AVE | E | AC | 5 | 170 | 36 | 6,120 | 5/28/24 | 57 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2173 | 14441 | WINDSOR DR | CONCORD LN | BEDFORD LN | E | AC | 2 | 267 | 36 | 9,862 | 4/5/22 | 57 | 84 | 16 | 0 | New Construction - Initial | 1/1/80 |
| 873 | 14824 | HAGUE LN | AMSTERDAM DR | EDAM CIR | E | AC | 4 | 245 | 36 | 8,820 | 3/31/22 | 57 | 83 | 17 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1417 | 15300 | NORTHRIDGE LN | LARCHWOOD DR | END | E | AAC | 1 | 742 | 36 | 28,712 | 5/7/24 | 57 | 55 | 45 | 0 | Overlay - AC Fabric | 10/1/16 |
| 2288 | 17020 | ADAMS AVE FRONTAGE | DERBYSHIRE LN | SIDCUP LN | E | AC | 8 | 672 | 28 | 18,816 | 3/11/22 | 57 | 70 | 30 | 0 | New Construction - Initial | 1/1/80 |
| 323 | 13948 | BROOKSIDE DR | BRIDGEWAY LN | HOMESTEAD LN | E | AC | 7 | 306 | 36 | 11,016 | 4/15/26 | 57 | 98 | 0 | 2 | Surface Treatment - Slurry Seal | 7/15/21 |
| 909 | 15549 | HATTERAS DR | SEAFORTH LN | BRETON LN | E | AC | 9 | 533 | 36 | 19,938 | 8/30/23 | 57 | 63 | 32 | 5 | New Construction | 1/1/80 |
| 1224 | 14832 | MAJOR CIR | B ST | CDS | E | AC | 4 | 303 | 34 | 11,552 | 3/31/22 | 57 | 76 | 24 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2021 | 15940 | TRUMBULL DR | PHELPS LN | SAYBROOK LN | E | AC | 2 | 1,026 | 36 | 36,936 | 3/24/22 | 57 | 53 | 47 | 0 | New Construction - Initial | 1/1/80 |
| 16 | 15681 | ALABAMA ST | INDIANAPOLIS AVE | ALLEY KNOXVILLE AVE | E | AC | 6 | 495 | 37 | 18,315 | 8/14/23 | 57 | 63 | 29 | 8 | Surface Treatment - Slurry Seal | 3/1/11 |
| 732 | 13462 | FIELDBURY LN | GLENFOX DR | TALBERT AVE | E | AAC | 5 | 499 | 36 | 17,964 | 5/29/24 | 57 | 58 | 40 | 2 | Overlay - AC Structural | 10/1/12 |
| 806 | 14632 | GENEVA AVE | FLORIDA ST | INDIANAPOLIS AVE | E | AC | 9 | 378 | 37 | 13,986 | 8/15/23 | 57 | 63 | 28 | 9 | New Construction | 1/1/80 |
| 1576 | 13722 | PRODUCT LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 57 | 80 | 10 | 10 | New Construction | 1/1/80 |
| 659 | 16015 | EFFINGHAM DR | STRATHMOOR LN | BROOKHURST ST | E | AC | 8 | 1,195 | 36 | 43,020 | 4/10/24 | 57 | 67 | 14 | 19 | Surface Treatment - Slurry Seal | 5/11/18 |
| 340 | 13715 | BUSINESS DR | CHEMICAL LN | GRAHAM ST | E | AC | 1 | 1,170 | 40 | 46,800 | 3/21/22 | 57 | 76 | 23 | 1 | New Construction | 1/1/80 |
| 748 | 15961 | FLAGSTONE LN | DEEPVIEW DR | CLARKDALE DR | E | AC | 7 | 1,041 | 36 | 37,476 | 8/21/23 | 57 | 68 | 30 | 2 | Surface Treatment - Slurry Seal | 3/1/11 |
| 758 | 15683 | FLORIDA ST | KNOXVILLE AVE | MEMPHIS AVE | E | AC | 6 | 661 | 36 | 23,796 | 8/15/23 | 58 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 202 | 13402 | BAXTER CIR | AMADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/21/24 | 58 | 91 | 8 | 1 | New Construction | 1/1/80 |
| 5230 | 60380 | 5TH ST | PCH | PACIFIC S | E | AC | 2 | 276 | 23 | 6,348 | 5/6/20 | 58 | 76 | 24 | 0 | New Construction - Initial | 1/1/80 |
| 1519 | 15065 | PHELPS LN | CALHOUN DR | DALE DR | E | AC | 2 | 420 | 36 | 15,120 | 3/24/22 | 58 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 549 | 13580 | CYPRESS AVE | ELM ST | BEACH BLVD | E | AC | 4 | 439 | 36 | 15,804 | 5/30/24 | 58 | 28 | 54 | 18 | New Construction | 1/1/80 |
| 2009 | 14893 | TREEHAVEN LN | SUMMERDALE DR | ROSEMONT DR | E | AC | 5 | 595 | 36 | 23,676 | 5/28/24 | 58 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1088 | 14700 | KNOXVILLE AVE | ALLEY DELAWARE ST | ENGLAND ST | E | AC | 6 | 160 | 37 | 5,920 | 8/15/23 | 58 | 55 | 45 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1668 | 15155 | ROOK DR | GOLDEN VIEW LN | TAURUS LN | E | AC | 3 | 1,000 | 36 | 37,500 | 5/28/24 | 58 | 57 | 43 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1067 | 14104 | KILKENNY LN | MALLOY DR | ALLEY MALLOY DR | E | AC | 9 | 139 | 36 | 5,004 | 8/23/23 | 58 | 80 | 20 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1334 | 13250 | MONTECITO DR | ANGLER LN | WOODSTOCK LN | E | AC | 3 | 1,012 | 36 | 36,432 | 4/7/26 | 58 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 379 | 15990 | CAPSTONE DR | BLUE FOX CIR | WHETMORE LN | E | AC | 3 | 893 | 36 | 34,648 | 5/28/24 | 58 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1073 | 15884 | KINGFISHER DR | FARNSWORTH LN | ALICANTE LN | E | AC | 9 | 911 | 36 | 32,796 | 8/23/23 | 58 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 1165 | 13513 | LILAC LN | ELK CIR | ALLEY WARNER AVE | E | AC | 3 | 137 | 32 | 4,384 | 4/7/22 | 58 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 16 | 15678 | ALABAMA ST | NASHVILLE AVE | OSWEGO AVE | E | AC | 6 | 330 | 36 | 11,880 | 8/15/23 | 58 | 59 | 15 | 26 | Surface Treatment - Slurry Seal | 3/1/11 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1632 | 13599 | REUBENS DR | BALLANTINE LN | BRIMHALL LN | E | AC | 3 | 1,014 | 36 | 36,504 | 5/7/26 | 58 | 57 | 40 | 3 | New Construction | 1/1/80 |
| 585 | 13587 | DEL MAR LN | CALIENTE DR | ALLEY HEIL AVE | E | AC | 2 | 140 | 36 | 5,040 | 3/24/22 | 58 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 1169 | 14688 | LINCOLN AVE | ALLEY CALIFORNIA ST | DELAWARE ST | E | AAC | 6 | 169 | 37 | 5,957 | 8/15/23 | 58 | 58 | 42 | 0 | Overlay - AC Structural | 3/1/11 |
| 163 | 15109 | AUBURN DR | REDLANDS LN | WHITTIER LN | E | AC | 3 | 1,245 | 36 | 45,570 | 1/6/25 | 58 | 69 | 31 | 0 | New Construction | 1/1/80 |
| 315 | 15101 | BRIMHALL LN | REUBENS DR | MYRTLE DR | E | AC | 3 | 660 | 36 | 24,260 | 5/7/26 | 58 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 486 | 13826 | COMPUTER LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 1/7/25 | 58 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 1365 | 13597 | MYCROFT LN | SHAYNE DR | HEIL AVE | E | AC | 3 | 170 | 36 | 6,120 | 5/5/26 | 59 | 74 | 26 | 0 | New Construction | 1/1/80 |
| 174 | 13709 | BAFFIN CIR | TASMAN DR | END | E | AC | 1 | 545 | 36 | 20,870 | 3/21/22 | 59 | 88 | 12 | 0 | New Construction | 1/1/80 |
| 1810 | 13468 | SHOREVEIW CIR | LAKEVIEW DR | END | E | AC | 5 | 237 | 32 | 9,084 | 5/29/24 | 59 | 51 | 49 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2023 | 13378 | TUCANA DR | TAURUS LN | GOLDENWEST ST | E | AC | 3 | 317 | 36 | 10,824 | 5/28/24 | 59 | 56 | 38 | 6 | Surface Treatment - Slurry Seal | 10/1/12 |
| 944 | 15505 | HINGHAM DR | LANTERN LN | MONTAUK CIR | E | AC | 9 | 370 | 36 | 14,070 | 5/10/24 | 59 | 78 | 17 | 5 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2049 | 13645 | VALLEA CIR | STERLING AVE | END | E | AC | 4 | 130 | 32 | 5,660 | 4/8/24 | 59 | 62 | 26 | 12 | New Construction - Initial | 1/1/80 |
| 2138 | 14276 | WESTCLIFF DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 954 | 36 | 34,344 | 5/7/24 | 59 | 80 | 19 | 1 | Surface Treatment - Slurry Seal | 5/11/18 |
| 904 | 13642 | HARTLUND ST | LE CONTE DR | CDS | E | AC | 4 | 475 | 34 | 17,950 | 4/8/24 | 59 | 71 | 17 | 12 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1789 | 15211 | SHASTA LN | WHITNEY DR | SUGAR AVE | E | AC | 4 | 1,290 | 36 | 46,440 | 5/13/24 | 59 | 72 | 27 | 1 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2058 | 15578 | VARSITY DR | HALLCROFT LN | EDWARDS ST | E | AC | 5 | 1,418 | 36 | 51,048 | 5/23/24 | 59 | 57 | 41 | 2 | Surface Treatment - Slurry Seal | 10/1/12 |
| 127 | 14538 | ANDERSON ST | COAST CIR | PCH | E | AC | 2 | 220 | 31 | 6,820 | 4/9/22 | 59 | 0 | 87 | 13 | New Construction | 1/1/80 |
| 239 | 15163 | BERSHIRE DR | SHOREHAM LN | STAMONT LN | E | AC | 5 | 782 | 36 | 27,504 | 3/30/26 | 59 | 92 | 8 | 0 | New Construction | 1/1/80 |
| 1169 | 14691 | LINCOLN AVE | ENGLAND ST | ALLEY ENGLAND ST | E | AC | 6 | 165 | 37 | 6,031 | 8/15/23 | 59 | 44 | 56 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1243 | 15301 | MAR VISTA DR | SUNNYCREST LN | EDWARDS ST | E | AAC | 1 | 452 | 36 | 16,272 | 5/7/24 | 59 | 56 | 44 | 0 | Overlay - AC Fabric | 10/1/16 |
| 173 | 14707 | BACKBAY CIR | OCEANHILL DR | CDS | E | AC | 6 | 266 | 32 | 10,012 | 8/15/23 | 59 | 79 | 10 | 11 | Surface Treatment - Slurry Seal | 3/1/11 |
| 305 | 15540 | BRETON LN | ST AUGUSTINE DR | CDS | E | AC | 9 | 584 | 32 | 20,188 | 8/30/23 | 59 | 72 | 28 | 0 | New Construction | 1/1/80 |
| 603 | 14341 | DOCKSIDE CIR | PIER DR | CDS | E | AAC | 9 | 372 | 36 | 14,892 | 4/1/24 | 59 | 83 | 16 | 1 | Overlay - AC Structural | 5/11/18 |
| 549 | 15262 | CYPRESS AVE | EMERALD LN | OAK LN | E | AC | 4 | 317 | 36 | 11,412 | 5/30/24 | 59 | 63 | 25 | 12 | New Construction | 1/1/80 |
| 722 | 15496 | FARNSWORTH LN | MARY CIR | SNOWVBIRD DR | E | AC | 9 | 782 | 36 | 28,152 | 8/23/23 | 59 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 149 | 15980 | ARMADA DR | FLINTSTONE LN | COLLINS CIR | E | AC | 5 | 1,013 | 36 | 36,468 | 5/20/24 | 59 | 71 | 16 | 13 | New Construction | 1/1/80 |
| 2187 | 15097 | WOODSTOCK LN | MONTECITO DR | CHRISTY DR | E | AC | 3 | 1,420 | 36 | 51,370 | 4/7/26 | 59 | 91 | 9 | 0 | New Construction - Initial | 1/1/80 |
| 726 | 15978 | FENLEY DR | STILL HARBOR LN | FLINTSTONE LN | E | AC | 5 | 1,135 | 36 | 42,360 | 5/21/24 | 59 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 1641 | 15802 | RIDGEBURY DR | GRAHAM ST | CRESTMOOR LN | E | AC | 5 | 716 | 36 | 25,776 | 5/8/26 | 60 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 1118 | 14273 | LANCELOT LN | WOODCREST DR | COMSTOCK DR | E | AC | 9 | 502 | 36 | 18,822 | 5/6/24 | 60 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1153 | 16003 | LENNOX DR | EDWARDS ST | WINDEMEIR LN | E | AC | 3 | 1,104 | 36 | 39,744 | 1/6/25 | 60 | 41 | 43 | 16 | New Construction - Initial | 1/1/80 |
| 1643 | 13258 | RINGO CIR | NORMANDY LN | CDS | E | AC | 3 | 238 | 32 | 8,866 | 4/6/26 | 60 | 88 | 12 | 0 | New Construction | 1/1/80 |
| 652 | 13230 | EDGEWATER LN | DAVENPORT DR | WAVERLY LN | E | AC | 2 | 1,678 | 36 | 60,408 | 3/24/22 | 60 | 74 | 22 | 4 | New Construction | 1/1/80 |
| 1169 | 14685 | LINCOLN AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 330 | 37 | 12,210 | 8/15/23 | 60 | 68 | 32 | 0 | Overlay - AC Structural | 3/1/11 |
| 1629 | 15332 | RESEARCH DR | COMPUTER LN | PRODUCER LN | E | AC | 1 | 1,097 | 40 | 43,880 | 1/7/25 | 60 | 83 | 10 | 7 | New Construction | 1/1/80 |
| 731 | 13399 | FERNPOINT CIR | HAMSHIRE DR | CDS | E | AC | 5 | 429 | 36 | 17,244 | 5/21/24 | 60 | 76 | 21 | 3 | New Construction | 1/1/80 |
| 753 | 15552 | FLEET LN | TIDEWATER CIR | CDS | E | AC | 9 | 349 | 36 | 12,564 | 3/20/24 | 60 | 70 | 17 | 13 | Surface Treatment - Slurry Seal | 5/11/18 |
| 969 | 15672 | HUNTINGTON ST | ELMIRA AVE | FRANKFORT AVE | E | AC | 9 | 329 | 40 | 13,160 | 8/14/23 | 60 | 35 | 51 | 14 | New Construction | 1/1/80 |
| 143 | 13176 | ARDSLEY CIR | HUMBOLDT DR | CDS | E | AC | 2 | 406 | 32 | 14,492 | 4/7/22 | 60 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 1480 | 13562 | PALMDALE ST | CAIN AVE | CEDAR AVE | E | AC | 3 | 660 | 38 | 25,080 | 5/30/24 | 60 | 81 | 11 | 8 | New Construction | 1/1/80 |
| 1742 | 15501 | SCHOONER LN | SNOWBIRD DR | ATLANTA AVE | E | AC | 9 | 311 | 36 | 11,196 | 8/24/23 | 60 | 63 | 32 | 5 | New Construction | 1/1/80 |
| 1934 | 15025 | SURFWOOD LN | ATLANTA AVE | BURLINGTON LN | E | AC | 9 | 1,159 | 36 | 41,724 | 8/24/23 | 60 | 78 | 14 | 8 | New Construction - Initial | 1/1/80 |
| 1073 | 14225 | KINGFISHER DR | CATAMARAN LN | FARNSWORTH LN | E | AC | 9 | 591 | 36 | 21,276 | 8/23/23 | 60 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 1406 | 15203 | NORBROOK DR | TWINFORD LN | FIELDBURY LN | E | AAC | 5 | 664 | 36 | 23,904 | 5/21/24 | 60 | 53 | 47 | 0 | Overlay - AC Structural | 10/1/12 |
| 2140 | 15077 | WESTPORT DR | BLAIR LN | LOWELL CIR | E | AC | 2 | 644 | 36 | 23,184 | 3/29/22 | 60 | 73 | 26 | 1 | New Construction - Initial | 1/1/80 |
| 475 | 15499 | COLIMA LN | CASTILLIAN DR | END | E | AC | 9 | 535 | 36 | 19,260 | 8/23/23 | 60 | 85 | 15 | 0 | New Construction | 1/1/80 |
| 1542 | 13844 | PLYMOUTH LN | ALBION DR | PRISCILLA DR | E | AC | 1 | 260 | 36 | 9,360 | 12/20/24 | 60 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 1941 | 13814 | SWAN LN | DOVEWOOD DR | ROBINWOOD DR | E | AC | 1 | 1,040 | 36 | 37,440 | 3/21/22 | 60 | 69 | 31 | 0 | New Construction - Initial | 1/1/80 |
| 291 | 15096 | BRADBURY LN | DAGNY CIR | HEIL AVE | E | AC | 3 | 963 | 36 | 34,668 | 5/7/26 | 61 | 51 | 47 | 2 | New Construction | 1/1/80 |
| 596 | 15667 | DETROIT AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 354 | 36 | 12,744 | 8/24/23 | 61 | 77 | 20 | 3 | New Construction | 1/1/80 |
| 1676 | 15078 | ROUNDHILL DR | DAVENPORT DR | BLAIR LN | E | AC | 2 | 1,407 | 36 | 50,430 | 3/29/22 | 61 | 65 | 35 | 0 | New Construction | 1/1/80 |
| 343 | 13425 | CADIZ CIR | ALTAMIRANO LN | END | E | AAC | 5 | 100 | 50 | 5,750 | 5/29/24 | 61 | 42 | 45 | 13 | Overlay - AC Structural | 10/1/12 |
| 425 | 13281 | CHELE CIR | LAKEMONT LN | CDS | E | AC | 3 | 143 | 36 | 6,948 | 12/19/24 | 61 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 1027 | 13440 | JUDWICK CIR | NEWMOON LN | END | E | AAC | 5 | 479 | 36 | 18,744 | 5/22/24 | 61 | 31 | 64 | 5 | Overlay - AC Structural | 10/1/12 |
| 2169 | 13280 | WINDEMEIR LN | LAURELHURST DR | LAFAYETTE DR | E | AC | 3 | 258 | 36 | 10,038 | 1/6/25 | 61 | 81 | 19 | 0 | New Construction - Initial | 1/1/80 |
| 1014 | 13266 | JEREVA CIR | FLINT DR | CDS | E | AC | 3 | 99 | 32 | 4,418 | 4/7/26 | 61 | 52 | 48 | 0 | New Construction | 1/1/80 |
| 1339 | 13451 | MOONFIELD DR | IVORYCREST LN | FIELDBURY LN | E | AAC | 5 | 917 | 36 | 33,012 | 5/23/24 | 61 | 44 | 51 | 5 | Overlay - AC Structural | 10/1/12 |
| 1411 | 13263 | NORGROVE CIR | SILVERWOOD DR | CDS | E | AC | 3 | 140 | 32 | 5,730 | 4/6/26 | 61 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 1663 | 14427 | ROLF CIR | HARTLUND ST | CDS | E | AC | 4 | 121 | 32 | 5,372 | 4/8/24 | 61 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 152 | 15267 | ASH ST | WARNER AVE | SYCAMORE AVE | E | AC | 4 | 398 | 36 | 14,328 | 5/30/24 | 61 | 45 | 39 | 16 | New Construction | 1/1/80 |
| 1564 | 15173 | PRESCOTT LN | KELLEY CIR | KISER DR | E | AC | 5 | 1,129 | 36 | 41,394 | 5/20/24 | 61 | 86 | 13 | 1 | New Construction | 1/1/80 |
| 1007 | 15196 | JASONWOOD DR | IVORYCREST LN | END | E | AAC | 5 | 836 | 36 | 31,896 | 5/22/24 | 61 | 33 | 67 | 0 | Overlay - AC Structural | 10/1/12 |
| 1088 | 14701 | KNOXVILLE AVE | ENGLAND ST | ALLEY ENGLAND ST | E | AC | 6 | 165 | 37 | 6,105 | 8/15/23 | 61 | 0 | 53 | 47 | Surface Treatment - Slurry Seal | 3/1/11 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1533 | 13723 | PIPELINE LN | ENGINEER DR | MACHINE DR | E | AC | 1 | 1,141 | 40 | 45,320 | 4/8/26 | 61 | 49 | 19 | 32 | New Construction | 1/1/80 |
| 1869 | 14325 | ST AUGUSTINE DR | NEWLAND ST | ANTIGUA LN | E | AC | 9 | 171 | 36 | 6,156 | 8/30/23 | 61 | 45 | 29 | 26 | New Construction | 1/1/80 |
| 5 | 15842 | ACACIA AVE | LAKE ST | ALABAMA ST | E | AC | 9 | 372 | 36 | 13,392 | 8/24/23 | 61 | 77 | 8 | 15 | New Construction | 1/1/80 |
| 1505 | 15845 | PECAN AVE | LAKE ST | ALABAMA ST | E | AC | 9 | 372 | 37 | 13,764 | 8/24/23 | 61 | 87 | 13 | 0 | New Construction | 1/1/80 |
| 1909 | 15773 | SUMMERDALE DR | ALLEY GROVE CIR | FRASER LN | E | AC | 5 | 594 | 36 | 21,384 | 5/30/24 | 62 | 62 | 35 | 3 | Surface Treatment - Slurry Seal | 1/10/12 |
| 2160 | 15788 | WILD ROSE LN | LIEGE DR | NORDINA DR | E | AC | 5 | 1,380 | 36 | 49,930 | 5/8/26 | 62 | 48 | 50 | 2 | New Construction - Initial | 1/1/80 |
| 1397 | 13169 | NIANTIC CIR | MISTRAL DR | CDS | E | AC | 2 | 405 | 32 | 14,460 | 4/7/22 | 62 | 27 | 38 | 35 | New Construction | 1/1/80 |
| 1426 | 13565 | OAK LN | ALLEY ASH ST | ALLEY OAK LN | E | AC | 4 | 176 | 36 | 6,336 | 5/30/24 | 62 | 63 | 34 | 3 | New Construction | 1/1/80 |
| 969 | 14662 | HUNTINGTON ST | HARTFORD AVE | INDIANAPOLIS AVE | E | AC | 9 | 329 | 36 | 11,844 | 8/14/23 | 62 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 1059 | 13439 | KENWICK CIR | NEWMOON LN | END | E | AAC | 5 | 488 | 36 | 19,068 | 5/23/24 | 62 | 50 | 49 | 1 | Overlay - AC Structural | 10/1/12 |
| 1185 | 14469 | MC FADDEN AVE | BOLSA CHICA ST | PELICAN LN | E | AC | 1 | 520 | 60 | 31,200 | 3/21/22 | 62 | 87 | 13 | 0 | New Construction | 1/1/80 |
| 1236 | 15083 | MANGRUM DR | BIRDIE LN | END | E | AC | 3 | 1,216 | 36 | 43,776 | 3/23/22 | 62 | 72 | 27 | 1 | New Construction | 1/1/80 |
| 422 | 15956 | CHARWOOD LN | SUNRIDGE DR | FIRESIDE DR | E | AC | 9 | 1,262 | 36 | 46,932 | 5/7/24 | 62 | 74 | 26 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 954 | 13851 | HOOKER DR | WILLETT LN | STANDISH LN | E | AC | 1 | 780 | 36 | 28,080 | 12/27/24 | 62 | 62 | 29 | 9 | New Construction | 1/1/80 |
| 314 | 15810 | BRIGHTON DR | CRESTMOOR LN | WHITFORD LN | E | AC | 5 | 670 | 36 | 25,120 | 3/31/26 | 62 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 1779 | 14101 | SEVEN SEAS LN | INDIANAPOLIS AVE | END | E | AC | 9 | 536 | 36 | 19,296 | 8/24/23 | 62 | 65 | 31 | 4 | New Construction | 1/1/80 |
| 405 | 14227 | CATAMARAN LN | KINGFISHER DR | SNOWBIRD DR | E | AC | 9 | 1,044 | 36 | 37,584 | 8/23/23 | 62 | 84 | 16 | 0 | New Construction | 1/1/80 |
| 508 | 13356 | CORONADO LN | SONOMA DR | CDS | E | AC | 5 | 179 | 36 | 7,794 | 5/24/24 | 62 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 1279 | 13404 | MC KINNEY CIR | ARMADA DR | CDS | E | AC | 5 | 338 | 36 | 13,668 | 5/29/24 | 62 | 81 | 15 | 4 | New Construction | 1/1/80 |
| 2131 | 13463 | WELLBROOK CIR | GLENFOX DR | END | E | AAC | 5 | 267 | 36 | 11,112 | 5/29/24 | 62 | 23 | 60 | 17 | Overlay - AC Structural | 10/1/12 |
| 4040 | 50210 | KENBROOK DR | BELLFIELD LN | FOSS LN | E | AC | 5 | 567 | 33 | 18,711 | 3/31/26 | 62 | 77 | 0 | 23 | New Construction - Initial | 1/1/80 |
| 865 | 14814 | GUILDERS DR | MARKEN LN | JEFFERSON LN | E | AC | 4 | 780 | 36 | 28,330 | 4/6/22 | 62 | 87 | 13 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1735 | 15543 | SATTERFIELD DR | LEASURE LN | SHAW LN | E | AC | 9 | 687 | 36 | 25,482 | 8/30/23 | 62 | 72 | 26 | 2 | New Construction | 1/1/80 |
| 1980 | 14336 | TIDEWATER CIR | FLEET LN | CDS | E | AC | 9 | 385 | 36 | 15,360 | 4/1/24 | 62 | 72 | 20 | 8 | Surface Treatment - Slurry Seal | 5/11/18 |
| 181 | 15102 | BALLANTINE LN | BELLINGER DR | SILVERWOOD DR | E | AC | 3 | 1,010 | 36 | 36,360 | 5/7/26 | 62 | 65 | 31 | 4 | New Construction | 1/1/80 |
| 4070 | 50430 | EDWARDS ST FRONTAGE | ARMADA DR | VATCHER DR | E | AC | 5 | 864 | 30 | 25,920 | 5/29/24 | 62 | 80 | 20 | 0 | New Construction - Initial | 1/1/80 |
| 427 | 13822 | CHEMICAL LN | PRODUCTION DR | SYSTEM DR | E | AC | 1 | 339 | 40 | 13,560 | 4/1/22 | 63 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 1564 | 15979 | PRESCOTT LN | FENLEY DR | KELLEY CIR | E | AC | 5 | 516 | 36 | 18,576 | 5/20/24 | 63 | 89 | 11 | 0 | New Construction | 1/1/80 |
| 152 | 13576 | ASH ST | SYCAMORE AVE | CYPRESS AVE | E | AC | 4 | 424 | 36 | 15,264 | 5/30/24 | 63 | 27 | 59 | 14 | New Construction | 1/1/80 |
| 144 | 13377 | ARGO CIR | CAPSTONE DR | END | E | AAC | 3 | 320 | 36 | 13,020 | 5/22/24 | 63 | 48 | 52 | 0 | Overlay - AC Structural | 10/1/12 |
| 1645 | 13447 | RIVERSIDE CIR | PACEMONT DR | END | E | AAC | 5 | 360 | 36 | 14,460 | 5/23/24 | 63 | 42 | 47 | 11 | Overlay - AC Structural | 10/1/12 |
| 1848 | 13429 | SORIA CIR | QUINTANA LN | END | E | AAC | 5 | 92 | 42 | 5,364 | 5/29/24 | 63 | 47 | 38 | 15 | Overlay - AC Structural | 10/1/12 |
| 503 | 14416 | CORDOBA LN | SLATER AVE | CRISTA PALMA DR | E | AC | 5 | 173 | 36 | 5,940 | 5/24/24 | 63 | 89 | 11 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 464 | 14615 | COAST CIR | PACIFIC CIR | ANDERSON ST | E | AC | 2 | 73 | 51 | 3,723 | 4/9/22 | 63 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1023 | 15873 | JOLIET AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 485 | 37 | 17,723 | 8/15/23 | 63 | 35 | 58 | 7 | Overlay - AC Structural | 3/1/11 |
| 1024 | 14216 | JON DAY DR | CRAIMER LN | RAVENWOOD LN | E | AC | 8 | 313 | 36 | 12,268 | 2/28/22 | 63 | 76 | 24 | 0 | Surface Treatment - Slurry Seal | 2/14/23 |
| 2103 | 13128 | WAIKIKI LN | EDINGER AVE | TRAVELWAY | E | AC | 2 | 140 | 36 | 5,040 | 3/24/22 | 63 | 73 | 27 | 0 | New Construction - Initial | 1/1/80 |
| 1719 | 14327 | SAND DOLLAR LN | ST AUGUSTINE DR | MILNE DR | E | AC | 9 | 758 | 36 | 27,788 | 8/30/23 | 63 | 71 | 23 | 6 | New Construction | 1/1/80 |
| 338 | 13325 | BUSBY LN | JEAN DR | SHIELDS DR | E | AC | 3 | 1,280 | 36 | 46,080 | 5/7/26 | 63 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 753 | 14335 | FLEET LN | TIDEWATER CIR | PIER DR | E | AAC | 9 | 622 | 36 | 23,142 | 3/20/24 | 63 | 76 | 24 | 0 | Overlay - AC Structural | 5/11/18 |
| 1652 | 15932 | ROBINWOOD DR | BOLSA CHICA ST | HUMMINGBIRD LN | E | AC | 1 | 1,190 | 36 | 42,840 | 3/21/22 | 63 | 63 | 36 | 1 | New Construction | 1/1/80 |
| 1809 | 15162 | SHOREHAM LN | BRIGHTON DR | BERSHIRE DR | E | AC | 5 | 913 | 36 | 32,292 | 3/30/26 | 63 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 742 | 15510 | FIRESIDE DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 954 | 36 | 35,844 | 5/7/24 | 63 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1502 | 13608 | PEARCE ST | SIMS ST | BLANTON ST | E | AC | 2 | 330 | 36 | 11,880 | 3/22/22 | 63 | 81 | 19 | 0 | New Construction | 1/1/80 |
| 16 | 14654 | ALABAMA ST | MEMPHIS AVE | NASHVILLE AVE | E | AC | 6 | 329 | 37 | 12,173 | 8/14/23 | 63 | 54 | 27 | 19 | New Construction | 1/1/80 |
| 183 | 14628 | BALTIMORE AVE | HUNTINGTON ST | ALLEY HUNTINGTON ST | E | AC | 9 | 156 | 37 | 5,772 | 8/14/23 | 63 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 1869 | 15545 | ST AUGUSTINE DR | ANTIGUA LN | SAND DOLLAR LN | E | AC | 9 | 252 | 36 | 9,072 | 2/22/22 | 63 | 49 | 36 | 15 | New Construction | 1/1/80 |
| 1101 | 15144 | LA MESA LN | PALO ALTO DR | POINT LOMA DR | E | AC | 5 | 1,020 | 36 | 36,720 | 5/24/24 | 64 | 59 | 41 | 0 | New Construction | 1/1/80 |
| 1893 | 15170 | STILL HARBOR LN | MC CARTHY DR | WINTERGREEN DR | E | AC | 5 | 928 | 36 | 33,408 | 5/21/24 | 64 | 92 | 8 | 0 | New Construction - Initial | 1/1/80 |
| 998 | 13444 | IVORYCREST LN | VARSITY DR | JASONWOOD DR | E | AAC | 5 | 166 | 36 | 5,976 | 5/29/24 | 64 | 56 | 43 | 1 | Overlay - AC Structural | 10/1/12 |
| 399 | 14243 | CASTILIAN DR | COLIMA LN. | MISSION LN | E | AC | 9 | 902 | 36 | 32,472 | 8/23/23 | 64 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 1120 | 14474 | LANDFALL DR | BUSHARD ST | HILARIA CIR | E | AC | 9 | 166 | 36 | 5,976 | 4/25/24 | 64 | 56 | 27 | 17 | Surface Treatment - Slurry Seal | 5/11/19 |
| 998 | 15200 | IVORYCREST LN | JASONWOOD DR | NORBROOK DR | E | AAC | 5 | 828 | 36 | 29,808 | 5/23/24 | 64 | 42 | 46 | 12 | Overlay - AC Structural | 10/1/12 |
| 1327 | 13636 | MONA LN | BETTY DR | END | E | AC | 3 | 126 | 36 | 4,536 | 5/30/24 | 64 | 13 | 81 | 6 | New Construction | 1/1/80 |
| 1361 | 14117 | MUNSTER DR | SOMERVILLE LN | LONDONDERRY LN | E | AC | 9 | 577 | 36 | 20,772 | 8/23/23 | 64 | 76 | 24 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1572 | 13845 | PRISCILLA DR | AULNAY LN | PLYMOUTH LN | E | AC | 1 | 261 | 36 | 9,396 | 1/3/25 | 64 | 65 | 34 | 1 | New Construction | 1/1/80 |
| 2140 | 15076 | WESTPORT DR | DAVENPORT DR | BLAIR LN | E | AC | 2 | 1,135 | 36 | 40,660 | 3/29/22 | 64 | 55 | 45 | 0 | New Construction - Initial | 1/1/80 |
| 2201 | 14102 | YVONNE DR | ALLEY MALLOY DR | INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/23/23 | 64 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 3/1/11 |
| 969 | 15673 | HUNTINGTON ST | DETROIT AVE | ELMIRA AVE | E | AC | 9 | 330 | 38 | 12,540 | 8/14/23 | 64 | 33 | 53 | 14 | New Construction | 1/1/80 |
| 1465 | 15205 | OXBORO LN | NORBROOK DR | MANOFIELD DR | E | AAC | 5 | 547 | 36 | 19,692 | 5/21/24 | 64 | 40 | 59 | 1 | Overlay - AC Structural | 10/1/12 |
| 354 | 15303 | CAMBAY LN | ALLEY MC FADDEN AVE | END | E | AC | 1 | 826 | 36 | 29,736 | 3/21/22 | 64 | 80 | 20 | 0 | New Construction | 1/1/80 |
| 561 | 13655 | DANCY CIR | SPRINGTIME LN | CDS | E | AC | 4 | 223 | 32 | 8,636 | 4/8/24 | 64 | 69 | 31 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 719 | 15938 | FANTASIA LN | EDINGER AVE | TENOR DR | E | AC | 2 | 875 | 36 | 31,500 | 3/24/22 | 64 | 86 | 14 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1574 | 14776 | PRODAN DR | GOTHARD ST | ENTERPRISE LN | E | AC | 4 | 402 | 40 | 16,830 | 5/9/24 | 64 | 70 | 30 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1577 | 15329 | PRODUCTION DR | CHEMICAL LN | GRAHAM ST | E | AC | 1 | 1,170 | 40 | 46,320 | 4/1/22 | 64 | 61 | 37 | 2 | New Construction | 1/1/80 |
| 788 | 15804 | GAINSFORD LN | FANWOOD DR | BECK CIR | E | AC | 5 | 794 | 36 | 29,334 | 5/8/26 | 64 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 2066 | 15090 | VENTURI DR | BIRDIE LN | NASSAU LN | E | AC | 3 | 1,421 | 36 | 51,156 | 3/23/22 | 64 | 48 | 27 | 25 | New Construction - Initial | 1/1/80 |
| 1109 | 15207 | LAKEPOINT LN | NEWBURY DR | INLET DR | E | AAC | 5 | 519 | 36 | 19,434 | 5/29/24 | 64 | 47 | 50 | 3 | Overlay - AC Structural | 10/1/12 |
| 1180 | 14356 | LOCKHAVEN CIR | EFFINGHAM DR | CDS | E | AC | 8 | 495 | 36 | 19,320 | 4/10/24 | 64 | 71 | 12 | 17 | New Construction | 1/1/80 |
| 1864 | 15282 | SPRINGTIME LN | LE CORTE DR | FORELLE DR | E | AC | 4 | 527 | 36 | 18,684 | 4/8/24 | 64 | 78 | 15 | 7 | New Construction | 1/1/80 |
| 1889 | 15279 | STERLING AVE | BEACH BLVD | PEMBERCO CIR | E | AC | 4 | 906 | 33 | 29,634 | 5/9/24 | 64 | 71 | 27 | 2 | New Construction | 1/1/80 |
| 1126 | 15124 | LARK LN | TROPHY DR | WARNER AVE | E | AC | 3 | 537 | 36 | 20,082 | 4/2/26 | 65 | 28 | 72 | 0 | New Construction | 1/1/80 |
| 1626 | 13828 | RENO CIR | TAFT LN | END | E | AC | 1 | 127 | 52 | 6,604 | 1/7/25 | 65 | 51 | 42 | 7 | New Construction | 1/1/80 |
| 1629 | 15331 | RESEARCH DR | GRAHAM ST | COMPUTER LN | E | AC | 1 | 925 | 40 | 37,000 | 1/7/25 | 65 | 85 | 15 | 0 | New Construction | 1/1/80 |
| 479 | 13428 | COLON CIR | CARRANZA LN | END | E | AAC | 5 | 92 | 42 | 5,364 | 5/29/24 | 65 | 32 | 68 | 0 | Overlay - AC Structural | 1/23/14 |
| 812 | 14879 | GERSHWIN DR | GRAHAM ST | BERLIN LN | E | AC | 5 | 167 | 36 | 6,012 | 4/1/26 | 65 | 87 | 13 | 0 | New Construction | 1/1/80 |
| 1556 | 13389 | PORTSIDE CIR | LANCEFIELD DR | END | E | AC | 5 | 102 | 36 | 5,472 | 3/31/26 | 65 | 31 | 57 | 12 | New Construction | 1/1/80 |
| 1075 | 15409 | KINGSDALE DR | COLDWATER LN | EDGEWOOD LN | E | AC | 7 | 835 | 36 | 30,060 | 8/21/23 | 65 | 59 | 33 | 8 | New Construction | 1/1/80 |
| 1136 | 16005 | LAURELHURST DR | WINDEMEIR LN | GOLDENWEST ST | E | AC | 3 | 1,540 | 36 | 54,864 | 12/19/24 | 65 | 35 | 62 | 3 | New Construction - Initial | 1/1/80 |
| 1296 | 15691 | MEMPHIS AVE | FLORIDA ST | BEACH BLVD | E | AC | 6 | 660 | 36 | 23,472 | 8/15/23 | 65 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 16 | 14655 | ALABAMA ST | ALLEY MEMPHIS AVE | MEMPHIS AVE | E | AC | 6 | 165 | 37 | 6,105 | 8/14/23 | 65 | 59 | 36 | 5 | New Construction | 1/1/80 |
| 1687 | 13470 | RUSHMOOR LN | ETNA CIR | SUGAR AVE | E | AC | 4 | 682 | 36 | 24,336 | 5/13/24 | 65 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1786 | 13390 | SHAMLEY CIR | LANCEFIELD DR | END | E | AC | 5 | 102 | 36 | 5,472 | 3/31/26 | 65 | 32 | 64 | 4 | New Construction | 1/1/80 |
| 349 | 14641 | CALIFORNIA ST | FRANKFORT AVE | GENEVA AVE | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 65 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1374 | 15086 | NASSAU LN | SNEAD DR | VENTURI DR | E | AC | 3 | 998 | 36 | 35,928 | 3/23/22 | 65 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 1231 | 13224 | MALTA CIR | COURTNEY LN | CDS | E | AC | 2 | 716 | 36 | 27,276 | 3/24/22 | 65 | 68 | 32 | 0 | New Construction | 1/1/80 |
| 195 | 15765 | BOLSA CHICA ST | WARNER AVE | LOS PATOS AVE | E | AC | 2 | 1,326 | 100 | 97,600 | 4/1/26 | 65 | 94 | 6 | 0 | New Construction - Initial | 1/1/80 |
| 902 | 13385 | HARTFIELD CIR | BERSHIRE DR | END | E | AC | 5 | 155 | 36 | 7,080 | 3/31/26 | 65 | 30 | 61 | 9 | New Construction | 1/1/80 |
| 1221 | 13639 | MAGIC CIR | HARTLUND ST | CDS | E | AC | 4 | 121 | 32 | 5,372 | 4/8/24 | 65 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 255 | 13223 | BLAIR LN | WESTPORT DR | ROUNDHILL DR | E | AC | 2 | 163 | 36 | 5,868 | 4/7/22 | 65 | 52 | 48 | 0 | New Construction | 1/1/80 |
| 943 | 13265 | HILTON LN | BELLINGER DR | FLINT DR | E | AC | 3 | 352 | 36 | 12,672 | 4/7/26 | 65 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 1392 | 15197 | NEWMOON LN | IRONGATE CIR | LITTLEFIELD DR | E | AAC | 5 | 814 | 36 | 29,304 | 5/23/24 | 65 | 35 | 65 | 0 | Overlay - AC Structural | 10/1/12 |
| 1843 | 15094 | SOFTWIND DR | SPRINGDALE ST | WOODSTOCK LN | E | AC | 3 | 1,194 | 36 | 42,984 | 5/7/26 | 65 | 60 | 36 | 4 | New Construction | 1/1/80 |
| 1937 | 14499 | SUSAN LN | BANNING AVE | CHRISTINE DR | E | AC | 9 | 563 | 36 | 20,268 | 4/17/24 | 65 | 84 | 16 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1947 | 13824 | SYSTEM DR | CHEMICAL LN | MANUFACTURE LN | E | AC | 1 | 614 | 40 | 25,060 | 4/1/22 | 65 | 61 | 39 | 0 | New Construction - Initial | 1/1/80 |
| 1023 | 15881 | JOLIET AVE | ENGLAND ST | FLORIDA ST | E | AC | 6 | 330 | 37 | 12,210 | 8/15/23 | 65 | 36 | 37 | 27 | New Construction | 1/1/80 |
| 1409 | 15795 | NORDINA DR | CHAPPARAL LN | WILD ROSE LN | E | AC | 5 | 767 | 36 | 27,862 | 5/8/26 | 65 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 16 | 15677 | ALABAMA ST | OSWEGO AVE | ALLEY ADAMS AVE | E | AC | 6 | 470 | 36 | 16,920 | 8/15/23 | 65 | 83 | 16 | 1 | Surface Treatment - Slurry Seal | 3/1/11 |
| 4050 | 50250 | LOOKOUT LN | NAPLES DR | KEEL DR | E | AC | 7 | 500 | 35 | 17,500 | 4/15/26 | 65 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 549 | 13579 | CYPRESS AVE | ASH ST. | ELM ST | E | AC | 4 | 436 | 36 | 15,696 | 5/30/24 | 65 | 17 | 67 | 16 | New Construction | 1/1/80 |
| 1596 | 15190 | QUINTANA LN | VILLA NUEVA DR | CARRANZA LN | E | AAC | 5 | 1,020 | 36 | 36,720 | 5/29/24 | 65 | 39 | 60 | 1 | Overlay - AC Structural | 10/1/12 |
| 216 | 14111 | BEAM CIR | SEAPORT DR | END | E | AAC | 9 | 155 | 32 | 4,960 | 8/21/23 | 65 | 54 | 46 | 0 | Overlay - AC Structural | 3/1/11 |
| 294 | 15776 | BRANNEN DR | APEL LN | SPRINGDALE ST | E | AC | 5 | 940 | 36 | 33,840 | 5/8/26 | 65 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 1508 | 15324 | PELICAN LN | ALLEY MC FADDEN AVE | DOVEWOOD DR | E | AC | 1 | 660 | 36 | 23,760 | 3/21/22 | 66 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 795 | 13710 | GALWAY CIR | ANDAMAN LN | END | E | AC | 1 | 530 | 36 | 20,330 | 3/21/22 | 66 | 91 | 7 | 2 | New Construction | 1/1/80 |
| 1772 | 12944 | SECOND ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 385 | 36 | 13,860 | 6/22/21 | 66 | 57 | 43 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 857 | 15123 | GREENVIEW LN | DONLYN DR | GILDRED CIR | E | AC | 3 | 780 | 36 | 28,080 | 5/8/26 | 66 | 49 | 50 | 1 | New Construction | 1/1/80 |
| 1437 | 13706 | OCEANUS DR | TRITON LN | GRAHAM ST | E | AC | 1 | 2,027 | 40 | 81,080 | 3/21/22 | 66 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 1685 | 14184 | RUNNING SPRINGS LN | KINGS CANYON DR | MAMMOTH DR | E | AC | 8 | 253 | 36 | 9,858 | 3/1/22 | 66 | 76 | 9 | 15 | Surface Treatment - Slurry Seal | 2/13/23 |
| 2140 | 13231 | WESTPORT DR | LOWELL CIR | COURTNEY LN | E | AC | 2 | 647 | 36 | 23,292 | 3/29/22 | 66 | 55 | 45 | 0 | New Construction - Initial | 1/1/80 |
| 416 | 14912 | CHAPPARAL LN | LIEGE DR | NORDINA DR | E | AC | 5 | 1,409 | 36 | 50,724 | 5/8/26 | 66 | 69 | 31 | 0 | New Construction | 1/1/80 |
| 480 | 14186 | COLONIAL CIR | MAMMOTH DR | CDS | E | AC | 8 | 579 | 32 | 20,028 | 3/1/22 | 66 | 68 | 31 | 1 | Surface Treatment - Slurry Seal | 2/13/23 |
| 518 | 15080 | COURTNEY LN | WESTPORT DR | EDGEWATER LN | E | AC | 2 | 551 | 36 | 19,836 | 3/24/22 | 66 | 52 | 48 | 0 | New Construction | 1/1/80 |
| 596 | 15868 | DETROIT AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 37 | 12,210 | 8/24/23 | 66 | 58 | 42 | 0 | New Construction | 1/1/80 |
| 1142 | 13448 | LEAF CIR | PACEMONT DR | END | E | AAC | 5 | 380 | 36 | 17,680 | 5/29/24 | 66 | 48 | 51 | 1 | Overlay - AC Structural | 10/1/12 |
| 1280 | 14428 | MC LAREN LN | ANNIK DR | BRABHAM DR | E | AC | 8 | 260 | 36 | 9,360 | 5/5/26 | 66 | 82 | 15 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1640 | 14357 | RICHMOND CIR | EFFINGHAM DR | CDS | E | AC | 8 | 495 | 36 | 19,320 | 4/10/24 | 66 | 53 | 16 | 31 | New Construction | 1/1/80 |
| 1950 | 13456 | TALEGATE DR | FIELDBURY LN | END | E | AAC | 5 | 265 | 36 | 9,252 | 5/29/24 | 66 | 43 | 53 | 4 | Overlay - AC Structural | 10/1/12 |
| 991 | 13441 | IRONGATE CIR | NEWMOON LN | END | E | AAC | 5 | 476 | 36 | 18,636 | 5/22/24 | 66 | 24 | 69 | 7 | Overlay - AC Structural | 10/1/12 |
| 1202 | 15610 | LUAU LN | MOLOKAI DR | LANAI CIR | E | AC | 9 | 514 | 36 | 18,504 | 4/17/24 | 66 | 79 | 18 | 3 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1283 | 14874 | MEADOWCREST DR | NORTHFIELD LN | EDWARDS ST | E | AC | 5 | 540 | 36 | 20,580 | 5/30/24 | 66 | 51 | 49 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 242 | 15254 | BETTY DR | GOLDENWEST ST | CDS | E | AC | 3 | 957 | 36 | 35,952 | 5/28/24 | 66 | 56 | 40 | 4 | New Construction | 1/1/80 |
| 681 | 14629 | ELMIRA AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/24/23 | 66 | 29 | 67 | 4 | New Construction | 1/1/80 |
| 1412 | 13626 | NORINO DR | COBRA LN | GOLDEN VIEW LN | E | AC | 3 | 253 | 36 | 9,108 | 5/30/24 | 66 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1521 | 14594 | PICCADILLY LN | ADAMS AVE | ADAMS AVE | E | AC | 8 | 68 | 50 | 3,400 | 4/6/22 | 66 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 508 | 15146 | CORONADO LN | SLATER AVE | SONOMA AVE | E | AC | 5 | 682 | 36 | 24,324 | 5/24/24 | 66 | 44 | 56 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 678 | 13578 | ELM ST | SYCAMORE AVE | CYPRESS AVE | E | AC | 4 | 424 | 36 | 15,264 | 5/30/24 | 66 | 47 | 28 | 25 | New Construction | 1/1/80 |
| 1169 | 14689 | LINCOLN AVE | DELAWARE ST | ALLEY DELAWARE ST | E | AC | 6 | 171 | 36 | 5,868 | 8/15/23 | 67 | 46 | 54 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1428 | 15996 | OAKMONT LN | EDGEMONT DR | HEIL AVE | E | AC | 3 | 690 | 36 | 24,265 | 1/6/25 | 67 | 68 | 21 | 11 | New Construction | 1/1/80 |
| 1994 | 13114 | WALNUT AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AC | 6 | 875 | 36 | 31,500 | 6/23/21 | 67 | 42 | 14 | 44 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1323 | 15800 | MISTY LN | PRICE DR | RAPHAEL DR | E | AC | 5 | 905 | 36 | 32,580 | 3/30/26 | 67 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 2043 | 15001 | UTICA AVE | LAKE ST | CDS | E | AC | 6 | 184 | 36 | 7,040 | 7/8/21 | 67 | 64 | 36 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2204 | 14811 | ZEIDER LN | FRIESLAND DR | SLATER AVE | E | AC | 4 | 1,180 | 36 | 42,480 | 3/25/24 | 67 | 54 | 38 | 8 | Surface Treatment - Slurry Seal | 7/29/20 |
| 806 | 15670 | GENEVA AVE | ALLEY HARTFORD AVE | FLORIDA ST | E | AC | 9 | 280 | 37 | 10,360 | 8/15/23 | 67 | 54 | 19 | 27 | New Construction | 1/1/80 |
| 16 | 15662 | ALABAMA ST | PECAN AVE | ALLEY FRANKFORT AVE | E | AC | 9 | 246 | 37 | 9,102 | 8/14/23 | 67 | 72 | 21 | 7 | New Construction | 1/1/80 |
| 857 | 13318 | GREENVIEW LN | GILDRED CIR | TROPHY DR | E | AC | 3 | 418 | 36 | 15,048 | 4/2/26 | 67 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 1023 | 15874 | JOLIET AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 330 | 37 | 12,210 | 8/15/23 | 67 | 26 | 67 | 7 | Overlay - AC Structural | 3/1/11 |
| 766 | 15728 | FOREST LN | DARSY DR | NEWMAN AVE | E | AC | 4 | 530 | 36 | 19,830 | 5/13/24 | 67 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1967 | 13391 | TERRIER DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 35,892 | 3/30/26 | 67 | 29 | 71 | 0 | New Construction - Initial | 1/1/80 |
| 380 | 13437 | CARBECK DR | BELLFIELD LN | FOSS LN | E | AC | 5 | 863 | 36 | 31,068 | 3/31/26 | 67 | 42 | 39 | 19 | New Construction | 1/1/80 |
| 871 | 13662 | HACIENDA DR | DUNES LN | END | E | AAC | 1 | 290 | 36 | 11,690 | 5/8/24 | 67 | 43 | 57 | 0 | Overlay - AC Fabric | 10/1/16 |
| 879 | 14414 | HALLPORT LN | VARSITY DR | NEWBURY DR | E | AAC | 5 | 155 | 36 | 5,292 | 5/23/24 | 67 | 0 | 74 | 26 | Overlay - AC Structural | 10/1/12 |
| 1229 | 15452 | MALLOY DR | YVONNE DR | DUBLIN LN | E | AC | 9 | 1,326 | 36 | 47,736 | 8/21/23 | 67 | 81 | 17 | 2 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1488 | 13033 | PARK ST | THIRTEENTH ST | ADAMS AVE | E | AC | 6 | 646 | 37 | 23,902 | 6/29/21 | 67 | 58 | 20 | 22 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1881 | 15576 | STARFIRE LN | HUDSON DR | DAYTONA CIR | E | AC | 9 | 899 | 36 | 33,114 | 4/17/24 | 67 | 80 | 20 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 969 | 14660 | HUNTINGTON ST | JOILET AVE | KNOXVILLE AVE | E | AC | 6 | 330 | 40 | 13,200 | 8/14/23 | 67 | 28 | 70 | 2 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1669 | 15118 | ROOSEVELT LN | STALLION CIR | PEARCE ST | E | AC | 2 | 515 | 36 | 18,540 | 4/2/26 | 67 | 87 | 10 | 3 | New Construction | 1/1/80 |
| 301 | 13261 | BRENT CIR | SILVERWOOD DR | CDS | E | AC | 3 | 140 | 32 | 5,730 | 4/6/26 | 67 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 327 | 15759 | BRUSH DR | WAITE LN | HART CIR | E | AC | 4 | 526 | 36 | 18,936 | 5/9/24 | 67 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 200 | 14248 | BASTIA LN | ATLANTA AVE | ATLANTA AVE | E | AC | 9 | 72 | 36 | 2,592 | 5/20/24 | 67 | 59 | 41 | 0 | New Construction | 1/1/80 |
| 254 | 14350 | BLACKFIN CIR | CHUBASCO LN | CDS | E | AC | 8 | 228 | 36 | 9,708 | 4/1/24 | 67 | 31 | 69 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 544 | 15532 | CUPAR LN | CDS | CDS | E | AC | 9 | 944 | 36 | 38,718 | 8/30/23 | 67 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 1956 | 14466 | TANGIERS DR | SPA DR | NEVEDA DR | E | AC | 1 | 621 | 36 | 22,356 | 4/13/26 | 67 | 30 | 47 | 23 | New Construction - Initial | 1/1/80 |
| 2030 | 12976 | TWELFTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/22/21 | 67 | 65 | 35 | 0 | New Construction - Initial | 1/1/80 |
| 2032 | 13019 | TWENTY-FIRST ST | ACACIA AVE | PALM AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 67 | 49 | 18 | 33 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2288 | 50330 | ADAMS AVE FRONTAGE | PICCADILLY LN | END | E | AC | 8 | 348 | 25 | 8,700 | 3/3/22 | 67 | 44 | 49 | 7 | New Construction - Initial | 1/1/80 |
| 1691 | 14319 | SABLE DR | MIRAMAR LN | BRETON LN | E | AC | 9 | 270 | 36 | 9,720 | 8/30/23 | 68 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 903 | 15871 | HARTFORD AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/14/23 | 68 | 65 | 35 | 0 | New Construction | 1/1/80 |
| 1958 | 15302 | TASMAN DR | BOLSA CHICA ST | BAFFIN CIR | E | AC | 1 | 930 | 36 | 33,480 | 3/21/22 | 68 | 66 | 27 | 7 | New Construction - Initial | 1/1/80 |
| 2032 | 13021 | TWENTY-FIRST ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 415 | 46 | 19,090 | 6/30/21 | 68 | 71 | 8 | 21 | Surface Treatment - Slurry Seal | 7/27/22 |
| 371 | 15654 | CAPE COTTAGE LN | NORTHPORT DR | SOUTHPORT DR | E | AC | 9 | 1,245 | 36 | 44,820 | 8/21/23 | 68 | 90 | 10 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 882 | 15982 | HAMSHIRE DR | SPRINGDALE ST | HALLCROFT LN | E | AC | 5 | 1,191 | 36 | 42,876 | 5/21/24 | 68 | 83 | 17 | 0 | New Construction | 1/1/80 |
| 1336 | 13302 | MOODY CIR | PEARCE ST | CDS | E | AC | 2 | 259 | 36 | 10,574 | 4/2/26 | 68 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 1752 | 12853 | SEA CANYON CIR | MORNING TIDE DR | CDS | E | AC | 5 | 363 | 32 | 14,055 | 6/30/21 | 68 | 77 | 15 | 8 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1159 | 15442 | LEXINGTON LN | LURLINE DR | ADAMS AVE | E | AC | 8 | 1,358 | 36 | 48,888 | 2/28/22 | 68 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1296 | 15688 | MEMPHIS AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 6 | 485 | 36 | 17,460 | 8/14/23 | 68 | 90 | 9 | 1 | New Construction | 1/1/80 |
| 1374 | 13237 | NASSAU LN | MANGRUM DR | SNEAD DR | E | AC | 3 | 311 | 36 | 11,196 | 3/23/22 | 68 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 1383 | 15206 | NEWBURY DR | HALLPORT LN | END | E | AAC | 5 | 785 | 36 | 30,060 | 5/29/24 | 68 | 35 | 65 | 0 | Overlay - AC Structural | 10/1/12 |
| 2096 | 14349 | VOLANTE DR | CHUBASCO LN | INFERNO LN | E | AC | 8 | 254 | 36 | 9,894 | 4/1/24 | 68 | 28 | 72 | 0 | New Construction - Initial | 1/1/80 |
| 2192 | 15803 | WRIGHTWOOD LN | MOSS DR | PINON DR | E | AC | 5 | 940 | 36 | 33,840 | 3/30/26 | 68 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 446 | 15316 | CITADEL DR | COLUMBIA LN | EDWARDS ST | E | AC | 1 | 645 | 36 | 23,220 | 1/3/25 | 68 | 82 | 17 | 1 | New Construction | 1/1/80 |
| 530 | 13086 | CREST AVE | ELEVENTH ST | TWELTH ST | E | AC | 6 | 675 | 43 | 29,025 | 7/8/21 | 68 | 52 | 40 | 8 | Surface Treatment - Slurry Seal | 7/27/22 |
| 619 | 13809 | DOVEWOOD DR | BOLSA CHICA ST | PELICAN LN | E | AC | 1 | 520 | 36 | 18,720 | 3/21/22 | 68 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 651 | 15295 | EDGEVIEW LN | HARDWICK CIR | KELSEY CIR | E | AC | 1 | 780 | 36 | 28,080 | 4/28/26 | 68 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 758 | 14742 | FLORIDA ST | YORKTOWN AVE | WILLIAMS AVE | E | AC | 7 | 660 | 36 | 23,760 | 4/9/24 | 68 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1392 | 13442 | NEWMOON LN | JASONWOOD DR | IRONGATE CIR | E | AAC | 5 | 255 | 36 | 9,180 | 5/22/24 | 68 | 21 | 78 | 1 | Overlay - AC Structural | 10/1/12 |
| 1972 | 12982 | THIRTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 375 | 46 | 17,250 | 6/22/21 | 68 | 0 | 86 | 14 | Surface Treatment - Slurry Seal | 7/27/22 |
| 903 | 14636 | HARTFORD AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 37 | 12,210 | 8/15/23 | 68 | 25 | 55 | 20 | New Construction | 1/1/80 |
| 1031 | 13374 | JULIP LN | ROCK DR | CAPSTONE DR | E | AC | 3 | 573 | 36 | 20,340 | 5/22/24 | 68 | 28 | 68 | 4 | Surface Treatment - Slurry Seal | 10/1/12 |
| 116 | 15885 | ALVARADO DR | COLIMA LN | MISSION LN | E | AC | 9 | 906 | 36 | 32,616 | 8/23/23 | 68 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 1862 | 15702 | SPRINGFIELD AVE | CALIFORNIA ST | DELWARE ST | E | AC | 6 | 280 | 36 | 10,080 | 6/30/21 | 68 | 71 | 18 | 11 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1931 | 15601 | SURFCREST DR | SEASIDE LN | VACATION LN | E | AC | 9 | 509 | 36 | 18,324 | 3/26/24 | 68 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1965 | 12967 | TENTH ST | WALNUT AVE | OLIVE AVE | E | AAC | 6 | 395 | 46 | 18,170 | 6/22/21 | 68 | 46 | 29 | 25 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2127 | 13329 | WEBER CIR | MYTINGER LN | CDS | E | AC | 3 | 419 | 36 | 16,434 | 4/6/26 | 68 | 54 | 46 | 0 | New Construction - Initial | 1/1/80 |
| 219 | 14941 | BECK CIR | GAINSFORD LN | END | E | AC | 5 | 154 | 36 | 5,544 | 3/31/26 | 68 | 60 | 34 | 6 | New Construction | 1/1/80 |
| 839 | 14230 | GOSHAWK LN | REILLY DR | KINGFISHER DR | E | AC | 9 | 985 | 36 | 35,460 | 8/24/23 | 68 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 861 | 14931 | GRIFFITH CIR | PRICE DR | END | E | AC | 5 | 385 | 36 | 15,660 | 3/30/26 | 68 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 1713 | 13427 | SAN DOVAL LN | VILLA NUEVA DR | ARACENA DR | E | AAC | 5 | 596 | 36 | 22,206 | 5/24/24 | 68 | 31 | 69 | 0 | Overlay - AC Structural | 10/1/12 |
| 1884 | 13630 | STARMONT LN | GRIMSBY DR | BERSHIRE DR | E | AC | 5 | 440 | 36 | 15,552 | 3/31/26 | 68 | 27 | 71 | 2 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1998 | 13396 | TORIN DR | PRESCOTT LN | FLINTSTONE LN | E | AC | 5 | 260 | 36 | 9,360 | 5/20/24 | 68 | 80 | 19 | 1 | New Construction - Initial | 1/1/80 |
| 352 | 13432 | CALPE CIR | SAN LEANDRO LN | END | E | AAC | 5 | 100 | 50 | 6,000 | 5/29/24 | 68 | 40 | 59 | 1 | Overlay - AC Structural | 1/23/14 |
| 523 | 14214 | CRAILET DR | KENWORTH CIR | CRAIMER LN | E | AC | 8 | 1,006 | 36 | 36,216 | 2/25/22 | 68 | 77 | 16 | 7 | Surface Treatment - Slurry Seal | 2/14/23 |
| 535 | 13416 | CRISTA PALMA DR | AVILLA LN. | END | E | AAC | 5 | 416 | 36 | 16,976 | 5/29/24 | 68 | 31 | 68 | 1 | Overlay - AC Structural | 10/1/12 |
| 917 | 13458 | HEATHPOINT LN | NEWBURY DR | GLENFOX DR | E | AC | 5 | 256 | 36 | 9,966 | 5/23/24 | 68 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1851 | 13661 | SPA DR | HAMMON LN | CALNEVA LN | E | AC | 1 | 780 | 36 | 28,080 | 4/13/26 | 68 | 57 | 43 | 0 | New Construction | 1/1/80 |
| 470 | 14265 | COHASSET LN | INDIANAPOLIS AVE | HINGHAM DR | E | AC | 9 | 370 | 36 | 13,320 | 5/8/24 | 68 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 5000 | 60030 | NORTH PACIFIC | 10TH ST | BROADWAY | E | AC | 2 | 728 | 25 | 18,200 | 5/6/24 | 68 | 87 | 13 | 0 | New Construction - Initial | 1/1/80 |
| 671 | 13721 | ELECTRONIC LN | MACHINE DR | MC FADDEN AVE | E | AC | 1 | 817 | 40 | 32,680 | 4/8/26 | 68 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 786 | 13667 | FRONTIER CIR | CALNEVA LN | END | E | AAC | 1 | 530 | 36 | 19,080 | 5/8/24 | 68 | 48 | 52 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1264 | 15809 | MARYPORT DR | FALKIRK LN | CRESTMOOR LN | E | AC | 5 | 521 | 36 | 18,756 | 3/30/26 | 68 | 49 | 48 | 3 | New Construction | 1/1/80 |
| 1382 | 15658 | NEW BRITAIN LN | ROTHERT LN | END | E | AC | 9 | 773 | 36 | 27,828 | 8/21/23 | 68 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1430 | 13699 | OAKTREE CIR | MAR VISTA DR | END | E | AC | 1 | 480 | 36 | 19,080 | 4/8/26 | 68 | 33 | 67 | 0 | New Construction | 1/1/80 |
| 2073 | 13446 | VESTRY CIR | PACEMONT DR | END | E | AAC | 5 | 362 | 36 | 14,532 | 5/29/24 | 68 | 16 | 76 | 8 | Overlay - AC Structural | 10/1/12 |
| 532 | 15957 | CRESTVIEW LN | FIRESIDE DR | CDS | E | AC | 9 | 1,343 | 36 | 50,498 | 5/20/24 | 68 | 53 | 36 | 11 | Surface Treatment - Slurry Seal | 5/11/18 |
| 421 | 13309 | CHARLEYVILLE CIR | MEADOWBROOK DR | END | E | AC | 3 | 219 | 32 | 8,808 | 4/2/26 | 68 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1581 | 15397 | PUA DR | KIPAHULU LN | MOOREA LN | E | AC | 8 | 1,102 | 36 | 39,672 | 3/7/22 | 69 | 82 | 18 | 0 | South Gate Slurry Seal | 2/8/23 |
| 2015 | 13707 | TRITON LN | OCEANUS DR | ARGOSY AVE | E | AC | 1 | 563 | 40 | 22,520 | 4/8/22 | 69 | 84 | 16 | 0 | New Construction - Initial | 1/1/80 |
| 2191 | 15152 | WRENFIELD DR | EDWARDS ST | COBRA LN | E | AC | 3 | 1,067 | 36 | 39,412 | 5/21/24 | 69 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 550 | 13251 | DAGNY CIR | NATIONAL LN | CDS | E | AAC | 3 | 343 | 36 | 13,598 | 4/7/26 | 69 | 67 | 33 | 0 | Overlay - AC Structural | 5/11/18 |
| 828 | 15208 | GLENFOX DR | WELLBROOK CIR | LAKEPOINT LN | E | AAC | 5 | 755 | 36 | 26,892 | 5/23/24 | 69 | 47 | 47 | 6 | Overlay - AC Structural | 10/1/12 |
| 311 | 15111 | BRIDGEWATER DR | REDLANDS LN | WHITTIER LN | E | AC | 3 | 1,348 | 36 | 49,278 | 12/19/24 | 69 | 54 | 43 | 3 | New Construction | 1/1/80 |
| 459 | 14419 | CLIFFVIEW LN | CENTRAL PARK DR | LAKEVIEW DR | E | AC | 5 | 273 | 30 | 8,190 | 5/29/24 | 69 | 36 | 42 | 22 | Surface Treatment - Slurry Seal | 10/1/12 |
| 494 | 13717 | CONTAINER LN | MC FADDEN AVE | RESEARCH DR | E | AC | 1 | 1,116 | 40 | 44,640 | 4/1/22 | 69 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 1263 | 14222 | MARY CIR | FARNSWORTH LN | END | E | AC | 9 | 321 | 32 | 10,272 | 8/24/23 | 69 | 31 | 69 | 0 | New Construction | 1/1/80 |
| 1409 | 14913 | NORDINA DR | FORBES LN | CHAPPARAL LN | E | AC | 5 | 249 | 36 | 9,214 | 4/1/26 | 69 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 837 | 15156 | GOLDEN VIEW LN | ROCK DR | FENWICK DR | E | AC | 3 | 726 | 36 | 27,636 | 5/22/24 | 69 | 30 | 70 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1039 | 14388 | KANAKOA LN | NEOLANI DR | MALAHINE DR | E | AC | 9 | 752 | 36 | 27,072 | 5/20/24 | 69 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1187 | 14312 | LOMOND DR | LOCHLEA LN | NEWLAND ST | E | AC | 9 | 660 | 39 | 26,766 | 8/30/23 | 69 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 1389 | 15370 | NEWHAVEN LN | BRIDGEPORT DR | ALLEY GILFORD CIR | E | AC | 7 | 877 | 36 | 31,572 | 4/2/24 | 69 | 67 | 30 | 3 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1531 | 13392 | PINON DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 35,892 | 3/30/26 | 69 | 79 | 17 | 4 | New Construction | 1/1/80 |
| 1714 | 13431 | SAN LEANDRO LN | VILLA NUEVA DR | CALPE CIR | E | AAC | 5 | 1,084 | 36 | 38,736 | 5/23/24 | 69 | 47 | 49 | 4 | Overlay - AC Structural | 10/1/12 |
| 622 | 14293 | DRAGON CIR | NATIONAL LN | CDS | E | AC | 8 | 491 | 36 | 20,716 | 3/18/24 | 69 | 49 | 43 | 8 | New Construction | 1/1/80 |
| 16 | 15664 | ALABAMA ST | CHICAGO AVE | DETROIT AVE | E | AC | 9 | 329 | 37 | 12,173 | 8/14/23 | 69 | 67 | 18 | 15 | New Construction | 1/1/80 |
| 2130 | 13631 | WELLBANK LN | LANCEFIELD DR | WOODBORO DR | E | AC | 5 | 353 | 36 | 14,208 | 3/31/26 | 69 | 30 | 70 | 0 | New Construction - Initial | 1/1/80 |
| 488 | 14440 | CONCORD LN | DAVENPORT DR | WINDSOR DR | E | AC | 2 | 409 | 36 | 14,974 | 4/5/22 | 69 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 612 | 13316 | DONLYN DR | GREENVIEW LN | SPRINGDALE ST | E | AC | 3 | 520 | 36 | 18,432 | 5/8/26 | 69 | 32 | 66 | 2 | New Construction | 1/1/80 |
| 1367 | 15993 | MYTINGER LN | GLORIA DR | CAMILLE DR | E | AC | 3 | 859 | 36 | 30,924 | 4/6/26 | 69 | 85 | 15 | 0 | New Construction | 1/1/80 |
| 1599 | 15831 | RAINGLEN LN | NEARGATE DR | END | E | AC | 5 | 897 | 36 | 34,292 | 3/31/26 | 69 | 44 | 53 | 3 | New Construction | 1/1/80 |
| 1117 | 15167 | LANCEFIELD DR | OLDGLEN LN | SHAMLEY CIR | E | AC | 5 | 509 | 36 | 19,324 | 3/31/26 | 69 | 17 | 83 | 0 | New Construction | 1/1/80 |
| 1670 | 15003 | SEVENTEENTH ST | HUNTINGTON ST | DELAWARE ST | E | AC | 7 | 1,043 | 56 | 58,408 | 3/13/24 | 69 | 65 | 27 | 8 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1194 | 14900 | LOS PATOS AVE | GREEN ST | BOLSA CHICA ST | E | AC | 2 | 660 | 36 | 23,112 | 3/22/22 | 69 | 53 | 46 | 1 | New Construction | 1/1/80 |
| 3000 | 20000 | KELVIN LN | ELLSWORTH DR | CARROLTOWN DR | E | AC | 9 | 902 | 36 | 32,472 | 5/9/24 | 69 | 40 | 52 | 8 | Surface Treatment - Slurry Seal | 5/11/18 |
| 490 | 13724 | CONNECTOR LN | ENGINEER DR | MACHINE DR | E | AC | 1 | 1,141 | 40 | 45,640 | 4/8/26 | 69 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 862 | 15166 | GRIMSBY DR | WHITFORD LN | TALBERT AVE | E | AC | 5 | 850 | 36 | 30,312 | 3/30/26 | 69 | 17 | 70 | 13 | New Construction | 1/1/80 |
| 1383 | 13457 | NEWBURY DR | LAKEPOINT LN | HALLPORT LN | E | AAC | 5 | 542 | 36 | 20,262 | 5/29/24 | 69 | 34 | 65 | 1 | Overlay - AC Structural | 10/1/12 |
| 1704 | 15516 | SALINE DR | REEF LN | PEBBLE LN | E | AC | 8 | 760 | 36 | 31,360 | 3/6/24 | 69 | 0 | 95 | 5 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1767 | 14106 | SEASHELL CIR | SEALROCK DR | END | E | AAC | 9 | 151 | 36 | 5,436 | 8/21/23 | 69 | 0 | 73 | 27 | Overlay - AC Structural | 3/1/11 |
| 2016 | 13705 | TROJAN CIR | MAR VISTA DR | END | E | AAC | 1 | 481 | 36 | 19,116 | 5/7/24 | 69 | 28 | 68 | 4 | Overlay - AC Fabric | 10/1/16 |
| 969 | 14646 | HUNTINGTON ST | FRANKFORT AVE | GENEVA AVE | E | AC | 9 | 330 | 40 | 13,200 | 8/14/23 | 69 | 0 | 83 | 17 | New Construction | 1/1/80 |
| 1296 | 14682 | MEMPHIS AVE | DELAWARE ST | FLORIDA ST | E | AAC | 6 | 661 | 36 | 23,508 | 8/15/23 | 70 | 58 | 27 | 15 | Overlay - AC Structural | 3/1/11 |
| 1728 | 13179 | SANTA ANITA LN | MEADOWLARK DR | CALIENTE DR | E | AC | 2 | 863 | 36 | 31,068 | 3/23/22 | 70 | 51 | 31 | 18 | New Construction | 1/1/80 |
| 289 | 13973 | BRABHAM DR | MC LAREN LN | HICKORY LN | E | AC | 8 | 940 | 36 | 33,840 | 4/15/26 | 70 | 84 | 16 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 792 | 15174 | GALIPEAN DR | COLLIE LN | PRESCOTT LN | E | AC | 5 | 633 | 36 | 22,788 | 5/20/24 | 70 | 80 | 19 | 1 | New Construction | 1/1/80 |
| 1183 | 13984 | LOLA LN | ANNIK DR | YORKTOWN AVE | E | AC | 8 | 171 | 36 | 6,156 | 5/5/26 | 70 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1406 | 13445 | NORBROOK DR | IVORYCREST LN | TWINFORD LN | E | AAC | 5 | 136 | 36 | 5,646 | 5/21/24 | 70 | 39 | 57 | 4 | Overlay - AC Structural | 10/1/12 |
| 1465 | 13455 | OXBORO LN | MANOFIELD DR | END | E | AAC | 5 | 115 | 36 | 4,140 | 5/29/24 | 70 | 0 | 99 | 1 | Overlay - AC Structural | 10/1/12 |
| 1117 | 13388 | LANCEFIELD DR | SHAMLEY CIR | WELLBANK LN | E | AC | 5 | 255 | 36 | 10,180 | 3/31/26 | 70 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 130 | 13324 | ANNETTE CIR | LOVELL LN | CDS | E | AC | 3 | 351 | 36 | 13,986 | 4/6/26 | 70 | 36 | 64 | 0 | New Construction | 1/1/80 |
| 1672 | 13351 | ROSEMONT DR | AUTUMN CIR | PINEHURST LN | E | AAC | 5 | 260 | 36 | 9,360 | 5/21/24 | 70 | 17 | 79 | 4 | Overlay - AC Structural | 10/1/12 |
| 1722 | 14232 | SANDPIPER LN | ALLEY INDIANAPOLIS AVE | REILLY DR | E | AC | 9 | 140 | 36 | 5,040 | 8/24/23 | 70 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 2033 | 13027 | TWENTY-SECOND ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 70 | 64 | 14 | 22 | Surface Treatment - Slurry Seal | 7/27/22 |
| 637 | 15766 | DUNBAR AVE | BOLSA CHICA ST | HARBOR BLUFFS CIR | E | AC | 2 | 1,182 | 36 | 42,552 | 4/1/26 | 70 | 35 | 64 | 1 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1176 | 13906 | LITTLE HARBOR DR | SUMMER BREEZE LN | GOLDENWEST ST | E | AC | 5 | 130 | 36 | 5,526 | 6/30/21 | 70 | 43 | 18 | 39 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1441 | 13359 | OJAI LN | NAPA CIR | POINT LOMA DR | E | AC | 5 | 262 | 36 | 10,572 | 5/28/24 | 70 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1806 | 14045 | SHOAL CIR | WESTWINDS LN | CDS | E | AC | 7 | 232 | 36 | 9,602 | 4/20/26 | 70 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 685 | 14978 | EMERALD LN | FIR DR | CYPRESS AVE | E | AC | 4 | 669 | 36 | 24,084 | 5/30/24 | 70 | 68 | 24 | 8 | New Construction | 1/1/80 |
| 774 | 14630 | FRANKFORT AVE | HILL ST | CDS | E | AC | 9 | 666 | 28 | 21,076 | 8/24/23 | 70 | 13 | 53 | 34 | New Construction | 1/1/80 |
| 1753 | 14112 | SEA CIR | SEAPORT DR | END | E | AAC | 9 | 155 | 32 | 4,960 | 8/21/23 | 70 | 0 | 79 | 21 | Overlay - AC Structural | 3/1/11 |
| 2018 | 13319 | TROPHY DR | LARK LN | GREENVIEW LN | E | AC | 3 | 540 | 36 | 20,440 | 4/2/26 | 70 | 41 | 59 | 0 | New Construction - Initial | 1/1/80 |
| 715 | 15974 | FALKIRK LN | RIDGEBURY DR | END | E | AC | 5 | 1,100 | 36 | 39,024 | 3/30/26 | 70 | 85 | 0 | 15 | New Construction | 1/1/80 |
| 818 | 13315 | GILDRED CIR | GREENVIEW LN | END | E | AC | 3 | 410 | 36 | 16,560 | 4/2/26 | 70 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 16 | 15660 | ALABAMA ST | GENEVA AVE | HARTFORD AVE | E | AC | 9 | 330 | 36 | 11,880 | 8/15/23 | 70 | 59 | 24 | 17 | New Construction | 1/1/80 |
| 2074 | 15185 | VIA ANGELINA DR | AVILLA LN | EL NOPAL LN | E | AAC | 5 | 1,141 | 36 | 42,076 | 5/22/24 | 70 | 25 | 74 | 1 | Overlay - AC Structural | 10/1/12 |
| 2075 | 13423 | VIA CARONA DR | AVILLA LN | EL NOPAL LN | E | AAC | 5 | 1,142 | 36 | 41,112 | 5/22/24 | 70 | 33 | 66 | 1 | Overlay - AC Structural | 10/1/12 |
| 629 | 15406 | DRYBANK DR | COLDWATER LN | EDGEWOOD LN | E | AC | 7 | 735 | 36 | 26,460 | 8/17/23 | 70 | 67 | 23 | 10 | Surface Treatment - Slurry Seal | 3/1/11 |
| 774 | 15879 | FRANKFORT AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 36 | 11,880 | 8/17/23 | 70 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 1773 | 13417 | SEGOVIA CIR | SAN ROQUE LN | END | E | AAC | 5 | 285 | 36 | 11,760 | 5/29/24 | 70 | 17 | 82 | 1 | Overlay - AC Structural | 10/1/12 |
| 831 | 15794 | GLENSTONE DR | HILLGATE LN | CDS | E | AC | 2 | 786 | 36 | 29,646 | 4/1/26 | 70 | 42 | 58 | 0 | New Construction | 1/1/80 |
| 1568 | 15797 | PRICE DR | DE LONG CIR | WRIGHTWOOD LN | E | AC | 5 | 759 | 36 | 28,074 | 3/30/26 | 70 | 18 | 78 | 4 | New Construction | 1/1/80 |
| 1605 | 15832 | RANGER LN | CUTTY SARK DR | ADAMS AVE | E | AC | 8 | 1,163 | 36 | 41,868 | 2/28/22 | 70 | 69 | 28 | 3 | Surface Treatment - Slurry Seal | 2/8/23 |
| 349 | 14666 | CALIFORNIA ST | JOILET AVE | KNOXVILLE AVE | E | AAC | 6 | 330 | 37 | 11,988 | 8/14/23 | 70 | 41 | 59 | 0 | Overlay - AC Structural | 3/1/11 |
| 772 | 15983 | FOXSHIELD DR | BLUEGATE LN | HALLCROFT LN | E | AC | 5 | 759 | 36 | 27,324 | 5/21/24 | 70 | 69 | 27 | 4 | New Construction | 1/1/80 |
| 1483 | 15557 | PANACEA DR | BUSHARD ST | CDS | E | AC | 8 | 401 | 36 | 15,936 | 4/1/24 | 70 | 38 | 62 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1617 | 15521 | REEF LN | SALINE DR | LEVEE DR | E | AC | 8 | 904 | 36 | 34,544 | 3/6/24 | 70 | 21 | 79 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1690 | 13419 | SABBICAS CIR | SAN ROQUE LN | END | E | AAC | 5 | 285 | 36 | 12,260 | 5/29/24 | 70 | 52 | 48 | 0 | Overlay - AC Structural | 10/1/12 |
| 1985 | 14289 | TILLER CIR | SILVER STRAND DR | CDS | E | AC | 8 | 529 | 36 | 20,244 | 3/6/24 | 70 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2123 | 13229 | WAVERLY LN | ROUNDHILL DR | EDGEWATER LN | E | AC | 2 | 262 | 36 | 9,432 | 4/7/22 | 70 | 34 | 66 | 0 | New Construction - Initial | 1/1/80 |
| 305 | 14328 | BRETON LN | ST AUGUSTINE DR | HATTERAS DR | E | AC | 9 | 833 | 36 | 30,738 | 8/30/23 | 70 | 14 | 86 | 0 | New Construction | 1/1/80 |
| 396 | 14951 | CASCADE ST | NORTH CITY LIMIT | ANACAPA DR | E | AAC | 1 | 131 | 36 | 4,716 | 5/7/24 | 70 | 59 | 41 | 0 | Overlay - AC Fabric | 10/1/16 |
| 969 | 14645 | HUNTINGTON ST | GENEVA AVE | HARTFORD AVE | E | AC | 9 | 331 | 38 | 12,578 | 8/14/23 | 70 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1518 | 13808 | PHEASANT CIR | PELICAN LN | END | E | AAC | 1 | 380 | 36 | 14,930 | 5/9/24 | 71 | 56 | 44 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1966 | 14234 | TERN CIR | SANDPIPER LN | END | E | AC | 9 | 361 | 36 | 12,996 | 8/24/23 | 71 | 59 | 41 | 0 | New Construction - Initial | 1/1/80 |
| 2172 | 14486 | WINDSONG CIR | SURFCREST DR | CDS | E | AC | 9 | 475 | 36 | 18,600 | 3/26/24 | 71 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 349 | 14642 | CALIFORNIA ST | ELMIRA AVE | FRANKFORT AVE | E | AC | 9 | 329 | 40 | 13,160 | 8/24/23 | 71 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 131 | 15583 | ANNIK DR | MC LAREN LN. | HICKORY LN | E | AC | 8 | 940 | 36 | 35,340 | 5/5/26 | 71 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1553 | 15684 | PORTLAND AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 485 | 36 | 16,884 | 8/14/23 | 71 | 48 | 46 | 6 | Overlay - AC Structural | 3/1/11 |
| 1595 | 13701 | QUILL CIR | MAR VISTA DR | END | E | AAC | 1 | 480 | 36 | 19,080 | 5/7/24 | 71 | 22 | 78 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1923 | 15297 | SUNNYCREST LN | LARKSPUR CIR | LARCHWOOD DR | E | AC | 1 | 770 | 36 | 27,720 | 4/8/26 | 71 | 25 | 72 | 3 | New Construction - Initial | 1/1/80 |
| 2288 | 50310 | ADAMS AVE FRONTAGE | CARMANIA LN (N) | RANGER LN | E | AC | 8 | 520 | 25 | 13,000 | 3/3/22 | 71 | 50 | 29 | 21 | Surface Treatment - Slurry Seal | 2/8/23 |
| 252 | 14093 | BISMARK DR | BROOKHURST ST | MATSONIA LN | E | AC | 8 | 886 | 36 | 31,896 | 3/3/22 | 71 | 37 | 59 | 4 | Surface Treatment - Slurry Seal | 2/8/23 |
| 770 | 12995 | FOURTEENTH ST | CREST AVE | LOMA AVE | E | AC | 6 | 845 | 45 | 41,745 | 6/30/21 | 71 | 46 | 30 | 24 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1325 | 15574 | MOKIHANA DR | IMPALA LN | ALLEY BUSHARD ST | E | AAC | 9 | 990 | 36 | 35,640 | 5/20/24 | 71 | 61 | 39 | 0 | Overlay - AC Structural | 5/11/18 |
| 139 | 13426 | ARACENA DR | CARRANZA LN | SAN DOVAL LN | E | AAC | 5 | 256 | 36 | 9,966 | 5/24/24 | 71 | 50 | 48 | 2 | Overlay - AC Structural | 10/1/12 |
| 2192 | 15169 | WRIGHTWOOD LN | PINON DR | PADUA DR | E | AC | 5 | 520 | 36 | 18,720 | 3/30/26 | 71 | 71 | 29 | 0 | New Construction - Initial | 1/1/80 |
| 650 | 15997 | EDGEMONT DR | EDWARDS ST | REDLANDS LN | E | AC | 3 | 1,119 | 36 | 39,996 | 12/19/24 | 71 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 894 | 13682 | HARDWICK CIR | EDGEVIEW LN | END | E | AAC | 1 | 530 | 36 | 20,830 | 5/7/24 | 71 | 25 | 75 | 0 | Overlay - AC Structural | 10/1/16 |
| 1791 | 15998 | SHAYNE DR | GENTRY LN | CDS | E | AC | 3 | 1,012 | 36 | 37,932 | 4/6/26 | 71 | 47 | 51 | 2 | New Construction | 1/1/80 |
| 1874 | 15117 | STALLION CIR | PARLAY CIR | ROOSEVELT LN | E | AC | 2 | 489 | 36 | 17,604 | 4/2/26 | 71 | 81 | 19 | 0 | New Construction | 1/1/80 |
| 1969 | 15242 | THAMES LN | HEIL AVE | SEINE DR | E | AC | 4 | 382 | 36 | 13,752 | 3/18/22 | 71 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2160 | 14889 | WILD ROSE LN | BRANNEN DR | LIEGE DR | E | AC | 5 | 256 | 36 | 9,216 | 4/2/26 | 71 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 322 | 14783 | BROOKSHIRE LN | WINDFIELD DR | TALBERT AVE | E | AC | 4 | 344 | 46 | 15,324 | 5/13/24 | 71 | 31 | 33 | 36 | Surface Treatment - Slurry Seal | 11/1/19 |
| 791 | 14417 | GALICIA LN | JARDINES DR | VILLA NUEVA DR | E | AC | 5 | 205 | 36 | 7,380 | 5/20/24 | 71 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2080 | 13791 | VICTORIA LN | MELBOURNE DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/8/26 | 71 | 33 | 67 | 0 | New Construction - Initial | 1/1/80 |
| 2093 | 13422 | VISTA DEL SOL DR | AVILLA LN | EL NOPAL LN | E | AAC | 5 | 1,142 | 36 | 41,112 | 5/22/24 | 71 | 40 | 60 | 0 | Overlay - AC Structural | 10/1/12 |
| 1644 | 15186 | RIO VISTA DR | GOLDENWEST ST | END | E | AAC | 5 | 539 | 36 | 21,404 | 5/29/24 | 71 | 8 | 92 | 0 | Overlay - AC Structural | 10/1/12 |
| 1756 | 14223 | SEABIRD CIR | FARNSWORTH LN | END | E | AC | 9 | 321 | 32 | 10,272 | 8/24/23 | 71 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 1965 | 12969 | TENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/22/21 | 71 | 37 | 39 | 24 | Surface Treatment - Slurry Seal | 7/27/22 |
| 209 | 13766 | BAYSIDE LN | SYDNEY DR | MEDFORD DR | E | AC | 1 | 274 | 36 | 11,364 | 4/27/26 | 71 | 17 | 60 | 23 | New Construction | 1/1/80 |
| 1041 | 14381 | KAPAA DR | KIOWA LN | KANEHOE LN | E | AC | 9 | 930 | 36 | 32,904 | 3/27/24 | 71 | 64 | 34 | 2 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1330 | 14266 | MONTAUK CIR | HINGHAM DR | CDS | E | AC | 9 | 279 | 32 | 11,478 | 5/8/24 | 71 | 53 | 29 | 18 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1523 | 15556 | PIER DR | FLEET LN | NORTHSHORE LN | E | AAC | 9 | 302 | 36 | 11,622 | 3/20/24 | 71 | 80 | 20 | 0 | Overlay - AC Structural | 5/11/18 |
| 385 | 14099 | CARMANIA LN | ORONSAY CR | ADAMS AVE | E | AC | 8 | 729 | 36 | 26,244 | 2/28/22 | 71 | 60 | 25 | 15 | Surface Treatment - Slurry Seal | 2/8/23 |
| 393 | 14261 | CARROLLTOWN DR | MAGNOLIA ST | KELVIN LN | E | AC | 9 | 176 | 36 | 6,336 | 5/9/24 | 71 | 49 | 45 | 6 | Surface Treatment - Slurry Seal | 5/11/18 |
| 713 | 13671 | FAIRVIEW LN | ANACAPA DR | BRIARCLIFF DR | E | AAC | 1 | 786 | 36 | 30,046 | 5/7/24 | 71 | 39 | 61 | 0 | Overlay - AC Fabric | 10/1/16 |
| 741 | 14343 | FIREBRAND LN | ATLANTA AVE | ORIENT DR | E | AC | 8 | 173 | 36 | 6,228 | 4/1/24 | 71 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 937 | 14907 | HILLGATE LN | CDS | GLENSTONE DR | E | AC | 2 | 103 | 36 | 5,058 | 4/1/26 | 71 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 1232 | 15895 | MAMMOTH DR | EVERGLADES LN | RUNNING SPRINGS LN | E | AC | 8 | 1,032 | 36 | 36,576 | 3/1/22 | 71 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1457 | 13819 | ORIOLE LN | SPARROW DR | SKYLARK DR | E | AC | 1 | 260 | 36 | 9,610 | 3/21/22 | 71 | 48 | 51 | 1 | New Construction | 1/1/80 |
| 1822 | 13289 | SIMS ST | PRAIRE DR | PEARCE ST | E | AC | 2 | 660 | 36 | 23,760 | 3/22/22 | 71 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 2076 | 13629 | VIA ESPANA LN | SPICKARD DR | SLATER AVE | E | AC | 3 | 166 | 36 | 5,400 | 5/22/24 | 71 | 51 | 49 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 391 | 13430 | CARRANZA LN | COLON CIR | SALAMANCA LN | E | AAC | 5 | 207 | 36 | 7,452 | 5/29/24 | 71 | 7 | 75 | 18 | Overlay - AC Structural | 10/1/12 |
| 1972 | 12981 | THIRTEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 71 | 8 | 91 | 1 | Surface Treatment - Slurry Seal | 7/27/22 |
| 621 | 13323 | DOYLE DR | SPRINGDALE ST | LOVELL LN | E | AC | 3 | 520 | 36 | 18,720 | 4/6/26 | 71 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 660 | 14231 | EGRET LN | RELL DR | KINGFISHER DR | E | AC | 9 | 982 | 36 | 35,352 | 8/24/23 | 71 | 65 | 35 | 0 | New Construction | 1/1/80 |
| 700 | 15837 | ESTUARY LN | DOLPHIN DR | ADAMS AVE | E | AC | 7 | 1,451 | 36 | 52,236 | 4/20/26 | 71 | 95 | 3 | 2 | Surface Treatment - Slurry Seal | 7/15/21 |
| 777 | 15792 | FRANS LN | APEL LN | GLENSTONE DR | E | AC | 5 | 383 | 36 | 14,038 | 4/2/26 | 71 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 850 | 13298 | GRAZ CIR | STALLION CIR | CDS | E | AC | 2 | 291 | 36 | 11,726 | 4/2/26 | 71 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 1323 | 15168 | MISTY LN | RAPHAEL DR | PADUA DR | E | AC | 5 | 780 | 36 | 28,080 | 3/30/26 | 71 | 49 | 51 | 0 | New Construction | 1/1/80 |
| 4040 | 50220 | KENBROOK DR | FOSS LN | SPRINGDALE ST | E | AC | 5 | 180 | 33 | 5,440 | 3/31/26 | 71 | 100 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 10 | 14372 | ADELIA CIR | CDS | POLYNESIAN LN | E | AC | 9 | 480 | 36 | 18,780 | 3/26/24 | 72 | 59 | 41 | 0 | New Construction | 1/1/80 |
| 1088 | 14697 | KNOXVILLE AVE | CALIFORNIA ST | ALLEY CALIFORNIA ST | E | AC | 6 | 160 | 37 | 5,920 | 8/15/23 | 72 | 50 | 29 | 21 | New Construction | 1/1/80 |
| 1206 | 14942 | LUDLOW CIR | AMDERTON LN | END | E | AC | 5 | 258 | 36 | 11,088 | 3/30/26 | 72 | 85 | 6 | 9 | New Construction | 1/1/80 |
| 128 | 13252 | ANGLER LN | PALISADE DR | ORLANDO DR | E | AC | 3 | 620 | 36 | 22,320 | 4/7/26 | 72 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 183 | 14627 | BALTIMORE AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 161 | 37 | 5,957 | 8/24/23 | 72 | 39 | 54 | 7 | New Construction | 1/1/80 |
| 601 | 14477 | DIRIGO CIR | LANDFALL DR | CDS | E | AAC | 9 | 472 | 36 | 18,492 | 4/21/26 | 72 | 20 | 63 | 17 | Overlay - AC Structural | 5/11/19 |
| 1054 | 13685 | KELSEY CIR | EDGEVIEW LN | END | E | AAC | 1 | 530 | 36 | 20,830 | 5/7/24 | 72 | 9 | 91 | 0 | Overlay - AC Structural | 10/1/16 |
| 1676 | 13232 | ROUNDHILL DR | BLAIR LN | COURTNEY LN | E | AC | 2 | 1,169 | 36 | 41,884 | 3/29/22 | 72 | 23 | 77 | 0 | New Construction | 1/1/80 |
| 1975 | 13660 | THUNDERBIRD CIR | STARDUST DR | END | E | AAC | 1 | 310 | 36 | 12,410 | 5/8/24 | 72 | 44 | 56 | 0 | Overlay - AC Fabric | 10/1/16 |
| 282 | 14619 | BOOTHBAY CIR | PORT GREENWICH LN | END | E | AC | 9 | 453 | 34 | 15,402 | 8/21/23 | 72 | 83 | 17 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1418 | 14342 | NORTHSHORE LN | PIER DR | HAMILTON AVE | E | AC | 9 | 169 | 36 | 5,796 | 4/1/24 | 72 | 53 | 31 | 16 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1678 | 14424 | ROYAL DR | ROSS LN | LANDAU LN | E | AC | 4 | 245 | 36 | 8,820 | 3/31/22 | 72 | 83 | 17 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 295 | 14478 | BRANTA CIR | LANDFALL DR | CDS | E | AAC | 9 | 472 | 36 | 19,492 | 4/21/26 | 72 | 17 | 69 | 14 | Overlay - AC Structural | 5/11/19 |
| 349 | 14668 | CALIFORNIA ST | HARTFORD AVE | INDIANAPOLIS AVE | E | AC | 9 | 329 | 37 | 12,173 | 8/14/23 | 72 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 699 | 13270 | ESTA CIR | GIARC LN | CDS | E | AC | 3 | 222 | 32 | 7,104 | 12/27/24 | 72 | 61 | 39 | 0 | New Construction | 1/1/80 |
| 832 | 15294 | GLENWOOD DR | SPRINGDALE ST | SHINKLE CIR | E | AAC | 1 | 899 | 36 | 32,364 | 5/7/24 | 72 | 45 | 54 | 1 | Overlay - AC Fabric | 10/1/16 |
| 1366 | 16002 | MYRTLE DR | GENTRY LN | BRIMHALL LN | E | AC | 3 | 1,016 | 36 | 37,076 | 5/7/26 | 72 | 23 | 77 | 0 | New Construction | 1/1/80 |
| 1647 | 14974 | RIVIERA DR | STARDUST DR | HAMMON LN | E | AAC | 1 | 1,028 | 36 | 37,008 | 5/8/24 | 72 | 70 | 30 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1940 | 14005 | SUVA LN | GARFILED AVE | SAMOA DR | E | AC | 8 | 188 | 36 | 6,768 | 3/7/22 | 72 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 29 | 14237 | ALICANTE LN | KINGFISHER DR | ALVARADO DR. | E | AC | 9 | 482 | 36 | 17,352 | 8/23/23 | 72 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1598 | 13453 | RAIN CIR | NORBROOK DR | END | E | AAC | 5 | 280 | 36 | 11,880 | 5/23/24 | 72 | 40 | 47 | 13 | Overlay - AC Structural | 10/1/12 |
| 1718 | 13666 | SAN SOUCI CIR | CALNEVA LN | END | E | AAC | 1 | 530 | 36 | 19,080 | 5/8/24 | 72 | 20 | 80 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1831 | 14531 | SKYLAB RD | ABLE LN | SPRINGDALE ST | E | AC | 1 | 1,325 | 60 | 79,500 | 4/9/26 | 72 | 82 | 18 | 0 | New Construction | 1/1/80 |
| 2294 | 15628 | BUSHARD ST FRONTAGE | INNSBRUCK DR | WOODLAWN DR | E | AC | 8 | 252 | 27 | 6,804 | 3/9/22 | 72 | 72 | 14 | 14 | Surface Treatment - Slurry Seal | 2/8/23 |
| 898 | 14110 | HARPOON CIR | SEAPORT DR | END | E | AAC | 9 | 238 | 32 | 7,616 | 8/21/23 | 72 | 24 | 76 | 0 | Overlay - AC Structural | 3/1/11 |
| 1028 | 13532 | JUDY CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 72 | 69 | 31 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1079 | 14382 | KIOWA LN | BERMUDA DR | KAHULUI DR | E | AC | 9 | 256 | 36 | 8,928 | 3/27/24 | 72 | 64 | 34 | 2 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1120 | 15577 | LANDFALL DR | DIRIGO CIR | BRANTA CIR | E | AC | 9 | 260 | 36 | 10,360 | 4/25/24 | 72 | 42 | 25 | 33 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1198 | 15125 | LOVELL LN | ANNETTE CIR | SHIELDS DR | E | AC | 3 | 781 | 36 | 28,116 | 4/6/26 | 72 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 1585 | 13810 | QUAIL CIR | BLUEBIRD LN | END | E | AAC | 1 | 530 | 36 | 20,330 | 5/9/24 | 72 | 72 | 28 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1602 | 15594 | RAMBLER DR | STARFIRE LN | ALLEY BUSHARD ST | E | AC | 9 | 403 | 36 | 14,508 | 5/20/24 | 72 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1627 | 14876 | RENOIR CIR | KERN DR | CDS | E | AC | 5 | 50 | 36 | 1,800 | 4/1/26 | 72 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1905 | 13136 | SUITE DR | FANTASIA LN | BALLAD LN | E | AC | 2 | 800 | 36 | 28,800 | 3/24/22 | 72 | 67 | 33 | 0 | New Construction - Initial | 1/1/80 |
| 324 | 13761 | BROWN CIR | COLUMBIA LN | END | E | AC | 1 | 543 | 36 | 21,048 | 12/18/24 | 72 | 84 | 16 | 0 | New Construction | 1/1/80 |
| 656 | 13314 | EDMONDS CIR | GREENVIEW LN | END | E | AC | 3 | 410 | 36 | 16,560 | 4/2/26 | 72 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 771 | 14773 | FOX CIR | STEEP LN | CDS | E | AAC | 4 | 126 | 18 | 2,518 | 4/14/26 | 72 | 55 | 45 | 0 | Overlay - AC Structural | 11/28/19 |
| 1097 | 13628 | KURT LN | MANHATTEN DR | SPICKARD DR | E | AAC | 3 | 261 | 36 | 9,896 | 5/28/24 | 72 | 16 | 84 | 0 | Overlay - AC Structural | 10/1/12 |
| 1639 | 13743 | RICE CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/9/26 | 72 | 0 | 59 | 41 | New Construction | 1/1/80 |
| 1858 | 15270 | SPICKARD DR | KURT LN | WHETMORE LN | E | AAC | 3 | 927 | 36 | 34,872 | 5/28/24 | 72 | 11 | 86 | 3 | Overlay - AC Structural | 10/1/12 |
| 487 | 14275 | COMSTOCK DR | CHARWOOD LN | LANCELOT LN | E | AC | 9 | 701 | 36 | 25,986 | 5/6/24 | 72 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1965 | 13073 | TENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 380 | 46 | 17,480 | 6/22/21 | 72 | 29 | 31 | 40 | Surface Treatment - Slurry Seal | 7/27/22 |
| 354 | 13714 | CAMBAY LN | ALLEY MC FADDEN AVE | MC FADDEN AVE | E | AC | 1 | 159 | 36 | 5,724 | 3/21/22 | 72 | 0 | 80 | 20 | New Construction | 1/1/80 |
| 556 | 14031 | DALLAS CIR | FLAGSTONE LN | END | E | AC | 7 | 466 | 34 | 15,844 | 8/21/23 | 72 | 67 | 25 | 8 | Surface Treatment - Slurry Seal | 3/1/11 |
| 651 | 13681 | EDGEVIEW LN | KELSEY CIR | LARCHWOOD DR | E | AC | 1 | 260 | 36 | 9,360 | 4/28/26 | 72 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 810 | 14675 | GEORGIA ST | INDIANAPOLIS AVE | JOILET AVE | E | AC | 6 | 331 | 37 | 11,840 | 8/15/23 | 72 | 45 | 38 | 17 | New Construction | 1/1/80 |
| 945 | 13287 | HOBART LN | DEFIANCE DR | BRIDGEWATER DR | E | AC | 3 | 254 | 36 | 10,144 | 12/19/24 | 72 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 1505 | 13104 | PECAN AVE | TWENTIETH ST | GOLDENWEST ST | E | AC | 6 | 795 | 36 | 28,920 | 6/23/21 | 72 | 72 | 10 | 18 | Surface Treatment - Slurry Seal | 7/27/22 |
| 16 | 15680 | ALABAMA ST | ALLEY KNOXVILLE AVE | ALLEY LINCOLN AVE | E | AC | 6 | 330 | 37 | 12,210 | 8/14/23 | 72 | 42 | 41 | 17 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1955 | 14206 | TANBARK CIR | MEREDITH DR | CDS | E | AC | 8 | 84 | 63 | 7,292 | 2/28/22 | 72 | 48 | 27 | 25 | Surface Treatment - Slurry Seal | 2/14/23 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2012 | 15414 | TRIDENT LN | ANCHORAGE DR | DOLPHIN DR | E | AC | 7 | 757 | 36 | 28,002 | 4/20/26 | 72 | 90 | 7 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2114 | 15027 | WARREN LN | EDINGER AVE | AUDREY DR | E | AAC | 2 | 300 | 36 | 10,800 | 4/7/26 | 72 | 44 | 56 | 0 | Overlay - AC Fabric | 10/1/16 |
| 2122 | 13304 | WAVERIDER CIR | BOLSA CHICA ST | CDS | E | AC | 2 | 203 | 36 | 8,558 | 4/2/26 | 72 | 69 | 31 | 0 | New Construction - Initial | 1/1/80 |
| 349 | 14644 | CALIFORNIA ST | CHICAGO AVE | DETROIT AVE | E | AC | 9 | 328 | 36 | 11,808 | 8/24/23 | 72 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 531 | 14947 | CRESTMOOR LN | BRIGHTON DR | MARYPORT DR | E | AC | 5 | 306 | 36 | 11,016 | 3/31/26 | 72 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 648 | 14452 | EBBTIDE CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 72 | 53 | 45 | 2 | New Construction | 1/1/80 |
| 963 | 14400 | HUDSON DR | IMPALA LN | STARFIRE LN | E | AC | 9 | 558 | 36 | 21,588 | 4/24/24 | 72 | 83 | 17 | 0 | New Construction | 1/1/80 |
| 1000 | 14807 | JACQUELYN LN | ALLEY BARTON DR | ALLEY SLATER AVE | E | AC | 4 | 500 | 36 | 19,000 | 5/28/24 | 73 | 66 | 20 | 14 | New Construction | 1/1/80 |
| 1444 | 15198 | OLDGATE LN | LITTLEFIELD DR | END | E | AAC | 5 | 337 | 36 | 12,132 | 5/23/24 | 73 | 22 | 75 | 3 | Overlay - AC Structural | 10/1/12 |
| 1778 | 14925 | SERENE DR | WOODFERN LN | END | E | AC | 5 | 499 | 36 | 19,964 | 3/30/26 | 73 | 52 | 42 | 6 | New Construction | 1/1/80 |
| 2082 | 14431 | YORKTOWN AVE | BROOKHURST ST | MAUNA LN | E | AC | 8 | 250 | 26 | 6,500 | 3/2/22 | 73 | 49 | 44 | 7 | New Construction - Initial | 1/1/80 |
| 376 | 14506 | CAPISTRANO LN | BANNING AVE | CHRISTINE DR | E | AC | 9 | 1,001 | 36 | 36,036 | 4/17/24 | 73 | 81 | 17 | 2 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1013 | 13370 | JEPSEN CIR | CORY DR | END | E | AAC | 3 | 449 | 36 | 18,164 | 5/22/24 | 73 | 23 | 69 | 8 | Overlay - AC Structural | 10/1/12 |
| 1037 | 14823 | KAMPEN LN | AMSTERDAM DR | VALENCIA DR | E | AC | 4 | 1,010 | 36 | 36,360 | 3/31/22 | 73 | 66 | 34 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1151 | 15561 | LEMONTREE LN | PEPPERTREE DR | CHEVY CHASE DR | E | AC | 8 | 838 | 36 | 30,918 | 5/20/24 | 73 | 77 | 23 | 0 | New Construction - Initial | 1/1/80 |
| 1778 | 15799 | SERENE DR | MONTBURY CIR | WOODFERN LN | E | AC | 5 | 618 | 36 | 22,248 | 3/30/26 | 73 | 65 | 34 | 1 | New Construction | 1/1/80 |
| 1972 | 12983 | THIRTEENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 73 | 0 | 89 | 11 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1739 | 15047 | SCENARIO DR | OPERA LN | WAIKIKI LN | E | AC | 2 | 781 | 36 | 28,116 | 3/24/22 | 73 | 91 | 9 | 0 | New Construction | 1/1/80 |
| 2083 | 13317 | VIEW CIR | LARK LN | END | E | AC | 3 | 252 | 36 | 10,572 | 4/2/26 | 73 | 46 | 54 | 0 | New Construction - Initial | 1/1/80 |
| 407 | 14176 | CATHAY CIR | INTERIOR LN | CDS | E | AC | 8 | 379 | 32 | 13,628 | 2/23/22 | 73 | 57 | 43 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 525 | 13330 | CRANDALL DR | MYTINGER LN | EDWARDS ST | E | AC | 3 | 530 | 36 | 19,080 | 4/6/26 | 73 | 41 | 47 | 12 | New Construction | 1/1/80 |
| 1055 | 13322 | KENDRICK CIR | LOVELL LN | CDS | E | AC | 3 | 351 | 36 | 13,986 | 4/6/26 | 73 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 1211 | 14274 | LYMAN DR | CRESTVIEW LN | BUSHARD ST | E | AC | 9 | 166 | 36 | 5,976 | 5/6/24 | 73 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1510 | 14867 | PENDLETON DR | ST ANDREWS LN | GRAHAM ST | E | AC | 2 | 170 | 32 | 5,440 | 4/1/26 | 73 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2187 | 13249 | WOODSTOCK LN | SOFTWIND DR | MONTECITO DR | E | AC | 3 | 260 | 36 | 9,610 | 4/7/26 | 73 | 66 | 34 | 0 | New Construction - Initial | 1/1/80 |
| 283 | 14473 | BORBA CIR | DAKAR LN | CDS | E | AC | 9 | 276 | 32 | 11,332 | 4/25/24 | 73 | 0 | 32 | 68 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1200 | 14059 | LOWMEAD DR | BRIARLY LN | LEECREST LN | E | AC | 7 | 628 | 36 | 24,108 | 4/20/26 | 73 | 89 | 11 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1358 | 14917 | MOSSVALE CIR | WOODFERN LN | END | E | AC | 5 | 548 | 35 | 20,980 | 3/30/26 | 73 | 60 | 35 | 5 | New Construction | 1/1/80 |
| 1683 | 14029 | RUMFORD LN | POE DR | DEEPVIEW DR | E | AAC | 7 | 520 | 36 | 18,720 | 8/17/23 | 73 | 28 | 58 | 14 | Overlay - AC Structural | 3/1/11 |
| 499 | 14980 | CORAL CAY LN | PCH | BLUEWATER LN | E | AC | 2 | 415 | 36 | 15,440 | 4/9/22 | 73 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 774 | 15669 | FRANKFORT AVE | DELAWARE ST | HILL ST | E | AC | 9 | 943 | 32 | 30,176 | 8/24/23 | 73 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 1317 | 13138 | MINUET DR | FANTASIA LN | BALLAD LN | E | AC | 2 | 800 | 36 | 29,300 | 3/24/22 | 73 | 69 | 31 | 0 | New Construction | 1/1/80 |
| 1803 | 15126 | SHIELDS DR | LOVELL LN | TRUDY LN | E | AC | 3 | 803 | 36 | 30,258 | 4/6/26 | 73 | 8 | 92 | 0 | New Construction | 1/1/80 |
| 1805 | 13100 | SHIPLEY ST | ADAMS AVE | CDS | E | AC | 6 | 464 | 36 | 17,250 | 7/8/21 | 73 | 47 | 37 | 16 | Surface Treatment - Slurry Seal | 7/27/22 |
| 724 | 14449 | FELCLIFF LN | ADAMS AVE | CROWN REEF LN | E | AC | 7 | 127 | 36 | 4,572 | 4/6/22 | 73 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1205 | 13435 | LUCIENTO DR | SALAMANCA LN | SAN LEANDRO LN | E | AAC | 5 | 438 | 36 | 15,768 | 5/23/24 | 73 | 35 | 65 | 0 | Overlay - AC Structural | 10/1/12 |
| 1315 | 15502 | MINERVA LN | ELLSWORTH DR | ELLSWORTH DR | E | AAC | 9 | 512 | 32 | 16,384 | 5/9/24 | 73 | 26 | 42 | 32 | Overlay - AC Structural | 5/11/18 |
| 1582 | 14241 | PUERTO DR | MISSION LN | NEWLAND ST | E | AC | 9 | 167 | 36 | 6,012 | 8/23/23 | 73 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 2025 | 13286 | TUFTS LN | LOYOLA DR | DEFIANCE DR | E | AC | 3 | 257 | 36 | 10,252 | 12/19/24 | 73 | 64 | 36 | 0 | New Construction - Initial | 1/1/80 |
| 2028 | 14920 | TUSCAN CIR | ALLSTONE DR | END | E | AC | 5 | 144 | 36 | 6,984 | 3/31/26 | 73 | 27 | 67 | 6 | New Construction - Initial | 1/1/80 |
| 2294 | 15629 | BUSHARD ST FRONTAGE | WOODLAWN DR | TELHAN DR | E | AC | 8 | 506 | 27 | 13,662 | 3/9/22 | 73 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 530 | 12991 | CREST AVE | MAIN ST | ELEVENTH ST | E | AC | 6 | 612 | 43 | 27,795 | 7/8/21 | 73 | 30 | 58 | 12 | Surface Treatment - Slurry Seal | 7/27/22 |
| 776 | 13313 | FRANMAR CIR | GREENVIEW LN | END | E | AC | 3 | 410 | 36 | 16,260 | 4/2/26 | 73 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 1306 | 13312 | MIDIRON CIR | GREENVIEW LN | END | E | AC | 3 | 412 | 32 | 14,684 | 4/2/26 | 73 | 16 | 82 | 2 | New Construction | 1/1/80 |
| 134 | 14903 | APEL LN | TILBURG DR | FRANS LN | E | AC | 5 | 421 | 36 | 15,156 | 4/1/26 | 73 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 2029 | 14891 | TWAIN LN | ROGERS DR | KERN DR | E | AC | 5 | 989 | 36 | 35,604 | 4/1/26 | 73 | 55 | 45 | 0 | New Construction - Initial | 1/1/80 |
| 2084 | 15653 | VIEWPOINT LN | TERRY DR | DAMASK DR | E | AC | 4 | 549 | 36 | 20,264 | 4/6/22 | 73 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 424 | 14257 | CHAUCER LN | ELLSWORTH DR | CARROLLTOWN DR | E | AAC | 9 | 902 | 36 | 32,472 | 5/8/24 | 73 | 37 | 62 | 1 | Overlay - AC Structural | 5/11/18 |
| 668 | 15986 | EL NOPAL LN | VIA ANGELINA DR | RIO VISTA DR | E | AAC | 5 | 751 | 36 | 28,036 | 5/29/24 | 73 | 22 | 78 | 0 | Overlay - AC Structural | 10/1/12 |
| 1642 | 13702 | RIDGEVIEW CIR | MAR VISTA DR | END | E | AAC | 1 | 480 | 36 | 19,280 | 5/7/24 | 73 | 23 | 77 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1981 | 14884 | TIFFANY CIR | KERN DR | CDS | E | AC | 5 | 542 | 36 | 20,762 | 4/1/26 | 73 | 28 | 72 | 0 | New Construction - Initial | 1/1/80 |
| 2199 | 13689 | YUCCA CIR | ROYAL OAK DR | END | E | AC | 1 | 334 | 32 | 12,488 | 4/29/26 | 73 | 66 | 34 | 0 | New Construction - Initial | 1/1/80 |
| 1006 | 13424 | JARDINES DR | AVILLA LN | END | E | AAC | 5 | 528 | 36 | 21,008 | 5/29/24 | 73 | 0 | 95 | 5 | Overlay - AC Structural | 10/1/12 |
| 1666 | 15726 | RONALD RD | ALLEY RONALD RD | BEACH BLVD | E | AC | 4 | 1,310 | 36 | 48,410 | 5/9/24 | 73 | 75 | 23 | 2 | New Construction | 1/1/80 |
| 1681 | 13542 | ROYER CIR | ROSS LN | CDS | E | AC | 4 | 244 | 32 | 9,058 | 3/31/22 | 73 | 76 | 23 | 1 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1687 | 15212 | RUSHMOOR LN | WHITNEY DR | ETNA CIR | E | AC | 4 | 626 | 36 | 22,536 | 5/13/24 | 73 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1919 | 14018 | SUNDAY DR | TOBAGO LN | WARD ST | E | AC | 8 | 455 | 32 | 14,560 | 3/2/22 | 73 | 80 | 19 | 1 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2020 | 15816 | TRUDY LN | HEIL AVE | JEAN DR | E | AC | 3 | 438 | 36 | 15,768 | 4/6/26 | 73 | 83 | 17 | 0 | New Construction - Initial | 1/1/80 |
| 1193 | 13421 | LOS AMIGOS CIR | VIA ESPANA LN | END | E | AAC | 5 | 916 | 36 | 34,476 | 5/29/24 | 74 | 19 | 81 | 0 | Overlay - AC Structural | 10/1/12 |
| 1514 | 13411 | PEPPER LN | VATCHER DR | BALMORAL DR | E | AC | 5 | 253 | 36 | 9,108 | 5/20/24 | 74 | 64 | 29 | 7 | New Construction | 1/1/80 |
| 2012 | 14048 | TRIDENT LN | DOLPHIN DR | CLIPPER DR | E | AC | 7 | 807 | 36 | 29,052 | 4/20/26 | 74 | 83 | 14 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 229 | 14916 | BELLPORT CIR | GLENSTONE DR | CDS | E | AC | 2 | 229 | 36 | 9,594 | 4/1/26 | 74 | 33 | 67 | 0 | New Construction | 1/1/80 |
| 997 | 13683 | IVORY CIR | EDGEVIEW LN | END | E | AC | 1 | 530 | 36 | 20,830 | 5/6/26 | 74 | 84 | 16 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 16 | 15679 | ALABAMA ST | ALLEY LINCOLN AVE | ALLEY MEMPHIS AVE | E | AC | 6 | 330 | 37 | 12,210 | 8/14/23 | 74 | 51 | 40 | 9 | New Construction | 1/1/80 |
| 16 | 15661 | ALABAMA ST | FRANKFORT AVE | GENEVA AVE | E | AC | 9 | 328 | 37 | 12,136 | 8/14/23 | 74 | 40 | 30 | 30 | New Construction | 1/1/80 |
| 1479 | 16007 | PALISADE ST | ANGLER LN | WOODSTOCK LN | E | AC | 3 | 1,012 | 36 | 36,432 | 5/7/26 | 74 | 10 | 90 | 0 | New Construction | 1/1/80 |
| 1480 | 13561 | PALMDALE ST | WARNER AVE | CAIN AVE | E | AC | 3 | 330 | 38 | 12,540 | 5/30/24 | 74 | 43 | 13 | 44 | New Construction | 1/1/80 |
| 1634 | 13583 | RHAPSODY DR | FANTASIA LN | MELODY LN | E | AC | 2 | 1,060 | 36 | 38,910 | 3/24/22 | 74 | 54 | 46 | 0 | New Construction | 1/1/80 |
| 1972 | 12980 | THIRTEENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/22/21 | 74 | 0 | 81 | 19 | Surface Treatment - Slurry Seal | 7/27/22 |
| 200 | 14245 | BASTIA LN | SNOWBIRD DR | ATLANTA AVE | E | AC | 9 | 246 | 36 | 8,856 | 8/30/23 | 74 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2031 | 13018 | TWENTIETH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 74 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1820 | 16000 | SILVERWOOD DR | WOODSTOCK LN | BRIMHALL LN | E | AC | 3 | 1,272 | 36 | 45,792 | 5/7/26 | 74 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 1873 | 14864 | ST PAUL CIR | ST GEORGE LN | END | E | AC | 5 | 545 | 36 | 22,110 | 5/20/24 | 74 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1933 | 14503 | SURFRIDER LN | PLAYA DR | CHRISTINE DR | E | AC | 9 | 549 | 36 | 20,764 | 4/17/24 | 74 | 74 | 26 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 690 | 13719 | ENGINEER DR | GRAHAM ST | PIPELINE LN | E | AC | 1 | 1,347 | 40 | 53,560 | 4/8/26 | 74 | 63 | 30 | 7 | New Construction | 1/1/80 |
| 876 | 14268 | HALF LEAGUE DR | BEACHWOOD LN | SNUG HARBOR CIR | E | AC | 9 | 250 | 36 | 9,750 | 5/6/24 | 74 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 128 | 15095 | ANGLER LN | SOFTWIND DR | PALISADE DR | E | AC | 3 | 534 | 36 | 19,224 | 4/7/26 | 74 | 14 | 86 | 0 | New Construction | 1/1/80 |
| 1474 | 13383 | PADUA DR | WRIGHTWOOD LN | SPRINGDALE ST | E | AC | 5 | 180 | 36 | 6,480 | 3/30/26 | 74 | 58 | 38 | 4 | New Construction | 1/1/80 |
| 1778 | 14929 | SERENE DR | MISTY LN | MONTBURY CIR | E | AC | 5 | 254 | 36 | 8,856 | 3/30/26 | 74 | 52 | 48 | 0 | New Construction | 1/1/80 |
| 1964 | 14599 | TENOR DR | FANTASIA LN | END | E | AC | 2 | 126 | 36 | 4,536 | 3/24/22 | 74 | 41 | 59 | 0 | New Construction - Initial | 1/1/80 |
| 575 | 13551 | DE VILLE CIR | LANDAU LN | CDS | E | AC | 4 | 518 | 36 | 18,648 | 3/31/22 | 74 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 781 | 13465 | FRESHWATER CIR | INLET DR | END | E | AC | 5 | 478 | 36 | 18,708 | 5/29/24 | 74 | 24 | 65 | 11 | Surface Treatment - Slurry Seal | 10/1/12 |
| 956 | 14259 | HOPETOWN LN | SPENCER CIR | CARROLLTOWN DR | E | AC | 9 | 300 | 36 | 10,800 | 5/9/24 | 74 | 60 | 39 | 1 | New Construction | 1/1/80 |
| 1345 | 14008 | MOOREA LN | PUA DR | KUKUI DR | E | AC | 8 | 260 | 36 | 9,360 | 3/7/22 | 74 | 42 | 47 | 11 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1842 | 14269 | SNUG HARBOR CIR | HALF LEAGUE DR | CDS | E | AC | 9 | 255 | 32 | 10,410 | 5/6/24 | 74 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 4 | 14533 | ABLE LN | SKYLAB RD | BOLSA AVE | E | AC | 1 | 1,434 | 60 | 86,040 | 4/7/26 | 74 | 43 | 47 | 10 | New Construction | 1/1/80 |
| 632 | 15450 | DUBLIN LN | SEAPORT DR | MALLOY DR | E | AC | 9 | 513 | 36 | 18,468 | 8/21/23 | 74 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 930 | 13971 | HICKORY LN | HYDE PARK DR | BRABHAM DR | E | AC | 8 | 1,286 | 36 | 47,296 | 4/15/26 | 74 | 77 | 21 | 2 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1006 | 15183 | JARDINES DR | SAN ROGUE LN | AVILLA LN | E | AAC | 5 | 1,108 | 36 | 40,388 | 5/20/24 | 74 | 35 | 56 | 9 | Overlay - AC Structural | 10/1/12 |
| 126 | 13713 | ANDAMAN LN | ALLEY MCFADDEN AVE | MCFADDEN AVE | E | AC | 1 | 159 | 36 | 5,724 | 3/21/22 | 74 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 2192 | 14922 | WRIGHTWOOD LN | PRICE DR | MOSS DR | E | AC | 5 | 225 | 36 | 9,100 | 3/30/26 | 74 | 30 | 65 | 5 | New Construction - Initial | 1/1/80 |
| 394 | 14038 | CARSON DR | NEWLAND AVE | SACRAMENTO LN | E | AC | 7 | 167 | 36 | 6,012 | 5/5/26 | 74 | 29 | 71 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 542 | 13262 | CULPEPPER CIR | SILVERWOOD DR | CDS | E | AC | 3 | 140 | 32 | 5,730 | 4/6/26 | 74 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 666 | 14415 | EL CORTIJO DR | EDWARDS ST | ALTAMIRANO LN | E | AAC | 5 | 167 | 36 | 5,724 | 5/20/24 | 74 | 32 | 68 | 0 | Overlay - AC Structural | 10/1/12 |
| 939 | 13975 | HILLSBORO CIR | LITCHFIELD DR | CDS | E | AC | 8 | 510 | 36 | 20,160 | 4/16/26 | 74 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 123 | 15292 | ANACAPA DR | CHATEAU LN | FAIRVIEW LN | E | AAC | 1 | 780 | 36 | 30,580 | 5/7/24 | 74 | 27 | 73 | 0 | Overlay - AC Fabric | 10/1/16 |
| 833 | 15129 | GLORIA DR | TRUDY LN | TORJIAN LN | E | AC | 3 | 1,140 | 36 | 41,040 | 5/7/26 | 74 | 62 | 36 | 2 | New Construction | 1/1/80 |
| 1088 | 14695 | KNOXVILLE AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 6 | 330 | 37 | 12,210 | 8/15/23 | 74 | 63 | 29 | 8 | New Construction | 1/1/80 |
| 1662 | 15763 | RODGERS DR | TWAIN LN | CDS | E | AC | 5 | 798 | 36 | 29,978 | 5/8/26 | 74 | 59 | 41 | 0 | New Construction | 1/1/80 |
| 2034 | 15204 | TWINFORD LN | NORBOOK DR | MANOFIELD DR | E | AAC | 5 | 511 | 36 | 18,396 | 5/23/24 | 74 | 24 | 76 | 0 | Overlay - AC Structural | 10/1/12 |
| 2128 | 15410 | WEEMS LN | KINGSDALE DR | END | E | AAC | 7 | 649 | 36 | 23,364 | 8/21/23 | 74 | 49 | 51 | 0 | Overlay - AC Structural | 3/1/11 |
| 280 | 13267 | BONDURANT CIR | FLINT DR | CDS | E | AC | 3 | 99 | 32 | 4,418 | 4/7/26 | 74 | 65 | 35 | 0 | New Construction - Initial | 1/1/80 |
| 855 | 15781 | GREENLEAF LN | GLENROY DR | END | E | AC | 2 | 452 | 36 | 17,184 | 4/1/26 | 74 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 1029 | 13282 | JULIEN CIR | LAKEMONT LN | CDS | E | AC | 3 | 143 | 36 | 6,648 | 12/19/24 | 74 | 58 | 42 | 0 | New Construction | 1/1/80 |
| 1282 | 15120 | MEADOWBROOK DR | CHARLEYVILLE CIR | GREENVIEW LN | E | AC | 3 | 513 | 36 | 18,968 | 4/2/26 | 74 | 35 | 65 | 0 | New Construction | 1/1/80 |
| 1554 | 14677 | PORTLAND CIR | HUNTINGTON ST | END | E | AAC | 6 | 576 | 36 | 22,236 | 8/15/23 | 74 | 16 | 76 | 8 | Overlay - AC Structural | 3/1/11 |
| 1803 | 13321 | SHIELDS DR | LOVELL LN | END | E | AC | 3 | 400 | 36 | 15,650 | 4/6/26 | 74 | 9 | 91 | 0 | New Construction | 1/1/80 |
| 1994 | 12929 | WALNUT AVE | ELEVENTH ST | FOURTEENTH ST | E | AC | 6 | 930 | 39 | 36,270 | 6/23/21 | 74 | 36 | 38 | 26 | Surface Treatment - Slurry Seal | 7/27/22 |
| 306 | 13675 | BRIARCLIFF DR | FAIRVIEW LN | END | E | AC | 1 | 551 | 32 | 19,382 | 5/6/26 | 74 | 75 | 22 | 3 | New Construction | 1/1/80 |
| 619 | 15325 | DOVEWOOD DR | PELICAN LN | HUMMINGBIRD LN | E | AC | 1 | 670 | 36 | 24,370 | 3/21/22 | 74 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 842 | 13259 | GOVIN CIR | NORMANDY LN | CDS | E | AC | 3 | 238 | 32 | 8,866 | 4/6/26 | 74 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 1394 | 15775 | NEWQUIST LN | EL DORADO DR | GLENROY DR | E | AC | 2 | 733 | 36 | 27,528 | 4/1/26 | 75 | 30 | 70 | 0 | New Construction | 1/1/80 |
| 1528 | 13035 | PINE ST | ADAMS AVE | SPRINGFIELD AVE | E | AC | 6 | 645 | 37 | 23,865 | 6/29/21 | 75 | 57 | 32 | 11 | Surface Treatment - Slurry Seal | 7/27/22 |
| 183 | 14626 | BALTIMORE AVE | ALABAMA ST | ALLEY ALABAMA ST | E | AC | 9 | 322 | 37 | 11,914 | 8/14/23 | 75 | 9 | 88 | 3 | New Construction | 1/1/80 |
| 2141 | 15416 | WESTWINDS LN | BREAKERS DR | SKIFF CIR | E | AC | 7 | 780 | 36 | 28,080 | 4/20/26 | 75 | 97 | 0 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1335 | 13418 | MONTOYA CIR | SAN ROQUE LN | END | E | AAC | 5 | 285 | 36 | 11,760 | 5/29/24 | 75 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1356 | 14923 | MOSS DR | WRIGHTWOOD LN | SPRINGDALE ST | E | AC | 5 | 180 | 36 | 6,204 | 3/30/26 | 75 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 2076 | 15184 | VIA ESPANA LN | SLATER AVE | VIA ANGELINA DR | E | AAC | 5 | 418 | 36 | 15,048 | 5/22/24 | 75 | 14 | 84 | 2 | Overlay - AC Structural | 10/1/12 |
| 592 | 13382 | DENVALE CIR | SELKIRK DR | END | E | AC | 5 | 126 | 36 | 6,036 | 3/30/26 | 75 | 54 | 39 | 7 | New Construction | 1/1/80 |
| 1308 | 15192 | MIDWAY DR | BELLFIELD LN | FOSS LN | E | AC | 5 | 1,047 | 36 | 37,692 | 3/31/26 | 75 | 26 | 60 | 14 | New Construction | 1/1/80 |
| 1457 | 13815 | ORIOLE LN | ROBINWOOD DR | SPARROW DR | E | AC | 1 | 260 | 36 | 9,360 | 3/21/22 | 75 | 72 | 28 | 0 | New Construction | 1/1/80 |
| 1599 | 14939 | RAINGLEN LN | BANKTON DR | NEARGATE DR | E | AC | 5 | 357 | 36 | 12,852 | 3/31/26 | 75 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 1897 | 13306 | STONEHAVEN CIR | GRAHAM ST | CDS | E | AC | 2 | 403 | 36 | 15,758 | 4/2/26 | 75 | 24 | 76 | 0 | New Construction - Initial | 1/1/80 |
| 722 | 14220 | FARNSWORTH LN | INDIANAPOLIS AVE | ALLEY INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/23/23 | 75 | 44 | 39 | 17 | New Construction | 1/1/80 |
| 1485 | 13240 | PAR CIR | FAIRWAY LN | END | E | AC | 3 | 348 | 32 | 12,386 | 3/23/22 | 75 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 1549 | 13284 | POMONA LN | LAFAYETTE DR | AUBURN DR | E | AC | 3 | 259 | 36 | 9,324 | 12/19/24 | 75 | 41 | 59 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1569 | 13516 | PRINCE DR | GOTHARD ST | BURKE LN | E | AC | 3 | 436 | 40 | 17,440 | 4/23/26 | 75 | 37 | 60 | 3 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2189 | 15723 | WOODWIND DR | SAMPSON LN | GEORGETOWN LN | E | AC | 4 | 911 | 40 | 37,190 | 5/13/24 | 75 | 67 | 33 | 0 | Surface Treatment - Slurry Seal | 11/1/19 |
| 866 | 15275 | GULF LN | ALLEY TALBERT AVE | CDS | E | AC | 4 | 534 | 36 | 19,224 | 5/13/24 | 75 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 530 | 13124 | CREST AVE | THIRTEENTH ST | FOURTEENTH ST | E | AC | 6 | 265 | 45 | 12,175 | 7/8/21 | 75 | 9 | 41 | 50 | Surface Treatment - Slurry Seal | 7/27/22 |
| 672 | 13084 | ELEVENTH ST | MAIN ST | LAKE ST | E | AC | 6 | 782 | 47 | 41,595 | 7/8/21 | 75 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 758 | 15004 | FLORIDA ST | SHAFFER CIR | GARFIELD AVE | E | AC | 4 | 478 | 36 | 17,208 | 4/8/24 | 75 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 758 | 14756 | FLORIDA ST | MAIN ST | PROFESSIONAL CIR | E | AC | 4 | 221 | 36 | 7,956 | 5/9/24 | 75 | 56 | 16 | 28 | Surface Treatment - Slurry Seal | 11/28/19 |
| 806 | 15865 | GENEVA AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 40 | 13,200 | 8/15/23 | 75 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1493 | 13299 | PARLAY CIR | STALLION CIR | CDS | E | AC | 2 | 282 | 36 | 11,402 | 4/2/26 | 75 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 359 | 14479 | CAMEO LN | CLEARBROOK DR | LANDFALL DR | E | AC | 9 | 267 | 36 | 9,612 | 4/25/24 | 75 | 80 | 20 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 398 | 13711 | CASPIAN CIR | ANDAMAN LN | END | E | AC | 1 | 532 | 36 | 20,402 | 3/21/22 | 75 | 83 | 15 | 2 | New Construction | 1/1/80 |
| 514 | 13189 | COTUIT CIR | HUMBOLDT DR | CDS | E | AC | 2 | 345 | 32 | 12,540 | 4/7/22 | 75 | 38 | 27 | 35 | New Construction | 1/1/80 |
| 526 | 14236 | CRANE CIR | SANDPIPER LN | END | E | AC | 9 | 357 | 36 | 12,852 | 8/24/23 | 75 | 60 | 35 | 5 | New Construction | 1/1/80 |
| 672 | 12972 | ELEVENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/22/21 | 75 | 52 | 39 | 9 | New Construction | 1/1/80 |
| 897 | 14464 | HAROLD PL | GRAHAM ST | HAMMON LN | E | AC | 1 | 1,322 | 36 | 47,592 | 4/7/26 | 75 | 28 | 72 | 0 | New Construction | 1/1/80 |
| 1323 | 14918 | MISTY LN | SLATER AVE | PRICE DR | E | AC | 5 | 170 | 36 | 6,120 | 3/30/26 | 75 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 1693 | 15299 | SABRE LN | BOLSA AVE | END | E | AC | 1 | 613 | 36 | 24,068 | 4/28/26 | 75 | 35 | 65 | 0 | New Construction | 1/1/80 |
| 546 | 14055 | CUTTER DR | ESTUARY LN | ISTHMUS LN | E | AC | 7 | 260 | 36 | 9,860 | 4/20/26 | 75 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 585 | 13586 | DEL MAR LN | ALLEY HEIL AVE | HEIL AVE | E | AC | 2 | 154 | 36 | 5,544 | 3/24/22 | 75 | 77 | 23 | 0 | New Construction | 1/1/80 |
| 635 | 13764 | DUKE CIR | CITADEL DR | END | E | AC | 1 | 410 | 36 | 16,560 | 1/3/25 | 75 | 79 | 14 | 7 | New Construction | 1/1/80 |
| 778 | 14886 | FRASER LN | SUMMERDALE DR | JUNE DR | E | AAC | 5 | 239 | 36 | 9,508 | 5/30/24 | 75 | 8 | 92 | 0 | Overlay - AC Structural | 10/1/12 |
| 1829 | 15525 | SKIMMER LN | STAR DR | KITE DR | E | AC | 8 | 1,014 | 36 | 36,504 | 3/18/24 | 75 | 41 | 38 | 21 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1965 | 12966 | TENTH ST | PCH | WALNUT AVE | E | AC | 6 | 375 | 50 | 18,750 | 6/22/21 | 75 | 43 | 35 | 22 | Surface Treatment - Slurry Seal | 7/27/22 |
| 518 | 15074 | COURTNEY LN | DAVENPORT DR | WESTPORT DR | E | AC | 2 | 1,182 | 36 | 42,552 | 3/24/22 | 75 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 106 | 14523 | ALLISON CIR | JONESPORT LN | CDS | E | AC | 9 | 215 | 32 | 8,680 | 4/24/24 | 75 | 48 | 52 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1405 | 14799 | NOBLE CIR | FOREST LN | CDS | E | AC | 4 | 400 | 34 | 15,100 | 5/13/24 | 75 | 34 | 66 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1462 | 15848 | OSWEGO AVE | LAKE ST | ALABAMA ST | E | AAC | 6 | 372 | 37 | 13,764 | 8/15/23 | 75 | 66 | 34 | 0 | Overlay - AC Structural | 3/1/11 |
| 2141 | 15415 | WESTWINDS LN | SHORE CIR | BREAKERS DR | E | AC | 7 | 520 | 36 | 18,720 | 4/20/26 | 75 | 97 | 0 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 393 | 15504 | CARROLLTOWN DR | KELVIN LN | HOPETOWN LN | E | AC | 9 | 760 | 36 | 27,360 | 5/8/24 | 75 | 27 | 64 | 9 | Surface Treatment - Slurry Seal | 5/11/18 |
| 826 | 14295 | GLENCAIRN LN | FRIARSCOURT DR. | SCOTTOUN DR | E | AC | 8 | 1,033 | 36 | 37,188 | 3/19/24 | 75 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 1044 | 13139 | KAUI LN | HONOLULU LN | HAWAII LN | E | AC | 2 | 262 | 36 | 10,432 | 3/24/22 | 75 | 46 | 33 | 21 | New Construction | 1/1/80 |
| 1237 | 15988 | MANHATTAN DR | MAYOR LN | WHETMORE LN | E | AAC | 3 | 1,181 | 36 | 42,516 | 5/22/24 | 75 | 11 | 85 | 4 | Overlay - AC Structural | 10/1/12 |
| 1819 | 13408 | SILVERHEEL CIR | COLLINS LN | CDS | E | AC | 5 | 222 | 36 | 9,492 | 5/20/24 | 75 | 81 | 19 | 0 | New Construction | 1/1/80 |
| 1958 | 13708 | TASMAN DR | BAFFIN CIR | CAMBAY LN | E | AC | 1 | 260 | 36 | 9,360 | 3/21/22 | 75 | 63 | 26 | 11 | New Construction - Initial | 1/1/80 |
| 262 | 15326 | BLUEBIRD LN | QUAIL CIR | ROBINWOOD DR | E | AC | 1 | 780 | 36 | 28,080 | 3/21/22 | 75 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 306 | 15293 | BRIARCLIFF DR | CHATEAU LN | FAIRVIEW LN | E | AC | 1 | 780 | 36 | 28,080 | 4/8/22 | 75 | 55 | 34 | 11 | New Construction | 1/1/80 |
| 1228 | 15608 | MALIBU LN | BANNING AVE | TAHITI CIR | E | AAC | 9 | 944 | 36 | 33,984 | 4/22/26 | 76 | 43 | 55 | 2 | Overlay - AC Structural | 5/11/19 |
| 611 | 14311 | DONCASTER DR | LOCHLEA LN | NEWLAND ST | E | AC | 9 | 660 | 36 | 23,760 | 8/30/23 | 76 | 20 | 80 | 0 | New Construction | 1/1/80 |
| 740 | 15261 | FIR DR | EMERALD LN | OAK LN | E | AC | 4 | 318 | 36 | 11,448 | 5/30/24 | 76 | 57 | 43 | 0 | New Construction | 1/1/80 |
| 780 | 14894 | FREEBORN DR | LIDO LN | ERWIN LN | E | AAC | 5 | 405 | 36 | 15,720 | 5/22/24 | 76 | 0 | 97 | 3 | Overlay - AC Structural | 10/1/12 |
| 866 | 13638 | GULF LN | TALBERT AVE | ALLEY TALBERT AVE | E | AC | 4 | 159 | 36 | 5,724 | 5/13/24 | 76 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1261 | 13173 | MARUFFA CIR | MISTRAL DR | CDS | E | AC | 2 | 381 | 32 | 13,692 | 4/7/22 | 76 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1765 | 14113 | SEAPORT DR | SEA CIR | END | E | AAC | 9 | 120 | 36 | 4,320 | 8/21/23 | 76 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1851 | 13659 | SPA DR | DOLLAR DR | HAMMON LN | E | AC | 1 | 1,391 | 36 | 50,076 | 4/13/26 | 76 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 191 | 13186 | BARNSTABLE CIR | HUMBOLDT DR | CDS | E | AC | 2 | 375 | 32 | 13,500 | 4/7/22 | 76 | 69 | 31 | 0 | New Construction | 1/1/80 |
| 2118 | 15389 | WATERBURY LN | KNEEP DR | YORKTOWN AVE | E | AC | 8 | 1,190 | 36 | 43,590 | 4/15/26 | 76 | 95 | 5 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 214 | 15955 | BEACHWOOD LN | FIVE HARBORS DR | CAMEL LN | E | AC | 9 | 868 | 36 | 31,248 | 5/6/24 | 76 | 57 | 43 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 530 | 12992 | CREST AVE | LAKE ST | MAIN ST | E | AC | 6 | 665 | 45 | 30,095 | 7/8/21 | 76 | 37 | 62 | 1 | Surface Treatment - Slurry Seal | 7/27/22 |
| 662 | 12954 | EIGHTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 410 | 48 | 19,680 | 6/22/21 | 76 | 52 | 32 | 16 | Surface Treatment - Slurry Seal | 7/27/22 |
| 803 | 13301 | GELDING CIR | ROOSEVELT LN | CDS | E | AC | 2 | 275 | 36 | 11,150 | 4/2/26 | 76 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 934 | 14475 | HILARIA CIR | LANDFALL DR. | CDS | E | AAC | 9 | 472 | 36 | 18,492 | 4/21/26 | 76 | 0 | 72 | 28 | Overlay - AC Structural | 5/11/19 |
| 16 | 14625 | ALABAMA ST | ATLANTA AVE | ALLEY BALTIMORE AVE | E | AC | 9 | 166 | 36 | 5,976 | 8/14/23 | 76 | 62 | 28 | 10 | New Construction | 1/1/80 |
| 1909 | 14871 | SUMMERDALE DR | TREEHAVEN LN | PINEHURST LN | E | AC | 5 | 485 | 36 | 19,492 | 5/21/24 | 76 | 38 | 62 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2085 | 13692 | VIKING CIR | SUNNYCREST LN | END | E | AAC | 1 | 352 | 32 | 13,064 | 5/7/24 | 76 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 454 | 13464 | CLEARWATER CIR | INLET DR | END | E | AC | 5 | 481 | 36 | 18,816 | 5/29/24 | 76 | 8 | 85 | 7 | Surface Treatment - Slurry Seal | 10/1/12 |
| 623 | 13740 | DRAKE LN | BOLSA AVE | ALEXANDRIA DR | E | AC | 1 | 570 | 36 | 21,270 | 4/27/26 | 76 | 36 | 48 | 16 | New Construction | 1/1/80 |
| 774 | 15866 | FRANKFORT AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 40 | 13,200 | 8/24/23 | 76 | 0 | 77 | 23 | New Construction | 1/1/80 |
| 1122 | 14270 | LANTERN LN | HINGHAM DR | CASTLEGATE DR | E | AAC | 9 | 243 | 36 | 8,748 | 5/10/24 | 76 | 44 | 33 | 23 | Overlay - AC Structural | 5/11/18 |
| 1539 | 14504 | PLAYA DR | SURFRIDER LN | ISLANDER LN | E | AC | 9 | 270 | 36 | 11,720 | 4/17/24 | 76 | 70 | 30 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1590 | 15520 | QUEENS PARK LN | UPLAND DR | ATLANTA AVE | E | AC | 8 | 747 | 36 | 26,892 | 3/19/24 | 76 | 60 | 29 | 11 | Surface Treatment - Slurry Seal | 5/11/18 |
| 17 | 13620 | ALADDIN DR | WEATHERLY LN | SCEPTRE LN | E | AC | 2 | 720 | 36 | 25,920 | 4/9/22 | 76 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 1722 | 15498 | SANDPIPER LN | TERN CIR | KINGFISHER DR | E | AC | 9 | 758 | 36 | 27,288 | 8/24/23 | 76 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 2052 | 14795 | VAN BUREN LN | MICHAEL DR | NEWMAN AVE | E | AC | 4 | 781 | 36 | 27,828 | 5/13/24 | 76 | 76 | 24 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 506 | 15947 | CORNERBROOK DR | STRATHMOOR LN | AMBERWICK LN | E | AC | 8 | 1,008 | 36 | 36,288 | 4/10/24 | 76 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 788 | 14945 | GAINSFORD LN | BECK CIR | BANKTON DR | E | AC | 5 | 305 | 36 | 10,692 | 3/31/26 | 76 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 884 | 15317 | HANOVER LN | PARIS CIR | HALIFAX DR | E | AC | 1 | 780 | 36 | 27,792 | 5/8/26 | 76 | 10 | 81 | 9 | New Construction | 1/1/80 |
| 966 | 15050 | HUMBOLDT DR | BARNSTABLE CIR | ARDSLEY CIR | E | AC | 2 | 397 | 36 | 14,292 | 4/7/22 | 76 | 54 | 46 | 0 | New Construction | 1/1/80 |
| 1107 | 14502 | LAGUNA CIR | CHRISTINE DR | CDS | E | AAC | 9 | 243 | 36 | 10,248 | 4/22/26 | 76 | 65 | 20 | 15 | Overlay - AC Structural | 5/11/19 |
| 2094 | 13613 | VISTA DR | GREEN ST | ISLAND CIR | E | AC | 2 | 184 | 36 | 7,650 | 4/7/22 | 76 | 68 | 32 | 0 | New Construction - Initial | 1/1/80 |
| 669 | 14296 | EL TORO LN | KITE DR | ATLANTA AVE | E | AC | 8 | 179 | 36 | 6,444 | 3/18/24 | 76 | 83 | 17 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 774 | 15668 | FRANKFORT AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 38 | 18,430 | 8/24/23 | 76 | 0 | 61 | 39 | New Construction | 1/1/80 |
| 941 | 13247 | HILLVIEW CIR | FERNHILL CIR | END | E | AC | 3 | 179 | 34 | 7,886 | 4/2/26 | 76 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 108 | 15977 | ALLSTONE DR | RAINGLEN LN | END | E | AC | 5 | 587 | 36 | 21,132 | 3/31/26 | 76 | 0 | 92 | 8 | New Construction | 1/1/80 |
| 1124 | 13694 | LARCHWOOD DR | SUNNYCREST LN | END | E | AC | 1 | 352 | 36 | 14,472 | 4/8/26 | 76 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1794 | 13748 | SHELLY DR | FIELDSTON LN | BOLSA PARK LN | E | AC | 1 | 769 | 36 | 28,184 | 4/27/26 | 76 | 0 | 93 | 7 | New Construction | 1/1/80 |
| 1923 | 13690 | SUNNYCREST LN | ROYAL OAK DR | LARKSPUR CIR | E | AC | 1 | 258 | 36 | 9,288 | 4/8/26 | 76 | 40 | 60 | 0 | New Construction - Initial | 1/1/80 |
| 2020 | 15128 | TRUDY LN | JEAN DR | SHIELDS DR | E | AC | 3 | 1,282 | 36 | 46,152 | 4/6/26 | 76 | 43 | 55 | 2 | New Construction - Initial | 1/1/80 |
| 615 | 13269 | DORAINE CIR | GIARC LN | CDS | E | AC | 3 | 222 | 32 | 8,904 | 12/27/24 | 76 | 48 | 51 | 1 | New Construction | 1/1/80 |
| 1124 | 13695 | LARCHWOOD DR | NORTHRIDGE LN | SUNNYCREST LN | E | AC | 1 | 1,280 | 36 | 45,792 | 4/8/26 | 76 | 16 | 84 | 0 | New Construction | 1/1/80 |
| 1833 | 13818 | SKYLARK DR | ORIOLE LN | HUMMINGBIRD LN | E | AC | 1 | 980 | 36 | 35,780 | 3/21/22 | 76 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 349 | 14665 | CALIFORNIA ST | KNOXVILLE AVE | LINCOLN AVE | E | AAC | 6 | 330 | 37 | 11,877 | 8/14/23 | 76 | 61 | 31 | 8 | Overlay - AC Structural | 3/1/11 |
| 751 | 14462 | GRAHAM ST | RANCHO RD | HAROLD PL | E | AAC | 1 | 394 | 18 | 9,092 | 5/8/24 | 76 | 36 | 37 | 27 | Overlay - AC Structural | 10/1/16 |
| 1182 | 13530 | LOIS CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 76 | 60 | 40 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1216 | 15923 | MACHINE DR | PIPELINE LN | SPRINGDALE ST | E | AC | 1 | 1,254 | 40 | 50,160 | 4/8/26 | 76 | 59 | 5 | 36 | New Construction | 1/1/80 |
| 1446 | 12926 | OLIVE AVE | SECOND ST | THIRD ST | E | AC | 6 | 265 | 26 | 6,890 | 6/30/21 | 76 | 80 | 19 | 1 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1502 | 15812 | PEARCE ST | ALGONQUIN ST | SIMS ST | E | AC | 2 | 660 | 36 | 23,760 | 3/22/22 | 76 | 62 | 21 | 17 | New Construction | 1/1/80 |
| 652 | 15081 | EDGEWATER LN | WAVERLY LN | END | E | AC | 2 | 1,061 | 36 | 38,196 | 3/24/22 | 76 | 6 | 33 | 61 | New Construction | 1/1/80 |
| 675 | 14258 | ELIZABETH LN | ELLSWORTH DR | CARROLTOWN DR | E | AAC | 9 | 902 | 36 | 32,472 | 5/20/24 | 76 | 31 | 42 | 27 | Overlay - AC Structural | 5/11/18 |
| 1364 | 13398 | MUTHER LN | KISER DR | HAMSHIRE DR | E | AC | 5 | 257 | 36 | 9,252 | 5/21/24 | 76 | 83 | 14 | 3 | New Construction | 1/1/80 |
| 1834 | 13558 | SKYLINE LN | SUNBREEZE DR | SLATER AVE | E | AC | 3 | 314 | 36 | 11,304 | 5/28/24 | 76 | 32 | 68 | 0 | New Construction | 1/1/80 |
| 217 | 14250 | BEARSDEN CIR | COLBREGGAN DR | CDS | E | AAC | 9 | 210 | 32 | 8,520 | 5/10/24 | 76 | 42 | 58 | 0 | Overlay - AC Structural | 5/11/18 |
| 2197 | 13797 | YORKSHIRE LN | OXFORD DR | CANTERBURY DR | E | AC | 1 | 276 | 36 | 9,936 | 1/6/25 | 76 | 56 | 44 | 0 | New Construction - Initial | 1/1/80 |
| 605 | 14467 | DOLLAR DR | SPA DR | NEVADA DR | E | AC | 1 | 434 | 36 | 15,624 | 4/13/26 | 76 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 809 | 14784 | GEORGETOWN LN | WOODWIND DR | WINDFIELD DR | E | AC | 4 | 765 | 40 | 30,600 | 5/13/24 | 76 | 24 | 76 | 0 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1391 | 15014 | NEWMAN AVE | BEACH BLVD | VAN BUREN ST | E | AC | 4 | 955 | 40 | 36,920 | 5/13/24 | 77 | 72 | 27 | 1 | Surface Treatment - Slurry Seal | 11/28/19 |
| 16 | 15663 | ALABAMA ST | DETROIT AVE | PECAN AVE | E | AC | 9 | 250 | 37 | 9,250 | 8/14/23 | 77 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 1907 | 14490 | SUMMER CIR | HIGHTIDE DR | CDS | E | AAC | 9 | 307 | 32 | 11,324 | 5/5/26 | 77 | 38 | 62 | 0 | Overlay - AC Structural | 5/11/19 |
| 2182 | 15796 | WOODFERN LN | SLATER AVE | SERENE DR | E | AC | 5 | 455 | 36 | 16,380 | 3/30/26 | 77 | 100 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2288 | 17022 | ADAMS AVE FRONTAGE | SUTTON LN | EAST END | E | AC | 8 | 120 | 28 | 3,360 | 3/11/22 | 77 | 12 | 88 | 0 | New Construction - Initial | 1/1/80 |
| 1121 | 13310 | LANGPORT CIR | GREENVIEW LN | END | E | AC | 3 | 333 | 32 | 13,156 | 4/2/26 | 77 | 40 | 60 | 0 | New Construction | 1/1/80 |
| 1731 | 15149 | SANTA YNEZ DR | MIRA LOMA CIR | MADERA LN | E | AC | 5 | 511 | 36 | 19,280 | 5/21/24 | 77 | 62 | 38 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1872 | 14481 | ST JOHN LN | HAMILTON AVE | CLEARBROOK DR | E | AAC | 9 | 525 | 36 | 19,650 | 4/21/26 | 77 | 51 | 37 | 12 | Overlay - AC Structural | 5/11/19 |
| 201 | 14921 | BATES CIR | ALLSTONE DR | END | E | AC | 5 | 217 | 36 | 9,612 | 3/31/26 | 77 | 28 | 69 | 3 | New Construction | 1/1/80 |
| 725 | 13381 | FELSON CIR | SELKIRK DR | END | E | AC | 5 | 114 | 36 | 5,904 | 3/30/26 | 77 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 857 | 15122 | GREENVIEW LN | TREETOP CIR | DONLYN DR | E | AC | 3 | 525 | 36 | 18,900 | 4/2/26 | 77 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 922 | 15466 | HENTON DR | BRENTSTONE LN | CDS | E | AC | 7 | 547 | 32 | 17,504 | 4/21/26 | 77 | 46 | 54 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 947 | 14817 | HOLLAND DR | MARKEN LN | END | E | AC | 4 | 96 | 36 | 3,456 | 4/6/22 | 77 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1296 | 14681 | MEMPHIS AVE | HUNTINGTON ST | DELAWARE ST | E | AC | 6 | 659 | 37 | 24,087 | 8/15/23 | 77 | 70 | 23 | 7 | New Construction | 1/1/80 |
| 1435 | 15602 | OCEANCREST DR | SUMMERWIND LN | CDS | E | AAC | 9 | 775 | 34 | 28,150 | 4/21/26 | 77 | 28 | 53 | 19 | Overlay - AC Structural | 5/11/19 |
| 1804 | 13677 | SHINKLE CIR | GLENWOOD DR | END | E | AAC | 1 | 350 | 32 | 12,950 | 5/7/24 | 77 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 423 | 13670 | CHATEAU LN | ANACAPA DR | BRIARCLIFF DR | E | AAC | 1 | 785 | 36 | 29,760 | 5/7/24 | 77 | 0 | 97 | 3 | Overlay - AC Structural | 10/1/16 |
| 473 | 14970 | COLDWATER LN | YORKTOWN AVE | SCRIBE DR | E | AC | 7 | 364 | 36 | 13,104 | 8/21/23 | 77 | 76 | 18 | 6 | Surface Treatment - Slurry Seal | 3/1/11 |
| 505 | 13731 | CORNELL DR | BOLSA PARK LN | END | E | AC | 1 | 294 | 36 | 12,084 | 4/8/26 | 77 | 25 | 28 | 47 | New Construction | 1/1/80 |
| 633 | 13254 | DUCHESS LN | PALISADE DR | CHRISTY DR | E | AC | 3 | 1,160 | 36 | 41,760 | 5/7/26 | 77 | 33 | 66 | 1 | New Construction | 1/1/80 |
| 678 | 13581 | ELM ST | CYPRESS AVE | CDS | E | AC | 4 | 443 | 36 | 17,448 | 5/30/24 | 77 | 15 | 63 | 22 | New Construction | 1/1/80 |
| 1124 | 15298 | LARCHWOOD DR | SPRINGDALE ST | NORTHRIDGE LN | E | AC | 1 | 915 | 36 | 32,652 | 4/8/26 | 77 | 28 | 72 | 0 | New Construction | 1/1/80 |
| 1301 | 14090 | MERRIMAC DR | BROOKHURST ST | CANBERRA LN | E | AC | 8 | 1,156 | 36 | 41,616 | 3/3/22 | 77 | 40 | 60 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 886 | 15830 | HARBOR BLUFFS CIR | CDS | CDS | E | AC | 2 | 514 | 36 | 20,794 | 4/1/26 | 77 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1447 | 14174 | OLYMPIC DR | INTERIOR LN | CDS | E | AC | 8 | 379 | 32 | 13,628 | 3/1/22 | 77 | 32 | 68 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 19 | 14253 | ALBANY CIR | HOPETOWN LN | CDS | E | AAC | 9 | 244 | 32 | 9,608 | 5/9/24 | 77 | 9 | 50 | 41 | Overlay - AC Structural | 5/11/18 |
| 5460 | 61020 | CANAL ST | BAYVIEW DR | END | E | AC | 2 | 78 | 26 | 2,028 | 5/6/24 | 77 | 53 | 47 | 0 | New Construction - AC | 1/1/80 |
| 768 | 13438 | FOSS LN | MIDWAY DR | CDS | E | AC | 5 | 127 | 36 | 4,572 | 3/31/26 | 77 | 42 | 58 | 0 | New Construction | 1/1/80 |
| 768 | 15194 | FOSS LN | KENBROOK DR | MIDWAY DR | E | AC | 5 | 552 | 36 | 19,872 | 3/31/26 | 77 | 55 | 37 | 8 | New Construction | 1/1/80 |
| 1322 | 15051 | MISTRAL DR | WANDERER LN | LEONARD LN | E | AC | 2 | 1,080 | 36 | 38,880 | 4/7/22 | 77 | 55 | 43 | 2 | New Construction | 1/1/80 |
| 1393 | 14512 | NEWPORT CIR | MOLOKAI DR | CDS | E | AAC | 9 | 313 | 32 | 11,516 | 4/22/26 | 77 | 52 | 48 | 0 | Overlay - AC Structural | 5/11/19 |
| 1456 | 13533 | ORINDA CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 77 | 49 | 38 | 13 | Surface Treatment - Slurry Seal | 7/29/20 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 222 | 15467 | BEDEL DR | MANSARD LN | VILLAGE DR | E | AC | 7 | 408 | 36 | 14,688 | 4/16/26 | 77 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 226 | 15191 | BELLFIELD LN | GRIMSBY DR | CDS | E | AC | 5 | 1,048 | 34 | 35,632 | 3/31/26 | 77 | 35 | 65 | 0 | New Construction | 1/1/80 |
| 436 | 15926 | CHINOOK DR | TROPICANA LN | SPRINGDALE ST | E | AC | 1 | 900 | 36 | 32,400 | 4/8/22 | 77 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 920 | 14938 | HELMSIDE DR | AMBERTON LN | CRESTMOOR LN | E | AC | 5 | 292 | 36 | 11,512 | 3/30/26 | 77 | 35 | 44 | 21 | New Construction | 1/1/80 |
| 982 | 14422 | INLET DR | LAKEPOINT LN | EDWARDS ST | E | AAC | 5 | 175 | 36 | 6,012 | 5/29/24 | 77 | 0 | 97 | 3 | Overlay - AC Structural | 10/1/12 |
| 1034 | 14379 | KAHULUI DR | KIOWA LN | KANEHOE LN | E | AC | 9 | 930 | 36 | 33,480 | 3/27/24 | 77 | 71 | 16 | 13 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1765 | 15449 | SEAPORT DR | SEA CIR | DUBLIN LN | E | AAC | 9 | 791 | 36 | 28,476 | 8/21/23 | 77 | 47 | 46 | 7 | Overlay - AC Structural | 3/1/11 |
| 2051 | 15434 | VALLEY FORGE DR | BROOKHURST ST | CANBERRA LN | E | AC | 8 | 1,156 | 36 | 41,616 | 3/3/22 | 77 | 17 | 80 | 3 | Surface Treatment - Slurry Seal | 2/8/23 |
| 393 | 14260 | CARROLLTOWN DR | HOPETOWN LN | CDS | E | AAC | 9 | 245 | 32 | 9,340 | 5/6/24 | 77 | 30 | 51 | 19 | Overlay - AC Structural | 5/11/18 |
| 1294 | 15030 | MELODY LN | EDINGER AVE | RHAPSODY DR | E | AC | 2 | 1,295 | 36 | 47,370 | 3/24/22 | 77 | 52 | 24 | 24 | New Construction | 1/1/80 |
| 1705 | 13793 | SALISBURY LN | MELBOURNE DR | MC FADDEN AVE | E | AC | 1 | 512 | 36 | 18,144 | 12/12/24 | 77 | 78 | 17 | 5 | New Construction | 1/1/80 |
| 2010 | 13311 | TREETOP CIR | GREENVIEW LN | END | E | AC | 3 | 360 | 32 | 13,320 | 4/2/26 | 77 | 0 | 97 | 3 | New Construction - Initial | 1/1/80 |
| 2033 | 13098 | TWENTY-SECOND ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 77 | 40 | 14 | 46 | Surface Treatment - Slurry Seal | 7/27/22 |
| 815 | 15104 | GIARC LN | DORIANE CIR | LENNOX DR | E | AC | 3 | 546 | 36 | 19,656 | 12/18/24 | 77 | 32 | 68 | 0 | New Construction | 1/1/80 |
| 969 | 14657 | HUNTINGTON ST | MEMPHIS AVE | NASHVILLE AVE | E | AC | 6 | 330 | 37 | 12,210 | 8/14/23 | 77 | 68 | 24 | 8 | New Construction | 1/1/80 |
| 1015 | 13978 | JERRILYN LN | GRAND DR | KREPP DR | E | AC | 8 | 1,020 | 36 | 36,720 | 4/15/26 | 77 | 83 | 17 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1108 | 15107 | LAKEMONT LN | EDGEMONT DR | CHELE CIR | E | AC | 3 | 520 | 36 | 19,470 | 12/19/24 | 77 | 44 | 51 | 5 | New Construction | 1/1/80 |
| 1505 | 13112 | PECAN AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AC | 6 | 930 | 36 | 33,480 | 6/23/21 | 77 | 49 | 18 | 33 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1568 | 14919 | PRICE DR | MISTY LN | DE LONG CIR | E | AC | 5 | 254 | 36 | 8,868 | 3/30/26 | 77 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 1862 | 15849 | SPRINGFIELD AVE | LAKE ST | PARK ST | E | AC | 6 | 585 | 36 | 21,060 | 6/30/21 | 77 | 23 | 77 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1972 | 13081 | THIRTEENTH ST | PCH | WALNUT AVE | E | AC | 6 | 365 | 50 | 18,570 | 6/22/21 | 77 | 41 | 38 | 21 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2057 | 14239 | VARAS CIR | MATARO LN | END | E | AC | 9 | 149 | 42 | 6,258 | 8/23/23 | 77 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5450 | 60700 | 26TH ST | PACIFIC S | END | E | AC | 2 | 28 | 30 | 840 | 4/23/26 | 77 | 0 | 46 | 54 | New Construction - Initial | 1/1/80 |
| 966 | 14958 | HUMBOLDT DR | WAYFARER LN | SAYBROOK LN | E | AC | 2 | 981 | 36 | 29,816 | 4/7/22 | 77 | 20 | 64 | 16 | New Construction | 1/1/80 |
| 117 | 13487 | AMAZON DR | ALLEY GANGES LN | SHER LN | E | AC | 4 | 818 | 36 | 29,948 | 3/18/22 | 77 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1717 | 13420 | SAN ROQUE LN | CRISTA PALMA DR | SEGOVIA CIR | E | AAC | 5 | 246 | 36 | 9,606 | 5/29/24 | 77 | 21 | 79 | 0 | Overlay - AC Structural | 10/1/12 |
| 1768 | 14483 | SEASIDE LN | LANDFALL DR | ROCK POINT DR | E | AAC | 9 | 656 | 36 | 23,328 | 4/21/26 | 77 | 32 | 65 | 3 | Overlay - AC Structural | 5/11/19 |
| 1971 | 12945 | THIRD ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 375 | 36 | 13,500 | 6/30/21 | 77 | 58 | 32 | 10 | Surface Treatment - Slurry Seal | 7/27/22 |
| 604 | 13365 | DOHRN CIR | KRISTOPHER LN | END | E | AAC | 3 | 368 | 36 | 15,248 | 5/22/24 | 77 | 45 | 55 | 0 | Overlay - AC Structural | 10/1/12 |
| 662 | 12955 | EIGHTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 48 | 19,680 | 6/22/21 | 77 | 25 | 45 | 30 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1088 | 14694 | KNOXVILLE AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 162 | 37 | 5,994 | 8/15/23 | 78 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1088 | 14693 | KNOXVILLE AVE | ALABAMA ST | ALLEY ALABAMA ST | E | AAC | 6 | 323 | 37 | 11,951 | 8/15/23 | 78 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 5350 | 61000 | 16TH ST | BAYVIEW DR | END | E | AC | 2 | 78 | 30 | 2,340 | 5/6/24 | 78 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 593 | 14036 | DENVER LN | YORKTOWN AVE | SALT LAKE DR | E | AC | 7 | 166 | 36 | 5,976 | 4/20/26 | 78 | 0 | 94 | 6 | Surface Treatment - Slurry Seal | 7/15/21 |
| 758 | 15671 | FLORIDA ST | GENEVA AVE | INDIANAPOLIS AVE | E | AC | 9 | 292 | 36 | 10,512 | 8/15/23 | 78 | 35 | 33 | 32 | New Construction | 1/1/80 |
| 1986 | 15714 | TIMBER CIR | DELAWARE ST | CDS | E | AC | 4 | 319 | 17 | 6,673 | 4/9/24 | 78 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 883 | 14389 | HANAKAI LN | NEOLANI DR | MALAHINE DR | E | AAC | 9 | 752 | 36 | 27,822 | 5/20/24 | 78 | 42 | 47 | 11 | Overlay - AC Structural | 5/11/18 |
| 1331 | 14927 | MONTBURY CIR | SERENE DR | END | E | AC | 5 | 420 | 36 | 16,920 | 3/30/26 | 78 | 58 | 42 | 0 | New Construction | 1/1/80 |
| 1403 | 13011 | NINETEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 415 | 46 | 19,090 | 6/23/21 | 78 | 85 | 15 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1780 | 13069 | SEVENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 375 | 46 | 17,250 | 6/22/21 | 78 | 0 | 56 | 44 | Surface Treatment - Slurry Seal | 7/27/22 |
| 186 | 15805 | BANKTON DR | GAINSFORD LN | END | E | AC | 5 | 424 | 36 | 17,264 | 5/8/26 | 78 | 56 | 38 | 6 | New Construction | 1/1/80 |
| 1875 | 15340 | STANDISH LN | HOOKER DR | EDINGER AVE | E | AC | 1 | 900 | 36 | 32,400 | 12/20/24 | 78 | 57 | 43 | 0 | New Construction | 1/1/80 |
| 1963 | 13273 | TELLIM LN | WALTON DR | LENNOX DR | E | AC | 3 | 712 | 36 | 25,344 | 12/19/24 | 78 | 61 | 39 | 0 | New Construction - Initial | 1/1/80 |
| 236 | 14926 | BERLARK CIR | SERENE DR | END | E | AC | 5 | 424 | 36 | 17,064 | 3/30/26 | 78 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 411 | 15581 | CENTRAL PARK DR | EDWARDS ST | CLIFFVIEW LN | E | AC | 5 | 1,310 | 80 | 104,800 | 5/23/24 | 78 | 38 | 37 | 25 | New Construction | 1/1/80 |
| 588 | 13499 | DELTON CIR | ALLEY MADDOX DR | CDS | E | AC | 3 | 223 | 32 | 8,636 | 3/18/22 | 78 | 54 | 37 | 9 | Surface Treatment - Slurry Seal | 7/29/20 |
| 937 | 14910 | HILLGATE LN | GLENSTONE DR | CDS | E | AC | 2 | 197 | 36 | 8,442 | 4/1/26 | 78 | 0 | 94 | 6 | New Construction | 1/1/80 |
| 1763 | 14108 | SEALROCK DR | SEASHELL CIR | LIGHTHOUSE LN | E | AC | 9 | 246 | 36 | 8,856 | 8/21/23 | 78 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1846 | 13357 | SONOMA DR | ELSINORE CIR | CORONADO LN | E | AAC | 5 | 253 | 36 | 9,108 | 5/24/24 | 78 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 583 | 15110 | DEFIANCE DR | REDLANDS LN | HOBART LN | E | AC | 3 | 1,086 | 36 | 40,096 | 12/19/24 | 78 | 32 | 68 | 0 | New Construction | 1/1/80 |
| 118 | 14759 | AMBERLEAF CIR | DELAWARE ST | CDS | E | AC | 4 | 514 | 36 | 18,504 | 5/7/24 | 78 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 1439 | 14262 | OCEANWOOD DR | MAGNOLIA ST | SEA MIST LN | E | AC | 9 | 379 | 36 | 14,394 | 5/6/24 | 78 | 10 | 89 | 1 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1679 | 15924 | ROYAL OAK DR | CHALET LN | SUNNYCREST LN | E | AAC | 1 | 1,041 | 36 | 38,976 | 5/7/24 | 78 | 34 | 66 | 0 | Overlay - AC Structural | 10/1/16 |
| 2097 | 13486 | VOLGA DR | ALLEY GANGES LN | SHER LN | E | AC | 4 | 817 | 36 | 29,412 | 3/18/22 | 78 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 225 | 15725 | BELL CIR | TALBERT AVE | CDS | E | AC | 4 | 562 | 36 | 21,732 | 5/13/24 | 78 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 442 | 16014 | CHUBASCO LN | ORIENT DR | PANACEA DR | E | AC | 8 | 1,016 | 36 | 37,326 | 4/1/24 | 78 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 473 | 15403 | COLDWATER LN | DRYBANK DR | ADAMS AVE | E | AC | 7 | 1,074 | 36 | 38,664 | 8/21/23 | 78 | 64 | 27 | 9 | Surface Treatment - Slurry Seal | 3/1/11 |
| 560 | 13935 | DANBURY CIR | NEWHAVEN LN | CDS | E | AC | 7 | 408 | 36 | 18,648 | 4/2/24 | 78 | 49 | 37 | 14 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1822 | 15811 | SIMS ST | PEARCE ST | WARNER AVE | E | AC | 2 | 1,320 | 36 | 47,520 | 3/22/22 | 78 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 1874 | 13300 | STALLION CIR | ROOSEVELT LN | CDS | E | AC | 2 | 275 | 36 | 11,150 | 4/2/26 | 78 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 1994 | 12939 | WALNUT AVE | SIXTH ST | EIGHTH ST | E | AC | 6 | 560 | 37 | 20,720 | 7/8/21 | 78 | 47 | 52 | 1 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2188 | 15387 | WOODWARD LN | VELARDO DR | CDS | E | AC | 8 | 770 | 36 | 29,520 | 4/15/26 | 78 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 248 | 14355 | BINGHAMPTON CIR | EFFINGHAM DR | CDS | E | AC | 8 | 495 | 36 | 19,320 | 4/10/24 | 78 | 68 | 13 | 19 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 859 | 15365 | GREGORY LN | GARFIELD AVE | CDS | E | AC | 7 | 1,164 | 27 | 31,428 | 4/8/24 | 78 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 125 | 15973 | ANCHORAGE DR | TOPEKA LN | TRIDENT LN | E | AC | 7 | 1,275 | 36 | 46,650 | 4/20/26 | 78 | 82 | 16 | 2 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1656 | 13961 | ROCKCREST LN | SAILPORT DR | YORKTOWN AVE | E | AC | 7 | 173 | 33 | 5,019 | 5/5/26 | 78 | 86 | 0 | 14 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1781 | 13780 | SEVILLA CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 4/8/26 | 78 | 34 | 25 | 41 | New Construction | 1/1/80 |
| 20 | 14043 | ALBATROSS DR | WINDWARD LN | WESTWINDS LN | E | AC | 7 | 1,012 | 36 | 36,432 | 4/20/26 | 78 | 88 | 5 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 413 | 14294 | CHANCE CIR | NATIONAL LN | CDS | E | AAC | 8 | 491 | 36 | 20,716 | 3/18/24 | 78 | 40 | 60 | 0 | Overlay - AC Structural | 5/11/18 |
| 953 | 13165 | HONOLULU LN | KAUI LN | SCENARIO DR | E | AC | 2 | 693 | 36 | 24,948 | 3/24/22 | 78 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 1509 | 13646 | PEMBERCO CIR | STERLING AVE | CDS | E | AAC | 4 | 130 | 32 | 5,660 | 4/13/26 | 78 | 35 | 55 | 10 | Overlay - AC Structural | 11/28/19 |
| 1722 | 14233 | SANDPIPER LN | REILLY DR | TERN CIR | E | AC | 9 | 261 | 36 | 9,396 | 8/24/23 | 78 | 32 | 54 | 14 | New Construction | 1/1/80 |
| 181 | 13264 | BALLANTINE LN | EDINGER AVE | BELLINGER DR | E | AC | 3 | 179 | 36 | 6,444 | 4/27/26 | 78 | 58 | 42 | 0 | New Construction | 1/1/80 |
| 185 | 15533 | BANFF LN | CREW DR | CDS | E | AC | 9 | 997 | 36 | 39,096 | 8/30/23 | 78 | 48 | 37 | 15 | New Construction | 1/1/80 |
| 1923 | 13704 | SUNNYCREST LN | MAR VISTA DR | END | E | AC | 1 | 481 | 36 | 19,316 | 4/8/26 | 78 | 56 | 44 | 0 | New Construction - Initial | 1/1/80 |
| 1965 | 13074 | TENTH ST | PALM AVE | CREST AVE | E | AC | 6 | 275 | 40 | 12,450 | 6/22/21 | 78 | 17 | 38 | 45 | Surface Treatment - Slurry Seal | 7/27/22 |
| 358 | 14881 | CAMELOT CIR | GLENROY DR | CDS | E | AC | 2 | 472 | 36 | 18,342 | 4/1/26 | 78 | 0 | 95 | 5 | New Construction | 1/1/80 |
| 16 | 15674 | ALABAMA ST | UTICA AVE. | WITCHITA AVE | E | AC | 6 | 650 | 36 | 23,400 | 6/29/21 | 78 | 70 | 20 | 10 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1455 | 15951 | ORIENT DR | CHUBASCO LN | COCOBANA LN | E | AC | 8 | 1,025 | 36 | 38,400 | 4/1/24 | 78 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1987 | 13156 | TISBURY CIR | MISTRAL DR | CDS | E | AC | 2 | 428 | 32 | 15,196 | 4/7/22 | 78 | 47 | 53 | 0 | New Construction - Initial | 1/1/80 |
| 2146 | 14866 | WHISTLER CIR | HERBERT LN | CDS | E | AC | 5 | 193 | 36 | 8,198 | 4/1/26 | 78 | 10 | 90 | 0 | New Construction - Initial | 1/1/80 |
| 540 | 14928 | CROWN CIR | BARWOOD DR | END | E | AC | 5 | 431 | 36 | 17,516 | 3/31/26 | 78 | 24 | 69 | 7 | New Construction | 1/1/80 |
| 1268 | 14240 | MATARO LN | VARAS CIR | ALVARADO DR | E | AC | 9 | 273 | 36 | 9,828 | 8/23/23 | 79 | 31 | 69 | 0 | New Construction | 1/1/80 |
| 1695 | 15007 | SADDLEBACK LN | ELLIS AVE | CDS | E | AC | 5 | 1,434 | 36 | 51,624 | 5/6/24 | 79 | 56 | 39 | 5 | Surface Treatment - Slurry Seal | 11/28/19 |
| 180 | 15034 | BALLAD LN | MINUET DR | PRELUDE DR | E | AC | 2 | 520 | 36 | 19,020 | 3/24/22 | 79 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 2090 | 15774 | VINELAND DR | NEWQUIST LN | END | E | AC | 2 | 304 | 36 | 10,944 | 4/1/26 | 79 | 37 | 63 | 0 | New Construction - Initial | 1/1/80 |
| 226 | 13436 | BELLFIELD LN | MIDWAY DR | GRIMSBY DR | E | AC | 5 | 203 | 36 | 7,308 | 3/31/26 | 79 | 38 | 53 | 9 | New Construction | 1/1/80 |
| 115 | 15187 | ALTAMIRANO LN | VILLA NUEVA DR | CADIZ CIR | E | AC | 5 | 1,101 | 36 | 41,136 | 5/23/24 | 79 | 78 | 20 | 2 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1424 | 13276 | NYANZA DR | MARJAN LN | TYEE LN | E | AC | 3 | 840 | 36 | 30,240 | 1/6/25 | 79 | 36 | 64 | 0 | New Construction | 1/1/80 |
| 1545 | 14827 | POLDER CIR | HAGUE LN | CDS | E | AC | 4 | 554 | 36 | 21,194 | 3/31/22 | 79 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1722 | 14228 | SANDPIPER LN | INDIANAPOLIS AVE | ALLEY INDIANAPOLIS AVE | E | AC | 9 | 152 | 36 | 5,472 | 8/24/23 | 79 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 213 | 14487 | BEACHSIDE DR | SEACREST LN | SEASIDE LN | E | AAC | 9 | 257 | 36 | 10,252 | 4/21/26 | 79 | 34 | 66 | 0 | Overlay - AC Structural | 5/11/19 |
| 2152 | 14192 | WHITETREE CIR | BAY MEADOW DR | END | E | AC | 8 | 426 | 34 | 16,284 | 2/23/22 | 79 | 53 | 15 | 32 | Surface Treatment - Slurry Seal | 2/13/23 |
| 670 | 13527 | ELBE CIR | RHINE DR | CDS | E | AC | 4 | 264 | 32 | 9,948 | 3/18/22 | 79 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1303 | 14798 | MICHAEL DR | JEFFERSON LN | CDS | E | AC | 4 | 81 | 36 | 4,416 | 5/13/24 | 79 | 34 | 64 | 2 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1794 | 13739 | SHELLY DR | BOLSA PARK LN | END | E | AC | 1 | 294 | 36 | 12,384 | 4/27/26 | 79 | 30 | 70 | 0 | New Construction | 1/1/80 |
| 1851 | 15286 | SPA DR | HAROLD PL | DOLLAR DR | E | AC | 1 | 776 | 36 | 27,936 | 4/8/22 | 79 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2019 | 13664 | TROPICANA LN | CHINOOK DR | SANDS DR | E | AC | 1 | 275 | 36 | 13,900 | 4/13/26 | 79 | 50 | 50 | 0 | New Construction - Initial | 1/1/80 |
| 2043 | 14717 | UTICA AVE | LAKE ST | PARK ST | E | AC | 6 | 650 | 36 | 23,400 | 7/8/21 | 79 | 19 | 37 | 44 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2197 | 13798 | YORKSHIRE LN | CANTERBURY DR | CUMBERLAND DR | E | AC | 1 | 276 | 36 | 9,936 | 1/6/25 | 79 | 26 | 38 | 36 | New Construction - Initial | 1/1/80 |
| 511 | 13696 | CORTEZ DR | SPRINGDALE ST | VANGUARD LN | E | AC | 1 | 370 | 36 | 14,070 | 4/28/26 | 79 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 830 | 14880 | GLENROY DR | GREENLEAF LN | NEWQUIST LN | E | AC | 2 | 321 | 36 | 12,696 | 4/1/26 | 79 | 19 | 78 | 3 | New Construction | 1/1/80 |
| 847 | 15915 | GRANT DR | WEYMOUTH LN | HARDING LN | E | AC | 7 | 942 | 37 | 34,854 | 4/2/24 | 79 | 55 | 45 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1300 | 14454 | MERMAID CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 79 | 33 | 67 | 0 | New Construction | 1/1/80 |
| 1811 | 14150 | SHOREWOOD CIR | ADAMS AVE | CDS | E | AC | 7 | 630 | 36 | 24,480 | 4/21/26 | 79 | 80 | 18 | 2 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1957 | 15901 | TARPON DR | WEAKFISH LN | SALMON LN | E | AC | 8 | 1,020 | 36 | 36,720 | 3/7/22 | 79 | 77 | 23 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1717 | 15182 | SAN ROQUE LN | SEGOVIA CIR | JARDINES DR | E | AAC | 5 | 730 | 36 | 27,030 | 5/23/24 | 79 | 18 | 74 | 8 | Overlay - AC Structural | 10/1/12 |
| 250 | 13245 | BIRDIE LN | VENTURI DR | MIDDLECOFF DR | E | AAC | 3 | 520 | 36 | 18,720 | 5/21/24 | 79 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 661 | 13006 | EIGHTEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/22/21 | 79 | 0 | 16 | 84 | Surface Treatment - Slurry Seal | 7/27/22 |
| 868 | 13320 | GUMM DR | TRUDY LN | END | E | AC | 3 | 672 | 36 | 24,192 | 4/6/26 | 79 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 896 | 13693 | HARMONY CIR | SUNNYCREST LN | END | E | AAC | 1 | 352 | 32 | 13,064 | 5/7/24 | 79 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1004 | 14785 | JAMESTOWN LN | WOODWIND DR | WINDFIELD DR | E | AC | 4 | 766 | 40 | 30,640 | 5/13/24 | 79 | 40 | 47 | 13 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1528 | 13036 | PINE ST | THIRTEENTH ST | ADAMS AVE | E | AC | 6 | 645 | 37 | 23,865 | 6/29/21 | 79 | 31 | 39 | 30 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1540 | 14882 | PLEASANT CIR | GLENROY DR | CDS | E | AC | 2 | 476 | 36 | 18,486 | 4/1/26 | 79 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 722 | 15495 | FARNSWORTH LN | ALLEY INDIANAPOLIS AVE | KINGFISHER DR | E | AC | 9 | 1,127 | 36 | 40,572 | 8/23/23 | 79 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 780 | 15784 | FREEBORN DR | ERWIN LN | EDWARDS ST | E | AAC | 5 | 785 | 36 | 28,590 | 5/22/24 | 79 | 0 | 94 | 6 | Overlay - AC Structural | 10/1/12 |
| 982 | 15582 | INLET DR | CLEARWATER CIR | LAKEVIEW DR | E | AC | 5 | 583 | 36 | 20,988 | 5/29/24 | 79 | 36 | 51 | 13 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1486 | 13770 | PARIS CIR | HANOVER LN | END | E | AC | 1 | 433 | 36 | 17,388 | 12/18/24 | 79 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 1648 | 15157 | ROB ROY CIR | MANHATTAN DR | END | E | AAC | 3 | 446 | 36 | 16,556 | 5/28/24 | 79 | 17 | 83 | 0 | Overlay - AC Structural | 10/1/12 |
| 434 | 15869 | CHICAGO AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 329 | 36 | 11,844 | 8/24/23 | 79 | 35 | 60 | 5 | New Construction | 1/1/80 |
| 5280 | 60445 | 9TH ST | PACIFIC N | PCH | E | AC | 2 | 211 | 21 | 4,431 | 4/23/26 | 79 | 26 | 74 | 0 | New Construction - Initial | 1/1/80 |
| 672 | 13077 | ELEVENTH ST | PALM AVE | MAIN ST | E | AC | 6 | 702 | 43 | 30,186 | 7/8/21 | 79 | 34 | 59 | 7 | Surface Treatment - Slurry Seal | 7/27/22 |
| 712 | 14395 | FAIRLANE CIR | RAMBLER DR | CDS | E | AC | 9 | 390 | 36 | 15,540 | 5/6/24 | 79 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 1353 | 14185 | MORRISTOWN CIR | MAMMOTH DR | CDS | E | AC | 8 | 579 | 32 | 20,028 | 3/1/22 | 79 | 43 | 54 | 3 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1893 | 13632 | STILL HARBOR LN | WINTERGREEN DR | KISER DR | E | AC | 5 | 260 | 36 | 10,110 | 5/21/24 | 79 | 78 | 22 | 0 | New Construction - Initial | 1/1/80 |
| 1990 | 14251 | TOBERMORY CIR | COLBREGGAN DR | CDS | E | AAC | 9 | 205 | 32 | 8,060 | 5/10/24 | 79 | 51 | 46 | 3 | Overlay - AC Structural | 5/11/18 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 662 | 13072 | EIGHTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 48 | 18,960 | 6/30/21 | 79 | 12 | 47 | 41 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1012 | 14973 | JENNY DR | LOCHLEA LN | NEWLAND ST | E | AC | 9 | 660 | 36 | 23,760 | 8/30/23 | 79 | 10 | 90 | 0 | New Construction | 1/1/80 |
| 1201 | 13285 | LOYOLA DR | TUFTS LN | WHITTIER LN | E | AC | 3 | 1,094 | 36 | 40,384 | 1/6/25 | 79 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 1242 | 13823 | MANUFACTURE LN | PRODUCTION DR | SYSTEM DR | E | AC | 1 | 339 | 40 | 13,810 | 4/1/22 | 79 | 44 | 53 | 3 | New Construction | 1/1/80 |
| 2017 | 14280 | TROON LN | ZETLAND DR | DUMBRECK DR | E | AAC | 8 | 236 | 36 | 9,876 | 3/18/24 | 79 | 0 | 58 | 42 | Overlay - AC Structural | 5/11/18 |
| 430 | 14071 | CHESAPEAKE LN | GRODON DDR | ADAMS AVE | E | AC | 7 | 1,063 | 36 | 39,268 | 4/16/26 | 79 | 74 | 26 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1726 | 15289 | SANDS LN | HAMMON LN | TROPICANA LN | E | AAC | 1 | 520 | 36 | 18,720 | 5/8/24 | 79 | 47 | 53 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1780 | 13070 | SEVENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 360 | 48 | 17,280 | 6/23/21 | 79 | 43 | 30 | 27 | New Construction | 1/1/80 |
| 1846 | 15145 | SONOMA DR | LA MESA LN | ELSINORE CIR | E | AAC | 5 | 499 | 36 | 17,964 | 5/24/24 | 79 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 2184 | 14286 | WOODLEA LN | FRIARSCOURT DR | JURA DR | E | AC | 8 | 783 | 36 | 28,188 | 3/19/24 | 79 | 62 | 37 | 1 | New Construction - Initial | 1/1/80 |
| 2291 | 17027 | ASTRONAUTICS LN | DELTA LN | RANCHO RD | E | AC | 1 | 1,592 | 36 | 61,512 | 4/7/26 | 79 | 10 | 73 | 17 | New Construction - Initial | 1/1/00 |
| 720 | 14933 | FANWOOD DR | GAINSFORD LN | RAINGLEN LN | E | AC | 5 | 389 | 36 | 14,754 | 3/31/26 | 79 | 29 | 66 | 5 | New Construction | 1/1/80 |
| 1452 | 13162 | OPERA LN | OPERETTA DR | SCENARIO DR | E | AC | 2 | 260 | 26 | 7,260 | 3/24/22 | 80 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 16 | 14653 | ALABAMA ST | ALLEY ADAMS AVE | ADAMS AVE | E | AC | 6 | 190 | 36 | 6,840 | 8/15/23 | 80 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1780 | 16033 | SEVENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/23/21 | 80 | 23 | 38 | 39 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2030 | 13079 | TWELFTH ST | PCH | WALNUT AVE | E | AC | 6 | 340 | 50 | 17,142 | 6/22/21 | 80 | 0 | 59 | 41 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2165 | 14956 | WILLIAMS AVE | FLORIDA ST | BEACH BLVD | E | AC | 7 | 660 | 36 | 23,760 | 4/9/24 | 80 | 45 | 39 | 16 | Surface Treatment - Slurry Seal | 11/28/19 |
| 438 | 15606 | CHRISTINE DR | SUSAN LN | ISLANDER LN | E | AAC | 9 | 532 | 36 | 19,152 | 4/22/26 | 80 | 28 | 62 | 10 | Overlay - AC Structural | 5/11/19 |
| 531 | 15807 | CRESTMOOR LN | WINDCROFT DR | BRIGHTON DR | E | AC | 5 | 661 | 36 | 23,796 | 3/31/26 | 80 | 53 | 41 | 6 | New Construction | 1/1/80 |
| 639 | 13735 | DUNDEE DR | BOLSA PARK LN | SOUTH END | E | AC | 1 | 485 | 36 | 18,960 | 4/8/26 | 80 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 337 | 14788 | BURTON DR | GRIFFIN LN | SAMPSON LN | E | AC | 4 | 126 | 40 | 5,040 | 5/8/24 | 80 | 44 | 46 | 10 | Surface Treatment - Slurry Seal | 11/1/19 |
| 651 | 13676 | EDGEVIEW LN | GLENWOOD DR | HARDWICK CIR | E | AC | 1 | 260 | 36 | 9,360 | 4/28/26 | 80 | 31 | 69 | 0 | New Construction | 1/1/80 |
| 680 | 13673 | ELMHURST CIR | BRIARCLIFF DR | END | E | AC | 1 | 505 | 36 | 19,930 | 5/6/26 | 80 | 21 | 79 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 871 | 14975 | HACIENDA DR | DUNES LN | SANDS DR | E | AAC | 1 | 1,230 | 36 | 44,280 | 5/8/24 | 80 | 41 | 57 | 2 | Overlay - AC Structural | 10/1/16 |
| 884 | 13784 | HANOVER LN | MELBOURNE DR | MC FADDEN AVE | E | AC | 1 | 512 | 36 | 18,144 | 5/8/26 | 80 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 1803 | 15130 | SHIELDS DR | TRUDY LN | EDWARDS ST | E | AC | 3 | 1,323 | 36 | 47,628 | 5/7/26 | 80 | 22 | 78 | 0 | New Construction | 1/1/80 |
| 549 | 13567 | CYPRESS AVE | OAK LN | ASH ST | E | AC | 4 | 447 | 36 | 16,092 | 5/30/24 | 80 | 0 | 93 | 7 | New Construction | 1/1/80 |
| 806 | 14633 | GENEVA AVE | ALLEY DELAWARE ST | ALLEY HARTFORD AVE | E | AC | 9 | 368 | 37 | 13,616 | 8/15/23 | 80 | 34 | 24 | 42 | New Construction | 1/1/80 |
| 1398 | 15652 | NICHOLS ST | WARNER AVE | CDS | E | AC | 4 | 615 | 36 | 23,940 | 3/31/22 | 80 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1475 | 14125 | PAGE CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 80 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1625 | 13367 | RENNRICK CIR | KRISTOPHER LN | END | E | AAC | 3 | 368 | 36 | 15,248 | 5/22/24 | 80 | 0 | 85 | 15 | Overlay - AC Structural | 10/1/12 |
| 1780 | 12952 | SEVENTH ST | PCH | WALNUT AVE | E | AC | 6 | 390 | 48 | 18,720 | 6/22/21 | 80 | 24 | 47 | 29 | Surface Treatment - Slurry Seal | 7/27/22 |
| 535 | 15181 | CRISTA PALMA DR | SAN ROQUE LN | AVILLA LN | E | AC | 5 | 1,108 | 36 | 40,638 | 5/23/24 | 80 | 34 | 66 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 764 | 14409 | FORD LN | WHETMORE LN | GOLDENWEST ST | E | AC | 3 | 177 | 36 | 5,784 | 5/28/24 | 80 | 16 | 84 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 981 | 14344 | INFERNO LN | ORIENT DR | VOLANTE DR | E | AC | 8 | 512 | 36 | 18,932 | 4/1/24 | 80 | 42 | 30 | 28 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1698 | 14453 | SAIL CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 80 | 35 | 65 | 0 | New Construction | 1/1/80 |
| 1931 | 14493 | SURFCREST DR | VACATION LN | HARBORBREEZE LN | E | AC | 9 | 259 | 36 | 9,324 | 3/26/24 | 80 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1942 | 16021 | SWANSEA LN | BURLCREST DR | CDS | E | AC | 7 | 956 | 36 | 35,916 | 4/16/26 | 80 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2030 | 13082 | TWELFTH ST | CREST AVE | MAIN ST | E | AC | 6 | 415 | 43 | 17,845 | 7/8/21 | 80 | 54 | 46 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1636 | 15243 | RHINE DR | DON DR | LOIRE CIR | E | AC | 4 | 520 | 36 | 18,720 | 3/18/22 | 80 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1748 | 14153 | SCOUGALL CIR | JOHNSON LN | CDS | E | AC | 7 | 323 | 32 | 11,836 | 4/21/26 | 80 | 18 | 82 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1971 | 12946 | THIRD ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 355 | 36 | 12,780 | 6/30/21 | 80 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1019 | 13292 | JIB CIR | RUDDER DR | CDS | E | AC | 2 | 499 | 36 | 21,240 | 4/7/22 | 80 | 55 | 43 | 2 | New Construction | 1/1/80 |
| 1128 | 15808 | LARKMONT DR | CRESTMOOR LN | HELENBROOK LN | E | AC | 5 | 517 | 36 | 19,362 | 3/31/26 | 80 | 31 | 66 | 3 | New Construction | 1/1/80 |
| 1630 | 13126 | RETHERFORD DR | SHERBECK LN | ROLLINS LN | E | AC | 3 | 1,010 | 36 | 37,110 | 4/7/26 | 80 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2153 | 15975 | WHITFORD LN | BRIGHTON DR | BERSHIRE DR | E | AC | 5 | 1,100 | 36 | 40,350 | 3/30/26 | 80 | 37 | 49 | 14 | New Construction - Initial | 1/1/80 |
| 334 | 14999 | BURLINGTON LN | CHESTERFIELD LN | ASHBURTON CIR | E | AC | 9 | 572 | 36 | 20,336 | 8/24/23 | 80 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 445 | 13979 | CINDY LN | KNEEP DR | GRAND DR | E | AC | 8 | 1,020 | 36 | 36,720 | 4/15/26 | 80 | 55 | 45 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 667 | 14861 | EL DORADO DR | NEWQUIST LN | ST ANDREWS LN | E | AC | 2 | 744 | 36 | 29,064 | 4/1/26 | 80 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 758 | 15005 | FLORIDA ST | PROFESSIONAL CIR | SHAFFER CIR | E | AC | 4 | 1,365 | 36 | 49,140 | 4/8/24 | 80 | 53 | 26 | 21 | Surface Treatment - Slurry Seal | 11/21/19 |
| 806 | 15878 | GENEVA AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 9 | 330 | 39 | 12,870 | 8/15/23 | 80 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 832 | 13679 | GLENWOOD DR | SHINKLE CIR | CHALET LN | E | AAC | 1 | 258 | 36 | 10,788 | 5/7/24 | 80 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1155 | 14865 | LESLIE LN | WARNER AVE | DUNBAR AVE | E | AC | 2 | 440 | 36 | 15,840 | 4/1/26 | 80 | 20 | 80 | 0 | New Construction - Initial | 1/1/80 |
| 1247 | 14407 | MARGARITA LN | FENWICK DR | BAKER DR | E | AAC | 3 | 300 | 36 | 11,550 | 5/21/24 | 80 | 0 | 93 | 7 | Overlay - AC Structural | 10/1/12 |
| 1709 | 14476 | SALUDA CIR | LANDFALL DR | CDS | E | AC | 9 | 472 | 36 | 18,492 | 4/25/24 | 80 | 0 | 48 | 52 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1731 | 15148 | SANTA YNEZ DR | LIDO LN | MIRA LOMA CIR | E | AC | 5 | 509 | 36 | 19,464 | 5/21/24 | 80 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 2055 | 13697 | VANGUARD LN | CORTEZ DR | SHEMAN DR | E | AC | 1 | 272 | 36 | 12,292 | 4/28/26 | 80 | 52 | 48 | 0 | New Construction - Initial | 1/1/80 |
| 2180 | 15165 | WOODBORO DR | BOLTON CIR | WELLBANK LN | E | AC | 5 | 1,214 | 36 | 44,704 | 3/30/26 | 80 | 7 | 83 | 10 | New Construction - Initial | 1/1/80 |
| 351 | 13665 | CALNEVA LN | CHINOOK DR | SAN SOUCI CIR | E | AC | 1 | 260 | 36 | 9,360 | 4/8/22 | 80 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 891 | 14544 | HARBOUR LN | MORNING STAR DR | END | E | AC | 2 | 761 | 36 | 27,396 | 4/7/22 | 80 | 14 | 83 | 3 | New Construction | 1/1/80 |
| 1248 | 14434 | MARIANA CIR | WELLINGTON CIR | CDS | E | AAC | 2 | 279 | 32 | 10,428 | 5/6/24 | 80 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1453 | 13152 | OPERETTA DR | FANTASIA LN | OPERA LN | E | AC | 2 | 1,060 | 36 | 38,660 | 3/24/22 | 80 | 0 | 81 | 19 | New Construction | 1/1/80 |
| 1654 | 14484 | ROCK POINT DR | OCEANVIEW LN | SEASIDE LN | E | AAC | 9 | 515 | 36 | 19,290 | 4/21/26 | 80 | 11 | 89 | 0 | Overlay - AC Structural | 5/11/19 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1801 | 13698 | SHERMAN DR | VANGUARD LN | SABRE LN | E | AC | 1 | 267 | 36 | 10,612 | 4/28/26 | 80 | 36 | 64 | 0 | New Construction | 1/1/80 |
| 1414 | 13257 | NORMANDY LN | MYRTLE DR | RINGO CIR | E | AC | 3 | 255 | 36 | 9,180 | 4/6/26 | 80 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1551 | 15614 | PORT CLYDE DR | CAPE MAY LN | ROCKPORT LN | E | AC | 9 | 612 | 36 | 24,032 | 4/17/24 | 80 | 64 | 36 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1697 | 13668 | SAHARA LN | CROUPIER CIR | NUGGET CIR | E | AC | 1 | 260 | 36 | 10,860 | 4/13/26 | 80 | 16 | 79 | 5 | New Construction | 1/1/80 |
| 1856 | 15733 | SPEER AVE | CRABB LN | MORGAN LN | E | AAC | 4 | 479 | 36 | 17,244 | 4/13/26 | 80 | 33 | 67 | 0 | Overlay - AC Structural | 11/1/19 |
| 930 | 14429 | HICKORY LN | BRABHAM DR | ANNIK DR | E | AC | 8 | 260 | 36 | 10,110 | 4/15/26 | 80 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1205 | 15189 | LUCIENTO DR | CADIZ CIR | SALAMANCA LN | E | AAC | 5 | 429 | 36 | 15,444 | 5/23/24 | 81 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 160 | 15151 | ATHENA DR | LIDO LN | MADERA LN | E | AAC | 5 | 1,020 | 36 | 36,720 | 5/22/24 | 81 | 0 | 99 | 1 | Overlay - AC Structural | 10/1/12 |
| 171 | 15985 | AVILLA LN | CRISTA PALMA DR | JARDINES DR | E | AAC | 5 | 971 | 36 | 34,668 | 5/22/24 | 81 | 10 | 90 | 0 | Overlay - AC Structural | 10/1/12 |
| 1765 | 14114 | SEAPORT DR | DUBLIN LN | LIGHTHOUSE LN | E | AAC | 9 | 135 | 36 | 4,860 | 8/21/23 | 81 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1825 | 13003 | SIXTEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 81 | 0 | 18 | 82 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1944 | 13566 | SYCAMORE AVE | OAK LN | ASH ST | E | AC | 4 | 447 | 36 | 16,092 | 5/30/24 | 81 | 10 | 87 | 3 | New Construction - Initial | 1/1/80 |
| 434 | 15870 | CHICAGO AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 36 | 17,460 | 8/24/23 | 81 | 12 | 40 | 48 | New Construction | 1/1/80 |
| 5360 | 60560 | 17TH ST | PACIFIC S | END | E | AC | 2 | 90 | 30 | 2,700 | 4/23/26 | 81 | 0 | 54 | 46 | New Construction - Initial | 1/1/80 |
| 979 | 13821 | INDUSTRIAL DR | CHEMICAL LN | GRAHAM ST | E | AAC | 1 | 1,170 | 40 | 46,800 | 5/3/24 | 81 | 43 | 55 | 2 | Overlay - AC Fabric | 10/1/16 |
| 1021 | 15892 | JOHSON LN | GUSS DR | BROWNING DR | E | AC | 7 | 750 | 36 | 27,000 | 4/21/26 | 81 | 47 | 44 | 9 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1311 | 14620 | MILLBRIDGE CIR | PORT GREENWICH LN | END | E | AC | 9 | 453 | 34 | 15,402 | 8/21/23 | 81 | 78 | 22 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1385 | 12869 | PALM AVE | MAIN ST | ELEVENTH ST | E | AC | 6 | 1,320 | 40 | 52,800 | 6/23/21 | 81 | 59 | 14 | 27 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1462 | 14678 | OSWEGO AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 162 | 36 | 5,544 | 8/14/23 | 81 | 55 | 45 | 0 | Overlay - AC Structural | 3/1/11 |
| 5 | 12873 | ACACIA AVE | ELEVENTH ST | FOURTEENTH ST | E | AC | 6 | 865 | 36 | 31,140 | 6/23/21 | 81 | 40 | 16 | 44 | Surface Treatment - Slurry Seal | 5/3/21 |
| 777 | 14909 | FRANS LN | GLENSTONE DR | CDS | E | AC | 5 | 193 | 36 | 8,198 | 4/2/26 | 81 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 1003 | 14868 | JAMES CIR | LYNN ST | ALLEY JAMES CIR | E | AC | 2 | 189 | 36 | 9,304 | 3/22/22 | 81 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 1374 | 13241 | NASSAU LN | VENTURI DR | MARSHALL DR | E | AC | 3 | 260 | 36 | 9,610 | 3/23/22 | 81 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 155 | 14593 | ASHWORTH CIR | CONSTITUTION DR | CDS | E | AC | 8 | 238 | 36 | 10,368 | 3/7/22 | 81 | 0 | 88 | 12 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2195 | 14326 | YARMOUTH LN | ST AUGUSTINE DR | HATTERAS DR | E | AC | 9 | 833 | 36 | 29,412 | 8/30/23 | 81 | 33 | 67 | 0 | New Construction - Initial | 1/1/80 |
| 221 | 14354 | BECKWOURTH CIR | CORNERBROOK DR | CDS | E | AC | 8 | 341 | 36 | 13,776 | 5/20/24 | 81 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 2293 | 14399 | BANNING AVE FRONTAGE | STARFIRE LN | CDS | E | AC | 9 | 370 | 27 | 11,790 | 4/17/24 | 81 | 71 | 25 | 4 | New Construction - Initial | 1/1/80 |
| 412 | 13680 | CHALET LN | GLENWOOD DR | ROYAL OAK DR | E | AAC | 1 | 280 | 36 | 13,080 | 5/7/24 | 81 | 0 | 97 | 3 | Overlay - AC Structural | 10/1/16 |
| 509 | 13332 | CORRINE CIR | COOPER LN | CDS | E | AC | 3 | 423 | 36 | 18,528 | 3/18/22 | 81 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 733 | 13749 | FIELDSTON LN | TYNDALL DR | SHELLY DR | E | AC | 1 | 274 | 36 | 11,364 | 4/27/26 | 81 | 13 | 83 | 4 | New Construction | 1/1/80 |
| 745 | 15954 | FIVE HARBORS DR | CDS | CDS | E | AAC | 9 | 1,056 | 32 | 36,792 | 5/6/24 | 81 | 38 | 62 | 0 | Overlay - AC Structural | 5/11/18 |
| 1025 | 15615 | JONESPORT LN | MELINDA CIR | ALLISON CIR | E | AC | 9 | 248 | 36 | 9,428 | 4/17/24 | 81 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1227 | 13188 | MALDEN CIR | SOMERSET LN | CDS | E | AC | 2 | 331 | 32 | 12,092 | 4/9/22 | 81 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 1254 | 15106 | MARJAN LN | EDINGER AVE | LAURELHURST DR | E | AC | 3 | 1,190 | 36 | 42,264 | 12/18/24 | 81 | 29 | 68 | 3 | New Construction | 1/1/80 |
| 1275 | 15154 | MAYOR LN | CORY DR | END | E | AAC | 3 | 368 | 36 | 15,748 | 5/22/24 | 81 | 13 | 87 | 0 | Overlay - AC Structural | 10/1/12 |
| 1281 | 13307 | MEADOW CIR | GRAHAM ST | CDS | E | AC | 2 | 451 | 36 | 18,036 | 4/2/26 | 81 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 369 | 13804 | CANTERBURY DR | YORKSHIRE LN | END | E | AC | 1 | 440 | 36 | 17,340 | 4/7/26 | 81 | 73 | 22 | 5 | New Construction | 1/1/80 |
| 807 | 13779 | GENOA CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 4/8/26 | 81 | 0 | 54 | 46 | New Construction | 1/1/80 |
| 980 | 13820 | INDUSTRY LN | MC FADDEN AVE | RESEARCH DR | E | AAC | 1 | 1,116 | 40 | 44,640 | 5/3/24 | 81 | 42 | 54 | 4 | Overlay - AC Fabric | 10/1/16 |
| 1222 | 14380 | MAHALO DR | KIOWA LN | KANEOHE LN | E | AC | 9 | 930 | 36 | 32,904 | 3/27/24 | 81 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 1375 | 16013 | NATIONAL LN | STAR DR | KITE DR | E | AC | 8 | 1,014 | 36 | 36,504 | 3/18/24 | 81 | 55 | 33 | 12 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1570 | 14129 | PRINCESS CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 81 | 85 | 15 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1682 | 13615 | RUDDER DR | GREEN ST | JIB CIR | E | AC | 2 | 446 | 36 | 16,056 | 4/7/22 | 81 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 1965 | 12989 | TENTH ST | MAIN ST | LAKE ST | E | AC | 6 | 648 | 37 | 23,976 | 7/8/21 | 81 | 25 | 73 | 2 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2052 | 15863 | VAN BUREN LN | SLATER AVE | MICHAEL DR | E | AAC | 4 | 541 | 36 | 18,888 | 5/13/24 | 81 | 33 | 66 | 1 | New Construction - Initial | 1/1/80 |
| 277 | 13386 | BOLTON CIR | WOODBORO DR | END | E | AC | 5 | 136 | 36 | 6,396 | 3/31/26 | 81 | 0 | 67 | 33 | New Construction - Initial | 1/1/80 |
| 501 | 14050 | CORAL CIR | WESTWINDS LN | CDS | E | AC | 7 | 232 | 36 | 8,352 | 4/20/26 | 81 | 39 | 58 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 533 | 14433 | CREW DR | BANFF LN | LOCHLEA LN | E | AC | 9 | 256 | 32 | 8,192 | 8/30/23 | 81 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 539 | 15291 | CROUPIER CIR | CALNEVA LN | SPRINGDALE ST | E | AC | 1 | 640 | 36 | 24,290 | 4/13/26 | 81 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 964 | 13857 | HUGHES DR | CARRIE LN | EDWARDS ST | E | AC | 1 | 531 | 36 | 19,116 | 12/19/24 | 81 | 54 | 46 | 0 | New Construction | 1/1/80 |
| 1131 | 13691 | LARKSPUR CIR | SUNNYCREST LN | END | E | AAC | 1 | 352 | 32 | 13,064 | 5/7/24 | 81 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1543 | 14028 | POE DR | DITMAR LN | RUMFORD LN | E | AAC | 7 | 261 | 36 | 9,396 | 8/17/23 | 81 | 56 | 42 | 2 | Overlay - AC Structural | 3/1/11 |
| 160 | 13364 | ATHENA DR | MADERA LN | EDWARDS ST | E | AAC | 5 | 170 | 36 | 6,120 | 5/22/24 | 81 | 0 | 99 | 1 | Overlay - AC Structural | 10/1/12 |
| 1768 | 15599 | SEASIDE LN | ROCK POINT DR | HIGHTIDE DR | E | AAC | 9 | 1,026 | 36 | 36,936 | 4/21/26 | 81 | 10 | 90 | 0 | Overlay - AC Structural | 5/11/19 |
| 1894 | 15551 | STILWELL DR | KROLL LN | SHAW LN | E | AC | 9 | 55 | 36 | 2,730 | 8/30/23 | 81 | 0 | 23 | 77 | New Construction - Initial | 1/1/80 |
| 481 | 13742 | COLUMBIA LN | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/27/26 | 81 | 0 | 63 | 37 | New Construction | 1/1/80 |
| 784 | 14901 | FRIML LN | ROGERS DR | KERN DR | E | AC | 5 | 1,120 | 36 | 40,320 | 4/1/26 | 81 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 864 | 14872 | GROVE CIR | SUMMERDALE DR | END | E | AAC | 5 | 246 | 36 | 10,584 | 5/30/24 | 81 | 36 | 64 | 0 | Overlay - AC Structural | 10/1/12 |
| 1160 | 14805 | LIBERTY AVE | JACQUELYN LN | ALLEY LIBERTY AVE | E | AAC | 4 | 155 | 36 | 5,580 | 4/13/26 | 81 | 0 | 100 | 0 | Overlay - AC Structural | 11/1/19 |
| 1373 | 15686 | NASHVILLE AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 485 | 37 | 17,649 | 8/14/23 | 81 | 49 | 51 | 0 | Overlay - AC Structural | 3/1/11 |
| 1606 | 14940 | RAPHAEL DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 35,892 | 3/30/26 | 81 | 58 | 29 | 13 | New Construction | 1/1/80 |
| 1609 | 14218 | RAVENWOOD LN | JON DAY DR | WARWICK DR | E | AC | 8 | 1,219 | 36 | 45,384 | 2/28/22 | 81 | 79 | 19 | 2 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1702 | 13433 | SALAMANCA LN | CARRANZA LN | LUCIENTO DR | E | AAC | 5 | 254 | 36 | 8,856 | 5/24/24 | 81 | 19 | 81 | 0 | Overlay - AC Structural | 10/1/12 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1711 | 15724 | SAMPSON LN | BURTON DR | WOODWIND DR | E | AC | 4 | 1,119 | 40 | 44,760 | 5/8/24 | 81 | 43 | 48 | 9 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1815 | 13210 | SILLIMAN DR | PHELPS LN | SAYBROOK LN | E | AAC | 2 | 871 | 36 | 31,356 | 5/10/24 | 81 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1871 | 15017 | ST GEORGE LN | WARNER AVE | ST PAUL CIR | E | AC | 5 | 335 | 36 | 13,200 | 5/20/24 | 81 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1895 | 13987 | STINGRAY LN | ALBACORE DR | VELARDO DR | E | AC | 8 | 709 | 36 | 27,524 | 3/7/22 | 81 | 69 | 28 | 3 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2086 | 15579 | VILLA NUEVA DR | CARRANZA NL | QUINTANA LN | E | AC | 5 | 512 | 36 | 18,432 | 5/23/24 | 81 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 2200 | 14766 | YUKON DR | HUNTINGTON ST | MANITOBA LN | E | AC | 4 | 478 | 45 | 22,260 | 5/13/24 | 81 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2291 | 17026 | ASTRONAUTICS LN | SKYLAB RD | DELTA LN | E | AC | 1 | 2,052 | 36 | 77,872 | 4/7/26 | 81 | 11 | 58 | 31 | New Construction - Initial | 1/1/00 |
| 240 | 14430 | BROOKHURST ST | KAMUELA DR. | YORKTOWN AVE | E | AC | 8 | 1,121 | 26 | 29,146 | 2/25/22 | 81 | 0 | 41 | 59 | Surface Treatment - Slurry Seal | 2/8/23 |
| 300 | 13127 | BREELAND DR | SHERBECK LN | GOLDENWEST ST | E | AC | 3 | 1,196 | 36 | 42,768 | 4/7/26 | 81 | 10 | 90 | 0 | New Construction | 1/1/80 |
| 307 | 15959 | BRIARLY LN | DOREMERE DR | LOWMEAD DR | E | AC | 7 | 1,007 | 36 | 37,002 | 4/20/26 | 81 | 86 | 14 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 453 | 15597 | CLEARBROOK DR | ARCHER CIR | CDS | E | AAC | 9 | 593 | 36 | 23,148 | 4/21/26 | 81 | 10 | 68 | 22 | Overlay - AC Structural | 5/11/19 |
| 478 | 15984 | COLLINS LN | MOTION CIR | COLLINS CIR | E | AC | 5 | 774 | 36 | 28,614 | 5/20/24 | 81 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 705 | 13896 | EVENING HILL DR | MANOR POINT CIR | SHADY HARBOR CIR | E | AC | 5 | 355 | 36 | 12,780 | 5/6/24 | 81 | 21 | 79 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 816 | 13376 | GIBSON CIR | MANHATTAN DR | END | E | AAC | 3 | 438 | 36 | 17,268 | 5/28/24 | 81 | 0 | 81 | 19 | Overlay - AC Structural | 10/1/12 |
| 860 | 14789 | GRIFFIN LN | SLATER AVE | BURTON DR | E | AC | 4 | 448 | 40 | 17,920 | 5/8/24 | 81 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 11/1/19 |
| 969 | 14711 | HUNTINGTON ST | SPRINGFIELD AVE | UTICA AVE | E | AC | 6 | 640 | 36 | 22,490 | 6/29/21 | 81 | 42 | 27 | 31 | Surface Treatment - Slurry Seal | 7/27/22 |
| 990 | 13369 | IRELAND LN | SHENLYN DR. | CORY DR | E | AAC | 3 | 259 | 36 | 10,074 | 5/22/24 | 81 | 13 | 87 | 0 | Overlay - AC Structural | 10/1/12 |
| 1002 | 14996 | JALM DR | NEWLAND ST | CDS | E | AC | 4 | 536 | 36 | 21,296 | 5/13/24 | 81 | 13 | 87 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1106 | 13283 | LAFAYETTE DR | POMONA LN | CDS | E | AC | 3 | 168 | 32 | 7,176 | 12/19/24 | 81 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 1264 | 15160 | MARYPORT DR | CRESTMOOR LN | SHOREHAM LN | E | AC | 5 | 524 | 36 | 18,864 | 3/31/26 | 81 | 0 | 94 | 6 | New Construction | 1/1/80 |
| 1386 | 13785 | NEWCASTLE LN | OXFORD DR | HALIFAX DR | E | AC | 1 | 1,040 | 36 | 37,152 | 4/8/26 | 81 | 50 | 38 | 12 | New Construction | 1/1/80 |
| 1519 | 15069 | PHELPS LN | DALE DR | CDS | E | AAC | 2 | 560 | 36 | 21,460 | 5/10/24 | 81 | 70 | 30 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1927 | 14989 | SUNSHINE DR | MAGNOLIA ST FRONTAGE | JETT DR | E | AC | 7 | 677 | 36 | 24,372 | 4/21/26 | 81 | 92 | 8 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 5000 | 60040 | NORTH PACIFIC | BROADWAY | 16TH ST | E | AC | 2 | 727 | 25 | 18,175 | 5/6/24 | 81 | 74 | 18 | 8 | New Construction - Initial | 1/1/80 |
| 573 | 14398 | DAYTONA CIR | STARFIRE LN | CDS | E | AC | 9 | 360 | 32 | 13,020 | 4/17/24 | 81 | 61 | 39 | 0 | New Construction | 1/1/80 |
| 856 | 14875 | GREENTREE LN | WARNER AVE | VINELAND DR | E | AC | 2 | 672 | 36 | 24,192 | 4/1/26 | 81 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1010 | 14801 | JEFFERSON LN | MICHAEL DR | DANY DR | E | AC | 4 | 260 | 36 | 9,072 | 5/13/24 | 81 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1505 | 12958 | PECAN AVE | ACACIA AVE | MAIN ST | E | AC | 6 | 42 | 65 | 2,380 | 7/8/21 | 81 | 23 | 77 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1699 | 13992 | SAILFISH DR | WEAKFISH LN | SALMON LN | E | AC | 8 | 1,019 | 36 | 36,684 | 3/7/22 | 81 | 43 | 50 | 7 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1940 | 14006 | SUVA LN | SAMOA DR | MAIKAI DR | E | AC | 8 | 281 | 36 | 10,116 | 3/7/22 | 81 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2126 | 15079 | WEATHERLY LN | WARNER AVE | ALADDIN DR | E | AC | 2 | 291 | 36 | 10,476 | 4/9/22 | 81 | 68 | 32 | 0 | New Construction - Initial | 1/1/80 |
| 231 | 13678 | BELMAR CIR | ROYAL OAK DR | END | E | AAC | 1 | 350 | 32 | 13,000 | 5/7/24 | 81 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 437 | 13592 | CHIPPER LN | SNEAD DR | MEADOWLARK DR | E | AC | 3 | 674 | 36 | 24,264 | 3/23/22 | 81 | 42 | 48 | 10 | New Construction | 1/1/80 |
| 1074 | 15482 | KINGS CANYON DR | INTERIOR LN | RUNNING SPRINGS LN | E | AC | 8 | 1,286 | 36 | 46,796 | 3/1/22 | 81 | 34 | 35 | 31 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1130 | 13055 | MAIN ST | ADAMS AVE | SEVENTEENTH ST | E | AAC | 6 | 1,191 | 30 | 11,910 | 6/29/21 | 81 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1217 | 15231 | MADDOX DR | ALLEY BARTLETT LN | TUNSTALL LN | E | AC | 3 | 158 | 36 | 5,688 | 4/9/22 | 81 | 57 | 43 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1275 | 13372 | MAYOR LN | SLATER AVE | CORY DR | E | AAC | 3 | 168 | 36 | 6,048 | 5/22/24 | 81 | 11 | 65 | 24 | Overlay - AC Structural | 10/1/12 |
| 1350 | 15056 | MORNING STAR DR | SAYBROOK LN | EDGEWATER LN | E | AAC | 2 | 794 | 36 | 28,584 | 5/10/24 | 81 | 42 | 58 | 0 | Overlay - AC Structural | 12/1/17 |
| 1516 | 13995 | PERCH CIR | TARPON DR | CDS | E | AC | 8 | 309 | 32 | 11,388 | 3/7/22 | 81 | 0 | 97 | 3 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1600 | 14175 | RAINIER CIR | INTERIOR LN | CDS | E | AC | 8 | 379 | 32 | 13,628 | 2/23/22 | 81 | 26 | 74 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 177 | 14408 | BAKER DR | MARGARITA LN | ROB ROY CIR | E | AAC | 3 | 249 | 36 | 9,714 | 5/28/24 | 81 | 19 | 79 | 2 | Overlay - AC Structural | 10/1/12 |
| 1780 | 12949 | SEVENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 390 | 48 | 18,720 | 6/23/21 | 81 | 11 | 45 | 44 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2047 | 13600 | VALENTINE DR | WHITTIER LN | GOLDENWEST ST | E | AC | 3 | 180 | 48 | 7,140 | 4/16/26 | 81 | 0 | 29 | 71 | New Construction - Initial | 1/1/80 |
| 846 | 15902 | GRAND DR | WATERBURY LN | CDS | E | AC | 8 | 1,026 | 36 | 38,736 | 4/15/26 | 81 | 80 | 20 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1164 | 15448 | LIGHTHOUSE LN | SEALROCK DR | END | E | AAC | 9 | 151 | 40 | 6,040 | 8/21/23 | 82 | 27 | 73 | 0 | Overlay - AC Structural | 3/1/11 |
| 124 | 14171 | ANCHOR CIR | CLOUDHAVEN DR | CDS | E | AC | 7 | 164 | 32 | 6,748 | 4/21/26 | 82 | 79 | 21 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1292 | 14522 | MELINDA CIR | JONESPORT LN | CDS | E | AC | 9 | 409 | 32 | 15,588 | 4/17/24 | 82 | 48 | 38 | 14 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1511 | 13700 | PENFIELD CIR | MAR VISTA DR | END | E | AC | 1 | 480 | 36 | 19,080 | 4/8/26 | 82 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 763 | 15987 | FORD DR | GOLDENWEST ST | END | E | AC | 3 | 966 | 36 | 34,776 | 5/13/24 | 82 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 1378 | 13293 | NEELY CIR | GREEN ST | CDS | E | AC | 2 | 269 | 36 | 10,934 | 4/7/22 | 82 | 50 | 47 | 3 | New Construction | 1/1/80 |
| 1619 | 14369 | REGATTA DR | POLYNESIAN LN | CDS | E | AAC | 9 | 480 | 36 | 18,780 | 3/26/24 | 82 | 62 | 38 | 0 | Overlay - AC Structural | 5/11/18 |
| 2043 | 15698 | UTICA AVE | PARK ST | MAIN ST | E | AC | 6 | 365 | 36 | 13,140 | 7/8/21 | 82 | 13 | 36 | 51 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2064 | 15852 | VENICE AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 6 | 450 | 36 | 16,100 | 7/8/21 | 82 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2167 | 14187 | WIND CAVE LN | MAMMOTH DR | BIG SUR DR | E | AC | 8 | 833 | 36 | 30,488 | 3/1/22 | 82 | 31 | 57 | 12 | Surface Treatment - Slurry Seal | 2/13/23 |
| 2170 | 15722 | WINDFIELD DR | JAMESTOWN LN | GEORGETOWN LN | E | AC | 4 | 283 | 40 | 11,320 | 5/13/24 | 82 | 44 | 51 | 5 | Surface Treatment - Slurry Seal | 11/1/19 |
| 306 | 13674 | BRIARCLIFF DR | SPRINGDALE ST | CHATEAU LN | E | AC | 1 | 180 | 36 | 6,480 | 5/6/26 | 82 | 70 | 30 | 0 | New Construction | 1/1/80 |
| 456 | 14738 | CLEVELAND DR | HUNTINGTON ST | CDS | E | AAC | 7 | 330 | 32 | 10,560 | 4/6/26 | 82 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 5010 | 60110 | SOUTH PACIFIC | 22ND ST | 19TH ST | E | AC | 2 | 706 | 25 | 17,650 | 4/23/26 | 82 | 24 | 71 | 5 | New Construction - Initial | 1/1/80 |
| 707 | 16018 | EVERGLADES LN | MAMMOTH DR | INDIANAPOLIS AVE | E | AC | 8 | 1,469 | 36 | 52,884 | 3/1/22 | 82 | 32 | 52 | 16 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1056 | 15783 | KENILWORTH DR | GREENLEAF LN | GRAHAM ST | E | AC | 2 | 1,400 | 36 | 50,400 | 4/1/26 | 82 | 22 | 75 | 3 | New Construction | 1/1/80 |
| 1197 | 14936 | LOURDES DR | MISTY LN | WRIGHTWOOD LN | E | AC | 5 | 1,013 | 36 | 36,192 | 3/30/26 | 82 | 63 | 28 | 9 | New Construction | 1/1/80 |
| 1446 | 16034 | OLIVE AVE | 22ND ST | GOLDENWEST ST | E | AC | 6 | 255 | 36 | 9,430 | 6/23/21 | 82 | 61 | 37 | 2 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1537 | 13274 | PITMAN LN | WALTON DR | LAURELHURST DR | E | AC | 3 | 1,010 | 36 | 35,784 | 12/18/24 | 82 | 25 | 75 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 325 | 15472 | BROWNING DR | HARBOR ISLE LN | CDS | E | AC | 7 | 557 | 32 | 20,124 | 4/21/26 | 82 | 38 | 62 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1160 | 15732 | LIBERTY AVE | CRABB LN | JACQUELYN LN | E | AAC | 4 | 325 | 36 | 11,700 | 4/13/26 | 82 | 38 | 62 | 0 | Overlay - AC Structural | 11/1/19 |
| 1185 | 14470 | MC FADDEN AVE | INDUSTRY LN | GRAHAM ST | E | AC | 1 | 256 | 44 | 11,264 | 3/21/22 | 82 | 42 | 31 | 27 | New Construction | 1/1/80 |
| 1303 | 14796 | MICHAEL DR | VAN BUREN ST | CDS | E | AC | 4 | 190 | 32 | 7,880 | 5/13/24 | 82 | 33 | 67 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1589 | 13569 | QUEENS LN | ALLEY BARTON DR | ALLEY SLATER AVE | E | AAC | 4 | 501 | 36 | 18,036 | 5/30/24 | 82 | 45 | 55 | 0 | Overlay - AC Structural | 10/1/12 |
| 1868 | 15768 | ST ANDREWS LN | EL DORADO DR | GLENROY DR | E | AC | 2 | 741 | 36 | 27,816 | 4/1/26 | 82 | 12 | 82 | 6 | New Construction | 1/1/80 |
| 228 | 14058 | BELLMEAD DR | BRIARLY LN | FELCLIFF LN | E | AC | 7 | 1,027 | 36 | 36,972 | 4/20/26 | 82 | 75 | 25 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 698 | 13174 | ESCAPADE CIR | SUNDANCER LN | CDS | E | AAC | 2 | 198 | 32 | 7,836 | 5/7/24 | 82 | 32 | 68 | 0 | Overlay - AC Fabric | 12/1/17 |
| 974 | 15572 | IMPALA LN | NEOLANI DR | MOKIHANA DR | E | AC | 9 | 1,013 | 36 | 37,218 | 4/24/24 | 82 | 48 | 52 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1291 | 15928 | MELBOURNE DR | HANOVER LN | VICTORIA LN | E | AC | 1 | 780 | 36 | 28,080 | 4/8/26 | 82 | 47 | 49 | 4 | New Construction | 1/1/80 |
| 1302 | 14791 | METZLER LN | BELVA DR | CDS | E | AC | 4 | 310 | 40 | 14,200 | 5/9/24 | 82 | 17 | 80 | 3 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1462 | 14679 | OSWEGO AVE | HUNTINGTON ST | DELAWARE ST | E | AAC | 6 | 660 | 36 | 23,184 | 8/14/23 | 82 | 41 | 59 | 0 | Overlay - AC Structural | 3/1/11 |
| 1563 | 15936 | PRELUDE DR | FANTASIA LN | BALLAD LN | E | AC | 2 | 800 | 36 | 28,800 | 3/24/22 | 82 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 1584 | 14924 | PUTNEY CIR | BARWOOD DR | END | E | AC | 5 | 313 | 36 | 13,268 | 3/31/26 | 82 | 0 | 77 | 23 | New Construction | 1/1/80 |
| 2155 | 15999 | WHITTIER LN | AUBURN DR | BRIDGEWATER DR | E | AC | 3 | 780 | 36 | 30,080 | 12/19/24 | 82 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2180 | 13384 | WOODBORO DR | WHITFORD LN | BOLTON CIR | E | AC | 5 | 340 | 36 | 11,952 | 3/31/26 | 82 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 246 | 15486 | BIG SUR DR | WIND CAVE LN | RUNNING SPRINGS LN | E | AC | 8 | 754 | 32 | 24,378 | 3/1/22 | 82 | 15 | 85 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 438 | 15607 | CHRISTINE DR | ISLANDER LN | CDS | E | AAC | 9 | 760 | 36 | 28,860 | 4/22/26 | 82 | 57 | 43 | 0 | Overlay - AC Structural | 5/11/19 |
| 890 | 15605 | HARBORBREEZE LN | SHOEBREEZE DR | SUMMERWIND LN | E | AAC | 9 | 770 | 36 | 29,720 | 4/21/26 | 82 | 0 | 94 | 6 | Overlay - AC Structural | 5/11/19 |
| 1 | 14829 | A ST | ROBIDOUX DR | WARNER AVE | E | AC | 4 | 644 | 36 | 23,184 | 3/31/22 | 82 | 0 | 39 | 61 | Surface Treatment - Slurry Seal | 7/29/20 |
| 15 | 14534 | AIRPORT CIR | CDS | WARNER AVE | E | AC | 2 | 664 | 36 | 25,154 | 4/2/26 | 82 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 197 | 13206 | BARUNA LN | NALU CIR | SEA WITCH LN | E | AC | 2 | 412 | 36 | 14,832 | 4/7/22 | 82 | 61 | 39 | 0 | New Construction | 1/1/80 |
| 2190 | 15368 | WORCHESTER LN | FALMOUTH DR | WENLOCK CIR | E | AAC | 7 | 1,180 | 36 | 43,639 | 4/14/26 | 82 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 5010 | 60130 | SOUTH PACIFIC | 16TH ST | BROADWAY | E | AC | 2 | 727 | 25 | 18,175 | 4/23/26 | 82 | 28 | 72 | 0 | New Construction - Initial | 1/1/80 |
| 969 | 14737 | HUNTINGTON ST | YORKTOWN AVE | SEVENTEENTH ST | E | AAC | 7 | 317 | 36 | 11,412 | 4/6/26 | 82 | 16 | 84 | 0 | Overlay - AC Structural | 11/28/19 |
| 1288 | 14151 | MEDITERRANEAN DR | MAGNOLIA ST | HARBOR ISLE LN | E | AC | 7 | 1,117 | 36 | 40,212 | 4/16/26 | 82 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 142 | 14480 | ARCHER CIR | CLEARBROOK DR | CDS | E | AAC | 9 | 415 | 36 | 16,440 | 4/21/26 | 82 | 31 | 56 | 13 | Overlay - AC Structural | 5/11/19 |
| 1631 | 15064 | SAYBROOK LN | TALISMAN LN | SILLMAN DR | E | AAC | 2 | 392 | 36 | 14,112 | 5/10/24 | 82 | 63 | 37 | 0 | Overlay - AC Structural | 12/1/17 |
| 2207 | 13557 | SLATER AVE FRONTAGE RD | LUCERO L N | CDS | E | AC | 3 | 232 | 27 | 7,464 | 5/20/24 | 82 | 53 | 35 | 12 | New Construction | 1/1/80 |
| 397 | 13371 | CASPERS CIR | CORY DR | END | E | AAC | 3 | 369 | 36 | 15,084 | 5/22/24 | 82 | 0 | 98 | 2 | Overlay - AC Structural | 10/1/12 |
| 719 | 15937 | FANTASIA LN | TENOR DR | SCENARIO DR | E | AC | 2 | 940 | 36 | 34,140 | 3/24/22 | 82 | 65 | 35 | 0 | New Construction | 1/1/80 |
| 1018 | 14152 | JETT DR | SUNSHINE DR | JOHNSON LN | E | AC | 7 | 255 | 36 | 9,180 | 4/21/26 | 82 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1223 | 15398 | MAIKAI DR | TONGA LN | END | E | AC | 8 | 864 | 36 | 32,904 | 3/7/22 | 82 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1679 | 15296 | ROYAL OAK DR | SUNNYCREST LN | EDWARDS ST | E | AC | 1 | 452 | 36 | 15,984 | 4/29/26 | 82 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 1969 | 13525 | THAMES LN | SEINE DR | RHINE DR | E | AC | 4 | 406 | 36 | 14,616 | 3/18/22 | 82 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 197 | 15071 | BARUNA LN | DAVENPORT DR | KITTEN CIR | E | AC | 2 | 607 | 36 | 21,852 | 4/7/22 | 82 | 72 | 28 | 0 | New Construction | 1/1/80 |
| 5200 | 60350 | 2ND ST | NORTH PACIFIC | SOUTH PACIFIC | E | AC | 2 | 200 | 25 | 5,000 | 4/23/26 | 82 | 37 | 41 | 22 | New Construction - Initial | 1/1/80 |
| 728 | 13887 | FEOLA CIR | BREELAND DR | END | E | AC | 3 | 560 | 36 | 21,960 | 4/7/26 | 82 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 959 | 14197 | HOT SPRINGS DR | EVERGLADES LN | RUNNING SPRINGS LN | E | AC | 8 | 1,006 | 36 | 36,716 | 3/1/22 | 82 | 43 | 32 | 25 | Surface Treatment - Slurry Seal | 2/13/23 |
| 961 | 13275 | HOWLAND LN | LENNOX DR | EDGEMONT DR | E | AC | 3 | 1,058 | 36 | 38,088 | 12/19/24 | 82 | 19 | 81 | 0 | New Construction | 1/1/80 |
| 1009 | 15127 | JEAN DR | BUSBY LN | TRUDY LN | E | AC | 3 | 520 | 36 | 18,552 | 4/6/26 | 82 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 1102 | 13657 | LA PALMA DR | PATTERSON LN | CDS | E | AAC | 4 | 281 | 32 | 10,492 | 4/13/26 | 82 | 36 | 35 | 29 | Overlay - AC Structural | 11/28/19 |
| 1111 | 15826 | LAKEVIEW DR | INLET DR | CLIFFVIEW LN | E | AC | 5 | 700 | 30 | 21,750 | 5/29/24 | 82 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1325 | 14394 | MOKIHANA DR | ALLEY BUSHARD ST | BUSHARD ST | E | AAC | 9 | 120 | 36 | 4,320 | 5/6/24 | 82 | 60 | 40 | 0 | Overlay - AC Structural | 5/11/18 |
| 164 | 15029 | AUDREY DR | TOMAS LN | WARREN LN | E | AC | 2 | 1,005 | 36 | 36,180 | 3/24/22 | 82 | 11 | 89 | 0 | New Construction | 1/1/80 |
| 1902 | 15558 | STRATHMOOR LN | ATLANTA AVE | BLUEFIELD DR | E | AC | 8 | 681 | 36 | 24,228 | 4/1/24 | 82 | 0 | 31 | 69 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2035 | 13277 | TYEE LN | NYANZA DR | LAURELHURST DR | E | AC | 3 | 260 | 36 | 10,110 | 1/6/25 | 82 | 35 | 65 | 0 | New Construction - Initial | 1/1/80 |
| 2166 | 14953 | WILLOW LN | CHINOOK AVE | END | E | AC | 1 | 397 | 36 | 14,292 | 4/8/22 | 82 | 26 | 74 | 0 | New Construction - Initial | 1/1/80 |
| 551 | 15258 | DAIRYVIEW CIR | END | END | E | AAC | 4 | 511 | 36 | 21,396 | 5/28/24 | 82 | 39 | 37 | 24 | Overlay - AC Structural | 10/1/12 |
| 580 | 15404 | DEEPCLIFF DR | DRYBROOK LN | END | E | AAC | 7 | 528 | 36 | 19,008 | 8/17/23 | 82 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 602 | 15969 | DITMAR LN | DEEPCLIFF DR | HURSTWELL DR | E | AC | 7 | 986 | 36 | 35,496 | 8/17/23 | 82 | 0 | 77 | 23 | New Construction | 1/1/80 |
| 691 | 14669 | ENGLAND ST | LINCOLN AVE | MEMPHIS AVE | E | AAC | 6 | 331 | 36 | 11,916 | 8/15/23 | 82 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 758 | 15711 | FLORIDA ST | WILLIAMS AVE | CLAY AVE | E | AC | 7 | 660 | 36 | 23,760 | 4/9/24 | 82 | 44 | 56 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1023 | 14704 | JOLIET AVE | GEORGIA ST | BEACH BLVD | E | AC | 6 | 315 | 37 | 11,655 | 8/15/23 | 82 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 1069 | 15308 | KIMBERLY DR | CAPETOWN LN | END | E | AC | 1 | 794 | 36 | 30,384 | 12/26/24 | 82 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 109 | 14915 | ALMELO LN | GHENT DR | NORDINA DR | E | AC | 5 | 1,125 | 36 | 40,500 | 4/1/26 | 82 | 57 | 43 | 0 | New Construction | 1/1/80 |
| 1398 | 15838 | NICHOLS ST | BELSITO DR | WARNER AVE | E | AC | 0 | 670 | 44 | 29,480 | 5/8/24 | 82 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 158 | 13720 | ASSEMBLY LN | MACHINE DR | MC FADDEN AVE | E | AC | 1 | 818 | 40 | 32,720 | 4/8/26 | 82 | 45 | 28 | 27 | New Construction | 1/1/80 |
| 1775 | 15161 | SELKIRK DR | FALKIRK LN | DENVALE CIR | E | AC | 5 | 765 | 36 | 27,264 | 3/30/26 | 82 | 31 | 64 | 5 | New Construction | 1/1/80 |
| 1849 | 15447 | SOUTHPORT DR | CAPE COTTAGE LN | END | E | AAC | 9 | 372 | 36 | 13,392 | 8/21/23 | 82 | 69 | 31 | 0 | Overlay - AC Structural | 3/1/11 |
| 2086 | 15580 | VILLA NUEVA DR | QUINTANA LN | END | E | AC | 5 | 381 | 36 | 13,428 | 5/20/24 | 82 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 586 | 14076 | DELAFIELD CIR | ROCKLAND LN | CDS | E | AC | 8 | 309 | 32 | 11,688 | 3/9/22 | 82 | 74 | 24 | 2 | Surface Treatment - Slurry Seal | 2/8/23 |
| 628 | 15595 | DRUMBEAT DR | BUSHARD ST | CDS | E | AC | 9 | 365 | 32 | 13,480 | 4/25/24 | 82 | 0 | 47 | 53 | Surface Treatment - Slurry Seal | 5/11/19 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 808 | 13596 | GENTRY LN | MYRTLE DR | SHAYNE DR | E | AC | 3 | 1,016 | 36 | 37,076 | 4/6/26 | 82 | 64 | 36 | 0 | New Construction | 1/1/80 |
| 1053 | 15473 | KELVINGROVE LN | INDIANAPOLIS AVE | CDS | E | AC | 7 | 493 | 32 | 17,576 | 4/21/26 | 83 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 1194 | 15941 | LOS PATOS AVE | WARNER AVE | SIMS ST | E | AC | 2 | 1,174 | 36 | 43,764 | 3/22/22 | 83 | 45 | 24 | 31 | New Construction | 1/1/80 |
| 126 | 15304 | ANDAMAN LN | TASMAN DR | CASPIAN CIR | E | AC | 1 | 548 | 36 | 19,728 | 3/21/22 | 83 | 53 | 24 | 23 | New Construction | 1/1/80 |
| 1880 | 15590 | STARDUST DR | NEVADA DR | HAMMON LN | E | AC | 1 | 790 | 36 | 28,440 | 4/9/22 | 83 | 43 | 57 | 0 | New Construction | 1/1/80 |
| 2185 | 14521 | WOODS HOLE DR | ROCKPORT LN | JONESPORT LN | E | AC | 9 | 254 | 36 | 8,856 | 4/17/24 | 83 | 11 | 89 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 250 | 15084 | BIRDIE LN | LITTLER DR | VENTURI DR | E | AAC | 3 | 1,014 | 36 | 36,504 | 5/21/24 | 83 | 23 | 72 | 5 | Overlay - AC Structural | 10/1/16 |
| 505 | 13759 | CORNELL DR | COLUMBIA LN | EDWARDS ST | E | AC | 1 | 645 | 36 | 22,644 | 12/18/24 | 83 | 77 | 16 | 7 | New Construction | 1/1/80 |
| 545 | 14885 | CURTIS CIR | GREEN ST | CDS | E | AC | 2 | 407 | 36 | 14,652 | 3/22/22 | 83 | 21 | 45 | 34 | New Construction | 1/1/80 |
| 695 | 15651 | ERNEST AVE | GOLDENWEST ST | GOTHARD ST | E | AC | 4 | 1,321 | 40 | 52,840 | 3/5/24 | 83 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 885 | 14987 | HAPPY DR | JOLLY LN | JOYFUL LN | E | AC | 4 | 509 | 36 | 18,324 | 5/13/24 | 83 | 15 | 85 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1373 | 14680 | NASHVILLE AVE | HUNTINGTON ST | DELAWARE ST | E | AAC | 6 | 660 | 37 | 23,828 | 8/14/23 | 83 | 19 | 81 | 0 | Overlay - AC Structural | 3/1/11 |
| 1422 | 13669 | NUGGET CIR | SAHARA LN | END | E | AC | 1 | 270 | 36 | 11,220 | 4/13/26 | 83 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1523 | 15555 | PIER DR | NORTHSHORE LN | CDS | E | AC | 9 | 547 | 36 | 21,492 | 3/20/24 | 83 | 31 | 69 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 350 | 14249 | CALLIEBURN CIR | COLBREGGAN DR | CDS | E | AAC | 9 | 206 | 32 | 9,392 | 5/10/24 | 83 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/18 |
| 640 | 13663 | DUNES LN | HACIENDA DR | CHINOOK DR | E | AC | 1 | 260 | 36 | 9,360 | 4/8/22 | 83 | 46 | 33 | 21 | New Construction | 1/1/80 |
| 1163 | 14890 | LIEGE DR | CHAPPARAL LN | WILD ROSE LN | E | AC | 5 | 629 | 36 | 22,644 | 4/1/26 | 83 | 61 | 39 | 0 | New Construction | 1/1/80 |
| 1431 | 15423 | OCCIDENTAL LN | VERONICA DR | MADELINE DR | E | AC | 7 | 827 | 36 | 31,272 | 4/20/26 | 83 | 83 | 3 | 14 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1588 | 14774 | QUEBEC DR | HUNTINGTON DR | CDS | E | AC | 4 | 150 | 34 | 6,600 | 5/13/24 | 83 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1672 | 15141 | ROSEMONT DR | SPRINGDALE ST | AUTUMN CIR | E | AAC | 5 | 440 | 36 | 15,840 | 5/21/24 | 83 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1784 | 14755 | SHAFFER CIR | FLORIDA ST | CDS | E | AAC | 4 | 184 | 34 | 6,256 | 5/5/26 | 83 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1982 | 13977 | TIGERFISH CIR | VELARDO DR | CDS | E | AC | 8 | 450 | 36 | 18,200 | 3/7/22 | 83 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1084 | 13221 | KITTEN CIR | BARUNA LN | CDS | E | AC | 2 | 170 | 36 | 6,120 | 4/7/22 | 83 | 50 | 45 | 5 | New Construction | 1/1/80 |
| 1147 | 13219 | LEGEND CIR | BARUNA LN | CDS | E | AC | 2 | 170 | 36 | 7,620 | 4/7/22 | 83 | 74 | 26 | 0 | New Construction - Initial | 1/1/80 |
| 119 | 15806 | AMBERTON LN | HELMSIDE DR | MARYPORT DR | E | AC | 5 | 551 | 36 | 20,836 | 3/30/26 | 83 | 43 | 49 | 8 | New Construction | 1/1/80 |
| 1321 | 14238 | MISSION LN | ALVARADO DR | END | E | AC | 9 | 481 | 36 | 17,316 | 8/23/23 | 83 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 1473 | 14154 | PADDOCK CIR | JOHNSON LN | CDS | E | AC | 7 | 324 | 32 | 10,368 | 4/21/26 | 83 | 0 | 95 | 5 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1685 | 15487 | RUNNING SPRINGS LN | MAMMOTH DR | HOT SPRINGS DR | E | AC | 8 | 1,341 | 36 | 49,026 | 3/1/22 | 83 | 25 | 38 | 37 | Surface Treatment - Slurry Seal | 2/13/23 |
| 348 | 15052 | CALIENTE DR | SARATOGA LN | SANTA ANITA LN | E | AAC | 2 | 520 | 36 | 19,220 | 5/21/24 | 83 | 59 | 41 | 0 | Overlay - AC Fabric | 10/1/16 |
| 349 | 14640 | CALIFORNIA ST | GENEVA AVE | HARTFORD AVE | E | AC | 9 | 331 | 37 | 12,247 | 8/24/23 | 83 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 452 | 15712 | CLAY AVE | FLORIDA ST | BEACH BLVD | E | AC | 7 | 661 | 36 | 23,796 | 4/9/24 | 83 | 0 | 65 | 35 | Surface Treatment - Slurry Seal | 4/1/17 |
| 819 | 13936 | GILFORD CIR | NEWHAVEN LN | CDS | E | AC | 7 | 408 | 36 | 17,768 | 4/2/24 | 83 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 969 | 15709 | HUNTINGTON ST | SEVENTEENTH ST | CLAY AVE | E | AAC | 7 | 1,105 | 36 | 39,780 | 4/6/26 | 83 | 37 | 63 | 0 | Overlay - AC Structural | 11/28/19 |
| 12 | 14164 | ADRIAN CIR | END | HAZELBROOK DR | E | AC | 7 | 496 | 36 | 19,356 | 4/16/26 | 83 | 72 | 25 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1621 | 15883 | REILLY DR | FARNSWORTH LN | SANDPIPER LN | E | AC | 9 | 796 | 36 | 28,656 | 8/24/23 | 83 | 53 | 33 | 14 | New Construction | 1/1/80 |
| 1979 | 15478 | TIDELAND LN | CLIFFWOOD DR | CLOUDHAVEN DR | E | AC | 7 | 350 | 36 | 14,100 | 4/21/26 | 83 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 814 | 15789 | GHENT DR | BREDA LN | WILD ROSE LN | E | AC | 5 | 513 | 36 | 18,718 | 4/2/26 | 83 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 974 | 14396 | IMPALA LN | MOKIHANA DR | HUDSON DR | E | AC | 9 | 260 | 36 | 10,110 | 4/24/24 | 83 | 75 | 25 | 0 | New Construction | 1/1/80 |
| 1463 | 14600 | OVERLOOK DR | EDWARDS ST | WILDFLOWER LN | E | AC | 5 | 403 | 36 | 14,508 | 5/7/24 | 83 | 37 | 41 | 22 | New Construction | 1/1/80 |
| 1614 | 16006 | REDLANDS LN | LAFAYETTE DR | HEIL AVE | E | AC | 3 | 1,228 | 36 | 44,208 | 12/19/24 | 83 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 1878 | 15523 | STAR DR | REEF LN | SKIMMER LN | E | AC | 8 | 1,008 | 36 | 35,744 | 3/18/24 | 83 | 25 | 63 | 12 | Surface Treatment - Slurry Seal | 5/11/18 |
| 758 | 15710 | FLORIDA ST | GARFIELD AVE | CLAY AVE | E | AC | 7 | 1,320 | 40 | 52,800 | 4/9/24 | 83 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1477 | 16016 | PAISLEY LN | CAITHNESS DR | NETHERWAY DR | E | AC | 8 | 758 | 36 | 29,640 | 3/18/24 | 83 | 37 | 42 | 21 | Surface Treatment - Slurry Seal | 5/11/18 |
| 204 | 15620 | BAY VIEW DR | BROADWAY | END | E | AC | 2 | 420 | 27 | 11,340 | 4/9/22 | 83 | 78 | 15 | 7 | New Construction | 1/1/80 |
| 2044 | 14492 | VACATION LN | SURFCREST DR | HIGHTIDE DR | E | AC | 9 | 560 | 36 | 20,910 | 5/5/26 | 83 | 51 | 46 | 3 | New Construction - Initial | 1/1/80 |
| 2103 | 15031 | WAIKIKI LN | TRAVELWAY | KONA DR | E | AC | 2 | 587 | 36 | 21,132 | 3/24/22 | 83 | 54 | 46 | 0 | New Construction - Initial | 1/1/80 |
| 5000 | 60000 | NORTH PACIFIC | WARNER AVE | 5TH ST | E | AC | 2 | 1,347 | 20 | 26,940 | 5/6/24 | 83 | 73 | 27 | 0 | New Construction - Initial | 1/1/80 |
| 903 | 14634 | HARTFORD AVE | HUNTINGTON ST | CALIFORNIA ST | E | AC | 9 | 330 | 37 | 12,210 | 8/14/23 | 83 | 26 | 51 | 23 | New Construction | 1/1/80 |
| 1195 | 13308 | LOS VERDES LN | HEIL AVE | MEADOWBROOK DR | E | AC | 3 | 321 | 36 | 10,968 | 4/2/26 | 83 | 69 | 31 | 0 | New Construction | 1/1/80 |
| 1313 | 13609 | MILO ST | SIMS ST | BLANTON ST | E | AC | 2 | 330 | 36 | 12,860 | 3/22/22 | 83 | 68 | 25 | 7 | New Construction | 1/1/80 |
| 1519 | 13204 | PHELPS LN | BRANFORD DR | CALHOUN DR | E | AC | 2 | 264 | 36 | 9,504 | 3/24/22 | 83 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 1573 | 13248 | PRO CIR | FERNHILL CIR | END | E | AC | 3 | 183 | 34 | 8,022 | 4/2/26 | 83 | 0 | 81 | 19 | New Construction | 1/1/80 |
| 1827 | 14267 | SKI HARBOR CIR | BEACHWOOD LN | CDS | E | AC | 9 | 303 | 32 | 11,196 | 5/6/24 | 83 | 33 | 49 | 18 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1841 | 15497 | SNOWBIRD DR | SCHOONER LN | BASTIA LN | E | AC | 9 | 624 | 36 | 22,464 | 8/23/23 | 83 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 2084 | 14994 | VIEWPOINT LN | CHRYSLER CIR | TERRY DR | E | AC | 4 | 689 | 36 | 24,804 | 4/6/22 | 83 | 64 | 36 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2141 | 14046 | WESTWINDS LN | ALBATROSS DR | SHORE CIR | E | AC | 7 | 260 | 36 | 10,110 | 4/20/26 | 83 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 302 | 15891 | BRENTSTONE LN | BURLCREST DR | CHARFORD DR | E | AC | 7 | 1,183 | 36 | 42,588 | 4/16/26 | 83 | 59 | 37 | 4 | Surface Treatment - Slurry Seal | 7/15/21 |
| 390 | 13988 | CARP CIR | VERLARDO DR | CDS | E | AC | 8 | 449 | 36 | 18,164 | 3/7/22 | 83 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 677 | 14255 | ELLSWORTH DR | MAGNOLIA ST | KELVIN LN | E | AC | 9 | 176 | 32 | 5,632 | 5/9/24 | 83 | 37 | 60 | 3 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1435 | 14494 | OCEANCREST DR | SUMMERWIND LN | CDS | E | AAC | 9 | 130 | 34 | 5,920 | 4/21/26 | 83 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 1612 | 14345 | RED JACKET CIR | ORIENT DR | CDS | E | AC | 8 | 451 | 36 | 16,236 | 4/1/24 | 83 | 14 | 86 | 0 | New Construction | 1/1/80 |
| 264 | 14348 | BLUEFIELD DR | COCOBANA LN | STRATHMOOR LN | E | AAC | 8 | 250 | 36 | 9,000 | 4/1/24 | 83 | 23 | 33 | 44 | Overlay - AC Structural | 5/11/18 |
| 5000 | 60060 | NORTH PACIFIC | 19TH ST | 22ND ST | E | AC | 2 | 706 | 25 | 17,650 | 5/6/24 | 83 | 38 | 21 | 41 | New Construction - Initial | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 5390 | 60600 | 20TH ST | PCH | PACIFIC N | E | AC | 2 | 87 | 23 | 2,001 | 4/23/26 | 83 | 0 | 68 | 32 | New Construction - Initial | 1/1/80 |
| 630 | 15970 | DRYBROOK LN | DEEPCLIFF DR | HURSTWELL DR | E | AC | 7 | 991 | 36 | 35,676 | 8/17/23 | 83 | 56 | 38 | 6 | Surface Treatment - Slurry Seal | 3/1/11 |
| 942 | 13137 | HILO CIR | WAIKIKI LN | CDS | E | AC | 2 | 535 | 36 | 19,260 | 3/24/22 | 83 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 956 | 15503 | HOPETOWN LN | ELLSWORTH DR | SPENCER CIR | E | AC | 9 | 602 | 36 | 21,672 | 5/9/24 | 83 | 37 | 62 | 1 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1238 | 14767 | MANITOBA LN | ALBERTA DR | YUKON DR | E | AC | 4 | 246 | 36 | 9,856 | 5/13/24 | 83 | 0 | 94 | 6 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1489 | 13543 | PARKER CIR | ROSS LN | CDS | E | AC | 4 | 244 | 32 | 9,058 | 3/31/22 | 83 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 178 | 14511 | BALBOA CIR | MOLOKAI DR | CDS | E | AAC | 9 | 313 | 32 | 11,516 | 4/22/26 | 83 | 40 | 56 | 4 | Overlay - AC Structural | 5/11/19 |
| 1857 | 14254 | SPENCER CIR | HOPETOWN LN | CDS | E | AAC | 9 | 245 | 32 | 7,840 | 5/6/24 | 83 | 24 | 73 | 3 | Overlay - AC Structural | 5/11/18 |
| 2032 | 13023 | TWENTY-FIRST ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 83 | 79 | 16 | 5 | Surface Treatment - Slurry Seal | 7/27/22 |
| 467 | 14347 | COCOBANA LN | ORIENT DR | BLUEFIELD DR | E | AC | 8 | 507 | 36 | 19,002 | 4/1/24 | 83 | 0 | 58 | 42 | Surface Treatment - Slurry Seal | 5/11/18 |
| 983 | 15900 | INNSBRUCK DR | BUSHARD ST FRONTAGE | TIBBETT LN | E | AC | 8 | 1,167 | 36 | 42,512 | 3/9/22 | 83 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1179 | 15535 | LOCHLEA LN | JENNY DR | HILLHEAD CIR | E | AC | 9 | 660 | 36 | 23,760 | 8/30/23 | 84 | 33 | 61 | 6 | New Construction | 1/1/80 |
| 1284 | 13149 | MEADOWLARK DR | EAGLE LN | BIRDIE LN | E | AAC | 3 | 265 | 36 | 9,540 | 5/9/24 | 84 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 129 | 15223 | ANITA LN | SHER LN | NANCY DR | E | AC | 4 | 1,054 | 36 | 37,944 | 3/18/22 | 84 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1502 | 13294 | PEARCE ST | GREEN ST | BOLSA CHICA ST | E | AC | 2 | 660 | 36 | 23,760 | 3/22/22 | 84 | 61 | 33 | 6 | New Construction | 1/1/80 |
| 1754 | 14263 | SEA MIST LN | FIVE HARBORS DR | OCEANWOOD DR | E | AC | 9 | 249 | 36 | 9,714 | 5/6/24 | 84 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1972 | 12984 | THIRTEENTH ST | PALM AVE | CREST AVE | E | AC | 6 | 610 | 42 | 25,620 | 7/8/21 | 84 | 20 | 32 | 48 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2145 | 15158 | WHETMORE LN | CAPSTONE DR | SPICKARD DR | E | AC | 3 | 950 | 36 | 36,700 | 5/22/24 | 84 | 26 | 74 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 661 | 13008 | EIGHTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/22/21 | 84 | 0 | 31 | 69 | Surface Treatment - Slurry Seal | 7/27/22 |
| 827 | 13496 | GLENCOE AVE | SILVER LN | BEACH BLVD | E | AC | 4 | 1,320 | 36 | 47,520 | 3/18/22 | 84 | 82 | 18 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 831 | 14908 | GLENSTONE DR | HILLGATE LN | GRAHAM ST | E | AC | 2 | 166 | 36 | 5,976 | 4/1/26 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1586 | 15008 | QUARTERHORSE LN | ELLIS AVE | CHURCHILL DR | E | AC | 5 | 1,480 | 36 | 53,280 | 5/7/24 | 84 | 58 | 35 | 7 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1831 | 14532 | SKYLAB RD | DELTA LN | ABLE LN | E | AC | 1 | 1,631 | 60 | 97,860 | 4/9/26 | 84 | 75 | 19 | 6 | New Construction | 1/1/80 |
| 233 | 14792 | BELVA DR | GOTHARD ST | METZLER LN | E | AC | 4 | 437 | 40 | 17,480 | 5/9/24 | 84 | 21 | 60 | 19 | Surface Treatment - Slurry Seal | 11/1/19 |
| 26 | 14948 | ALFAWN CIR | SELKIRK DR | END | E | AC | 5 | 102 | 36 | 5,172 | 3/30/26 | 84 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 279 | 14084 | BOND CIR | EDUCATION LN | CDS | E | AC | 8 | 472 | 36 | 18,792 | 3/9/22 | 84 | 53 | 41 | 6 | Surface Treatment - Slurry Seal | 2/8/23 |
| 304 | 15248 | BRESSEL LN | MERLE CIR | WARNER AVE | E | AC | 4 | 486 | 36 | 17,746 | 4/6/22 | 84 | 74 | 26 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 727 | 14406 | FENWICK DR | GOLDEN VIEW LN | MARGARITA LN | E | AC | 3 | 126 | 36 | 5,536 | 5/28/24 | 84 | 13 | 85 | 2 | Surface Treatment - Slurry Seal | 10/1/12 |
| 967 | 13817 | HUMMINGBIRD LN | DOVEWOOD DR | ROBINWOOD DR | E | AC | 1 | 1,040 | 36 | 37,440 | 3/21/22 | 84 | 0 | 95 | 5 | New Construction | 1/1/80 |
| 993 | 13614 | ISLAND CIR | VISTA DR | CDS | E | AC | 2 | 243 | 36 | 13,270 | 4/7/22 | 84 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 1105 | 13185 | LADONA CIR | MISTRAL DR | CDS | E | AC | 2 | 358 | 32 | 12,956 | 4/7/22 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1414 | 15100 | NORMANDY LN | RINGO CIR | SHAYNE DR | E | AC | 3 | 765 | 36 | 27,540 | 4/6/26 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1445 | 13387 | OLDGLEN LN | LANCEFIELD DR | WOODBORO DR | E | AC | 5 | 315 | 36 | 12,340 | 3/31/26 | 84 | 0 | 61 | 39 | New Construction | 1/1/80 |
| 1880 | 14465 | STARDUST DR | SPA DR | NEVEDA DR | E | AC | 1 | 808 | 36 | 29,088 | 4/8/22 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1899 | 14542 | STONINGTON CIR | CAPE MAY LN | CDS | E | AAC | 9 | 118 | 32 | 5,276 | 5/5/26 | 84 | 0 | 77 | 23 | Overlay - AC Structural | 5/11/19 |
| 1926 | 14455 | SUNSET CIR | BEACH BLVD | END | E | AC | 9 | 270 | 32 | 8,640 | 8/24/23 | 84 | 17 | 51 | 32 | New Construction - Initial | 1/1/80 |
| 2132 | 14435 | WELLINGTON CIR | MARIANA CIR | CDS | E | AAC | 2 | 500 | 32 | 11,836 | 5/6/24 | 84 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 770 | 13090 | FOURTEENTH ST | PALM AVE | CREST AVE | E | AC | 6 | 556 | 45 | 25,020 | 6/30/21 | 84 | 48 | 44 | 8 | Surface Treatment - Slurry Seal | 7/27/22 |
| 967 | 15327 | HUMMINGBIRD LN | ROBINWOOD DR | SKYLARK DR | E | AC | 1 | 520 | 36 | 18,970 | 3/21/22 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1581 | 14009 | PUA DR | MOOREA LN | END | E | AC | 8 | 431 | 36 | 17,316 | 3/7/22 | 84 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1670 | 14739 | SEVENTEENTH ST | FLORIDA ST | CLAY AVE | E | AC | 7 | 660 | 36 | 23,760 | 3/13/24 | 84 | 0 | 67 | 33 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1877 | 13750 | STANFORD LN | CORNELL DR | CITADEL DR | E | AC | 1 | 780 | 36 | 27,792 | 12/18/24 | 84 | 78 | 22 | 0 | New Construction | 1/1/80 |
| 471 | 15953 | COLBREGGAN DR | CALLIEBURN CIR | MINERVA LN | E | AAC | 9 | 950 | 36 | 35,200 | 5/10/24 | 84 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/18 |
| 1228 | 14530 | MALIBU LN | TAHITI CIR | LEILANI DR | E | AAC | 9 | 275 | 36 | 10,650 | 4/22/26 | 84 | 48 | 49 | 3 | Overlay - AC Structural | 5/11/19 |
| 1376 | 15824 | NAUTILUS DR | MARINA LN | BUSHARD ST | E | AC | 7 | 1,106 | 36 | 40,566 | 4/16/26 | 84 | 58 | 39 | 3 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1507 | 13333 | PEGGY CIR | COOPER LN | CDS | E | AC | 3 | 423 | 36 | 18,528 | 3/18/22 | 84 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1528 | 13034 | PINE ST | SPRINGFIELD AVE | UTICA AVE | E | AC | 6 | 642 | 37 | 23,754 | 6/29/21 | 84 | 41 | 46 | 13 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1727 | 14330 | SANDY HOOK DR | ANTIGUA LN | SEAFORTH LN | E | AC | 9 | 446 | 36 | 16,806 | 8/30/23 | 84 | 21 | 79 | 0 | New Construction | 1/1/80 |
| 1755 | 15070 | SEA WITCH LN | BARUNA LN | FINISTERRE DR | E | AC | 2 | 1,312 | 36 | 47,232 | 4/5/22 | 84 | 30 | 70 | 0 | New Construction | 1/1/80 |
| 332 | 15237 | BURKE LN | HEIL AVE | EARL CIR | E | AC | 3 | 1,303 | 40 | 52,120 | 3/31/22 | 84 | 61 | 37 | 2 | Surface Treatment - Slurry Seal | 7/29/20 |
| 657 | 14081 | EDUCATION LN | YORKTOWN AVE | FREDERICK CIR | E | AC | 8 | 410 | 36 | 14,760 | 3/7/22 | 84 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 758 | 14673 | FLORIDA ST | INDIANAPOLIS AVE | JOILET AVE | E | AAC | 6 | 330 | 37 | 12,210 | 8/15/23 | 84 | 0 | 64 | 36 | Overlay - AC Structural | 3/1/11 |
| 1010 | 14800 | JEFFERSON LN | SLATER AVE | MICHAEL DR | E | AAC | 4 | 530 | 36 | 18,080 | 4/13/26 | 84 | 22 | 19 | 59 | Overlay - AC Structural | 11/28/19 |
| 1119 | 15253 | LANDAU LN | HEIL AVE | ROYAL DR | E | AC | 4 | 1,349 | 36 | 48,564 | 3/31/22 | 84 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1146 | 14061 | LEECREST LN | LARKPORT DR | LOWMEAD DR | E | AC | 7 | 266 | 36 | 10,326 | 4/20/26 | 84 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 606 | 13288 | DOLORES ST | PRAIRIE DR | PEARCE ST | E | AC | 2 | 663 | 36 | 26,508 | 3/29/22 | 84 | 40 | 41 | 19 | New Construction | 1/1/80 |
| 1194 | 15785 | LOS PATOS AVE | SIMS ST | GREEN ST | E | AC | 2 | 1,320 | 36 | 47,520 | 3/22/22 | 84 | 0 | 50 | 50 | New Construction | 1/1/80 |
| 1867 | 14131 | SQUIRES CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 84 | 47 | 53 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1923 | 13703 | SUNNYCREST LN | LARCHWOOD DR | MAR VISTA DR | E | AC | 1 | 259 | 36 | 9,324 | 4/8/26 | 84 | 44 | 56 | 0 | New Construction - Initial | 1/1/80 |
| 2290 | 17025 | JOLLY LN | HAPPY DR | TALBERT AVE | E | AC | 4 | 466 | 36 | 18,176 | 5/13/24 | 84 | 25 | 71 | 4 | Surface Treatment - Slurry Seal | 11/28/19 |
| 257 | 13610 | BLANTON ST | PEARCE ST | MILO ST | E | AC | 2 | 660 | 36 | 23,120 | 3/22/22 | 84 | 61 | 20 | 19 | New Construction | 1/1/80 |
| 639 | 13730 | DUNDEE DR | NORTH END | BOLSA PARK LN | E | AC | 1 | 294 | 36 | 12,084 | 4/8/26 | 84 | 0 | 92 | 8 | New Construction | 1/1/80 |
| 730 | 15093 | FERNHILL CIR | GRAHAM ST | END | E | AC | 3 | 552 | 36 | 21,672 | 4/2/26 | 84 | 20 | 80 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 921 | 15028 | HENDRICKSEN DR | SCHYER LN | DAVIS LN | E | AAC | 2 | 1,025 | 36 | 38,400 | 5/21/24 | 84 | 48 | 52 | 0 | Overlay - AC Fabric | 10/1/16 |
| 132 | 15547 | ANTIGUA LN | ST AUGUSTINE DR | SANDY HOOK DR | E | AC | 9 | 1,013 | 36 | 37,218 | 8/30/23 | 84 | 47 | 49 | 4 | New Construction | 1/1/80 |
| 1368 | 13199 | NALU CIR | BARUNA LN | CDS | E | AC | 2 | 229 | 36 | 9,744 | 4/7/22 | 84 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 1571 | 14205 | PRINCETON CIR | MEREDITH DR | CDS | E | AC | 8 | 108 | 31 | 5,348 | 2/28/22 | 84 | 43 | 36 | 21 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1633 | 14787 | REYNOLDS CIR | SAMPSON LN | CDS | E | AC | 4 | 304 | 40 | 13,660 | 5/8/24 | 84 | 22 | 72 | 6 | New Construction | 1/1/80 |
| 1823 | 13227 | SIRIUS DR | BOLERO LN | BARUNA LN | E | AC | 2 | 430 | 36 | 16,980 | 4/7/22 | 84 | 61 | 19 | 20 | New Construction | 1/1/80 |
| 2201 | 14103 | YVONNE DR | MALLOY DR | ALLEY MALLOY DR | E | AAC | 9 | 139 | 36 | 5,004 | 8/23/23 | 84 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 462 | 15894 | CLOUDHAVEN DR | MOONCREST CIR | TIDELAND LN | E | AC | 7 | 721 | 36 | 27,456 | 4/16/26 | 84 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 877 | 15323 | HALIFAX DR | VICTORIA LN | FLINTRIDGE LN | E | AC | 1 | 505 | 36 | 18,930 | 4/8/26 | 84 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 895 | 13216 | HARKNESS CIR | TRUMBULL DR | CDS | E | AC | 2 | 529 | 36 | 20,544 | 4/7/22 | 84 | 43 | 55 | 2 | New Construction | 1/1/80 |
| 912 | 13166 | HAWAII LN | KAUI LN | SCENARIO DR | E | AC | 2 | 695 | 36 | 25,520 | 3/24/22 | 84 | 69 | 21 | 10 | New Construction | 1/1/80 |
| 1109 | 13459 | LAKEPOINT LN | INLET DR | END | E | AC | 5 | 268 | 36 | 11,448 | 5/29/24 | 84 | 30 | 49 | 21 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1110 | 14705 | LAKESIDE LN | MEMPHIS AVE | OCEANHILL DR | E | AAC | 6 | 986 | 34 | 33,524 | 8/15/23 | 84 | 44 | 54 | 2 | Overlay - AC Structural | 3/1/11 |
| 1361 | 14118 | MUNSTER DR | LONDONDERRY LN | DUBLIN LN | E | AC | 9 | 1,040 | 36 | 37,440 | 8/23/23 | 84 | 19 | 59 | 22 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1398 | 15839 | NICHOLS ST | WAGON DR | BELSITO DR | E | AC | 0 | 1,645 | 44 | 72,380 | 5/8/24 | 84 | 35 | 63 | 2 | New Construction | 1/1/80 |
| 1662 | 15762 | RODGERS DR | BERLIN LN | TWAIN LN | E | AC | 5 | 508 | 36 | 18,538 | 5/8/26 | 84 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 179 | 14288 | BALGAIR CIR | SCOTSTOUN DR | CDS | E | AC | 8 | 452 | 32 | 16,132 | 3/19/24 | 84 | 0 | 97 | 3 | Surface Treatment - Slurry Seal | 5/11/18 |
| 238 | 15564 | BERMUDA DR | MAGNOLIA ST | KANEHOE LN | E | AC | 9 | 1,110 | 36 | 39,672 | 3/27/24 | 84 | 50 | 50 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 527 | 14177 | CRATER CIR | ROCKY MOUNTAIN DR | CDS | E | AC | 8 | 399 | 36 | 16,164 | 2/23/22 | 84 | 0 | 41 | 59 | Surface Treatment - Slurry Seal | 2/13/23 |
| 5270 | 60420 | 8TH ST | PACIFIC N | PCH | E | AC | 2 | 180 | 21 | 3,780 | 4/23/26 | 84 | 71 | 6 | 23 | New Construction - Initial | 1/1/80 |
| 192 | 14793 | BARON CIR | TALBERT AVE | CDS | E | AAC | 4 | 603 | 36 | 23,208 | 4/20/26 | 84 | 16 | 84 | 0 | Overlay - AC Structural | 11/28/19 |
| 2032 | 13097 | TWENTY-FIRST ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 84 | 68 | 21 | 11 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2108 | 16004 | WALTON DR | GIARC LN | MARJAN LN | E | AC | 3 | 1,291 | 36 | 47,226 | 12/18/24 | 84 | 20 | 72 | 8 | New Construction - Initial | 1/1/80 |
| 2168 | 14935 | WINDCROFT DR | CRESTMOOR LN | HELENBROOK LN | E | AC | 5 | 494 | 36 | 18,534 | 3/31/26 | 84 | 29 | 66 | 5 | New Construction - Initial | 1/1/80 |
| 351 | 15290 | CALNEVA LN | SAN SOUCI CIR | SPA DR | E | AC | 1 | 792 | 36 | 28,512 | 4/9/22 | 84 | 49 | 51 | 0 | New Construction | 1/1/80 |
| 662 | 16032 | EIGHTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 396 | 48 | 19,008 | 6/30/21 | 84 | 0 | 87 | 13 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1135 | 13915 | LAURA CIR | GREGORY LN | CDS | E | AC | 7 | 160 | 27 | 5,570 | 4/8/24 | 85 | 31 | 69 | 0 | New Construction - Initial | 1/1/80 |
| 1169 | 14683 | LINCOLN AVE | ALABAMA ST | ALLEY ALABAMA ST | E | AAC | 6 | 323 | 37 | 11,951 | 8/15/23 | 85 | 14 | 79 | 7 | Overlay - AC Structural | 3/1/11 |
| 1448 | 13202 | ONDINE CIR | EDGEWATER LN | CDS | E | AAC | 2 | 350 | 36 | 14,100 | 5/10/24 | 85 | 41 | 59 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1725 | 13584 | SANDRA LN | AUDREY DR | CHERYL DR | E | AAC | 2 | 569 | 36 | 21,234 | 5/21/24 | 85 | 63 | 37 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1824 | 15038 | SISSON DR | BOLSA CHICA ST | WARREN LN | E | AAC | 2 | 1,195 | 36 | 43,020 | 5/21/24 | 85 | 25 | 42 | 33 | Overlay - AC Fabric | 10/1/16 |
| 2164 | 13969 | WILLHELM CIR | RANDI LN | CDS | E | AC | 8 | 330 | 32 | 12,360 | 4/15/26 | 85 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2288 | 50300 | ADAMS AVE FRONTAGE | CARMANIA LN | END | E | AC | 8 | 123 | 25 | 3,075 | 3/3/22 | 85 | 0 | 81 | 19 | Surface Treatment - Slurry Seal | 2/8/23 |
| 969 | 14736 | HUNTINGTON ST | GARFIELD AVE | CLAY AVE | E | AAC | 7 | 1,320 | 36 | 47,520 | 4/6/26 | 85 | 0 | 94 | 6 | Overlay - AC Structural | 11/28/19 |
| 1081 | 13368 | KIRKLUND CIR | KRISTOPHER LN | END | E | AAC | 3 | 368 | 36 | 15,248 | 5/22/24 | 85 | 12 | 72 | 16 | Overlay - AC Structural | 10/1/12 |
| 1305 | 13243 | MIDDLECOFF DR | CLUBHOUSE LN | FAIRWAY LN | E | AC | 3 | 855 | 36 | 31,030 | 3/23/22 | 85 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 1619 | 14375 | REGATTA DR | POLYNESIAN LN | KANEOHE LN | E | AAC | 9 | 478 | 36 | 17,708 | 3/26/24 | 85 | 41 | 59 | 0 | Overlay - AC Structural | 5/11/18 |
| 1796 | 15153 | SHENLYN DR | EDWARDS ST | IRELAND LN | E | AAC | 3 | 531 | 36 | 19,866 | 5/22/24 | 85 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 186 | 14946 | BANKTON DR | END | GAINSFORD LN | E | AC | 5 | 146 | 36 | 5,256 | 3/31/26 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1945 | 13755 | SYDNEY DR | BOLSA PARK LN | END | E | AAC | 1 | 294 | 36 | 12,084 | 4/27/26 | 85 | 0 | 72 | 28 | New Construction - Initial | 1/1/80 |
| 212 | 17000 | BEACH BLVD FRONTAGE | DRIFTWOOD DR | TRAVELWAY | E | AC | 9 | 1,352 | 28 | 37,856 | 8/24/23 | 85 | 0 | 98 | 2 | New Construction | 1/1/80 |
| 512 | 15989 | CORY DR | MAYOR LN | END | E | AC | 3 | 1,127 | 36 | 42,572 | 5/22/24 | 85 | 13 | 79 | 8 | Surface Treatment - Slurry Seal | 10/1/12 |
| 928 | 14235 | HERON CIR | SANDPIPER LN | END | E | AC | 9 | 360 | 36 | 12,960 | 8/24/23 | 85 | 51 | 46 | 3 | New Construction | 1/1/80 |
| 1151 | 14364 | LEMONTREE LN | CHEVY CHASE DR | CDS | E | AC | 8 | 127 | 36 | 4,572 | 5/20/24 | 85 | 0 | 47 | 53 | New Construction - Initial | 1/1/80 |
| 1298 | 16020 | MEREDITH DR | BROOKHURST ST | CRAIMER LN | E | AC | 8 | 1,358 | 36 | 48,888 | 2/28/22 | 85 | 53 | 42 | 5 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1391 | 15727 | NEWMAN AVE | VAN BUREN ST | CDS | E | AC | 4 | 1,049 | 40 | 43,460 | 5/13/24 | 85 | 21 | 57 | 22 | Surface Treatment - Slurry Seal | 11/28/19 |
| 157 | 13040 | ASPENWOOD LN | ADAMS AVE | SHIPLEY ST | E | PCC | 6 | 190 | 20 | 4,780 | 7/8/21 | 85 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1649 | 13326 | ROBERT LN | JEAN DR | SHIELDS DR | E | AC | 3 | 1,281 | 36 | 46,116 | 5/7/26 | 85 | 74 | 26 | 0 | New Construction | 1/1/80 |
| 196 | 14425 | BARTON DR | KOLEDO LN | QUEENS LN | E | AAC | 4 | 298 | 36 | 10,728 | 5/30/24 | 85 | 0 | 81 | 19 | Overlay - AC Structural | 10/1/12 |
| 198 | 15976 | BARWOOD DR | RAINGLEN LN | BECKWALL LN | E | AC | 5 | 652 | 36 | 23,184 | 3/31/26 | 85 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 208 | 13183 | BAYSHORE LN | MEADOWLARK DR | CALIENTE DR | E | AAC | 2 | 863 | 36 | 31,068 | 5/21/24 | 85 | 16 | 84 | 0 | Overlay - AC Fabric | 10/1/16 |
| 567 | 15729 | DARSY DR | FOREST LN | CDS | E | AC | 4 | 398 | 34 | 15,832 | 5/13/24 | 85 | 32 | 63 | 5 | Surface Treatment - Slurry Seal | 11/28/19 |
| 806 | 15872 | GENEVA AVE | ALABAMA ST | HUNTINGTON ST | E | AC | 9 | 485 | 37 | 17,945 | 8/15/23 | 85 | 25 | 75 | 0 | New Construction | 1/1/80 |
| 978 | 14346 | INDIGO CIR | ORIENT DR | CDS | E | AC | 8 | 451 | 36 | 17,736 | 4/1/24 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 987 | 14393 | IOLANI CIR | ZAMORA LN | CDS | E | AC | 9 | 235 | 32 | 9,020 | 5/20/24 | 85 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 1079 | 15569 | KIOWA LN | KAHULUI DR | ALOHA DR | E | AC | 9 | 768 | 36 | 27,648 | 3/27/24 | 85 | 61 | 39 | 0 | New Construction | 1/1/80 |
| 1085 | 14526 | KITTERY CIR | CASTINE DR | CDS | E | AC | 9 | 169 | 32 | 6,908 | 4/17/24 | 85 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1086 | 14130 | KNIGHTS CIR | CROWN REEF LN | CDS | E | AC | 7 | 160 | 36 | 7,260 | 4/21/26 | 85 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1192 | 15379 | LORRAINE DR | SAUSALITO LN | BAYWATER LN | E | AC | 7 | 916 | 36 | 32,976 | 4/15/26 | 85 | 45 | 41 | 14 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1303 | 14797 | MICHAEL DR | VAN BUREN ST | JEFFERSON LN | E | AC | 4 | 561 | 34 | 19,074 | 5/13/24 | 85 | 17 | 83 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1466 | 15930 | OXFORD DR | HANOVER LN | VICTORIA LN | E | AC | 1 | 781 | 36 | 28,116 | 12/12/24 | 85 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 1526 | 15515 | PIERVIEW LN | INDIANAPOLIS AVE | SALINE DR | E | AC | 8 | 416 | 36 | 14,720 | 3/6/24 | 85 | 17 | 83 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1613 | 13278 | REDGROVE CIR | OAKMONT LN | CDS | E | AC | 3 | 420 | 36 | 16,920 | 12/19/24 | 85 | 22 | 78 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1759 | 14488 | SEACREST LN | BEACHSIDE DR | HIGHTIDE DR | E | AAC | 9 | 773 | 36 | 28,578 | 4/21/26 | 85 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 2105 | 13997 | WALLEYE LN | BASS DR | VELARDO DR | E | AC | 8 | 450 | 36 | 16,950 | 3/7/22 | 85 | 60 | 33 | 7 | Surface Treatment - Slurry Seal | 2/8/23 |
| 5310 | 60480 | 12TH ST | PACIFIC S | END | E | AC | 2 | 46 | 30 | 1,380 | 4/23/26 | 85 | 0 | 30 | 70 | New Construction - Initial | 1/1/80 |
| 721 | 13328 | FARINELLA DR | TRUDY LN | SUMMERCLOUD LN | E | AC | 3 | 1,148 | 36 | 41,328 | 4/6/26 | 85 | 68 | 32 | 0 | New Construction | 1/1/80 |
| 1000 | 14808 | JACQUELYN LN | ALLEY SLATER AVE | SLATER AVE | E | AC | 4 | 150 | 36 | 5,400 | 5/30/24 | 85 | 50 | 48 | 2 | New Construction | 1/1/80 |
| 1066 | 13366 | KILDA CIR | KRISTOPHER LN | END | E | AAC | 3 | 368 | 36 | 15,248 | 5/22/24 | 85 | 44 | 56 | 0 | Overlay - AC Structural | 10/1/12 |
| 1563 | 13134 | PRELUDE DR | BALLAD LN | MELODY LN | E | AC | 2 | 260 | 36 | 9,360 | 3/24/22 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2113 | 15424 | WARFIELD DR | SANDERSON LN | OCCIDENTAL LN | E | AC | 7 | 681 | 36 | 25,266 | 4/20/26 | 85 | 74 | 19 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 657 | 14085 | EDUCATION LN | CONSTITUTION DR | GARRETT CIR | E | AC | 8 | 261 | 36 | 9,396 | 3/7/22 | 85 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 751 | 665 | GRAHAM ST | SLATER AVE | END | E | AC | 0 | 1,638 | 30 | 49,140 | 3/31/26 | 85 | 67 | 33 | 0 | New Construction - Initial | 1/1/80 |
| 1040 | 15568 | KANEOHE LN | BERMUDA DR | KAPAA DR | E | AC | 9 | 768 | 36 | 27,648 | 3/27/24 | 85 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 1544 | 15143 | POINT LOMA DR | AVALON LN | OJAI LN | E | AC | 5 | 515 | 36 | 19,680 | 5/21/24 | 85 | 14 | 82 | 4 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1812 | 13899 | SICILY CIR | EVENING HILL DR | CDS | E | AC | 5 | 361 | 36 | 16,196 | 5/6/24 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1825 | 13093 | SIXTEENTH ST | PCH | WALNUT AVE | E | AC | 6 | 370 | 46 | 16,825 | 6/22/21 | 85 | 0 | 25 | 75 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2116 | 13529 | WASHINGTON AVE | LYNDON ST | NICHOLS ST | E | ACT | 4 | 530 | 36 | 19,080 | 3/31/22 | 85 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 400 | 15618 | CASTINE DR | WOOD ISLAND LN | CDS | E | AC | 9 | 325 | 32 | 12,900 | 4/17/24 | 85 | 40 | 50 | 10 | Surface Treatment - Slurry Seal | 5/11/19 |
| 414 | 15060 | CHANNEL LN | DEVON CIR | GILBERT DR | E | AC | 2 | 1,236 | 36 | 44,296 | 4/9/22 | 85 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 880 | 15371 | HAMDEN LN | GARFIELD AVE | NEWHAVEN LN | E | AC | 7 | 1,434 | 36 | 51,624 | 4/2/24 | 85 | 0 | 87 | 13 | Surface Treatment - Slurry Seal | 11/28/19 |
| 925 | 14843 | HERITAGE LN | TERYY DR | LANCASTER DR | E | AC | 4 | 465 | 36 | 16,990 | 4/6/22 | 85 | 50 | 45 | 5 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1348 | 14810 | MORGAN LN | SLATER AVE | SPEER AVE | E | AAC | 4 | 661 | 36 | 23,796 | 4/13/26 | 85 | 12 | 82 | 6 | Overlay - AC Structural | 11/1/19 |
| 1671 | 14803 | ROSANNA DR | GERALDINE LN | ROXANNE LN | E | AAC | 4 | 288 | 36 | 11,118 | 4/13/26 | 85 | 34 | 66 | 0 | Overlay - AC Structural | 12/6/19 |
| 1910 | 15372 | SUMMERFIELD LN | GARFIELD AVE | DEAUVILLE DR | E | AC | 7 | 515 | 36 | 19,518 | 4/2/24 | 85 | 68 | 26 | 6 | Surface Treatment - Slurry Seal | 11/28/19 |
| 2117 | 14525 | WATCH HARBOR DR | BUSHARD ST | WOOD ISLAND LN | E | AC | 9 | 167 | 36 | 5,724 | 4/24/24 | 85 | 35 | 65 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 327 | 14851 | BRUSH DR | ALLEY NEWLAND ST | NEWLAND ST | E | AC | 4 | 152 | 36 | 5,472 | 4/6/22 | 85 | 68 | 32 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 375 | 15307 | CAPETOWN LN | BOLSA AVE | KIMBERLY DR | E | AC | 1 | 819 | 36 | 29,196 | 12/26/24 | 85 | 0 | 25 | 75 | New Construction | 1/1/80 |
| 574 | 14930 | DE LONG CIR | PRICE DR | END | E | AC | 5 | 385 | 36 | 15,360 | 3/30/26 | 85 | 40 | 60 | 0 | New Construction | 1/1/80 |
| 6 | 13946 | ACAPULCO CIR | SAUSALITO LN | CDS | E | AC | 7 | 654 | 34 | 23,486 | 4/15/26 | 85 | 47 | 48 | 5 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1638 | 13489 | RHONE LN | SHER LN | KIM LN | E | AC | 4 | 851 | 36 | 30,636 | 3/18/22 | 85 | 60 | 40 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1761 | 14992 | SEAGATE DR | PROMENADE PKWY | CDS | E | AC | 4 | 592 | 42 | 26,114 | 3/5/24 | 85 | 0 | 45 | 55 | Surface Treatment - Slurry Seal | 11/28/19 |
| 2206 | 14189 | ZION CIR | CARLSBAD LN | END | E | AC | 8 | 363 | 36 | 14,568 | 2/23/22 | 85 | 0 | 33 | 67 | Surface Treatment - Slurry Seal | 2/13/23 |
| 529 | 13963 | CRESCENT DR | PISMO LN | CORALWOOD LN | E | AC | 7 | 1,116 | 36 | 40,676 | 4/15/26 | 85 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1469 | 13449 | PACEMONT DR | IVORYCREST LN | VESTRY CIR | E | AC | 5 | 213 | 36 | 7,668 | 5/23/24 | 85 | 59 | 37 | 4 | New Construction | 1/1/80 |
| 1886 | 15861 | STEEP LN | FOX CIR | ELLIS AVE | E | AC | 4 | 321 | 36 | 11,268 | 5/13/24 | 85 | 16 | 84 | 0 | New Construction | 1/1/80 |
| 473 | 14971 | COLDWATER LN | SCRIBE DR | DRYBANK DR | E | AC | 7 | 1,479 | 36 | 53,244 | 8/21/23 | 85 | 0 | 79 | 21 | Surface Treatment - Slurry Seal | 3/1/11 |
| 483 | 13716 | COMMERCIAL DR | CHEMICAL LN | GRAHAM ST | E | AAC | 1 | 1,170 | 40 | 46,800 | 5/3/24 | 85 | 43 | 50 | 7 | Overlay - AC Fabric | 10/1/16 |
| 1025 | 14524 | JONESPORT LN | ALLISON CIR | CAPE MAY LN | E | AC | 9 | 647 | 36 | 23,004 | 4/24/24 | 85 | 39 | 46 | 15 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1212 | 15245 | LYNDON ST | WARNER AVE | CDS | E | AC | 4 | 466 | 36 | 18,576 | 3/31/22 | 85 | 47 | 49 | 4 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1499 | 13974 | PAULINE LN | GARFIELD AVE | LITCHFIELD DR | E | AC | 8 | 630 | 36 | 22,680 | 4/16/26 | 85 | 72 | 28 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1824 | 15039 | SISSON DR | WARREN LN | DAVIS LN | E | AAC | 2 | 1,286 | 36 | 47,046 | 5/21/24 | 85 | 41 | 57 | 2 | Overlay - AC Fabric | 10/1/16 |
| 1853 | 15524 | SPARKMAN LN | KITE DR | CDS | E | AC | 8 | 751 | 36 | 28,732 | 3/18/24 | 85 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 5/11/18 |
| 345 | 15511 | CAITHNESS DR | PAISLET LN | QUEENS PARK LN | E | AAC | 8 | 1,026 | 36 | 39,288 | 3/18/24 | 85 | 48 | 48 | 4 | Overlay - AC Structural | 5/11/18 |
| 463 | 13595 | CLUBHOUSE LN | ALLEY HEIL AVE | HEIL AVE | E | AC | 3 | 152 | 45 | 6,840 | 3/23/22 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 582 | 14162 | DEERVALE LN | CANDLEWOOD DR | HAZELBROOK DR | E | AC | 7 | 743 | 36 | 26,748 | 4/16/26 | 85 | 32 | 63 | 5 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1040 | 15567 | KANEOHE LN | HAITI DR | BERMUDA DR | E | AC | 9 | 1,008 | 36 | 36,288 | 3/27/24 | 86 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 1284 | 13148 | MEADOWLARK DR | GRAHAM ST | EAGLE LN | E | AAC | 3 | 176 | 34 | 5,984 | 5/9/24 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 1446 | 12905 | OLIVE AVE | ELEVENTH ST | FOURTEENTH ST | E | AC | 6 | 930 | 38 | 35,340 | 6/23/21 | 86 | 0 | 62 | 38 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1688 | 13760 | RUTGERS CIR | COLUMBIA LN | END | E | AC | 1 | 543 | 36 | 21,048 | 12/18/24 | 86 | 67 | 25 | 8 | New Construction | 1/1/80 |
| 1856 | 15015 | SPEER AVE | MORGAN LN | BEACH BLVD | E | AAC | 4 | 1,320 | 26 | 33,940 | 4/13/26 | 86 | 7 | 93 | 0 | Overlay - AC Structural | 11/1/19 |
| 1991 | 15032 | TOMAS LN | AUDREY DR | CHERYL DR | E | AAC | 2 | 533 | 36 | 19,938 | 5/21/24 | 86 | 32 | 61 | 7 | Overlay - AC Fabric | 10/1/16 |
| 2087 | 15650 | VILLAGE DR | JETT DR | MAGNOLIA ST | E | AC | 7 | 743 | 36 | 26,748 | 4/21/26 | 86 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 287 | 14027 | BOWMAN LN | HURSTWELL DR | DRYBANK DR | E | AAC | 7 | 536 | 36 | 19,296 | 8/17/23 | 86 | 0 | 91 | 9 | Overlay - AC Structural | 3/1/11 |
| 5290 | 60440 | 10TH ST | PCH | END | E | AC | 2 | 403 | 25 | 10,075 | 4/23/26 | 86 | 0 | 43 | 57 | New Construction - Initial | 1/1/80 |
| 947 | 15016 | HOLLAND DR | BEACH BLVD | CDS | E | AC | 4 | 625 | 36 | 23,750 | 4/6/22 | 86 | 43 | 57 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 969 | 14656 | HUNTINGTON ST | NASHVILLE AVE | OSWEGO AVE | E | AC | 6 | 330 | 36 | 11,592 | 8/14/23 | 86 | 25 | 37 | 38 | New Construction | 1/1/80 |
| 1026 | 14545 | JOYFUL LN | TALBERT AVE | HAPPY DR | E | AC | 4 | 508 | 36 | 18,288 | 5/13/24 | 86 | 19 | 54 | 27 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1098 | 14283 | LA CRESTA CIR | PIERVIEW LN | CDS | E | AC | 8 | 510 | 36 | 19,560 | 3/6/24 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1241 | 15890 | MANSARD LN | HENTON DR | BAINFORD DR | E | AC | 7 | 941 | 36 | 34,376 | 4/16/26 | 86 | 73 | 27 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1427 | 13279 | OAKGROVE CIR | OAKMONT LN | CDS | E | AC | 3 | 420 | 36 | 16,920 | 12/19/24 | 86 | 0 | 77 | 23 | New Construction | 1/1/80 |
| 1502 | 15119 | PEARCE ST | BOLSA CHICA ST | ROOSEVELT LN | E | AC | 2 | 663 | 36 | 23,868 | 4/2/26 | 86 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 1924 | 15508 | SUNRIDGE DR | CHARWOOD LN | CRESTVIEW LN | E | AC | 9 | 955 | 36 | 35,130 | 5/20/24 | 86 | 0 | 76 | 24 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2114 | 13141 | WARREN LN | AUDREY DR | SISSON DR | E | AC | 2 | 850 | 36 | 30,600 | 5/21/24 | 86 | 63 | 37 | 0 | New Construction - Initial | 1/1/80 |
| 11 | 14959 | ADMIRRALTY DR | PCH | CHANNEL LN | E | AC | 2 | 796 | 60 | 40,240 | 4/9/22 | 86 | 31 | 66 | 3 | New Construction | 1/1/80 |
| 1287 | 15315 | MEDFORD DR | HOLIDAY LN | END | E | AC | 1 | 540 | 36 | 20,940 | 12/18/24 | 86 | 77 | 23 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1420 | 13792 | NORWICH CIR | MELBOURNE DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/8/26 | 86 | 0 | 82 | 18 | New Construction | 1/1/80 |
| 1622 | 15743 | REMBRANDT DR | HAGUE LN | NEWLAND ST | E | AC | 4 | 653 | 36 | 23,508 | 3/31/22 | 86 | 44 | 56 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2203 | 13687 | ZANE CIR | ROYAL OAK DR | END | E | AC | 1 | 350 | 32 | 13,200 | 5/6/26 | 86 | 37 | 63 | 0 | New Construction - Initial | 1/1/80 |
| 372 | 15622 | CAPE MAY LN | PORT CYLDE DR | STONINGTON CIR | E | AC | 9 | 373 | 36 | 14,678 | 4/24/24 | 86 | 0 | 49 | 51 | Surface Treatment - Slurry Seal | 5/11/19 |
| 450 | 15085 | CLARK DR | BIRDIE LN | NASSAU LN | E | AC | 3 | 1,223 | 36 | 44,028 | 3/23/22 | 86 | 23 | 65 | 12 | New Construction | 1/1/80 |
| 610 | 13531 | DONALD CIR | LUCIA LN | CDS | E | AC | 4 | 350 | 32 | 12,450 | 4/6/22 | 86 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1120 | 15596 | LANDFALL DR | HILARIA CIR | DIRIGO CIR | E | AC | 9 | 764 | 36 | 27,504 | 4/25/24 | 86 | 0 | 72 | 28 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1391 | 15013 | NEWMAN AVE | BEACH BLVD | CDS | E | AAC | 4 | 1,330 | 36 | 47,880 | 4/13/26 | 86 | 15 | 85 | 0 | Overlay - AC Structural | 11/28/19 |
| 2027 | 13618 | TUNSTALL LN | MADDOX DR | NORMA DR | E | AC | 3 | 792 | 36 | 28,512 | 3/18/22 | 86 | 0 | 91 | 9 | New Construction - Initial | 1/1/80 |
| 2111 | 13201 | WANDERER LN | HUMBOLDT DR | CAROUSEL LN | E | AC | 2 | 631 | 36 | 23,716 | 4/7/22 | 86 | 47 | 50 | 3 | New Construction - Initial | 1/1/80 |
| 349 | 14664 | CALIFORNIA ST | LINCOLN AVE | MEMPHIS AVE | E | AAC | 6 | 330 | 37 | 11,803 | 8/14/23 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 401 | 13233 | CASTLE DR | EAGLE LN | CLUBHOUSE LN | E | AAC | 3 | 1,039 | 36 | 37,404 | 5/9/24 | 86 | 0 | 94 | 6 | Overlay - AC Structural | 10/1/16 |
| 872 | 14352 | HAGERSTOWN CIR | CORNERBROOK DR | CDS | E | AC | 8 | 340 | 36 | 13,740 | 5/20/24 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 969 | 14658 | HUNTINGTON ST | KNOXVILLE AVE | LINCOLN AVE | E | AC | 6 | 330 | 40 | 13,200 | 8/14/23 | 86 | 39 | 56 | 5 | New Construction | 1/1/80 |
| 994 | 14505 | ISLANDER LN | PLAYA DR | CHRISTINE DR | E | AAC | 9 | 695 | 36 | 26,020 | 4/22/26 | 86 | 42 | 38 | 20 | Overlay - AC Structural | 5/11/19 |
| 1036 | 13212 | KAMALII DR | BARUNA LN | SEA WITCH LN | E | AC | 2 | 445 | 36 | 16,020 | 4/7/22 | 86 | 21 | 79 | 0 | New Construction | 1/1/80 |
| 1370 | 15822 | NANTUCKET DR | WATERBURY LN | BUSHARD ST | E | AC | 7 | 1,122 | 36 | 40,392 | 4/16/26 | 86 | 83 | 10 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1494 | 13807 | PARTRIDGE CIR | PELICAN LN | END | E | AAC | 1 | 380 | 36 | 14,930 | 5/9/24 | 86 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1936 | 14432 | SURVEYOR CIR | HAMILTON AVE | END | E | AC | 9 | 496 | 41 | 22,336 | 8/30/23 | 86 | 63 | 15 | 22 | New Construction - Initial | 1/1/80 |
| 2289 | 17024 | EDISON AVE | NEWLAND AVE | SOUTH END | E | AC | 9 | 816 | 25 | 20,400 | 8/30/23 | 86 | 0 | 60 | 40 | New Construction - Initial | 1/1/80 |
| 272 | 14370 | BOBBIE CIR | POLYNESIAN LN | CDS | E | AAC | 9 | 480 | 36 | 18,780 | 3/26/24 | 86 | 32 | 68 | 0 | Overlay - AC Structural | 5/11/18 |
| 360 | 14794 | CAMERON ST | SLATER AVE | NEWMAN AVE | E | AAC | 4 | 1,322 | 36 | 43,592 | 4/13/26 | 86 | 51 | 38 | 11 | Overlay - AC Structural | 11/28/19 |
| 466 | 13625 | COBRA LN | WRENFIELD DR | NORINO DR | E | AC | 3 | 287 | 36 | 11,332 | 5/21/24 | 86 | 55 | 45 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 5260 | 60410 | 7TH ST | PCH | END | E | AC | 2 | 264 | 23 | 6,072 | 4/23/26 | 86 | 28 | 21 | 51 | New Construction - Initial | 1/1/80 |
| 530 | 13085 | CREST AVE | CREST AVE | THIRTEENTH ST | E | AC | 6 | 192 | 45 | 8,940 | 7/8/21 | 86 | 26 | 74 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 662 | 12956 | EIGHTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 390 | 47 | 18,330 | 6/22/21 | 86 | 0 | 80 | 20 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1436 | 14706 | OCEANHILL DR | DELAWARE ST | CDS | E | AAC | 6 | 1,218 | 34 | 42,912 | 8/15/23 | 86 | 21 | 62 | 17 | Overlay - AC Structural | 3/1/11 |
| 1544 | 13353 | POINT LOMA DR | OJAI LN | CORONADO LN | E | AC | 5 | 474 | 36 | 17,064 | 5/21/24 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1747 | 15943 | SCOTSTOUN DR | GLENCAIRN LN | QUEENS PARK LN | E | AC | 8 | 1,027 | 36 | 36,972 | 3/19/24 | 86 | 35 | 65 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1839 | 14188 | SMOKEY CIR | CARLSBAD LN | END | E | AC | 8 | 363 | 36 | 14,568 | 2/23/22 | 86 | 43 | 45 | 12 | Surface Treatment - Slurry Seal | 2/13/23 |
| 2011 | 14087 | TRENTON LN | FORRESTAL DR | VALLEY FORGE DR | E | AC | 8 | 260 | 36 | 10,360 | 2/25/22 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 374 | 14527 | CAPE SPLIT CIR | CAPE MAY LN | CDS | E | AC | 9 | 131 | 32 | 5,992 | 4/24/24 | 86 | 14 | 50 | 36 | Surface Treatment - Slurry Seal | 5/11/19 |
| 562 | 13672 | DANES CIR | BRIARCLIFF DR | END | E | AC | 1 | 504 | 36 | 19,394 | 5/6/26 | 86 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 707 | 14183 | EVERGLADES LN | KINGS CANTON DR | MAMMOTH DR | E | AC | 8 | 253 | 36 | 9,108 | 3/1/22 | 86 | 46 | 54 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1169 | 14684 | LINCOLN AVE | ALLEY ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 162 | 37 | 5,994 | 5/6/26 | 86 | 100 | 0 | 0 | Overlay - AC Structural | 3/1/11 |
| 1743 | 13142 | SCHRYER LN | HENDRICKSEN DR | SISSON DR | E | AAC | 2 | 849 | 36 | 30,564 | 5/21/24 | 86 | 0 | 83 | 17 | Overlay - AC Fabric | 10/1/16 |
| 1818 | 15946 | SILVER STRAND DR | REEF LN | CDS | E | AC | 8 | 1,010 | 36 | 37,560 | 3/6/24 | 86 | 0 | 88 | 12 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1983 | 14515 | TIKI CIR | LUAU LN | CDS | E | AAC | 9 | 345 | 32 | 12,540 | 4/22/26 | 86 | 45 | 55 | 0 | Overlay - AC Structural | 5/11/19 |
| 2065 | 13184 | VENTURE DR | WALRUS LN | SUNDANCER LN | E | AC | 2 | 1,520 | 36 | 54,720 | 4/7/22 | 86 | 16 | 78 | 6 | New Construction - Initial | 1/1/80 |
| 2134 | 14905 | WENDY CIR | FRANS LN | CDS | E | AC | 5 | 263 | 36 | 10,718 | 4/2/26 | 86 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 298 | 14340 | BREAKWATER CIR | BOWSPIRIT LN | CDS | E | AAC | 9 | 350 | 32 | 12,700 | 4/1/24 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 321 | 14075 | BROOKLINE CIR | INNSBRUCK DR | CDS | E | AC | 8 | 365 | 32 | 13,180 | 3/9/22 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 429 | 13585 | CHERYL DR | TOMAS LN | SANDRA LN | E | AAC | 2 | 740 | 36 | 27,390 | 5/21/24 | 86 | 0 | 69 | 31 | Overlay - AC Fabric | 10/1/16 |
| 452 | 14747 | CLAY AVE | MAIN ST | HOLLY ST | E | AC | 7 | 368 | 30 | 11,040 | 3/12/24 | 86 | 0 | 58 | 42 | Surface Treatment - Slurry Seal | 11/28/19 |
| 690 | 15922 | ENGINEER DR | PIPELINE LN | SPRINGDALE ST | E | AC | 1 | 1,206 | 40 | 47,760 | 4/8/26 | 86 | 16 | 29 | 55 | New Construction | 1/1/80 |
| 702 | 13778 | ETON CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 12/26/24 | 86 | 79 | 21 | 0 | New Construction | 1/1/80 |
| 9 | 13061 | ADAMS AVE | MAIN ST | SEVENTEENTH ST | E | AC | 6 | 745 | 46 | 36,075 | 6/30/21 | 86 | 0 | 54 | 46 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1070 | 14277 | KIMBERWICK LN | FIRESIDE DR | HAVEN LN | E | AC | 9 | 177 | 36 | 6,372 | 5/7/24 | 86 | 47 | 53 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1184 | 50480 | LOMA AVE | PARK ST | MAIN ST | E | AC | 6 | 349 | 36 | 12,564 | 6/28/21 | 86 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1320 | 14317 | MIRAMAR LN | DORSETT DR | SABLE DR | E | AC | 9 | 512 | 36 | 18,144 | 8/30/23 | 86 | 41 | 52 | 7 | New Construction | 1/1/80 |
| 1495 | 14548 | PASEO CIR | NEWLAND ST | CDS | E | AC | 4 | 362 | 36 | 15,032 | 5/13/24 | 86 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 175 | 14378 | BAHAMA LN | HAITI DR | RHODESIA DR | E | AAC | 9 | 752 | 36 | 28,072 | 3/26/24 | 86 | 16 | 52 | 32 | Overlay - AC Structural | 5/11/18 |
| 1951 | 14546 | TALISMAN LN | SAYBROOK LN | PICKWICK CIR | E | AAC | 2 | 348 | 36 | 12,528 | 5/10/24 | 86 | 51 | 49 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2031 | 13014 | TWENTIETH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 386 | 46 | 17,756 | 6/30/21 | 86 | 61 | 33 | 6 | Surface Treatment - Slurry Seal | 2/13/24 |
| 2177 | 14272 | WINTERWOOD CIR | CHARWOOD LN | CDS | E | AC | 9 | 440 | 34 | 16,460 | 5/7/24 | 86 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 291 | 13253 | BRADBURY LN | PALISADE DR | DAGNY CIR | E | AC | 3 | 367 | 36 | 13,212 | 4/7/26 | 86 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 389 | 13200 | CAROUSEL LN | WANDERER LN | WANDERER LN | E | AC | 2 | 1,011 | 36 | 39,396 | 4/7/22 | 86 | 38 | 19 | 43 | New Construction | 1/1/80 |
| 460 | 50520 | CLIFFWOOD DR | TIDELAND LN | CDS | E | AC | 7 | 238 | 32 | 9,416 | 4/21/26 | 86 | 24 | 76 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 782 | 15519 | FRIARSCOURT DR | GLENCAIRN LN | HUNTER LN | E | AC | 8 | 506 | 36 | 18,216 | 3/19/24 | 86 | 15 | 66 | 19 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1179 | 15536 | LOCHLEA LN | ALLEY DONCASTER DR | ALLEY LOMOND DR | E | AC | 9 | 326 | 36 | 11,736 | 8/30/23 | 86 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1528 | 14735 | PINE ST | UTICA AVE | PARK ST | E | AC | 6 | 660 | 36 | 23,760 | 6/29/21 | 86 | 0 | 0 | 100 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1659 | 15616 | ROCKPORT LN | PORT CLYDE DR | CDS | E | AC | 9 | 382 | 36 | 16,252 | 4/17/24 | 86 | 0 | 67 | 33 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1860 | 15945 | SPINNAKER DR | HORIZON LN | BROOKHURST ST | E | AC | 8 | 695 | 36 | 24,500 | 3/6/24 | 86 | 0 | 58 | 42 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 262 | 13813 | BLUEBIRD LN | DOVEWOOD DR | QUAIL CIR | E | AC | 1 | 260 | 36 | 9,360 | 3/21/22 | 86 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 357 | 13545 | CAMEL CIR | ROSS LN | END | E | AC | 4 | 199 | 32 | 7,618 | 3/31/22 | 86 | 63 | 33 | 4 | Surface Treatment - Slurry Seal | 7/29/20 |
| 372 | 15623 | CAPE MAY LN | STONINGTON CIR | JONESPORT LN | E | AAC | 9 | 546 | 36 | 19,656 | 5/5/26 | 86 | 0 | 91 | 9 | Overlay - AC Structural | 5/11/19 |
| 438 | 14501 | CHRISTINE DR | HULA CIR | SUSAN LN | E | AC | 9 | 249 | 36 | 9,964 | 4/17/24 | 86 | 19 | 69 | 12 | Surface Treatment - Slurry Seal | 5/11/19 |
| 475 | 14242 | COLIMA LN | CASTILIAN CIR | SNOWBIRD DR | E | AC | 9 | 253 | 36 | 9,108 | 8/23/23 | 86 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 5390 | 60610 | 20TH ST | PACIFIC S | END | E | AC | 2 | 81 | 26 | 2,106 | 4/23/26 | 86 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 552 | 14472 | DAKAR LN | DRUMBEAT DR | BORBA CIR | E | AC | 9 | 202 | 32 | 6,964 | 4/25/24 | 86 | 0 | 50 | 50 | Surface Treatment - Slurry Seal | 5/11/19 |
| 813 | 14444 | GETTYSBURG DR | MAGNOLIA ST FRONTAGE | LOTUS LN | E | AC | 7 | 1,036 | 36 | 37,296 | 4/20/26 | 86 | 52 | 48 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 904 | 15274 | HARTLUND ST | ALLEY TALBERT AVE | MAGIC CIR | E | AAC | 4 | 437 | 34 | 14,858 | 4/13/26 | 86 | 30 | 70 | 0 | Overlay - AC Structural | 11/28/19 |
| 1188 | 14115 | LONDONDERRY LN | MALLOY DR | MUNSTER DR | E | AAC | 9 | 260 | 36 | 9,360 | 8/23/23 | 86 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1488 | 14733 | PARK ST | UTICA AVE | LAKE ST | E | AC | 6 | 1,145 | 36 | 41,220 | 6/29/21 | 86 | 51 | 4 | 45 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1741 | 15827 | SCEPTRE LN | ALADDIN DR | WARNER AVE | E | AC | 2 | 367 | 36 | 13,212 | 4/9/22 | 86 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 1993 | 15972 | TOPEKA LN | SALT LAKE DR | DOLPHIN DR | E | AC | 7 | 1,026 | 36 | 37,686 | 4/20/26 | 86 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 342 | 14024 | CADE CIR | DRYBROOK LN | END | E | AAC | 7 | 294 | 32 | 9,408 | 8/17/23 | 86 | 24 | 59 | 17 | Overlay - AC Structural | 3/1/11 |
| 414 | 13194 | CHANNEL LN | ADMIRALTY DR | DEVON CIR | E | AC | 2 | 401 | 36 | 14,436 | 4/9/22 | 86 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 5380 | 60590 | 19TH ST | PCH | END | E | AC | 2 | 330 | 26 | 8,580 | 4/23/26 | 86 | 0 | 58 | 42 | New Construction - Initial | 1/1/80 |
| 694 | 14778 | ENTERPRISE LN | PRODAN DR | MOUNTJOY DR | E | AAC | 4 | 1,030 | 40 | 42,700 | 4/14/26 | 86 | 46 | 52 | 2 | Overlay - AC Structural | 11/28/19 |
| 736 | 13208 | FIGARO CIR | EDGEWATER LN | CDS | E | AAC | 2 | 350 | 36 | 14,100 | 5/10/24 | 86 | 55 | 45 | 0 | Overlay - AC Fabric | 12/1/17 |
| 969 | 15682 | HUNTINGTON ST | OSWEGO AVE | ADAMS AVE | E | AAC | 6 | 660 | 36 | 23,760 | 8/14/23 | 86 | 32 | 68 | 0 | Overlay - AC Structural | 3/1/11 |
| 1112 | 13535 | LAMAR DR | NEWLAND ST | LUCIA LN | E | AC | 4 | 493 | 36 | 17,748 | 4/6/22 | 87 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1174 | 15364 | LISTER LN | MODALE DR | GARFIELD AVE | E | AAC | 7 | 1,440 | 36 | 51,840 | 4/14/26 | 87 | 43 | 54 | 3 | Overlay - AC Structural | 11/28/19 |
| 1318 | 13434 | MIRA EL RIO LN | LUCIENTO DR | CENTRAL PARK DR | E | AAC | 5 | 177 | 36 | 6,084 | 5/23/24 | 87 | 0 | 98 | 2 | Overlay - AC Structural | 10/1/12 |
| 1338 | 14168 | MOONCREST CIR | CLOUDHAVEN DR | CDS | E | AC | 7 | 342 | 36 | 14,812 | 4/21/26 | 87 | 58 | 42 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1636 | 15240 | RHINE DR | RHONE LN | CHARLES LN | E | AC | 4 | 520 | 36 | 18,720 | 3/18/22 | 87 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1774 | 13523 | SEINE DR | TIBER LN | THAMES LN | E | AC | 4 | 809 | 36 | 29,874 | 3/31/22 | 87 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2147 | 13924 | WHITBURN CIR | WEYMOUTH LN | CDS | E | AAC | 7 | 150 | 32 | 8,212 | 4/14/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2205 | 14279 | ZETLAND DR | PAISLEY LN | TROON LN | E | AC | 8 | 783 | 36 | 28,188 | 3/18/24 | 87 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 276 | 13754 | BOLSA PARK LN | SHELLY DR | SYDNEY DR | E | AC | 1 | 274 | 36 | 9,576 | 4/27/26 | 87 | 69 | 31 | 0 | New Construction - Initial | 1/1/80 |
| 947 | 14816 | HOLLAND DR | WAAL CIR | JEFFERSON LN | E | AC | 4 | 260 | 36 | 9,360 | 4/6/22 | 87 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1130 | 13051 | MAIN ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 578 | 45 | 26,185 | 6/29/21 | 87 | 0 | 28 | 72 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1321 | 15500 | MISSION LN | SNOWBIRD DR | ALVARADO DR | E | AC | 9 | 505 | 36 | 18,180 | 8/23/23 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 135 | 13727 | APOLLO LN | ATLAS DR | THOR DR | E | AC | 1 | 267 | 36 | 10,362 | 4/8/26 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1403 | 13012 | NINETEENTH ST | PCH | WALNUT AVE | E | AC | 6 | 370 | 50 | 18,500 | 6/23/21 | 87 | 0 | 34 | 66 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1446 | 12917 | OLIVE AVE | SIXTH ST | EIGHTH ST | E | AC | 6 | 600 | 40 | 24,000 | 6/23/21 | 87 | 0 | 50 | 50 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1449 | 14528 | ONSET CIR | CAPE MAY LN | CDS | E | AC | 9 | 206 | 32 | 8,092 | 4/24/24 | 87 | 17 | 83 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1665 | 13771 | ROME CIR | HANOVER LN | END | E | AC | 1 | 433 | 36 | 17,388 | 12/18/24 | 87 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 220 | 15798 | BECKWALL LN | NEARGATE DR | END | E | AC | 5 | 542 | 36 | 21,512 | 3/31/26 | 87 | 16 | 78 | 6 | New Construction | 1/1/80 |
| 28 | 15226 | ALHAMBRA AVE | RHONE LN | SILVER LN | E | AC | 4 | 1,154 | 36 | 41,544 | 3/18/22 | 87 | 67 | 33 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 349 | 14643 | CALIFORNIA ST | DETROIT AVE | ELMIRA AVE | E | AC | 9 | 330 | 38 | 12,540 | 8/24/23 | 87 | 0 | 80 | 20 | New Construction | 1/1/80 |
| 519 | 14159 | COVE CIR | ADAMS AVE FRONTAGE | END | E | AC | 7 | 558 | 36 | 21,588 | 4/16/26 | 87 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 5280 | 60450 | 9TH ST | PACIFIC S | END | E | AC | 2 | 66 | 30 | 1,980 | 4/23/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5330 | 60510 | 14TH ST | PACIFIC S | END | E | AC | 2 | 90 | 30 | 2,700 | 4/23/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5430 | 60670 | 24TH ST | PACIFIC S | END | E | AC | 2 | 58 | 27 | 1,566 | 4/23/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 815 | 13271 | GIARC LN | WALTON DR | DORIANE CIR | E | AC | 3 | 168 | 36 | 6,798 | 12/18/24 | 87 | 0 | 76 | 24 | New Construction | 1/1/80 |
| 873 | 15742 | HAGUE LN | EDAM CIR | VALENCIA DR | E | AC | 4 | 765 | 36 | 27,540 | 3/31/22 | 87 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1141 | 14961 | LE GRAND LN | HEIL AVE | PRAIRE DR | E | AAC | 2 | 664 | 36 | 25,570 | 5/21/24 | 87 | 17 | 25 | 58 | Overlay - AC Structural | 12/1/17 |
| 1166 | 13130 | LILES LN | ALLEY EDINGER AVE | HENDRICKSEN DR | E | AAC | 2 | 144 | 36 | 5,184 | 5/21/24 | 87 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1186 | 15912 | LOMBARDY LN | LORRAINE DR | YORKTOWN AVE | E | AC | 7 | 685 | 36 | 24,660 | 4/15/26 | 87 | 54 | 46 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1932 | 15356 | SURFDALE LN | LAWN HAVEN DR | GARDEN CIR | E | AC | 5 | 522 | 36 | 18,792 | 5/6/24 | 87 | 81 | 19 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 2135 | 13926 | WENLOCK CIR | WORCHESTER LN | CDS | E | AAC | 7 | 116 | 31 | 7,008 | 4/14/26 | 87 | 0 | 91 | 9 | Overlay - AC Structural | 11/28/19 |
| 2179 | 15617 | WOOD ISLAND LN | CAPE MAY LN | CASTINE DR | E | AC | 9 | 956 | 36 | 35,416 | 4/24/24 | 87 | 0 | 73 | 27 | Surface Treatment - Slurry Seal | 5/11/19 |
| 5270 | 60430 | 8TH ST | PACIFIC S | END | E | AC | 2 | 23 | 27 | 621 | 4/23/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 688 | 14297 | ENDEVER DR | SKIMMER LN | BROOKHURST ST | E | AC | 8 | 187 | 36 | 6,732 | 3/19/24 | 87 | 48 | 52 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 708 | 14873 | EVERGREEN CIR | SUMMERDALE DR | END | E | AAC | 5 | 246 | 36 | 10,584 | 5/30/24 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 817 | 15063 | GILBERT DR | CHANNEL LN | SOMERSET LN | E | AC | 2 | 1,332 | 36 | 48,452 | 4/9/22 | 87 | 52 | 38 | 10 | New Construction | 1/1/80 |
| 2288 | 17018 | ADAMS AVE FRONTAGE | LOTUS LN | WEST END | E | AC | 7 | 398 | 32 | 14,236 | 4/20/26 | 87 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 251 | 13331 | BISHOP DR | EDWARDS ST | COOPER LN | E | AC | 3 | 531 | 36 | 19,116 | 3/18/22 | 87 | 63 | 37 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1179 | 14309 | LOCHLEA LN | HILLHEAD CIR | ALLEY DONCASTER DR | E | AC | 9 | 165 | 36 | 5,940 | 8/30/23 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2089 | 14779 | VINCENT CIR | GOTHARD ST | END | E | AC | 4 | 422 | 40 | 18,680 | 5/9/24 | 87 | 48 | 52 | 0 | New Construction - Initial | 1/1/80 |
| 444 | 14760 | CHURCHILL DR | ROCKINGHORSE LN | QUARTERHORSE LN | E | AC | 5 | 393 | 36 | 14,148 | 5/7/24 | 87 | 0 | 52 | 48 | Surface Treatment - Slurry Seal | 11/28/19 |
| 5000 | 60080 | NORTH PACIFIC | 25TH ST | ANDERSON ST | E | AC | 2 | 485 | 25 | 12,125 | 5/6/24 | 87 | 42 | 23 | 35 | New Construction - Initial | 1/1/80 |
| 797 | 15359 | GARDEN CIR | SURFDALE CIR | CDS | E | AC | 5 | 343 | 36 | 14,348 | 5/6/24 | 87 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1030 | 15224 | JULIETTE LOW DR | ANITA LN | SILVER LN | E | AC | 4 | 890 | 36 | 32,040 | 3/18/22 | 87 | 58 | 39 | 3 | Surface Treatment - Slurry Seal | 7/29/20 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1488 | 13029 | PARK ST | SPRINGFIELD AVE | UTICA AVE | E | AC | 6 | 645 | 37 | 23,865 | 6/29/21 | 87 | 0 | 45 | 55 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1744 | 14307 | SCONE DR | CUPAR LN | BANFF LN | E | AC | 9 | 266 | 36 | 9,576 | 8/30/23 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1751 | 14529 | SPRINGDALE ST | LITTLEFIELD DR | END | E | AC | 5 | 225 | 80 | 18,000 | 3/31/26 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1960 | 15273 | TAYLOR DR | CAMABY LN | DELAWARE ST | E | AC | 4 | 1,371 | 36 | 49,068 | 4/9/24 | 87 | 39 | 51 | 10 | New Construction - Initial | 1/1/80 |
| 317 | 13925 | BRIXHAM CIR | WEYMOUTH LN | CDS | E | AAC | 7 | 142 | 32 | 7,956 | 4/14/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 387 | 15721 | CARNABY LN | TAYLOR DR | DANTON CIR | E | AAC | 4 | 529 | 36 | 19,044 | 4/14/26 | 87 | 25 | 75 | 0 | Overlay - AC Structural | 11/28/19 |
| 481 | 15314 | COLUMBIA LN | CORNELL DR | BROWN CIR | E | AC | 1 | 520 | 36 | 18,720 | 12/18/24 | 87 | 40 | 27 | 33 | New Construction | 1/1/80 |
| 664 | 14608 | EL ARROYO DR | BRITTANY LN | NEWLAND ST | E | AC | 4 | 496 | 36 | 17,856 | 5/13/24 | 87 | 18 | 82 | 0 | Surface Treatment - Slurry Seal | 4/1/17 |
| 718 | 15367 | FALMOUTH DR | WORCHESTER LN | SHERBORNE LN | E | AAC | 7 | 530 | 36 | 21,398 | 4/14/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 849 | 15485 | GRAYSTONE LN | VERDANT DR | END | E | AC | 8 | 554 | 34 | 20,636 | 2/23/22 | 87 | 17 | 44 | 39 | Surface Treatment - Slurry Seal | 2/13/23 |
| 1114 | 14516 | LANAI CIR | LUAU LN | CDS | E | AAC | 9 | 345 | 32 | 12,540 | 4/22/26 | 87 | 20 | 80 | 0 | Overlay - AC Structural | 5/11/19 |
| 1349 | 13406 | MORION CIR | COLLINS LN | CDS | E | AC | 5 | 222 | 36 | 7,992 | 5/20/24 | 87 | 17 | 83 | 0 | New Construction | 1/1/80 |
| 1381 | 14468 | NEVADA DR | STARDUST DR | TANGIERS DR | E | AAC | 1 | 260 | 36 | 9,360 | 5/8/24 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 2040 | 13255 | UNDERHILL LN | MYRTLE DR | SHAYNE DR | E | AC | 3 | 1,020 | 36 | 36,720 | 4/6/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2190 | 13927 | WORCHESTER LN | WENLOCK CIR | YORKTOWN AVE | E | AAC | 7 | 174 | 36 | 6,264 | 4/14/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 515 | 13514 | COUNT CIR | BURKE LN | END | E | AC | 3 | 130 | 32 | 5,660 | 3/31/22 | 87 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 521 | 15734 | CRABB LN | SPEER DR | CDS | E | AC | 4 | 456 | 36 | 16,416 | 5/13/24 | 87 | 4 | 96 | 0 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1160 | 14806 | LIBERTY AVE | ALLEY LIBERTY AVE | BEACH BLVD | E | AAC | 4 | 1,331 | 36 | 47,916 | 4/13/26 | 87 | 22 | 66 | 12 | Overlay - AC Structural | 11/1/19 |
| 1326 | 15609 | MOLOKAI DR | CATALINA CIR | NEWPORT CIR | E | AAC | 9 | 520 | 36 | 18,720 | 4/22/26 | 87 | 51 | 49 | 0 | Overlay - AC Structural | 5/11/19 |
| 1342 | 14451 | MOONSHADOW CIR | VIEWPOINT LN | CDS | E | AC | 4 | 273 | 32 | 10,236 | 4/6/22 | 87 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1923 | 13688 | SUNNYCREST LN | ROYAL OAK DR | END | E | AC | 1 | 334 | 36 | 14,024 | 4/8/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2118 | 14069 | WATERBURY LN | HYANNIS PORT DR | CAPE COD DR | E | AC | 7 | 262 | 36 | 10,182 | 4/16/26 | 87 | 61 | 32 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 446 | 13752 | CITADEL DR | LA SALLE LN | STANFORD LN | E | AC | 1 | 260 | 36 | 9,072 | 4/27/26 | 87 | 39 | 45 | 16 | New Construction | 1/1/80 |
| 677 | 15952 | ELLSWORTH DR | KELVIN LN | MINERVA LN | E | AAC | 9 | 944 | 36 | 34,734 | 5/9/24 | 87 | 0 | 98 | 2 | Overlay - AC Structural | 5/11/18 |
| 935 | 14639 | HILL ST | FRANKFORT AVE | ALLEY GENEVA AVE | E | AC | 9 | 160 | 33 | 5,280 | 8/24/23 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1092 | 15903 | KREPP DR | WATERBURY LN | STEVEN LN | E | AC | 8 | 960 | 36 | 36,060 | 4/15/26 | 87 | 83 | 10 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1213 | 15786 | LYNN ST | JAMES CIR | LOS PATOS AVE | E | AAC | 2 | 821 | 36 | 27,056 | 5/21/24 | 87 | 0 | 35 | 65 | Overlay - AC Fabric | 12/1/17 |
| 184 | 14165 | BANCROFT CIR | HAZELBROOK DR | CDS | E | AC | 7 | 496 | 36 | 19,356 | 4/16/26 | 87 | 51 | 49 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1850 | 14337 | SOUTHSHORE DR | FLEET LN | COMPASS LN | E | AC | 9 | 618 | 36 | 22,748 | 4/1/24 | 87 | 37 | 63 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2163 | 13848 | WILLETT LN | ROYALIST DR | END | E | AC | 1 | 530 | 36 | 20,330 | 12/18/24 | 87 | 33 | 63 | 4 | New Construction - Initial | 1/1/80 |
| 299 | 14914 | BREDA LN | GHENT DR | NORDINA DR | E | AC | 5 | 1,120 | 36 | 40,570 | 4/1/26 | 87 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 339 | 14611 | BUSHWICK DR | ASHBURTON CIR | ATTLEBORO CIR | E | AC | 9 | 235 | 36 | 8,460 | 8/24/23 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 5250 | 60400 | 6TH ST | PACIFIC N | PCH | E | AC | 2 | 197 | 25 | 4,925 | 4/23/26 | 87 | 23 | 77 | 0 | New Construction - Initial | 1/1/80 |
| 5340 | 60530 | 15TH ST | PACIFIC S | END | E | AC | 2 | 80 | 22 | 1,760 | 4/23/26 | 87 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5410 | 60630 | 22ND ST | PCH | END | E | AC | 2 | 363 | 30 | 10,890 | 4/23/26 | 87 | 0 | 53 | 47 | Surface Treatment - Slurry Seal | 7/27/22 |
| 679 | 14972 | ELMCREST LN | DRYBROOK LN | DRYBANK DR | E | AAC | 7 | 1,283 | 36 | 46,188 | 8/17/23 | 87 | 0 | 76 | 24 | Overlay - AC Structural | 3/1/11 |
| 1359 | 14777 | MOUNTJOY DR | GOTHARD ST | ENTERPRISE LN | E | AAC | 4 | 439 | 40 | 18,310 | 4/14/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 767 | 14086 | FORRESTAL DR | BROOKHURST ST | TRENTON LN | E | AC | 8 | 884 | 36 | 32,824 | 2/25/22 | 87 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 811 | 14802 | GERALDINE LN | SLATER AVE | ROSANNA DR | E | AAC | 4 | 511 | 36 | 19,146 | 4/13/26 | 87 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1416 | 14618 | NORTHPORT DR | PORT GREENWICH LN | END | E | AC | 9 | 453 | 36 | 16,308 | 8/21/23 | 88 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1651 | 15749 | ROBIDOUX DR | BEACH BLVD | B ST | E | AC | 4 | 599 | 28 | 15,572 | 3/31/22 | 88 | 58 | 36 | 6 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1700 | 13959 | SAILPORT DR | HOPEBAY LN | CDS | E | AC | 7 | 340 | 32 | 12,130 | 4/15/26 | 88 | 39 | 61 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1953 | 14932 | TAMIKO CIR | PRICE DR | END | E | AC | 5 | 385 | 36 | 15,360 | 3/30/26 | 88 | 15 | 85 | 0 | New Construction - Initial | 1/1/80 |
| 197 | 15068 | BARUNA LN | SEA WITCH LN | DAVENPORT DR | E | AC | 2 | 886 | 36 | 31,896 | 4/7/22 | 88 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 276 | 13756 | BOLSA PARK LN | SYDNEY DR | MEDFORD DR | E | AC | 1 | 274 | 36 | 9,576 | 12/18/24 | 88 | 71 | 29 | 0 | New Construction - Initial | 1/1/80 |
| 408 | 14035 | CATO CIR | FLAXMAN DR | END | E | AAC | 7 | 347 | 32 | 11,104 | 8/21/23 | 88 | 34 | 66 | 0 | Overlay - AC Structural | 3/1/11 |
| 420 | 13522 | CHARLES LN | DON DR | RHINE DR | E | AC | 4 | 503 | 36 | 18,858 | 3/31/22 | 88 | 0 | 69 | 31 | Surface Treatment - Slurry Seal | 7/29/20 |
| 452 | 14745 | CLAY AVE | STEWARD ST | CDS | E | AC | 7 | 830 | 28 | 24,740 | 5/6/24 | 88 | 0 | 66 | 34 | New Construction | 1/1/80 |
| 5210 | 60360 | 3RD ST | PACIFIC S | END | E | AC | 2 | 24 | 15 | 360 | 4/23/26 | 88 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 599 | 13211 | DIABLO CIR | EDGEWATER LN | CDS | E | AAC | 2 | 350 | 36 | 14,100 | 5/10/24 | 88 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1164 | 14109 | LIGHTHOUSE LN | SEAPORT DR | SEALROCK DR | E | AAC | 9 | 246 | 36 | 8,856 | 8/21/23 | 88 | 20 | 80 | 0 | Overlay - AC Structural | 3/1/11 |
| 1324 | 14982 | MODALE DR | FLAGSTAFF LN | NEWLAND ST | E | AC | 7 | 595 | 36 | 21,420 | 4/8/24 | 88 | 34 | 66 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1399 | 14371 | NIGUEL CIR | POLYNESIAN LN | CDS | E | AAC | 9 | 480 | 36 | 19,080 | 3/26/24 | 88 | 0 | 93 | 7 | Overlay - AC Structural | 5/11/18 |
| 1513 | 14363 | PENSACOLA CIR | PEPPERTREE DR | CDS | E | AC | 8 | 334 | 32 | 12,188 | 5/20/24 | 88 | 22 | 41 | 37 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1844 | 13192 | SOMERSET LN | MALDEN CIR | GILBERT DR | E | AC | 2 | 1,041 | 36 | 37,976 | 4/9/22 | 88 | 34 | 36 | 30 | New Construction | 1/1/80 |
| 2086 | 14418 | VILLA NUEVA DR | ALTAMIRANO LN | CARRANZA LN | E | AC | 5 | 256 | 36 | 9,966 | 5/23/24 | 88 | 33 | 67 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 25 | 15931 | ALEXANDRIA DR | HANOVER LN | VICTORIA LN | E | AC | 1 | 781 | 36 | 28,116 | 4/8/26 | 88 | 60 | 40 | 0 | New Construction | 1/1/80 |
| 433 | 14358 | CHEVY CHASE DR | PINETREE LN | LEMONTREE LN | E | AC | 8 | 727 | 36 | 26,672 | 5/20/24 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 5000 | 60050 | NORTH PACIFIC | 16TH ST | 19TH ST | E | AC | 2 | 705 | 25 | 17,625 | 5/6/24 | 88 | 52 | 48 | 0 | New Construction - Initial | 1/1/80 |
| 735 | 13068 | FIFTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 375 | 54 | 19,015 | 6/22/21 | 88 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 884 | 13782 | HANOVER LN | OXFORD DR | PARIS CIR | E | AC | 1 | 260 | 36 | 9,360 | 4/8/26 | 88 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 1091 | 15012 | KOVACS LN | TALBERT AVE | REDONDO CIR | E | AC | 4 | 911 | 40 | 36,440 | 5/13/24 | 88 | 19 | 81 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1170 | 13135 | LINDA CIR | TOMAS LN | END | E | AAC | 2 | 470 | 36 | 18,720 | 5/21/24 | 88 | 50 | 50 | 0 | Overlay - AC Fabric | 10/1/16 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1462 | 14732 | OSWEGO AVE | ALABAMA ST | ALLEY ALABAMA ST | E | AAC | 6 | 322 | 36 | 11,304 | 8/14/23 | 88 | 48 | 52 | 0 | Overlay - AC Structural | 3/1/11 |
| 1838 | 14461 | TALBERT AVE | GOTHARD ST | END | E | AC | 4 | 747 | 40 | 31,380 | 5/9/24 | 88 | 57 | 43 | 0 | New Construction - Initial | 1/1/80 |
| 1881 | 15825 | STARFIRE LN | DAYTONA CIR | BANNING AVE | E | AC | 9 | 294 | 36 | 10,584 | 4/17/24 | 88 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1917 | 13407 | SUNDANCE CIR | COLLINS LN | CDS | E | AC | 5 | 222 | 36 | 9,492 | 5/20/24 | 88 | 20 | 80 | 0 | New Construction - Initial | 1/1/80 |
| 1094 | 15991 | KRISTOPHER LN | WRENFIELD DR | SHENLYN DR | E | AAC | 3 | 1,264 | 36 | 44,928 | 5/21/24 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1464 | 14743 | OWEN AVE | FLORIDA ST | BEACH BLVD | E | AAC | 7 | 660 | 36 | 23,760 | 4/15/26 | 88 | 18 | 75 | 7 | Overlay - AC Structural | 11/28/19 |
| 156 | 13686 | ASPEN CIR | ROYAL OAK DR | END | E | AC | 1 | 350 | 32 | 13,000 | 5/6/26 | 88 | 23 | 77 | 0 | New Construction | 1/1/80 |
| 1594 | 13889 | QUIETSANDS CIR | LAWN HAVEN DR | CDS | E | AC | 5 | 193 | 36 | 8,948 | 4/15/24 | 88 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1637 | 14374 | RHODESIA DR | BAHAMA LN | KANEOHE LN | E | AAC | 9 | 260 | 36 | 9,072 | 3/27/24 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 2065 | 13187 | VENTURE DR | SUNDANCER LN | CDS | E | AC | 2 | 189 | 32 | 7,848 | 4/7/22 | 88 | 0 | 50 | 50 | New Construction - Initial | 1/1/80 |
| 318 | 60490 | BROADWAY | PCH | PACIFIC S | E | AC | 2 | 304 | 44 | 13,376 | 4/23/26 | 88 | 19 | 42 | 39 | New Construction - Initial | 1/1/80 |
| 5010 | 60140 | SOUTH PACIFIC | BROADWAY | 10TH ST | E | AC | 2 | 728 | 25 | 18,200 | 4/23/26 | 88 | 44 | 47 | 9 | New Construction - Initial | 1/1/80 |
| 643 | 13244 | EAGLE LN | MEADOWLARK DR | MIDDLECOFF DR | E | AC | 3 | 871 | 36 | 32,106 | 3/23/22 | 88 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 1890 | 13980 | STEVEN LN | KNEEP DR | RONNEY DR | E | AC | 8 | 255 | 36 | 9,530 | 4/15/26 | 88 | 36 | 57 | 7 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2041 | 14460 | UPLAND DR | QUEENS PARK LN | SPARKMAN LN | E | AAC | 8 | 253 | 36 | 9,108 | 3/19/24 | 88 | 43 | 57 | 0 | Overlay - AC Structural | 5/11/18 |
| 274 | 13228 | BOLERO LN | FINISTERRE DR | SIRIUS DR | E | AC | 2 | 800 | 36 | 29,550 | 4/7/22 | 88 | 52 | 48 | 0 | New Construction - Initial | 1/1/80 |
| 652 | 15066 | EDGEWATER LN | FIGARO CIR | DAVENPORT DR | E | AAC | 2 | 807 | 36 | 29,052 | 5/10/24 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 852 | 15116 | GREEN ST | BARRACUDA LN | WARNER AVE | E | AC | 2 | 884 | 36 | 31,824 | 3/22/22 | 88 | 37 | 50 | 13 | New Construction | 1/1/80 |
| 972 | 14447 | HYANNIS PORT DR | WATERBURY LN | BUSHARD ST | E | AC | 7 | 1,065 | 36 | 38,340 | 4/16/26 | 88 | 62 | 29 | 9 | Surface Treatment - Slurry Seal | 7/15/21 |
| 977 | 14361 | INDIAN WELLS CIR | LEMONTREE LN | CDS | E | AC | 8 | 499 | 36 | 19,464 | 5/20/24 | 88 | 0 | 94 | 6 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1089 | 13571 | KOLEDO LN | BARTON DR | ALLEY BARTON DR | E | AAC | 4 | 165 | 36 | 5,940 | 5/30/24 | 88 | 0 | 87 | 13 | Overlay - AC Structural | 10/1/12 |
| 120 | 15559 | AMBERWICK LN | EFFINGHAM DR | CDS | E | AC | 8 | 1,021 | 36 | 38,256 | 4/10/24 | 88 | 64 | 32 | 4 | New Construction | 1/1/80 |
| 258 | 14597 | BUSHARD ST | LITCHFIELD DR | VELARDO DR | E | AC | 8 | 259 | 28 | 7,252 | 4/16/26 | 88 | 46 | 54 | 0 | New Construction | 1/1/80 |
| 261 | 13812 | BLUE JAY CIR | BLUEBIRD LN | END | E | AC | 1 | 530 | 36 | 20,330 | 3/21/22 | 88 | 46 | 50 | 4 | New Construction | 1/1/80 |
| 362 | 13327 | CAMILLE DR | MYTINGER LN | SUMMERCLOUD LN | E | AC | 3 | 358 | 36 | 12,888 | 4/6/26 | 88 | 66 | 34 | 0 | New Construction | 1/1/80 |
| 751 | 223 | GRAHAM ST | SLATER AVE | END | E | AC | 0 | 1,638 | 30 | 49,140 | 3/31/26 | 88 | 71 | 29 | 0 | New Construction - Initial | 1/1/80 |
| 880 | 13928 | HAMDEN LN | HARDING LN | NEWHAVEN LN | E | AC | 7 | 256 | 36 | 8,928 | 4/2/24 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1219 | 14604 | MADERA LN | ATHENA DR | MUKAI CT | E | AC | 5 | 386 | 36 | 15,036 | 5/22/24 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1244 | 14410 | MARBER LN | WOODBORO DR | TALBERT AVE | E | AC | 5 | 182 | 36 | 6,552 | 3/30/26 | 88 | 42 | 58 | 0 | New Construction | 1/1/80 |
| 1421 | 13786 | NOTTINGHAM LN | OXFORD DR | HALIFAX DR | E | AC | 1 | 1,040 | 36 | 37,152 | 12/18/24 | 88 | 70 | 27 | 3 | New Construction | 1/1/80 |
| 2202 | 15575 | ZAMORA LN | KEOKI CIR | MOKIHANA DR | E | AAC | 9 | 761 | 36 | 27,396 | 5/20/24 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 5370 | 60570 | 18TH ST | PCH | PACIFIC N | E | AC | 2 | 106 | 29 | 3,074 | 4/23/26 | 88 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 609 | 14965 | DON DR | CHARLES LN | RHINE DR | E | AC | 4 | 649 | 36 | 24,864 | 3/31/22 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 657 | 15431 | EDUCATION LN | FREDERICK CIR | CONSTITUTION DR | E | AC | 8 | 759 | 36 | 27,324 | 3/7/22 | 88 | 0 | 70 | 30 | New Construction | 1/1/80 |
| 966 | 15054 | HUMBOLDT DR | WANDERER LN | BARNSTABLE CIR | E | AC | 2 | 1,115 | 36 | 40,140 | 4/7/22 | 88 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 971 | 15405 | HURSTWELL DR | BOWMAN LN | DITMAR LN | E | AAC | 7 | 566 | 36 | 20,376 | 8/17/23 | 88 | 0 | 80 | 20 | Overlay - AC Structural | 3/1/11 |
| 1033 | 14287 | JURA DR | WOODLEA LN | HUNTER LN | E | AC | 8 | 267 | 36 | 9,612 | 3/19/24 | 88 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1450 | 14763 | ONTARIO DR | CARNABY LN | HUNTINGTON ST | E | AAC | 4 | 483 | 36 | 17,100 | 4/14/26 | 88 | 18 | 73 | 9 | Overlay - AC Structural | 11/28/19 |
| 1548 | 14368 | POLYNESIAN LN | HAMILTON AVE | REGATTA DR | E | AAC | 9 | 168 | 36 | 6,048 | 5/6/24 | 88 | 21 | 75 | 4 | Overlay - AC Structural | 5/11/18 |
| 1664 | 13888 | ROLLINS LN | RETHERFORD DR | BREELAND DR | E | AC | 3 | 281 | 36 | 10,866 | 12/12/24 | 88 | 71 | 29 | 0 | New Construction | 1/1/80 |
| 1900 | 14212 | STONYBROOK DR | BROOKJURST ST | CRAIMER LN | E | AC | 8 | 1,255 | 36 | 45,180 | 2/28/22 | 88 | 0 | 67 | 33 | Surface Treatment - Slurry Seal | 2/14/23 |
| 259 | 15747 | BLAYLOCK DR | A ST | BARCELONA LN | E | AC | 4 | 887 | 36 | 32,182 | 3/31/22 | 88 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 505 | 15309 | CORNELL DR | BOLSA PARK LN | STANFORD LN | E | AC | 1 | 1,298 | 36 | 46,152 | 4/8/26 | 88 | 43 | 57 | 0 | New Construction | 1/1/80 |
| 933 | 15600 | HIGHTIDE DR | SEACREST LN | SUMMER CIR | E | AAC | 9 | 511 | 36 | 18,396 | 4/21/26 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 1040 | 14376 | KANEOHE LN | REGATTA DR | HAITI DR | E | AC | 9 | 273 | 36 | 10,578 | 3/26/24 | 88 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1083 | 15944 | KITE DR | SPARKMAN LN | SKIMMER LN | E | AC | 8 | 1,007 | 36 | 36,252 | 3/18/24 | 88 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1093 | 13575 | KRISTIN CIR | KEELSON LN | END | E | AAC | 4 | 197 | 34 | 6,698 | 5/30/24 | 88 | 0 | 57 | 43 | Overlay - AC Structural | 10/1/12 |
| 1302 | 14790 | METZLER LN | SLATER AVE | BELVA DR | E | AAC | 4 | 1,319 | 40 | 52,760 | 4/13/26 | 88 | 57 | 38 | 5 | Overlay - AC Structural | 11/1/19 |
| 1381 | 15589 | NEVADA DR | TANGIERS DR | HAMMON LN | E | AAC | 1 | 1,203 | 36 | 43,308 | 5/8/24 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 1700 | 15382 | SAILPORT DR | CORALWOOD LN | HOPEBAY LN | E | AC | 7 | 1,039 | 36 | 37,654 | 4/15/26 | 88 | 26 | 57 | 17 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1945 | 13765 | SYDNEY DR | BOLSA PARK LN | BAYSIDE LN | E | AC | 1 | 769 | 36 | 28,184 | 4/27/26 | 88 | 0 | 80 | 20 | New Construction - Initial | 1/1/80 |
| 1949 | 14509 | TAHITI CIR | MALIBU LN | CDS | E | AAC | 9 | 266 | 32 | 10,012 | 4/22/26 | 88 | 50 | 50 | 0 | Overlay - AC Structural | 5/11/19 |
| 2306 | 60870 | PLAZA LN | ACORN DR | DOVERTON DR | E | AC | 2 | 828 | 28 | 23,184 | 4/2/26 | 88 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 498 | 15992 | COOPER LN | ABBOTT DR | MARILYN DR | E | AC | 3 | 1,555 | 36 | 55,732 | 3/18/22 | 88 | 0 | 96 | 4 | Surface Treatment - Slurry Seal | 7/29/20 |
| 734 | 12996 | FIFTEENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/22/21 | 88 | 0 | 94 | 6 | Surface Treatment - Slurry Seal | 7/27/22 |
| 85 | 14247 | ATLANTA AVE | BASTIA LN | END | E | AC | 9 | 527 | 26 | 13,702 | 8/30/23 | 88 | 0 | 35 | 65 | New Construction | 1/1/80 |
| 1257 | 13506 | MARS DR | GEMINI LN | GOTHARD ST | E | AC | 3 | 361 | 40 | 15,190 | 4/7/22 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1326 | 14513 | MOLOKAI DR | NEWPORT CIR | BUSHARD ST | E | AAC | 9 | 322 | 36 | 11,592 | 4/22/26 | 88 | 61 | 35 | 4 | Overlay - AC Structural | 5/11/19 |
| 2030 | 50100 | TWELFTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 375 | 46 | 17,250 | 6/22/21 | 88 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 241 | 13934 | BETHEL CIR | BRIDGEPORT DR | CDS | E | AAC | 7 | 315 | 32 | 13,728 | 4/15/26 | 88 | 0 | 43 | 57 | Overlay - AC Structural | 11/28/19 |
| 296 | 13242 | BRASSIE CIR | SPRINGDALE ST | END | E | AAC | 3 | 270 | 32 | 9,890 | 5/9/24 | 88 | 0 | 45 | 55 | Overlay - AC Fabric | 10/1/16 |
| 435 | 14954 | CHINOOK AVE | CADCADE ST | WILLOW LN | E | AC | 1 | 833 | 32 | 26,656 | 4/8/22 | 88 | 0 | 33 | 67 | New Construction | 1/1/80 |
| 933 | 14489 | HIGHTIDE DR | OCEANVIEW LN | SEACREST LN | E | AAC | 9 | 258 | 36 | 10,288 | 4/21/26 | 88 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 965 | 14500 | HULA CIR | CHRISTINE DR | CDS | E | AC | 9 | 220 | 36 | 10,420 | 4/17/24 | 88 | 36 | 64 | 0 | New Construction | 1/1/80 |
| 1776 | 15112 | SELL CIR | HEIL AVE | CDS | E | AC | 2 | 492 | 36 | 21,672 | 4/9/22 | 89 | 28 | 57 | 15 | New Construction | 1/1/80 |
| 448 | 13869 | CLARE DR | EDWARDS ST | TULLOW LN | E | AC | 3 | 406 | 36 | 14,328 | 12/19/24 | 89 | 38 | 53 | 9 | New Construction | 1/1/80 |
| 843 | 14025 | GRACE CIR | DITMAR LN | END | E | AAC | 7 | 345 | 32 | 11,040 | 8/17/23 | 89 | 20 | 80 | 0 | Overlay - AC Structural | 3/1/11 |
| 1343 | 15834 | MOONTIDE CIR | ADAMS AVE FRONTAGE | CDS | E | AC | 7 | 635 | 36 | 24,360 | 4/16/26 | 89 | 66 | 34 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1380 | 15513 | NETHERWAY DR | PAISLEY LN | QUEENS PARK LN | E | AC | 8 | 1,039 | 36 | 38,580 | 3/18/24 | 89 | 0 | 66 | 34 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1385 | 15841 | PALM AVE | MAIN ST | LAKE ST | E | AC | 6 | 265 | 46 | 12,190 | 7/8/21 | 89 | 0 | 77 | 23 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1911 | 15604 | SUMMERWIND LN | OCEANCREST DR | OCEANBREEZE LN | E | AC | 9 | 817 | 36 | 29,412 | 3/26/24 | 89 | 48 | 40 | 12 | Surface Treatment - Slurry Seal | 5/11/19 |
| 485 | 14026 | COMPTON DR | DITMAR LN | NEWLAND AVE | E | AC | 7 | 442 | 36 | 15,912 | 8/17/23 | 89 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 647 | 14421 | EASY LN | MIDWAY DR | CDS | E | AC | 5 | 127 | 36 | 4,572 | 3/31/26 | 89 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 900 | 14780 | HARRIMAN ST | GOTHARD ST | CDS | E | AC | 4 | 331 | 36 | 11,916 | 5/9/24 | 89 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 933 | 14491 | HIGHTIDE DR | SUMMER CIR | VACATION LN | E | AAC | 9 | 254 | 36 | 10,144 | 4/21/26 | 89 | 20 | 69 | 11 | Overlay - AC Structural | 5/11/19 |
| 1087 | 13794 | KNOLLWOOD CIR | HALIFAX DR | END | E | AC | 1 | 326 | 36 | 13,236 | 4/8/26 | 89 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 1322 | 15048 | MISTRAL DR | LEONARD LN | TISBURY CIR | E | AC | 2 | 527 | 36 | 18,972 | 4/7/22 | 89 | 0 | 67 | 33 | New Construction | 1/1/80 |
| 1389 | 13931 | NEWHAVEN LN | ALLEY GIILFORD CIR | YORKTOWN AVE | E | AC | 7 | 150 | 36 | 5,400 | 4/2/24 | 89 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1446 | 12927 | OLIVE AVE | FIRST ST | SECOND ST | E | AC | 6 | 265 | 36 | 9,540 | 6/30/21 | 89 | 0 | 36 | 64 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1602 | 14471 | RAMBLER DR | ALLEY BUSHARD ST | BUSHARD ST | E | AC | 9 | 150 | 36 | 5,400 | 5/20/24 | 89 | 46 | 54 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1847 | 13772 | SORENTO CIR | HANOVER LN | END | E | AC | 1 | 433 | 36 | 17,388 | 12/18/24 | 89 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 2129 | 13835 | WELDE CIR | AULNAY LN | END | E | AC | 1 | 397 | 36 | 15,542 | 12/18/24 | 89 | 72 | 28 | 0 | New Construction - Initial | 1/1/80 |
| 369 | 13795 | CANTERBURY DR | VICTORIA LN | YORKSHIRE LN | E | AC | 1 | 782 | 36 | 27,864 | 5/8/26 | 89 | 50 | 39 | 11 | New Construction | 1/1/80 |
| 674 | 13839 | ELIOT CIR | WINSLOW DR | END | E | AC | 1 | 339 | 36 | 13,454 | 12/20/24 | 89 | 19 | 81 | 0 | New Construction | 1/1/80 |
| 760 | 15818 | FLOWER LN | SUNBREEZE DR | SLATER AVE | E | AAC | 3 | 314 | 36 | 12,054 | 5/20/24 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 805 | 13508 | GEMINI LN | MARS DR | SATURN DR | E | AC | 3 | 575 | 40 | 24,500 | 4/7/22 | 89 | 0 | 63 | 37 | Surface Treatment - Slurry Seal | 7/29/20 |
| 897 | 14463 | HAROLD PL | SPA DR | GRAHAM ST | E | AAC | 1 | 563 | 36 | 20,268 | 5/8/24 | 89 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 915 | 15893 | HAZELBROOK DR | RAMONA LN | BUSHARD ST | E | AC | 7 | 1,122 | 36 | 40,392 | 4/16/26 | 89 | 35 | 65 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1089 | 15263 | KOLEDO LN | MANDRELL DR | BARTON DR | E | AAC | 4 | 330 | 36 | 11,880 | 5/30/24 | 89 | 16 | 56 | 28 | Overlay - AC Structural | 10/1/12 |
| 1469 | 15201 | PACEMONT DR | VESTRY CIR | FIELDBURY LN | E | AC | 5 | 873 | 36 | 31,428 | 5/23/24 | 89 | 29 | 48 | 23 | New Construction | 1/1/80 |
| 1515 | 15562 | PEPPERTREE DR | LEMONTREE LN | SPYGLASS LN | E | AAC | 8 | 496 | 36 | 18,606 | 5/20/24 | 89 | 0 | 94 | 6 | Overlay - AC Structural | 5/11/18 |
| 172 | 15748 | B ST | WARNER AVE | BLAYLOCK DR | E | AC | 4 | 670 | 35 | 23,450 | 3/31/22 | 89 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1825 | 13001 | SIXTEENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 89 | 0 | 91 | 9 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1912 | 14458 | SUMMIT DR | BEACON HILL LN | GOLDENWEST ST | E | AC | 5 | 709 | 44 | 31,196 | 5/6/24 | 89 | 0 | 57 | 43 | New Construction - Initial | 1/1/80 |
| 1997 | 14535 | WARNER AVE | WEATHERLY LN | SCEPTRE LN | E | AC | 2 | 720 | 63 | 45,360 | 4/9/22 | 89 | 41 | 59 | 0 | New Construction - Initial | 1/1/80 |
| 2119 | 15553 | WATERFRONT DR | BOWSPRIT LN | BUSHARD ST | E | AC | 9 | 517 | 36 | 19,362 | 3/20/24 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2306 | 60860 | PLAZA LN | WARNER AVE | ACORN DR | E | AC | 2 | 750 | 36 | 34,320 | 4/2/26 | 89 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 234 | 14606 | BENJAMIN DR | BRITTANY LN | NEWLAND ST | E | AAC | 4 | 483 | 36 | 17,388 | 4/9/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 12/5/19 |
| 259 | 15746 | BLAYLOCK DR | BEACH BLVD | A ST | E | AC | 4 | 300 | 35 | 10,500 | 4/6/22 | 89 | 0 | 57 | 43 | Surface Treatment - Slurry Seal | 7/29/20 |
| 266 | 15176 | BLUEGATE LN | HAMSHIRE DR | CDS | E | AC | 5 | 453 | 36 | 18,108 | 5/21/24 | 89 | 20 | 80 | 0 | New Construction | 1/1/80 |
| 335 | 15369 | BURNHAM CIR | WORCHESTER LN | CDS | E | AC | 7 | 556 | 36 | 23,166 | 4/2/24 | 89 | 23 | 61 | 16 | Surface Treatment - Slurry Seal | 11/28/19 |
| 739 | 15072 | FINISTERRE DR | BOLERO LN | BARUNA LN | E | AC | 2 | 470 | 36 | 16,920 | 4/7/22 | 89 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 957 | 15522 | HORIZON LN | SPINNAKER DR | SILVER STRAND DR | E | AAC | 8 | 500 | 36 | 18,000 | 3/6/24 | 89 | 0 | 57 | 43 | Overlay - AC Structural | 5/11/18 |
| 1579 | 14603 | PROMENADE PKWY DR | MAIN ST | SEAGATE DR | E | AC | 4 | 849 | 42 | 35,658 | 3/5/24 | 89 | 0 | 54 | 46 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1610 | 13171 | REBEL CIR | SUNDANCER LN | CDS | E | AAC | 2 | 485 | 34 | 17,990 | 5/7/24 | 89 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 453 | 14482 | CLEARBROOK DR | ARCHER CIR | ST JOHN LN | E | AC | 9 | 250 | 36 | 9,750 | 4/25/24 | 89 | 0 | 71 | 29 | Surface Treatment - Slurry Seal | 5/11/19 |
| 889 | 13892 | HARBOR KEY CIR | EVENING HILL DR | CDS | E | AAC | 5 | 195 | 32 | 8,240 | 4/30/26 | 89 | 0 | 33 | 67 | Overlay - AC Structural | 11/28/19 |
| 904 | 13637 | HARTLUND ST | TALBERT AVE | ALLEY TALBERT AVE | E | AAC | 4 | 175 | 34 | 5,814 | 4/13/26 | 89 | 23 | 77 | 0 | Overlay - AC Structural | 11/28/19 |
| 1047 | 13574 | KEELSON LN | KRISTIN CIR | END | E | AAC | 4 | 107 | 38 | 5,266 | 5/30/24 | 89 | 0 | 47 | 53 | Overlay - AC Structural | 10/1/12 |
| 1202 | 14514 | LUAU LN | LANAI CIR | LEILANI DR | E | AC | 9 | 258 | 36 | 8,700 | 4/17/24 | 89 | 23 | 77 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1324 | 15814 | MODALE DR | CHAPEL LN | FLAGSTAFF LN | E | AC | 7 | 727 | 36 | 26,652 | 4/8/24 | 89 | 41 | 59 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 2154 | 13469 | WHITNEY DR | RUSHMOOR LN | END | E | AC | 4 | 535 | 36 | 22,860 | 5/13/24 | 89 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 244 | 14450 | BICKLEY DR | BUSHARD ST FRONTAGE | BROMLEY LN | E | AC | 8 | 1,128 | 36 | 41,358 | 3/9/22 | 89 | 44 | 53 | 3 | Surface Treatment - Slurry Seal | 2/8/23 |
| 493 | 14459 | CONSTITUTION LN | EDUCATION LN | BROOKHURST ST | E | AC | 8 | 661 | 36 | 23,796 | 3/9/22 | 89 | 25 | 75 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 5010 | 60120 | SOUTH PACIFIC | 19TH ST | 16TH ST | E | AC | 2 | 705 | 25 | 17,625 | 4/23/26 | 89 | 19 | 68 | 13 | New Construction - Initial | 1/1/80 |
| 747 | 15913 | FLAGSTAFF LN | MODALE DR | CDS | E | AAC | 7 | 1,269 | 36 | 48,717 | 4/6/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1099 | 14508 | LA JOLLA CIR | MALIBU LN | CDS | E | AAC | 9 | 331 | 32 | 12,092 | 4/22/26 | 89 | 20 | 76 | 4 | Overlay - AC Structural | 5/11/19 |
| 1188 | 14116 | LONDONDERRY LN | MUNSTER DR | END | E | AC | 9 | 130 | 36 | 4,680 | 8/23/23 | 89 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1737 | 15376 | SAUSALITO LN | NAPLES DR | LORRAINE DR | E | AC | 7 | 501 | 36 | 18,036 | 4/15/26 | 89 | 36 | 64 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2099 | 14819 | WAAL CIR | HOLLAND DR | CDS | E | AC | 4 | 560 | 36 | 21,410 | 4/6/22 | 89 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2202 | 14390 | ZAMORA LN | NEOLANI DR | KEOKI CIR | E | AAC | 9 | 251 | 36 | 9,036 | 5/20/24 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 463 | 13590 | CLUBHOUSE LN | ALLEY EDINGER AVE | CASTLE DR | E | AAC | 3 | 140 | 36 | 5,040 | 5/9/24 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 5010 | 60090 | SOUTH PACIFIC | ANDERSON ST | 25TH ST | E | AC | 2 | 481 | 25 | 12,025 | 4/23/26 | 89 | 0 | 84 | 16 | New Construction - Initial | 1/1/80 |
| 5010 | 60100 | SOUTH PACIFIC | 25TH ST | 22ND ST | E | AC | 2 | 709 | 25 | 17,725 | 4/23/26 | 89 | 0 | 81 | 19 | New Construction - Initial | 1/1/80 |
| 724 | 15960 | FELCLIFF LN | DOREMERE DR | ADAMS AVE | E | AC | 7 | 1,108 | 36 | 40,638 | 4/20/26 | 89 | 86 | 1 | 13 | Surface Treatment - Slurry Seal | 7/15/21 |
| 919 | 14944 | HELENBROOK LN | WINDCROFT DR | LARKMONT DR | E | AC | 5 | 464 | 36 | 16,704 | 3/31/26 | 89 | 0 | 91 | 9 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1154 | 13172 | LEONARD LN | MISTRAL DR | HUMBOLDT DR | E | AC | 2 | 260 | 36 | 9,072 | 4/7/22 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 165 | 14362 | AUGUSTA CIR | PEPPERTREE DR | CDS | E | AAC | 8 | 334 | 32 | 12,188 | 5/20/24 | 89 | 0 | 77 | 23 | Overlay - AC Structural | 5/11/18 |
| 2124 | 15040 | WAYFARER LN | HUMBOLDT DR | CDS | E | AC | 2 | 980 | 36 | 36,780 | 4/7/22 | 89 | 0 | 79 | 21 | New Construction - Initial | 1/1/80 |
| 531 | 14934 | CRESTMOOR LN | SERENE DR | WINDCROFT DR | E | AC | 5 | 246 | 36 | 8,568 | 3/30/26 | 89 | 0 | 90 | 10 | New Construction | 1/1/80 |
| 735 | 12947 | FIFTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 370 | 56 | 18,815 | 6/22/21 | 89 | 18 | 65 | 17 | New Construction | 1/1/80 |
| 1179 | 14310 | LOCHLEA LN | ALLEY LOMOND DR | LOMOND DR | E | AC | 9 | 170 | 28 | 5,786 | 8/30/23 | 89 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1284 | 15935 | MEADOWLARK DR | DEL MAR LN | GRAHAM ST | E | AAC | 2 | 1,024 | 36 | 36,864 | 5/21/24 | 89 | 0 | 93 | 7 | Overlay - AC Fabric | 10/1/16 |
| 1284 | 15934 | MEADOWLARK DR | SARATOGA LN | DEL MAR LN | E | AAC | 2 | 783 | 36 | 28,688 | 5/21/24 | 89 | 0 | 85 | 15 | Overlay - AC Fabric | 10/1/16 |
| 1450 | 15716 | ONTARIO DR | HUNTINGTON ST | DELAWARE ST | E | AAC | 4 | 888 | 36 | 31,680 | 4/14/26 | 89 | 57 | 39 | 4 | Overlay - AC Structural | 11/28/19 |
| 1482 | 14762 | PAMMY LN | TAYLOR DR | FRANKLIN DR | E | AAC | 4 | 1,000 | 36 | 35,712 | 4/14/26 | 89 | 0 | 95 | 5 | Overlay - AC Structural | 11/28/19 |
| 1589 | 13572 | QUEENS LN | ALLEY SLATER AVE | SLATER AVE | E | AAC | 4 | 150 | 36 | 5,400 | 5/30/24 | 89 | 0 | 87 | 13 | Overlay - AC Structural | 10/1/12 |
| 1677 | 15731 | ROXANNE LN | ROSANNA DR | CDS | E | AAC | 4 | 333 | 32 | 12,456 | 4/13/26 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1876 | 14943 | STANFIELD CIR | LARKMONT DR | END | E | AC | 5 | 202 | 36 | 8,772 | 3/31/26 | 89 | 0 | 92 | 8 | New Construction | 1/1/80 |
| 1914 | 15256 | SUNBREEZE DR | FLOWER LN | GRASS CIR | E | AAC | 3 | 665 | 36 | 25,440 | 5/20/24 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1988 | 14170 | TITAN LN | CLOUDHAVEN DR | INDIANAPOLIS AVE | E | AC | 7 | 156 | 36 | 5,616 | 4/21/26 | 89 | 22 | 78 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 31 | 14278 | ALISA LN | INDIANAPOLIS AVE | CAITHNESS DR | E | AC | 8 | 166 | 36 | 5,976 | 3/19/24 | 89 | 0 | 63 | 37 | Surface Treatment - Slurry Seal | 5/11/18 |
| 427 | 15305 | CHEMICAL LN | BUSINESS DR | MC FADDEN AVE | E | AAC | 1 | 796 | 40 | 31,840 | 5/3/24 | 89 | 0 | 84 | 16 | Overlay - AC Structural | 10/1/16 |
| 5000 | 60070 | NORTH PACIFIC | 22ND ST | 25TH ST | E | AC | 2 | 705 | 25 | 17,625 | 5/6/24 | 89 | 66 | 34 | 0 | New Construction - Initial | 1/1/80 |
| 5010 | 60170 | SOUTH PACIFIC | 5TH ST | END | E | AC | 2 | 956 | 25 | 23,900 | 4/23/26 | 89 | 0 | 94 | 6 | New Construction - Initial | 1/1/80 |
| 5370 | 60580 | 18TH ST | PACIFIC S | END | E | AC | 2 | 54 | 26 | 1,404 | 4/23/26 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 569 | 14614 | EDWARDS ST | GARFIELD AVE | PENINSULA LN | E | AC | 5 | 669 | 44 | 29,436 | 3/28/22 | 89 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 734 | 12999 | FIFTEENTH ST | PCH | WALNUT AVE | E | AC | 6 | 355 | 50 | 18,630 | 6/22/21 | 89 | 0 | 37 | 63 | Surface Treatment - Slurry Seal | 7/27/22 |
| 893 | 15967 | HARDING LN | GRANT DR | YORKTOWN AVE | E | AAC | 7 | 1,076 | 37 | 39,812 | 4/14/26 | 89 | 20 | 70 | 10 | Overlay - AC Structural | 11/28/19 |
| 1580 | 14622 | PROVIDENCE LN | CAPE COD DR | ADAMS AVE | E | AC | 7 | 1,338 | 36 | 48,168 | 4/16/26 | 89 | 40 | 60 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 274 | 13217 | BOLERO LN | NALU CIR | FINISTERRE DR | E | AC | 2 | 1,864 | 36 | 67,104 | 4/7/22 | 89 | 0 | 53 | 47 | New Construction - Initial | 1/1/80 |
| 288 | 15554 | BOWSPRIT LN | WATERFRONT DR | PIER DR | E | AAC | 9 | 460 | 36 | 17,310 | 3/20/24 | 89 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 443 | 13900 | CHURCH CIR | SURFDALE LN | CDS | E | AC | 5 | 311 | 36 | 13,196 | 5/6/24 | 89 | 47 | 53 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 446 | 13753 | CITADEL DR | STANFORD LN | COLUMBIA LN | E | AC | 1 | 260 | 36 | 8,784 | 4/27/26 | 89 | 32 | 54 | 14 | New Construction | 1/1/80 |
| 1047 | 15265 | KEELSON LN | ALLEY SLATER AVE | KRISTIN CIR | E | AAC | 4 | 1,012 | 36 | 36,432 | 5/30/24 | 90 | 17 | 47 | 36 | Overlay - AC Structural | 10/1/12 |
| 1326 | 14507 | MOLOKAI DR | MALIBU LN | CATALINA CIR | E | AAC | 9 | 252 | 36 | 9,072 | 4/22/26 | 90 | 0 | 93 | 7 | Overlay - AC Structural | 5/11/19 |
| 1522 | 14547 | PICKWICK CIR | TALISMAN LN | PICKWICK CIR | E | AAC | 2 | 559 | 36 | 21,724 | 5/10/24 | 90 | 21 | 79 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2294 | 14596 | BUSHARD ST FRONTAGE | VELARDO DR | BASS DR | E | AC | 8 | 449 | 28 | 12,572 | 3/7/22 | 90 | 0 | 37 | 63 | New Construction - Initial | 1/1/80 |
| 348 | 13588 | CALIENTE DR | BAYSHORE LN | HOLLYWOOD LN | E | AAC | 2 | 265 | 36 | 10,040 | 5/21/24 | 90 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 348 | 15053 | CALIENTE DR | DEL MAR LN | BAYSHORE LN | E | AAC | 2 | 532 | 36 | 19,152 | 5/21/24 | 90 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 710 | 15011 | FAIRCREST DR | EDWARDS ST | ROCKINGHORSE LN | E | AC | 5 | 466 | 36 | 16,776 | 5/7/24 | 90 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 758 | 14674 | FLORIDA ST | JOILET AVE | KNOXVILLE AVE | E | AAC | 6 | 330 | 37 | 11,988 | 8/15/23 | 90 | 0 | 69 | 31 | Overlay - AC Structural | 3/1/11 |
| 830 | 15778 | GLENROY DR | NEWQUIST LN | ST ANDREWS LN | E | AC | 2 | 778 | 36 | 28,008 | 4/1/26 | 90 | 17 | 83 | 0 | New Construction | 1/1/80 |
| 966 | 13170 | HUMBOLDT DR | ARDSLEY CIR | WAYFARER LN | E | AC | 2 | 445 | 36 | 16,020 | 4/7/22 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1398 | 14964 | NICHOLS ST | WAGON DR | SLATER AVE | E | AC | 0 | 327 | 44 | 14,388 | 5/8/24 | 90 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 1438 | 15598 | OCEANVIEW LN | ROCK POINT DR | HIGHTIDE DR | E | AC | 9 | 1,026 | 36 | 38,936 | 3/26/24 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1751 | 15619 | SPRINGDALE ST | TALBERT AVE | LITTLEFIELD DR | E | AC | 5 | 1,152 | 80 | 92,160 | 3/31/26 | 90 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 1991 | 13140 | TOMAS LN | CHERYL DR | SISSON DR | E | AAC | 2 | 268 | 36 | 9,648 | 5/21/24 | 90 | 0 | 89 | 11 | Overlay - AC Fabric | 10/1/16 |
| 285 | 14439 | BOUNTY CIR | CHANNEL LN | CDS | E | AC | 2 | 288 | 32 | 10,716 | 4/9/22 | 90 | 0 | 51 | 49 | New Construction - Initial | 1/1/80 |
| 614 | 15420 | DOREMERE DR | NEWLAND AV | GEMFALL LN | E | AC | 7 | 981 | 36 | 35,316 | 4/20/26 | 90 | 66 | 34 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 752 | 15963 | FLAXMAN DR | WEEMS LN | EDGEWOOD LN | E | AAC | 7 | 771 | 36 | 27,756 | 8/21/23 | 90 | 0 | 92 | 8 | Overlay - AC Structural | 3/1/11 |
| 1230 | 13886 | MALM CIR | BREELAND DR | END | E | AC | 3 | 560 | 36 | 21,960 | 4/7/26 | 90 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 148 | 13182 | ARLINGTON LN | MEADOWLARD DR | CALIENTE DR | E | AAC | 2 | 863 | 36 | 31,068 | 5/21/24 | 90 | 20 | 57 | 23 | Overlay - AC Fabric | 10/1/16 |
| 161 | 13726 | ATLAS DR | APOLLO LN | SABRE LN | E | AC | 1 | 150 | 36 | 7,400 | 12/26/24 | 90 | 62 | 38 | 0 | New Construction | 1/1/80 |
| 1788 | 15351 | SHANNON DR | SHERBECK LN | END | E | AC | 3 | 770 | 36 | 29,520 | 4/7/26 | 90 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 1788 | 13884 | SHANNON DR | DUNDALK LN | SHERBECK LN | E | AC | 3 | 260 | 36 | 10,110 | 4/7/26 | 90 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 1912 | 14984 | SUMMIT DR | PENINSULA LN | BEACON HILL LN | E | AC | 5 | 2,155 | 44 | 94,820 | 5/6/24 | 90 | 0 | 55 | 45 | New Construction - Initial | 1/1/80 |
| 502 | 13964 | CORALWOOD LN | CRESCENT DR | SEAHURST DR | E | AC | 7 | 350 | 36 | 12,850 | 4/15/26 | 90 | 65 | 35 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 502 | 15383 | CORALWOOD LN | SEAHURST DR | SAILPORT DR | E | AC | 7 | 678 | 36 | 24,658 | 4/15/26 | 90 | 0 | 69 | 31 | Surface Treatment - Slurry Seal | 7/15/21 |
| 5450 | 60690 | 26TH ST | PCH | PACIFIC N | E | AC | 2 | 207 | 30 | 6,210 | 4/23/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1611 | 13871 | RED COACH DR | OAKSHIRE LN | DAWSON LN | E | AC | 3 | 584 | 36 | 21,024 | 12/19/24 | 90 | 0 | 39 | 61 | New Construction | 1/1/80 |
| 1749 | 14023 | SCRIBE DR | COLDWATER LN | DRYBROOK LN | E | AAC | 7 | 210 | 36 | 7,560 | 8/17/23 | 90 | 0 | 76 | 24 | Overlay - AC Structural | 3/1/11 |
| 204 | 14536 | BAY VIEW DR | ALLEY BAY VIEW 1 | BROADWAY | E | AC | 2 | 122 | 27 | 3,294 | 4/9/22 | 90 | 0 | 22 | 78 | New Construction | 1/1/80 |
| 258 | 15627 | BUSHARD ST | GREENWICH DR | NANTUCKET DR | E | AC | 7 | 528 | 28 | 14,784 | 4/16/26 | 90 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 836 | 13178 | GOLDEN GATE LN | MEADOWLARK DR | CALIENTE DR | E | AAC | 2 | 863 | 36 | 31,068 | 5/21/24 | 90 | 0 | 95 | 5 | Overlay - AC Fabric | 10/1/16 |
| 884 | 13783 | HANOVER LN | HALIFAX DR | MELBOURNE DR | E | AC | 1 | 260 | 36 | 9,072 | 4/8/26 | 90 | 0 | 52 | 48 | New Construction | 1/1/80 |
| 1068 | 13488 | KIM LN | RHONE LN | CDS | E | AC | 4 | 294 | 36 | 11,084 | 3/18/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1088 | 14698 | KNOXVILLE AVE | ALLEY CALIFORNIA ST | DELAWARE ST | E | AC | 6 | 169 | 37 | 6,253 | 8/15/23 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1214 | 14782 | LYONS CIR | TALBERT AVE | CDS | E | AC | 4 | 275 | 40 | 12,500 | 5/13/24 | 90 | 0 | 92 | 8 | Surface Treatment - Slurry Seal | 11/1/19 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1258 | 14828 | MARSEILLE DR | GRANADA LN | BARCELONA LN | E | AC | 4 | 757 | 36 | 27,252 | 3/31/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1289 | 14818 | MEER CIR | HOLLAND DR | CDS | E | AC | 4 | 560 | 36 | 21,410 | 4/6/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1355 | 13214 | MORSE CIR | TRUMBULL DR | CDS | E | AAC | 2 | 306 | 36 | 11,016 | 5/10/24 | 90 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1446 | 13065 | OLIVE AVE | THIRD ST | MAIN ST | E | AC | 6 | 267 | 36 | 9,612 | 6/30/21 | 90 | 0 | 51 | 49 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1515 | 14359 | PEPPERTREE DR | PINETREE LN | AUGUSTA CIR | E | AAC | 8 | 250 | 36 | 9,750 | 5/20/24 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1631 | 15058 | SAYBROOK LN | ALLEY SEABROOK LN | BRANFORD DR | E | AAC | 2 | 420 | 36 | 15,120 | 5/10/24 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 1638 | 15238 | RHONE LN | HEIL AVE | RHINE DR | E | AC | 4 | 1,190 | 36 | 42,840 | 3/31/22 | 90 | 59 | 37 | 4 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1670 | 14740 | SEVENTEENTH ST | DELAWARE ST | CLAY AVE | E | AC | 7 | 383 | 36 | 13,788 | 3/13/24 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1891 | 14752 | STEWART ST | GARFIELD AVE | CLAY AVE | E | AC | 7 | 1,320 | 30 | 39,600 | 5/6/24 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1916 | 13960 | SUNCORAL DR | BAYWATER LN | PISMO LN | E | AC | 7 | 251 | 36 | 9,036 | 4/15/26 | 90 | 36 | 64 | 0 | New Construction - Initial | 1/1/80 |
| 5300 | 60460 | 11TH ST | PACIFIC S | END | E | AC | 2 | 64 | 31 | 1,984 | 4/23/26 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 825 | 14539 | HEIL AVE | TRUDY LN | TORJIAN LN | E | AC | 3 | 1,140 | 36 | 41,040 | 4/6/26 | 90 | 0 | 0 | 100 | New Construction - Initial | 1/1/80 |
| 947 | 15737 | HOLLAND DR | MARKEN LN | WAAL CIR | E | AC | 4 | 520 | 36 | 18,720 | 4/6/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1 | 14830 | A ST | WARNER AVE | BLAYLOCK DR | E | AC | 4 | 660 | 34 | 22,440 | 3/31/22 | 90 | 46 | 54 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1000 | 14809 | JACQUELYN LN | SPEER AVE | LIBERTY AVE | E | AC | 4 | 330 | 36 | 11,880 | 5/13/24 | 90 | 1 | 38 | 61 | Surface Treatment - Slurry Seal | 11/1/19 |
| 1173 | 15278 | LISA LN | STERLING AVE | TAYLOR DR | E | AAC | 4 | 659 | 33 | 21,483 | 4/13/26 | 90 | 71 | 29 | 0 | Overlay - AC Structural | 11/28/19 |
| 1504 | 15517 | PEBBLE LN | SPINNAKER DR | CDS | E | AAC | 8 | 529 | 36 | 20,244 | 3/6/24 | 90 | 0 | 91 | 9 | Overlay - AC Structural | 5/11/18 |
| 1908 | 15131 | SUMMERCLOUD LN | CAMILLE DR | SHIELDS DR | E | AC | 3 | 573 | 36 | 20,628 | 4/6/26 | 90 | 27 | 34 | 39 | New Construction - Initial | 1/1/80 |
| 2002 | 16011 | TOWAY LN | DOWN DR | END | E | AC | 1 | 1,100 | 36 | 40,850 | 12/20/24 | 90 | 0 | 38 | 62 | New Construction - Initial | 1/1/80 |
| 2013 | 14976 | TRINIDAD LN | EDINGER AVE | AQUARIUS DR | E | AAC | 2 | 1,508 | 46 | 56,810 | 5/7/24 | 90 | 29 | 56 | 15 | Overlay - AC Fabric | 12/1/17 |
| 205 | 14498 | BAYBREEZE DR | SUMMERWIND LN | BROOKHURST ST | E | AAC | 9 | 237 | 44 | 9,628 | 5/5/26 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 257 | 13290 | BLANTON ST | PRAIRE DR | PEARCE ST | E | AC | 2 | 660 | 36 | 23,760 | 3/29/22 | 90 | 0 | 42 | 58 | New Construction | 1/1/80 |
| 892 | 14271 | HARCOURT CIR | BROOKSIDE LN | CDS | E | AAC | 9 | 252 | 32 | 9,864 | 5/20/24 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 969 | 15002 | HUNTINGTON ST | MONTE CRISTO LN | GARFIELD AVE | E | AC | 4 | 472 | 36 | 16,992 | 4/9/24 | 90 | 24 | 76 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1023 | 15875 | JOLIET AVE | CALIFORNIA ST | DELAWARE ST | E | AC | 6 | 329 | 37 | 12,173 | 8/15/23 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1416 | 15656 | NORTHPORT DR | NEW BRITAIN LN | PORT GREENWICH LN | E | AC | 9 | 534 | 36 | 19,224 | 8/21/23 | 90 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 1586 | 15009 | QUARTERHORSE LN | CHURCHILL DR | END | E | AC | 5 | 566 | 36 | 20,376 | 5/7/24 | 90 | 0 | 93 | 7 | New Construction | 1/1/80 |
| 691 | 14670 | ENGLAND ST | KNOXVILLE AVE | LINCOLN AVE | E | AC | 6 | 330 | 37 | 12,062 | 8/15/23 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1047 | 13573 | KEELSON LN | ALLEY SLATER AVE | SLATER AVE | E | AAC | 4 | 150 | 36 | 5,400 | 5/30/24 | 90 | 0 | 49 | 51 | Overlay - AC Structural | 10/1/12 |
| 1156 | 14282 | LEVEE DR | QUEENS PARK LN | REEF LN | E | AC | 8 | 246 | 36 | 8,856 | 3/18/24 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1178 | 14960 | LITTLER DR | BIRDIE LN | CLARK DR | E | AAC | 3 | 1,153 | 36 | 41,758 | 5/9/24 | 90 | 31 | 61 | 8 | Overlay - AC Fabric | 10/1/16 |
| 1285 | 15463 | MEANDER LN | BURLCREST DR | RATH CIR | E | AC | 7 | 600 | 36 | 22,350 | 4/16/26 | 90 | 70 | 30 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1669 | 15023 | ROOSEVELT LN | PEARCE ST | CDS | E | AC | 2 | 487 | 36 | 18,782 | 4/2/26 | 90 | 100 | 0 | 0 | New Construction | 1/1/80 |
| 1721 | 14966 | SANDPEBBLE CIR | GARDEN CIR | CDS | E | AC | 5 | 338 | 36 | 15,668 | 5/6/24 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2033 | 13028 | TWENTY-SECOND ST | PCH | WALNUT AVE | E | AC | 6 | 355 | 46 | 16,960 | 6/30/21 | 90 | 0 | 41 | 59 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2111 | 15055 | WANDERER LN | CAROUSEL LN | HUMBOLDT DR | E | AC | 2 | 578 | 36 | 20,520 | 4/7/22 | 90 | 0 | 38 | 62 | New Construction - Initial | 1/1/80 |
| 2292 | 17028 | DELTA LN | SKYLAB LN | ASTRONAUTICS LN | E | AC | 1 | 1,338 | 36 | 48,168 | 4/8/26 | 90 | 0 | 63 | 37 | New Construction - Initial | 1/1/00 |
| 331 | 14339 | BULKHEAD CIR | WATERFRONT DR | CDS | E | AAC | 9 | 395 | 36 | 15,720 | 3/20/24 | 90 | 0 | 95 | 5 | Overlay - AC Structural | 5/11/18 |
| 404 | 14510 | CATALINA CIR | MOLOKAI DR | CDS | E | AC | 9 | 313 | 32 | 11,516 | 4/17/24 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 769 | 15134 | FOUNTAIN LN | HEIL AVE | DALE VISTA LN | E | AC | 3 | 1,117 | 36 | 40,212 | 3/18/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1251 | 14157 | MARINA LN | ADAMS AVE FRONTAGE | NAUTILUS DR | E | AC | 7 | 805 | 36 | 29,730 | 4/16/26 | 90 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1298 | 14207 | MEREDITH DR | CRAIMER LN | MIDLAND LN | E | AC | 8 | 377 | 36 | 14,322 | 2/28/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1341 | 13479 | MOONLIGHT CIR | WISHINGWELL LN | CDS | E | AC | 3 | 486 | 36 | 19,296 | 3/18/22 | 90 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1636 | 15241 | RHINE DR | CHARLES LN | DON DR | E | AC | 4 | 670 | 36 | 24,120 | 3/18/22 | 90 | 49 | 51 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1790 | 15544 | SHAW LN | STILLWELL DR | END | E | AC | 9 | 1,153 | 36 | 43,008 | 8/30/23 | 90 | 49 | 51 | 0 | New Construction | 1/1/80 |
| 189 | 15744 | BARCELONA LN | BLAYLOCK DR | VALENCIA DR | E | AC | 4 | 520 | 36 | 18,970 | 3/31/22 | 90 | 12 | 68 | 20 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1999 | 14442 | TORJIAN LN | HEIL AVE | GLORIA DR | E | AC | 3 | 248 | 36 | 8,928 | 4/6/26 | 90 | 56 | 44 | 0 | New Construction - Initial | 1/1/80 |
| 2080 | 13776 | VICTORIA LN | BOLSA AVE | ALEXANDRIA DR | E | AC | 1 | 569 | 36 | 20,484 | 12/12/24 | 90 | 43 | 57 | 0 | New Construction - Initial | 1/1/80 |
| 2100 | 13917 | WADEBRIDGE CIR | COLCHESTER LN | CDS | E | AC | 7 | 332 | 32 | 10,624 | 4/2/24 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 2163 | 15339 | WILLETT LN | PRISCILLA DR | ROYALIST DR | E | AC | 1 | 1,040 | 36 | 37,440 | 12/18/24 | 90 | 51 | 49 | 0 | New Construction - Initial | 1/1/80 |
| 1369 | 15225 | NANCY DR | RHONE LN | MARK LN | E | AC | 4 | 890 | 36 | 32,790 | 3/18/22 | 90 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1497 | 15862 | PATTERSON LN | FORELLE DR | ELLIS AVE | E | AAC | 4 | 665 | 32 | 21,024 | 4/13/26 | 90 | 0 | 94 | 6 | Overlay - AC Structural | 11/28/19 |
| 166 | 15920 | AULNAY LN | PRISCILLA DR | ROYALIST DR | E | AC | 1 | 1,040 | 36 | 37,440 | 12/18/24 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1695 | 15010 | SADDLEBACK LN | GARFIELD AVE | CDS | E | AC | 5 | 643 | 37 | 23,791 | 5/7/24 | 90 | 13 | 50 | 37 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1862 | 13116 | SPRINGFIELD AVE | PARK ST | MAIN ST | E | AC | 6 | 348 | 36 | 12,528 | 6/30/21 | 90 | 0 | 62 | 38 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2 | 15132 | ABBOTT DR | CDS | END | E | AC | 3 | 475 | 36 | 18,452 | 3/18/22 | 90 | 56 | 44 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2118 | 15425 | WATERBURY LN | GREENWICH DR | HYANNIS PORT DR | E | AC | 7 | 792 | 36 | 28,512 | 4/16/26 | 90 | 34 | 54 | 12 | Surface Treatment - Slurry Seal | 7/15/21 |
| 250 | 13236 | BIRDIE LN | MANGUM DR | LITTLER DR | E | AAC | 3 | 260 | 36 | 9,360 | 5/21/24 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 576 | 13938 | DEAUVILLE DR | COLCHESTER LN | SUMMERFIELD LN | E | AAC | 7 | 898 | 36 | 33,488 | 4/15/26 | 90 | 57 | 43 | 0 | Overlay - AC Structural | 11/28/19 |
| 590 | 15914 | DEMION LN | ELLIS AVE | CDS | E | AAC | 7 | 1,216 | 36 | 47,121 | 4/14/26 | 90 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 663 | 13868 | EIRE CIR | TULLOW LN | END | E | AC | 3 | 294 | 32 | 11,208 | 4/27/26 | 90 | 0 | 71 | 29 | New Construction | 1/1/80 |
| 1215 | 13495 | MAC DONALD AVE | BEACH BLVD | END | E | AC | 4 | 660 | 35 | 23,100 | 4/1/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1328 | 15440 | MONITOR DR | CANBERRA LN | INDEPENDENCE LN | E | AC | 8 | 1,142 | 36 | 40,896 | 3/2/22 | 91 | 0 | 74 | 26 | Surface Treatment - Slurry Seal | 2/8/23 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1974 | 15306 | THOR DR | SPRINGDALE ST | END | E | AC | 1 | 624 | 36 | 24,264 | 12/26/24 | 91 | 0 | 43 | 57 | New Construction - Initial | 1/1/80 |
| 2030 | 12978 | TWELFTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 375 | 48 | 19,680 | 6/22/21 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5010 | 60150 | SOUTH PACIFIC | 10TH ST | 7TH ST | E | AC | 2 | 705 | 25 | 17,625 | 4/23/26 | 91 | 40 | 40 | 20 | New Construction - Initial | 1/1/80 |
| 554 | 15135 | DALE VISTA LN | MASON DR | MARILYN DR | E | AC | 3 | 1,290 | 36 | 46,440 | 3/18/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 796 | 15221 | GANGES LN | ALLEY GANGES LN | ALLEY GANGES LN | E | AC | 4 | 348 | 36 | 13,528 | 3/18/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 858 | 14446 | GREENWICH DR | WATERBURY LN | BUSHARD ST | E | AC | 7 | 1,070 | 36 | 38,520 | 4/16/26 | 91 | 39 | 56 | 5 | Surface Treatment - Slurry Seal | 7/15/21 |
| 903 | 15877 | HARTFORD AVE | DELAWARE ST | GENEVA AVE | E | AC | 9 | 626 | 37 | 23,162 | 8/15/23 | 91 | 0 | 69 | 31 | New Construction | 1/1/80 |
| 1095 | 15550 | KROLL LN | ARCEL CIR | STILWELL DR | E | AC | 9 | 406 | 32 | 14,492 | 8/30/23 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1530 | 15560 | PINETREE LN | CHEVY CHASE DR | PEPPERTREE DR | E | AAC | 8 | 836 | 36 | 31,596 | 5/20/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1548 | 15566 | POLYNESIAN LN | BOBBIE CIR | RHODESIA DR | E | AAC | 9 | 768 | 36 | 27,648 | 3/26/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1707 | 14284 | SALT AIR CIR | SPINNAKER DR | CDS | E | AAC | 8 | 528 | 36 | 20,208 | 3/6/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 2102 | 13568 | WAGON DR | NICHOLS ST | DAIRYVIEW CIR | E | AAC | 4 | 181 | 36 | 6,516 | 5/28/24 | 91 | 2 | 98 | 0 | Overlay - AC Structural | 10/1/12 |
| 276 | 13736 | BOLSA PARK LN | DUNDEE DR | CORNELL DR | E | AC | 1 | 274 | 36 | 9,864 | 12/18/24 | 91 | 60 | 40 | 0 | New Construction - Initial | 1/1/80 |
| 463 | 13594 | CLUBHOUSE LN | MIDDLECOFF DR | ALLEY HEIL AVE | E | AC | 3 | 140 | 36 | 5,040 | 3/23/22 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 5430 | 60660 | 24TH ST | PCH | PACIFIC N | E | AC | 2 | 228 | 29 | 6,612 | 4/23/26 | 91 | 24 | 64 | 12 | New Construction - Initial | 1/1/80 |
| 597 | 13193 | DEVON CIR | CHANNEL LN | CDS | E | AC | 2 | 335 | 32 | 12,220 | 4/9/22 | 91 | 27 | 62 | 11 | New Construction | 1/1/80 |
| 907 | 15613 | HARWICH LN | GATESHEAD DR | WALLINGFORD LN | E | AAC | 9 | 816 | 36 | 30,126 | 4/22/26 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 950 | 13493 | HOLT AVE | PARKSIDE LN | BEACH BLVD | E | AC | 4 | 660 | 36 | 23,760 | 4/1/22 | 91 | 0 | 67 | 33 | Surface Treatment - Slurry Seal | 7/29/20 |
| 988 | 14285 | IONA LN | NETHERWAY DR | ERSKINE DR | E | AC | 8 | 237 | 36 | 8,532 | 3/19/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1413 | 15268 | NORMA DR | GOLDENWEST ST | TUNSTALL LN | E | AC | 3 | 653 | 36 | 23,508 | 3/18/22 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1590 | 15514 | QUEENS PARK LN | CAITHNESS DR | NETHERWAY DR | E | AC | 8 | 684 | 36 | 25,800 | 3/18/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1636 | 15244 | RHINE DR | LOIRE CIR | HEIL AVE | E | AC | 4 | 693 | 36 | 24,948 | 3/18/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 166 | 15335 | AULNAY LN | WINSLOW DR | PRISCILLA DR | E | AC | 1 | 520 | 36 | 18,720 | 12/18/24 | 91 | 0 | 88 | 12 | New Construction | 1/1/80 |
| 1686 | 13175 | RUNNING TIDE CIR | SUNDANCER LN | CDS | E | AAC | 2 | 576 | 34 | 21,084 | 5/7/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1696 | 15036 | SAGAMORE DR | TYPHOON LN | CDS | E | AAC | 2 | 1,093 | 36 | 41,148 | 5/7/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1766 | 15037 | SEASCAPE DR | CDS | CDS | E | AAC | 2 | 945 | 36 | 37,620 | 5/7/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1783 | 13897 | SHADY HARBOR CIR | EVENING HILL DR | CDS | E | AAC | 5 | 416 | 36 | 16,976 | 4/30/26 | 91 | 0 | 67 | 33 | Overlay - AC Structural | 11/28/19 |
| 1822 | 15770 | SIMS ST | WARNER AVE | STELLRECHT CIR | E | AAC | 2 | 764 | 36 | 27,504 | 5/13/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1888 | 14877 | STELLRECHT CIR | SIMS ST | CDS | E | AC | 2 | 397 | 36 | 15,792 | 3/22/22 | 91 | 0 | 86 | 14 | New Construction | 1/1/80 |
| 2038 | 13150 | TYPHOON LN | SAGAMORE DR | VENTURE DR | E | AAC | 2 | 762 | 36 | 28,182 | 5/7/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2065 | 13160 | VENTURE DR | TYPHOON LN | WALRUS LN | E | AC | 2 | 254 | 36 | 9,894 | 4/7/22 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 387 | 14770 | CARNABY LN | DANTON CIR | APPLEBY DR | E | AAC | 4 | 722 | 36 | 26,992 | 4/14/26 | 91 | 0 | 92 | 8 | Overlay - AC Structural | 11/28/19 |
| 401 | 13234 | CASTLE DR | CLUBHOUSE LN | END | E | AAC | 3 | 285 | 36 | 10,260 | 5/9/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 823 | 13650 | GLEADA ST | STERLING AVE | KINER AVE | E | AC | 4 | 397 | 33 | 13,601 | 4/8/24 | 91 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 888 | 15470 | HARBOR ISLE LN | ADAMS AVE | GUSS DR | E | AC | 7 | 1,151 | 36 | 42,186 | 4/16/26 | 91 | 42 | 58 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1130 | 13056 | MAIN ST | PALM AVE | CREST AVE | E | AAC | 6 | 858 | 45 | 39,610 | 6/29/21 | 91 | 0 | 44 | 56 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1138 | 15354 | LAWN HAVEN DR | EVENING HILL DR | CDS (E) | E | AC | 5 | 1,090 | 36 | 41,240 | 5/6/24 | 91 | 22 | 73 | 5 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1410 | 14621 | NORFOLK DR | PORT GREENWICH LN | KELSO DR | E | AAC | 9 | 549 | 36 | 19,764 | 8/21/23 | 91 | 58 | 42 | 0 | Overlay - AC Structural | 3/1/11 |
| 1506 | 14198 | PECK DR | RUNNING SPRINGS LN | BROOKHURST ST | E | AC | 8 | 187 | 45 | 7,585 | 3/1/22 | 91 | 0 | 59 | 41 | New Construction | 1/1/80 |
| 1808 | 14496 | SHOREBREEZE DR | HARBORBREEZE LN | OCEANBREEZE LN | E | AAC | 9 | 262 | 36 | 10,182 | 4/21/26 | 91 | 0 | 96 | 4 | Overlay - AC Structural | 5/11/19 |
| 1825 | 13092 | SIXTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 380 | 46 | 17,480 | 6/22/21 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1977 | 13521 | TIBER LN | SEINE DR | RHINE DR | E | AC | 4 | 758 | 36 | 28,038 | 3/31/22 | 91 | 45 | 55 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2031 | 13016 | TWENTIETH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 405 | 46 | 18,630 | 6/30/21 | 91 | 0 | 43 | 57 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2062 | 15906 | VELARDO DR | BUSHARD ST | STINGRAY LN | E | AC | 8 | 1,075 | 36 | 39,700 | 3/7/22 | 91 | 50 | 42 | 8 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2098 | 14290 | VOYAGER CIR | HORIZON LN | CDS | E | AC | 8 | 510 | 36 | 18,360 | 3/6/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2299 | 60760 | LAMB LN | YORKTOWN AVE | PATCH DR | E | AC | 8 | 630 | 36 | 22,680 | 3/2/22 | 91 | 0 | 44 | 56 | New Construction - AC | 1/1/15 |
| 30 | 14392 | ALII CIR | ZAMORA LN | CDS | E | AC | 9 | 235 | 32 | 9,020 | 5/20/24 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 431 | 15000 | CHESTERFIELD LN | BURLINGTON LN | ATTLEBORO CIR | E | AC | 9 | 542 | 36 | 19,512 | 8/24/23 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 591 | 15468 | DENSMORE LN | BEDEL DR | BAINFORD DR | E | AC | 7 | 668 | 36 | 24,048 | 4/16/26 | 91 | 61 | 39 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 884 | 13781 | HANOVER LN | ALEXANDRIA DR | OXFORD DR | E | AC | 1 | 260 | 36 | 9,360 | 4/8/26 | 91 | 23 | 77 | 0 | New Construction | 1/1/80 |
| 992 | 13048 | ISLAND BAY LN | PALM AVE | MORNING TIDE DR | E | AC | 5 | 285 | 36 | 9,400 | 6/30/21 | 91 | 0 | 62 | 38 | Surface Treatment - Slurry Seal | 7/27/22 |
| 110 | 15570 | ALOHA DR | KIOWA LN | KANEHOE LN | E | AC | 9 | 930 | 36 | 34,980 | 3/27/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1501 | 15057 | PEALE LN | MALDEN CIR | GILBERT DR | E | AC | 2 | 1,178 | 36 | 42,408 | 4/9/22 | 91 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 1590 | 14281 | QUEENS PARK LN | CAITHNESS DR | LEVEE DR | E | AC | 8 | 456 | 36 | 16,416 | 3/18/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1658 | 15429 | ROCKLAND LN | YORKTOWN AVE | INNSBRUCK DR | E | AC | 8 | 450 | 36 | 16,200 | 3/9/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1960 | 15813 | TAYLOR DR | DELAWARE ST | BEACH BLVD | E | AAC | 4 | 1,188 | 36 | 42,180 | 4/14/26 | 91 | 25 | 67 | 8 | Overlay - AC Structural | 11/28/19 |
| 2175 | 16010 | WINSLOW DR | ALDEN LN | AULNAY LN | E | AC | 1 | 1,041 | 36 | 37,476 | 12/20/24 | 91 | 62 | 38 | 0 | New Construction - Initial | 1/1/80 |
| 364 | 14937 | CANDLE CIR | GAINSFORD LN | END | E | AC | 5 | 94 | 36 | 3,384 | 3/31/26 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 5250 | 60415 | 6TH ST | PACIFIC S | END | E | AC | 2 | 34 | 37 | 1,258 | 4/23/26 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 911 | 14078 | HAVENHURST LN | WOODLAWN DR | WARBURTON DR | E | AC | 8 | 293 | 36 | 10,548 | 3/9/22 | 91 | 0 | 80 | 20 | Surface Treatment - Slurry Seal | 2/8/23 |
| 11 | 13190 | ADMIRRALTY DR | CHANNEL LN | CDS | E | AC | 2 | 299 | 32 | 11,068 | 4/9/22 | 91 | 0 | 65 | 35 | New Construction | 1/1/80 |
| 1266 | 13337 | MASON DR | DALE VISTA LN | FOUNTAIN LN | E | AC | 3 | 398 | 36 | 14,328 | 3/18/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 146 | 13131 | ARIA CIR | PRELUDE DR | CDS | E | AC | 2 | 412 | 36 | 16,332 | 3/24/22 | 91 | 0 | 58 | 42 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1502 | 13607 | PEARCE ST | BLANTON ST | LYNN ST | E | AC | 2 | 330 | 36 | 11,880 | 3/22/22 | 91 | 59 | 41 | 0 | New Construction | 1/1/80 |
| 1597 | 13151 | RAGTIME CIR | SUNDANCER LN | CDS | E | AAC | 2 | 196 | 32 | 8,072 | 5/7/24 | 91 | 0 | 76 | 24 | Overlay - AC Fabric | 12/1/17 |
| 168 | 14952 | AUTOPARK DR | REPAIR LN | GOTHARD ST | E | AC | 4 | 353 | 40 | 13,800 | 5/9/24 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1782 | 14353 | SHACKLEFORD CIR | CORNERBROOK DR | CDS | E | AC | 8 | 340 | 36 | 13,740 | 5/20/24 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 230 | 16022 | BELLSHIRE DR | MAYPORT LN | SWANSEA LN | E | AC | 7 | 758 | 36 | 27,288 | 4/21/26 | 91 | 0 | 33 | 67 | Surface Treatment - Slurry Seal | 7/15/21 |
| 3500 | 35000 | KELLOG CIR | MADDOX DR | CDS | E | AC | 3 | 223 | 36 | 11,328 | 3/18/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 406 | 13994 | CATFISH CIR | TARPON DR | CDS | E | AC | 8 | 310 | 32 | 11,420 | 3/7/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 652 | 15062 | EDGEWATER LN | BRANFORD DR | FIGARO CIR | E | AAC | 2 | 525 | 36 | 18,900 | 5/10/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 721 | 13335 | FARINELLA DR | EDWARDS ST | COOPER LN | E | AC | 3 | 537 | 36 | 19,032 | 3/18/22 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 744 | 15624 | FISHER DR | SAYBROOK LN | DAVIS CUP | E | AAC | 2 | 322 | 36 | 11,592 | 5/10/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 821 | 13643 | GLADYS AVE | WHARTON ST | HARTLUND ST | E | AAC | 4 | 387 | 33 | 13,371 | 4/14/26 | 91 | 38 | 62 | 0 | Overlay - AC Structural | 11/28/19 |
| 1123 | 14292 | LAPWORTH CIR | NATIONAL LN | CDS | E | AAC | 8 | 491 | 36 | 20,716 | 3/18/24 | 91 | 25 | 61 | 14 | Overlay - AC Structural | 5/11/18 |
| 1657 | 14761 | ROCKINGHORSE LN | CHURCHILL DR | FAIRCREST DR | E | AC | 5 | 467 | 36 | 16,812 | 5/7/24 | 91 | 0 | 15 | 85 | New Construction | 1/1/80 |
| 172 | 14831 | B ST | ROBIDOUX DR | WARNER AVE | E | AC | 4 | 651 | 34 | 22,134 | 3/31/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1723 | 14897 | SANDRA LEE LN | ORION AVE | LOS PATOS AVE | E | AAC | 2 | 662 | 36 | 23,832 | 5/21/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2031 | 13015 | TWENTIETH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 415 | 46 | 19,090 | 6/30/21 | 91 | 0 | 61 | 39 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2062 | 15587 | VELARDO DR | WOODWARD LN | BUSHARD ST | E | AC | 8 | 1,153 | 36 | 42,258 | 4/15/26 | 91 | 71 | 29 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2143 | 15277 | WHARTON ST | GLADYS AVE | KINER AVE | E | AAC | 4 | 864 | 33 | 29,512 | 4/14/26 | 91 | 46 | 54 | 0 | Overlay - AC Structural | 11/28/19 |
| 5220 | 60370 | 4TH ST | PACIFIC N | PCH | E | AC | 2 | 182 | 23 | 4,186 | 4/23/26 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 969 | 15719 | HUNTINGTON ST | ALBERTA DR | ELLIS AVE | E | AAC | 4 | 537 | 36 | 19,332 | 4/14/26 | 91 | 0 | 87 | 13 | Overlay - AC Structural | 11/28/19 |
| 1158 | 13901 | LEXIE CIR | PALM AVE | END | E | AC | 5 | 173 | 36 | 9,015 | 7/8/21 | 91 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 7/27/22 |
| 137 | 13158 | AQUARIUS DR | RASCAL LN | SUNDANCER LN | E | AAC | 2 | 245 | 36 | 8,820 | 5/7/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1490 | 14985 | PARKSIDE LN | STARK ST | HOLT AVE | E | AC | 4 | 475 | 36 | 17,100 | 4/1/22 | 91 | 0 | 84 | 16 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1490 | 15625 | PARKSIDE LN | EDINGER AVE | STARK ST | E | AC | 4 | 905 | 36 | 32,580 | 4/1/22 | 91 | 0 | 83 | 17 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1589 | 14426 | QUEENS LN | BARTON DR | ALLEY BARTON DR | E | AAC | 4 | 158 | 36 | 5,688 | 5/30/24 | 91 | 45 | 52 | 3 | Overlay - AC Structural | 10/1/12 |
| 1736 | 13507 | SATURN DR | GEMINI LN | GOTHARD ST | E | AC | 3 | 395 | 40 | 16,550 | 4/7/22 | 91 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2033 | 13024 | TWENTY-SECOND ST | ACACIA AVE | PALM AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/30/21 | 91 | 0 | 48 | 52 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2288 | 50370 | ADAMS AVE FRONTAGE | VINTAGE LN | CROWN REEF LN | E | AC | 7 | 505 | 30 | 15,150 | 4/20/26 | 91 | 100 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 245 | 15481 | BIG BEND LN | OLYMPIC DR | LASSEN CIR | E | AC | 8 | 915 | 36 | 33,690 | 3/1/22 | 91 | 0 | 83 | 17 | Surface Treatment - Slurry Seal | 2/13/23 |
| 349 | 14667 | CALIFORNIA ST | INDIANAPOLIS AVE | JOILET AVE | E | AC | 6 | 330 | 37 | 11,988 | 8/14/23 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 3/1/11 |
| 481 | 13751 | COLUMBIA LN | BROWN CIR | CITADEL DR | E | AC | 1 | 260 | 36 | 9,360 | 12/18/24 | 91 | 52 | 43 | 5 | New Construction | 1/1/80 |
| 652 | 13197 | EDGEWATER LN | MORNING STAR DR | BRANFORD DR | E | AAC | 2 | 260 | 36 | 9,360 | 5/10/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 770 | 16026 | FOURTEENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/22/21 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1284 | 13239 | MEADOWLARK DR | NASSAU LN | FAIRWAY LN | E | AAC | 3 | 260 | 36 | 9,360 | 5/9/24 | 91 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 1621 | 14229 | REILLY DR | SANDPIPER LN | END | E | AC | 9 | 364 | 36 | 13,104 | 8/24/23 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1764 | 14888 | SEAPINE CIR | GREEN ST | CDS | E | AAC | 2 | 347 | 36 | 13,992 | 5/21/24 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 2120 | 14543 | WATERWAY CIR | HEIL AVE | CDS | E | AAC | 2 | 446 | 34 | 16,414 | 5/21/24 | 91 | 39 | 53 | 8 | Overlay - AC Fabric | 12/1/17 |
| 5 | 15843 | ACACIA AVE | MAIN ST | LAKE ST | E | AC | 6 | 270 | 36 | 9,720 | 7/8/21 | 91 | 0 | 76 | 24 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5460 | 61010 | CANAL ST | PCH | END N | E | PCC | 2 | 56 | 24 | 1,344 | 5/13/24 | 91 | 0 | 34 | 66 | New Construction - PCC | 1/1/80 |
| 765 | 15284 | FORELLE DR | PATTERSON LN | GOODWIN LN | E | AAC | 4 | 612 | 37 | 22,348 | 4/13/26 | 91 | 26 | 74 | 0 | Overlay - AC Structural | 11/28/19 |
| 852 | 14962 | GREEN ST | PEARCE ST | BARRACUDA LN | E | AC | 2 | 437 | 36 | 15,732 | 3/22/22 | 91 | 0 | 95 | 5 | New Construction | 1/1/80 |
| 875 | 14012 | HALAWA DR | MAUNA LN | PITSCAIM LN | E | AC | 8 | 1,080 | 36 | 38,880 | 3/2/22 | 91 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1213 | 15115 | LYNN ST | PEARCE ST | WARNER AVE | E | AC | 2 | 1,321 | 36 | 47,556 | 3/22/22 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1236 | 13235 | MANGRUM DR | EAGLE LN | BIRDIE LN | E | AC | 3 | 260 | 36 | 9,360 | 3/23/22 | 91 | 23 | 77 | 0 | New Construction | 1/1/80 |
| 180 | 13133 | BALLAD LN | PRELUDE DR | CDS | E | AC | 2 | 412 | 36 | 16,132 | 3/24/22 | 91 | 24 | 76 | 0 | New Construction | 1/1/80 |
| 1915 | 13881 | SUNBURST LN | MOONBEAM DR | BLUEBONNET DR | E | AC | 3 | 365 | 36 | 14,140 | 12/20/24 | 91 | 0 | 48 | 52 | New Construction - Initial | 1/1/80 |
| 1962 | 14949 | TELHAN DR | BUSHARD ST FRONTAGE | ELMSFORD LN | E | AC | 8 | 1,132 | 36 | 41,502 | 3/9/22 | 91 | 0 | 72 | 28 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2031 | 13017 | TWENTIETH ST | PCH | WALNUT AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/30/21 | 91 | 0 | 94 | 6 | Surface Treatment - Slurry Seal | 7/27/22 |
| 384 | 16017 | CARLSBAD LN | YELLOWSTONE DR | BAY MEADOW DR | E | AC | 8 | 765 | 36 | 26,952 | 2/23/22 | 91 | 0 | 48 | 52 | Surface Treatment - Slurry Seal | 2/13/23 |
| 500 | 15715 | DELAWARE ST | ONTARIO DR | ELLIS AVE | E | AC | 4 | 1,083 | 36 | 38,988 | 4/9/24 | 91 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 11/28/19 |
| 775 | 14772 | FRANKLIN DR | DELAWARE ST | CDS | E | AAC | 4 | 507 | 36 | 18,502 | 4/14/26 | 91 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 848 | 13559 | GRASS CIR | SUNBREEZE DR | END | E | AAC | 3 | 223 | 36 | 10,278 | 5/20/24 | 91 | 0 | 93 | 7 | Overlay - AC Structural | 10/1/12 |
| 1022 | 15391 | JOICE LN | RONNEY DR | KAREN CIR | E | AC | 8 | 510 | 36 | 19,110 | 4/15/26 | 92 | 48 | 52 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1104 | 15313 | LA SALLE LN | CORNELL DR | MC FADDEN AVE | E | AC | 1 | 1,292 | 36 | 46,512 | 4/21/26 | 92 | 71 | 15 | 14 | New Construction | 1/1/80 |
| 1841 | 14226 | SNOWBIRD DR | CATAMARAN LN | SCHOONER LN | E | AC | 9 | 415 | 36 | 14,940 | 8/23/23 | 92 | 0 | 86 | 14 | New Construction | 1/1/80 |
| 2036 | 13922 | TYLER CIR | HARDING LN | CDS | E | AC | 7 | 520 | 37 | 22,860 | 4/2/24 | 92 | 28 | 72 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 28 | 13492 | ALHAMBRA AVE | SILVER LN | BEACH BLVD | E | AC | 4 | 1,320 | 36 | 47,520 | 3/18/22 | 92 | 0 | 43 | 57 | Surface Treatment - Slurry Seal | 7/29/20 |
| 318 | 15942 | BROADWAY | INTREPID LN | PCH | E | AAC | 2 | 351 | 28 | 6,328 | 5/13/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 463 | 13593 | CLUBHOUSE LN | MARSHALL DR | MIDDLECOFF DR | E | AC | 3 | 260 | 36 | 9,360 | 3/23/22 | 92 | 0 | 72 | 28 | New Construction | 1/1/80 |
| 472 | 15917 | COLCHESTER LN | GARFIELD AVE | DARTMOOR DR | E | AAC | 7 | 1,033 | 36 | 37,188 | 4/14/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 703 | 15377 | GARFIELD AVE | PLUM TREE LN | END | E | AC | 7 | 678 | 26 | 17,628 | 3/5/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/14/21 |
| 1918 | 15045 | SUNDANCER LN | RAGTIME CIR | NIMBLE CIR | E | AAC | 2 | 399 | 36 | 14,364 | 5/7/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 267 | 13993 | BLUEGILL CIR | TARPON DR | CDS | E | AC | 8 | 310 | 32 | 11,420 | 3/7/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 5 | 13102 | ACACIA AVE | TWENTIETH ST | GOLDENWEST ST | E | AC | 6 | 781 | 36 | 28,116 | 6/23/21 | 92 | 0 | 51 | 49 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5000 | 60020 | NORTH PACIFIC | 7TH ST | 10TH ST | E | AC | 2 | 705 | 25 | 17,625 | 5/6/24 | 92 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 968 | 15958 | HUNTER LN | ERSKINE DR | SCOTSTOUN DR | E | AC | 8 | 1,288 | 36 | 46,368 | 3/19/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1040 | 14383 | KANEOHE LN | KAPAA DR | ALOHA DR | E | AC | 9 | 256 | 36 | 9,966 | 3/27/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1667 | 15390 | RONNEY DR | JOICE LN | BUSHARD ST | E | AC | 8 | 344 | 36 | 13,134 | 4/15/26 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2106 | 14518 | WALLINGFORD LN | GATESHEAD DR | HARWICH LN | E | AAC | 9 | 696 | 36 | 25,806 | 4/22/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 2306 | 60880 | PLAZA LN | DOVERTON DR | HEIL AVE | E | AC | 2 | 1,078 | 28 | 33,200 | 4/2/26 | 92 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 329 | 14401 | BUCKINGHAM DR | GRAHAM ST | DAN LN | E | AC | 1 | 1,239 | 40 | 49,240 | 4/7/26 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 372 | 14541 | CAPE MAY LN | JONESPORT LN | CDS | E | AC | 9 | 171 | 36 | 7,956 | 4/24/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 500 | 14758 | DELAWARE ST | TAYLOR DR | ONTARIO DR | E | AC | 4 | 260 | 36 | 9,360 | 4/9/24 | 92 | 0 | 76 | 24 | Surface Treatment - Slurry Seal | 11/28/19 |
| 631 | 14308 | DRYMEN DR | BANFF LN | ALLEY DONCASTER DR | E | AC | 9 | 264 | 36 | 9,540 | 8/30/23 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 755 | 13799 | FLINTRIDGE LN | CUMBERLAND DR | HALIFAX DR | E | AC | 1 | 521 | 36 | 19,256 | 4/8/26 | 92 | 0 | 94 | 6 | New Construction | 1/1/80 |
| 851 | 13907 | GRAZIADIO DR | BEACH BLVD | LIBRA CIR | E | AAC | 7 | 512 | 36 | 17,412 | 4/14/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1309 | 13937 | MILFORD CIR | NEWLAND ST | CDS | E | AAC | 7 | 311 | 32 | 13,912 | 4/15/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1350 | 13195 | MORNING STAR DR | EDGEWATER LN | CDS | E | AAC | 2 | 357 | 36 | 14,352 | 5/10/24 | 92 | 0 | 88 | 12 | Overlay - AC Fabric | 12/1/17 |
| 1379 | 15571 | NEOLANI DR | KANAKOA LN | ZAMORA LN | E | AC | 9 | 517 | 36 | 18,612 | 4/24/24 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1389 | 13930 | NEWHAVEN LN | HAMDEN LN | BRIDGEPORT DR | E | AAC | 7 | 370 | 36 | 13,320 | 4/14/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1404 | 15840 | NINTH ST | PCH | WALNUT AVE | E | AC | 6 | 370 | 46 | 17,020 | 6/22/21 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1434 | 15603 | OCEANBREEZE LN | OCEANCREST DR | SUMMERWIND LN | E | AC | 9 | 796 | 36 | 29,406 | 3/26/24 | 92 | 0 | 89 | 11 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1505 | 12957 | PECAN AVE | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/23/21 | 92 | 0 | 84 | 16 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1723 | 15764 | SANDRA LEE LN | ORION AVE | CDS | E | AAC | 2 | 441 | 36 | 17,376 | 5/21/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1775 | 13380 | SELKIRK DR | DENVALE CIR | SHOREHAM LN | E | AC | 5 | 258 | 36 | 9,012 | 3/30/26 | 92 | 0 | 87 | 13 | New Construction | 1/1/80 |
| 1841 | 14244 | SNOWBIRD DR | BASTIA LN | MISSION LN | E | AC | 9 | 706 | 36 | 25,416 | 8/23/23 | 92 | 15 | 78 | 7 | New Construction | 1/1/80 |
| 1922 | 15217 | SUNLIGHT DR | MAGELLAN LN | WISHINGWELL LN | E | AC | 3 | 520 | 36 | 18,720 | 3/18/22 | 92 | 27 | 73 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1922 | 13481 | SUNLIGHT DR | WISHINGWELL LN | CDS | E | AC | 3 | 486 | 36 | 17,496 | 3/18/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 265 | 13986 | BLUEFIN LN | GARFIELD AVE | ALBACORE DR | E | AC | 8 | 180 | 47 | 7,810 | 3/7/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 468 | 13348 | COD CIR | SUN DR | END | E | AC | 3 | 225 | 36 | 10,100 | 4/7/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 5300 | 60455 | 11TH ST | PACIFIC N | PCH | E | AC | 2 | 167 | 20 | 3,340 | 4/23/26 | 92 | 0 | 47 | 53 | New Construction - Initial | 1/1/80 |
| 572 | 15918 | DAWSON LN | MC FADDEN AVE | SKYVIEW DR | E | AC | 3 | 696 | 36 | 25,056 | 4/7/26 | 92 | 27 | 42 | 31 | New Construction | 1/1/80 |
| 948 | 15713 | HOLLY ST | GARFIELD AVE | MAIN ST | E | AC | 7 | 580 | 36 | 20,880 | 3/12/24 | 92 | 0 | 85 | 15 | Surface Treatment - Slurry Seal | 11/28/19 |
| 969 | 15006 | HUNTINGTON ST | MAIN ST | CDS | E | AAC | 4 | 593 | 42 | 26,156 | 4/6/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1001 | 13684 | JADE CIR | EDGEVIEW LN | END | E | AC | 1 | 530 | 36 | 20,830 | 5/6/26 | 92 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 1024 | 14211 | JON DAY DR | BROOKHURST ST | CRAIMER LN | E | AC | 8 | 1,280 | 36 | 46,080 | 2/28/22 | 92 | 0 | 51 | 49 | Surface Treatment - Slurry Seal | 2/14/23 |
| 1238 | 15717 | MANITOBA LN | ONTARIO DR | ALBERTA DR | E | AAC | 4 | 561 | 36 | 20,196 | 4/14/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1527 | 13849 | PILGRIM CIR | ROYALIST DR | END | E | AC | 1 | 530 | 36 | 20,330 | 12/20/24 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1548 | 14373 | POLYNESIAN LN | REGATTA DR | BOBBIE CIR | E | AAC | 9 | 256 | 36 | 9,216 | 3/26/24 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1701 | 13966 | SAILWIND LN | SEASPRAY DR | BAYWOOD DR | E | AC | 7 | 261 | 36 | 9,646 | 5/5/26 | 92 | 51 | 49 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2030 | 13080 | TWELFTH ST | PALM AVE | CREST AVE | E | AC | 6 | 298 | 46 | 13,708 | 7/8/21 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2033 | 13025 | TWENTY-SECOND ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/30/21 | 92 | 0 | 69 | 31 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2072 | 13861 | VESPER CIR | WHITEOAK LN | END | E | AC | 3 | 213 | 32 | 8,316 | 4/7/26 | 92 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 333 | 14138 | BURLCREST DR | BRENTSTONE LN | SWANSEA LN | E | AC | 7 | 469 | 36 | 17,634 | 4/21/26 | 92 | 55 | 45 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 484 | 14338 | COMPASS LN | SOUTHSHORE DR | WATERFRONT DR | E | AC | 9 | 389 | 36 | 14,504 | 4/1/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 5 | 13111 | ACACIA AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AC | 6 | 880 | 36 | 31,680 | 6/23/21 | 92 | 0 | 71 | 29 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5010 | 60160 | SOUTH PACIFIC | 7TH ST | 5TH ST | E | AC | 2 | 470 | 25 | 11,750 | 4/23/26 | 92 | 35 | 56 | 9 | New Construction - Initial | 1/1/80 |
| 838 | 13656 | GOODWIN LN | FORELLE DR | ELLIS AVE | E | AC | 4 | 660 | 36 | 23,184 | 4/8/24 | 92 | 27 | 68 | 5 | Surface Treatment - Slurry Seal | 11/28/19 |
| 926 | 14878 | HERMANSON CIR | LYNN ST | CDS | E | AAC | 2 | 407 | 36 | 16,152 | 5/21/24 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 1382 | 14623 | NEW BRITAIN LN | HAMMON LN | END | E | AAC | 9 | 639 | 36 | 23,004 | 8/21/23 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 166 | 15334 | AULNAY LN | MC FADDEN AVE | WINSLOW DR | E | AC | 1 | 441 | 36 | 15,876 | 12/18/24 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1868 | 14892 | ST ANDREWS LN | GLENROY DR | KENILWORTH DR | E | AC | 2 | 260 | 36 | 9,360 | 4/1/26 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 765 | 15283 | FORELLE DR | GOODWIN LN | SPRINGTIME LN | E | AAC | 4 | 570 | 37 | 20,490 | 4/13/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 802 | 15612 | GATESHEAD DR | HARWICH LN | BUSHARD ST | E | AAC | 9 | 721 | 36 | 25,956 | 4/22/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 969 | 14997 | HUNTINGTON ST | PACIFIC VIEW | ATLANTA AVE | E | AAC | 9 | 1,249 | 37 | 46,213 | 8/24/23 | 92 | 0 | 57 | 43 | Overlay - AC Structural | 7/1/10 |
| 1061 | 14167 | KENYON LN | HAZELBROOK DR | CLIFFWOOD DR | E | AC | 7 | 241 | 36 | 8,164 | 4/21/26 | 92 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1316 | 14833 | MINORU LN | ALLEY WARNER AVE | WARNER AVE | E | AC | 4 | 180 | 36 | 6,480 | 4/6/22 | 92 | 44 | 56 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1835 | 13878 | SKYVIEW DR | SWEETBRIAR LN | DAWSON LN | E | AC | 3 | 594 | 36 | 21,096 | 12/12/24 | 92 | 0 | 52 | 48 | New Construction | 1/1/80 |
| 212 | 17002 | BEACH BLVD FRONTAGE | TRAVELWAY | WEST END | E | AC | 9 | 1,032 | 36 | 37,152 | 8/30/23 | 92 | 0 | 41 | 59 | New Construction | 1/1/80 |
| 271 | 14988 | BOARDWALK DR | SAYBROOK LN | ALGONQUIN ST | E | AC | 2 | 834 | 36 | 30,024 | 4/5/22 | 92 | 28 | 72 | 0 | New Construction - Initial | 1/1/80 |
| 388 | 13910 | CAROLYN LN | KATHERINE DR | CDS | E | AAC | 7 | 382 | 36 | 14,732 | 4/14/26 | 92 | 23 | 77 | 0 | Overlay - AC Structural | 11/21/19 |
| 493 | 15647 | CONSTITUTION LN | CLANCY LN | EDUCATION LN | E | AC | 8 | 530 | 36 | 19,080 | 3/7/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 564 | 13524 | DANUBE DR | RHONE LN | THAMES LN | E | AC | 4 | 1,043 | 36 | 37,548 | 3/31/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 571 | 13143 | DAVIS LN | HENDRICKSEN DR | SISSON DR | E | AAC | 2 | 849 | 36 | 32,064 | 5/21/24 | 92 | 0 | 93 | 7 | Overlay - AC Fabric | 10/1/16 |
| 644 | 13515 | EARL CIR | BURKE LN | CDS | E | AC | 3 | 130 | 32 | 5,660 | 3/31/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 829 | 14837 | GLENHAVEN LN | TERRY DR | ARNETT DR | E | AC | 4 | 465 | 36 | 16,990 | 4/6/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1072 | 14869 | KING CIR | ALLEY GREEN ST | GREEN ST | E | AAC | 2 | 187 | 36 | 9,232 | 5/21/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1239 | 13895 | MANOR POINT CIR | EVENING HILL DR | CDS | E | AAC | 5 | 354 | 36 | 14,744 | 4/30/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1505 | 12895 | PECAN AVE | EIGHTH ST | ELEVENTH ST | E | AC | 6 | 912 | 36 | 32,832 | 6/23/21 | 92 | 0 | 83 | 17 | Surface Treatment - Slurry Seal | 6/8/21 |
| 1763 | 14107 | SEALROCK DR | LIGHTHOUSE LN | NEWLAND ST | E | AAC | 9 | 162 | 36 | 5,832 | 8/21/23 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 1840 | 15087 | SNEAD DR | NASSAU LN | CHIPPER LN | E | AAC | 3 | 576 | 36 | 20,986 | 5/9/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 385 | 15444 | CARMANIA LN | SHALOM DR | ORONSAY CR | E | AC | 8 | 517 | 36 | 18,612 | 2/28/22 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 417 | 15462 | CHARFORD DR | CAMFIELD LN | IVES LN | E | AC | 7 | 409 | 36 | 14,724 | 4/21/26 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 516 | 14991 | COUNTESS DR | EDINGER AVE | PORTOFINO CIR | E | AC | 2 | 1,605 | 44 | 71,870 | 4/7/22 | 92 | 0 | 88 | 12 | New Construction | 1/1/80 |
| 1320 | 15538 | MIRAMAR LN | GREENFIELD LN | DORSETT DR | E | AC | 9 | 686 | 36 | 24,696 | 8/30/23 | 92 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 1446 | 13113 | OLIVE AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AC | 6 | 930 | 36 | 33,480 | 6/23/21 | 92 | 0 | 63 | 37 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1502 | 15114 | PEARCE ST | LYNN ST | GREEN ST | E | AC | 2 | 660 | 36 | 23,760 | 3/22/22 | 92 | 0 | 45 | 55 | New Construction | 1/1/80 |
| 1552 | 14617 | PORT GREENWICH LN | NORTHPORT DR | BOOTHBAY CIR | E | AC | 9 | 255 | 36 | 9,180 | 8/21/23 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1561 | 15113 | PRAIRIE DR | ALLEY LE GRAND LN | LYNN ST | E | AAC | 2 | 786 | 36 | 29,276 | 5/21/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2031 | 13096 | TWENTIETH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/30/21 | 92 | 0 | 85 | 15 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2154 | 15210 | WHITNEY DR | CASCADE LN | RUSHMOOR LN | E | AC | 4 | 550 | 36 | 19,800 | 5/13/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2207 | 13560 | SLATER AVE FRONTAGE RD | FLOWER LN | END | E | AAC | 3 | 251 | 27 | 7,977 | 5/20/24 | 92 | 0 | 79 | 21 | Overlay - AC Structural | 10/1/12 |
| 316 | 14607 | BRITTANY LN | BENJAMIN DR | EL ARROYO DR | E | AAC | 4 | 251 | 36 | 9,036 | 4/9/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 455 | 14193 | CLEARWOOD CIR | BAY MEADOW DR | CDS | E | AC | 8 | 426 | 34 | 16,284 | 2/23/22 | 92 | 59 | 41 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 634 | 13556 | DUELLO LN | NIMROD DR | SLATER AVE | E | AAC | 3 | 314 | 36 | 11,304 | 5/20/24 | 92 | 0 | 54 | 46 | Overlay - AC Structural | 10/1/12 |
| 696 | 15518 | ERSKINE DR | BUSHARD ST | IONA LN | E | AC | 8 | 898 | 36 | 32,076 | 3/19/24 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 770 | 12993 | FOURTEENTH ST | ACACIA AVE | PALM AVE | E | AC | 6 | 390 | 46 | 17,940 | 6/22/21 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1291 | 15927 | MELBOURNE DR | VICTORIA LN | YORKSHIRE LN | E | AC | 1 | 780 | 36 | 29,080 | 12/12/24 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1546 | 13923 | POLK CIR | HARDING LN | CDS | E | AAC | 7 | 524 | 37 | 23,008 | 4/14/26 | 92 | 0 | 93 | 7 | Overlay - AC Structural | 11/28/19 |
| 1552 | 15655 | PORT GREENWICH LN | BOOTHBAY CIR | CAPE NEWBURY DR | E | AC | 9 | 768 | 36 | 27,648 | 8/21/23 | 92 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1579 | 14602 | PROMENADE PKWY DR | SEAGATE DR | GOTHARD AVE | E | AC | 4 | 1,017 | 42 | 42,714 | 3/5/24 | 92 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1912 | 14981 | SUMMIT DR | SEAPOINT AVE | PENINSULA LN | E | AC | 5 | 1,617 | 44 | 71,148 | 5/6/24 | 92 | 0 | 70 | 30 | New Construction - Initial | 1/1/80 |
| 2109 | 13132 | WALTZ CIR | PRELUDE DR | CDS | E | AC | 2 | 412 | 36 | 16,332 | 3/24/22 | 92 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 584 | 12862 | DEGUELLE CIR | FINDLEY CIR | CDS | E | AC | 5 | 286 | 34 | 12,785 | 7/8/21 | 92 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 643 | 15082 | EAGLE LN | CASTLE DR | MEADOWLARK DR | E | AAC | 3 | 1,185 | 36 | 43,410 | 5/9/24 | 92 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 888 | 14155 | HARBOR ISLE LN | BROWNING DR | STRATHCONA CIR | E | AC | 7 | 583 | 36 | 22,488 | 4/21/26 | 92 | 32 | 68 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 904 | 15276 | HARTLUND ST | MAGIC CIR | LE CONTE DR | E | AAC | 4 | 832 | 34 | 28,288 | 4/13/26 | 92 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1071 | 13651 | KINER AVE | GLEADA LN | LISA LN | E | AAC | 4 | 854 | 33 | 28,682 | 4/13/26 | 93 | 55 | 45 | 0 | Overlay - AC Structural | 11/28/19 |
| 1255 | 13490 | MARK LN | NANCY DR | ALHAMBRA AVE | E | AC | 4 | 260 | 36 | 10,110 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1322 | 13155 | MISTRAL DR | TISBURY CIR | WAYFARER LN | E | AC | 2 | 481 | 36 | 17,316 | 4/7/22 | 93 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 332 | 13517 | BURKE LN | EARL CIR | PRINCE DR | E | AC | 3 | 361 | 40 | 14,440 | 3/31/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 492 | 14095 | CONSTELLATION LN | MONITOR DR | LURLINE DR | E | AC | 8 | 1,040 | 36 | 37,440 | 3/2/22 | 93 | 0 | 83 | 17 | Surface Treatment - Slurry Seal | 2/8/23 |
| 534 | 14969 | CRIMSON CIR | FLAGSTAFF LN | CDS | E | AAC | 7 | 692 | 36 | 30,112 | 4/6/26 | 93 | 0 | 93 | 7 | Overlay - AC Structural | 11/28/19 |
| 636 | 15512 | DUMBRECK DR | PAISLEY LN | QUEENS PARK LN | E | AC | 8 | 1,039 | 36 | 37,148 | 3/18/24 | 93 | 0 | 80 | 20 | New Construction | 1/1/80 |
| 704 | 14224 | EVELYNE CIR | FARNSWORTH LN | END | E | AC | 9 | 321 | 32 | 10,272 | 8/24/23 | 93 | 0 | 69 | 31 | New Construction | 1/1/80 |
| 1617 | 14291 | REEF LN | LEVEE DR | STAR DR | E | AC | 8 | 127 | 36 | 6,572 | 3/6/24 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1628 | 14950 | REPAIR LN | AUTOPARK DR | ELLIS AVE | E | AC | 4 | 183 | 40 | 7,000 | 5/9/24 | 93 | 14 | 86 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1689 | 13338 | RUTH DR | PATRICIA LN | SIMMONE LN | E | AC | 3 | 265 | 36 | 10,340 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1920 | 15350 | SUNFLOWER LN | CHESTNUT DR | MOONBEAM DR | E | AC | 3 | 539 | 36 | 21,404 | 12/20/24 | 93 | 0 | 56 | 44 | New Construction - Initial | 1/1/80 |
| 333 | 15464 | BURLCREST DR | MEANDER LN | BRENTSTONE LN | E | AC | 7 | 527 | 36 | 19,722 | 4/21/26 | 93 | 47 | 53 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 852 | 15780 | GREEN ST | KING CIR | LOS PATOS AVE | E | AAC | 2 | 821 | 36 | 29,556 | 5/21/24 | 93 | 0 | 86 | 14 | Overlay - AC Fabric | 12/1/17 |
| 1005 | 14751 | JANA CIR | FLORIDA ST | CDS | E | AAC | 7 | 190 | 33 | 6,270 | 4/15/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1607 | 13147 | RASCAL LN | SEASCAPE DR | AQUARIUS DR | E | AAC | 2 | 385 | 36 | 13,860 | 5/7/24 | 93 | 0 | 70 | 30 | Overlay - AC Fabric | 12/1/17 |
| 2119 | 14360 | WATERFRONT DR | BUSHARD ST | PINETREE LN | E | AAC | 8 | 169 | 36 | 5,796 | 5/20/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 2305 | 60820 | MARIGAYLE CIR | EDWARDS ST | CDS | E | AC | 5 | 185 | 36 | 8,550 | 5/7/24 | 93 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 276 | 13729 | BOLSA PARK LN | KIMBERLY DR | DUNDEE DR | E | AC | 1 | 276 | 36 | 9,936 | 12/18/24 | 93 | 40 | 60 | 0 | New Construction - Initial | 1/1/80 |
| 327 | 15760 | BRUSH DR | MONROE LN | TRIPP CIR | E | AC | 4 | 550 | 36 | 19,800 | 4/6/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 711 | 13220 | FAIRFIELD CIR | WESTPORT DR | CDS | E | AAC | 2 | 400 | 36 | 15,900 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 770 | 13115 | FOURTEENTH ST | PCH | OLIVE AVE | E | AC | 6 | 775 | 46 | 36,095 | 6/22/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1062 | 14391 | KEOKI CIR | ZAMORA LN | CDS | E | AC | 9 | 235 | 32 | 9,020 | 5/20/24 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1071 | 13644 | KINER AVE | WHARTON ST | HARTLUND ST | E | AAC | 4 | 387 | 33 | 13,371 | 4/14/26 | 93 | 38 | 62 | 0 | Overlay - AC Structural | 11/28/19 |
| 1148 | 14385 | LEHUA LN | HAMILTON AVE | NEOLANI DR | E | AC | 9 | 178 | 36 | 6,120 | 4/24/24 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 1213 | 15018 | LYNN ST | WARNER AVE | JAMES CIR | E | AAC | 2 | 505 | 36 | 18,180 | 5/21/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1217 | 13505 | MADDOX DR | ALLEY SABOT LN | ALLEY MADDOX DR | E | AC | 3 | 160 | 36 | 5,760 | 3/18/22 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1217 | 15230 | MADDOX DR | BARTLETT LN | ALLEY BARTLETT LN | E | AC | 3 | 157 | 36 | 5,652 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1217 | 15232 | MADDOX DR | TUNSTALL LN | ALLEY SABOT LN | E | AC | 3 | 359 | 36 | 12,924 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1217 | 13504 | MADDOX DR | ALLEY GOLDENWEST ST | BARTLETT LN | E | AC | 3 | 157 | 36 | 5,652 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1265 | 13555 | MASHIE CIR | NIMROD DR | END | E | AAC | 3 | 216 | 32 | 8,412 | 5/20/24 | 93 | 0 | 58 | 42 | Overlay - AC Structural | 10/1/12 |
| 1284 | 15088 | MEADOWLARK DR | FAIRWAY LN | SPRINGDALE ST | E | AAC | 3 | 614 | 45 | 26,630 | 5/9/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1360 | 14993 | MUKAI CT | MADERA LN | CDS | E | AC | 5 | 271 | 36 | 12,036 | 5/22/24 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 10/1/12 |
| 1385 | 12863 | PALM AVE | ELEVENTH ST | FOURTEENTH ST | E | AC | 6 | 975 | 40 | 39,000 | 6/23/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1446 | 12922 | OLIVE AVE | FIFTH ST | SIXTH ST | E | AC | 6 | 270 | 36 | 9,720 | 6/23/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1534 | 13164 | PIRATE CIR | SUNDANCER LN | CDS | E | AAC | 2 | 404 | 32 | 14,428 | 5/7/24 | 93 | 0 | 86 | 14 | Overlay - AC Fabric | 12/1/17 |
| 1631 | 15061 | SAYBROOK LN | BRANFORD DR | TALISMAN LN | E | AAC | 2 | 365 | 36 | 13,140 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 1637 | 15565 | RHODESIA DR | BAHAMA LN | CDS | E | AAC | 9 | 740 | 36 | 28,440 | 3/27/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 1892 | 13213 | STILES CIR | TRUMBELL DR | CDS | E | AAC | 2 | 223 | 36 | 9,528 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1906 | 15360 | SUMMER BREEZE LN | LITTLE HARBOR DR | CDS | E | AC | 5 | 807 | 36 | 31,845 | 6/30/21 | 93 | 0 | 66 | 34 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1968 | 14839 | TERRY DR | LEAFWOOD CIR | HERITAGE LN | E | AC | 4 | 256 | 36 | 9,216 | 4/6/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1968 | 15757 | TERRY DR | MONTCLAIR LN | IRBY LN | E | AC | 4 | 750 | 36 | 27,000 | 4/6/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 199 | 15820 | BASS DR | BUSHARD ST | WALLEYE LN | E | AC | 8 | 322 | 36 | 12,592 | 3/7/22 | 93 | 0 | 72 | 28 | New Construction | 1/1/80 |
| 2053 | 14825 | VAN DYKE LN | AMSTERDAM DR | REMBRANDT DR | E | AC | 4 | 491 | 36 | 17,676 | 3/31/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2080 | 13787 | VICTORIA LN | ALEXANDRIA DR | OXFORD DR | E | AC | 1 | 260 | 36 | 9,072 | 12/12/24 | 93 | 0 | 83 | 17 | New Construction - Initial | 1/1/80 |
| 281 | 13342 | BONNIE DR | PATRICIA LN | KETTLER LN | E | AC | 3 | 521 | 36 | 18,756 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 563 | 14775 | DANTON CIR | CARNABY LN | CDS | E | AAC | 4 | 122 | 32 | 5,404 | 4/14/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 570 | 15073 | DAVENPORT DR | SAYBROOK LN | ALGONQUIN ST | E | AAC | 2 | 802 | 60 | 48,120 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 770 | 13089 | FOURTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/22/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 806 | 14631 | GENEVA AVE | DELAWARE ST | ALLEY DELAWARE ST | E | AC | 9 | 170 | 37 | 6,290 | 8/15/23 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 905 | 14073 | HARTSDALE CIR | INNSBRUCK DR | END | E | AC | 8 | 295 | 32 | 10,940 | 3/9/22 | 93 | 0 | 71 | 29 | Surface Treatment - Slurry Seal | 2/8/23 |
| 969 | 15718 | HUNTINGTON ST | QUEBEC CIR | ALBERTA DR | E | AAC | 4 | 258 | 36 | 9,288 | 4/14/26 | 93 | 0 | 86 | 14 | Overlay - AC Structural | 11/28/19 |
| 969 | 14769 | HUNTINGTON ST | ONTARIO DR | QUEBEC CIR | E | AAC | 4 | 267 | 36 | 9,612 | 4/14/26 | 93 | 0 | 83 | 17 | Overlay - AC Structural | 11/28/19 |
| 1213 | 13606 | LYNN ST | PRAIRIE DR | PEARCE ST | E | AAC | 2 | 660 | 36 | 24,750 | 5/21/24 | 93 | 0 | 88 | 12 | Overlay - AC Fabric | 12/1/17 |
| 1218 | 15964 | MADELINE DR | MAGNOLIA ST | OCCIDENTAL LN | E | AC | 7 | 1,121 | 36 | 41,106 | 4/20/26 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1631 | 15067 | SAYBROOK LN | SILLMAN DR | DAVENPORT DR | E | AAC | 2 | 1,137 | 36 | 40,932 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 276 | 13747 | BOLSA PARK LN | TYNDALL DR | SHELLY DR | E | AC | 1 | 274 | 36 | 9,576 | 12/18/24 | 93 | 0 | 59 | 41 | New Construction - Initial | 1/1/80 |
| 948 | 14754 | HOLLY ST | CLAY AVE | CDS | E | AC | 7 | 450 | 34 | 15,300 | 3/12/24 | 93 | 0 | 77 | 23 | New Construction | 1/1/80 |
| 958 | 14860 | HOSKINS ST | MILO ST | WARNER AVE | E | AAC | 2 | 660 | 36 | 23,760 | 5/21/24 | 93 | 0 | 73 | 27 | Overlay - AC Structural | 12/1/17 |
| 1065 | 50450 | KETTLER LN | BONNIE DR | SYLVIA DR | E | AC | 3 | 1,018 | 36 | 40,348 | 3/18/22 | 93 | 0 | 92 | 8 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1310 | 13552 | MILL CIR | FORD DR | END | E | AAC | 3 | 350 | 32 | 12,700 | 5/28/24 | 93 | 0 | 62 | 38 | Overlay - AC Structural | 10/1/12 |
| 1502 | 13303 | PEARCE ST | ROOSEVELT LN | CDS | E | AC | 2 | 332 | 36 | 13,202 | 4/2/26 | 93 | 63 | 37 | 0 | New Construction | 1/1/80 |
| 1855 | 15044 | SPARTAN CIR | AQUARIUS DR | CDS | E | AAC | 2 | 554 | 36 | 21,744 | 5/7/24 | 93 | 0 | 86 | 14 | Overlay - AC Fabric | 12/1/17 |
| 1918 | 15046 | SUNDANCER LN | NIMBLE CIR | REBEL CIR | E | AAC | 2 | 309 | 36 | 11,124 | 5/7/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1918 | 13146 | SUNDANCER LN | SEASCAPE DR | RAGTIME CIR | E | AAC | 2 | 378 | 36 | 13,608 | 5/7/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 197 | 13225 | BARUNA LN | KITTEN CIR | SIRUS DR | E | AC | 2 | 268 | 36 | 10,398 | 5/10/24 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 310 | 15968 | BRIDGEPORT DR | NEWHAVEN LN | NEWLAND ST | E | AAC | 7 | 517 | 36 | 18,612 | 4/15/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 373 | 15446 | CAPE NEWBURY DR | CAPE COTTAGE LN | END | E | AC | 9 | 733 | 36 | 26,388 | 8/21/23 | 93 | 0 | 60 | 40 | Surface Treatment - Slurry Seal | 3/1/11 |
| 415 | 14968 | CHAPEL LN | ELLIS AVE | MODALE DR | E | AAC | 7 | 1,288 | 36 | 46,848 | 4/14/26 | 93 | 32 | 68 | 0 | Overlay - AC Structural | 11/28/19 |
| 5 | 13103 | ACACIA AVE | SEVENTEENTH ST | TWENTIETH ST | E | AC | 6 | 828 | 36 | 29,808 | 6/23/21 | 93 | 0 | 81 | 19 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5360 | 60550 | 17TH ST | PCH | PACIFIC N | E | AC | 2 | 156 | 28 | 4,368 | 4/23/26 | 93 | 0 | 60 | 40 | New Construction - Initial | 1/1/80 |
| 689 | 13932 | ENFIELD CIR | HAMDEN LN | CDS | E | AC | 7 | 198 | 36 | 10,989 | 4/2/24 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 761 | 14519 | FOLKSTONE CIR | HARWICH LN | CDS | E | AAC | 9 | 139 | 32 | 4,448 | 4/22/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 800 | 14771 | GASPE CIR | APPLEBY DR | CDS | E | AAC | 4 | 458 | 36 | 17,988 | 4/14/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 992 | 13078 | ISLAND BAY LN | MORNING TIDE DR | CDS | E | AC | 5 | 943 | 32 | 38,740 | 6/30/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1173 | 13649 | LISA LN | STERLING DR | CDS | E | AAC | 4 | 124 | 33 | 3,828 | 4/13/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1220 | 13605 | MAGELLAN LN | BOUQUET DR | SUNLIGHT DR | E | AC | 3 | 1,041 | 36 | 37,476 | 3/18/22 | 93 | 0 | 91 | 9 | Surface Treatment - Slurry Seal | 7/29/20 |
| 18 | 15393 | ALBACORE DR | CDS | STINGRAY LN | E | AC | 8 | 784 | 36 | 29,474 | 3/7/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 1822 | 14898 | SIMS ST | STELLRECHT CIR | LOS PATOS AVE | E | AAC | 2 | 561 | 36 | 20,196 | 5/21/24 | 93 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2175 | 13841 | WINSLOW DR | ALDEN LN | MAYFLOWER LN | E | AC | 1 | 260 | 36 | 9,360 | 12/20/24 | 93 | 0 | 61 | 39 | New Construction - Initial | 1/1/80 |
| 935 | 14638 | HILL ST | ALLEY GENEVA AVE | GENEVA AVE | E | AC | 9 | 160 | 33 | 5,280 | 8/24/23 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1022 | 13983 | JOICE LN | KAREN CIR | GRAND DR | E | AC | 8 | 254 | 36 | 9,894 | 4/15/26 | 93 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1045 | 14322 | KAUSCH CIR | SATTERFIELD DR | END | E | AC | 9 | 240 | 32 | 9,180 | 8/30/23 | 93 | 0 | 87 | 13 | New Construction | 1/1/80 |
| 127 | 60710 | ANDERSON ST | PCH | END | E | AC | 2 | 358 | 32 | 11,456 | 4/9/22 | 93 | 39 | 61 | 0 | New Construction - Initial | 1/1/80 |
| 1314 | 13834 | MILTON CIR | AULNAY LN | END | E | AC | 1 | 330 | 36 | 13,130 | 12/18/24 | 93 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 1379 | 14386 | NEOLANI DR | IMPALA LN | KANAKOA LN | E | AC | 9 | 278 | 36 | 11,008 | 4/24/24 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1825 | 16025 | SIXTEENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 380 | 46 | 17,480 | 6/22/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1911 | 14497 | SUMMERWIND LN | OCEANBREEZE LN | HARBORBREEZE LN | E | AC | 9 | 504 | 36 | 18,894 | 3/26/24 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 553 | 13582 | DALE DR | EDGEWATER LN | PHELPS LN | E | AAC | 2 | 260 | 36 | 9,360 | 5/10/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 1140 | 15281 | LE CONTE DR | HARTLUND ST | CDS | E | AAC | 4 | 460 | 36 | 18,060 | 4/13/26 | 93 | 0 | 87 | 13 | Overlay - AC Structural | 11/28/19 |
| 1316 | 15750 | MINORU LN | ALLEY SARU CIR | ALLEY WARNER AVE | E | AC | 4 | 466 | 36 | 16,776 | 4/6/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1693 | 13728 | SABRE LN | ATLAS DR | BOLSA AVE | E | AC | 1 | 224 | 36 | 8,814 | 12/26/24 | 93 | 0 | 62 | 38 | New Construction | 1/1/80 |
| 1851 | 13658 | SPA DR | RANCHO RD | HAROLD PL | E | AC | 1 | 173 | 36 | 6,228 | 4/8/22 | 93 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1960 | 15280 | TAYLOR DR | BEACH BLVD | LISA LN | E | AAC | 4 | 1,115 | 32 | 35,424 | 4/13/26 | 93 | 40 | 60 | 0 | Overlay - AC Structural | 11/28/19 |
| 452 | 15024 | CLAY AVE | HOLLY ST | RANCH LN | E | AAC | 7 | 1,321 | 36 | 47,556 | 4/6/26 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 716 | 13205 | FALKLAND CIR | CHANNEL LN | CDS | E | AC | 2 | 200 | 32 | 7,900 | 4/9/22 | 93 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 874 | 14377 | HAITI DR | BAHAMA LN | KANEHOE LN | E | AAC | 9 | 259 | 36 | 10,074 | 3/26/24 | 93 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/18 |
| 881 | 15288 | HAMMON LN | SANDS DR | SPA DR | E | AC | 1 | 772 | 36 | 27,792 | 4/8/22 | 93 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 952 | 14062 | HONEYWOOD LN | YORKTOWN AVE | VERONICA DR | E | AC | 7 | 170 | 36 | 6,120 | 5/5/26 | 93 | 0 | 58 | 42 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1210 | 13347 | LYDIA DR | MARIE LN | GOLDENWEST ST | E | AC | 3 | 409 | 36 | 14,724 | 3/18/22 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1861 | 13912 | SPRING CIR | FLAGSTAFF LN | CDS | E | AAC | 7 | 401 | 32 | 17,088 | 4/6/26 | 93 | 0 | 95 | 5 | Overlay - AC Structural | 11/28/19 |
| 258 | 14550 | BUSHARD ST | NANTUCKET DR | HYANNIS PORT DR | E | AC | 7 | 264 | 28 | 7,392 | 4/16/26 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 734 | 13091 | FIFTEENTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 375 | 46 | 17,250 | 6/22/21 | 93 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1249 | 15994 | MARIE LN | HEIL AVE | PAULA CIR | E | AC | 3 | 933 | 36 | 33,588 | 3/18/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1825 | 13002 | SIXTEENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/22/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 25 | 15311 | ALEXANDRIA DR | COLUMBIA LN | EDWARDS ST | E | AC | 1 | 645 | 36 | 22,644 | 12/20/24 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 327 | 14849 | BRUSH DR | HART CIR | MONROE LN | E | AC | 4 | 262 | 36 | 9,432 | 4/6/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 770 | 12994 | FOURTEENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/22/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1532 | 15585 | PIONEER DR | MAGNOLIA ST | LOTUS LN | E | AC | 7 | 1,117 | 36 | 40,662 | 4/20/26 | 94 | 67 | 33 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1925 | 14457 | SUNRISE DR | BEACH BLVD | BEACH BLVD | E | AC | 9 | 131 | 46 | 6,026 | 8/30/23 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 348 | 13181 | CALIENTE DR | SANTA ANITA LN | DEL MAR LN | E | AAC | 2 | 260 | 36 | 9,360 | 5/21/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 10/1/16 |
| 985 | 13209 | INTREPID LN | REMORA DR | BROADWAY | E | AAC | 2 | 957 | 32 | 30,624 | 5/13/24 | 94 | 0 | 75 | 25 | Overlay - AC Fabric | 12/1/17 |
| 1487 | 14540 | PARK AVE | PCH | END | E | AC | 2 | 255 | 36 | 9,180 | 4/9/22 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1638 | 13518 | RHONE LN | RHINE DR | VANTAGE DR | E | AC | 4 | 500 | 36 | 19,000 | 3/31/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1946 | 15137 | SYLVIA DR | DIANE LN | KETTLER LN | E | AC | 3 | 521 | 36 | 18,756 | 3/18/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 204 | 15621 | BAY VIEW DR | REMORA DR | ALLEY BAY VIEW 2 | E | AC | 2 | 602 | 27 | 16,254 | 4/9/22 | 94 | 0 | 71 | 29 | New Construction | 1/1/80 |
| 210 | 15380 | BAYWATER LN | SUNCORAL DR | CLIFFSIDE DR | E | AC | 7 | 646 | 36 | 23,506 | 4/15/26 | 94 | 0 | 69 | 31 | Surface Treatment - Slurry Seal | 7/15/21 |
| 2112 | 15430 | WARBURTON DR | BUSHARD ST FRONTAGE | ELMSFORD LN | E | AC | 8 | 1,124 | 36 | 40,464 | 3/9/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2161 | 13161 | WILDFIRE CIR | AQUARIUS DR | CDS | E | AAC | 2 | 411 | 36 | 16,596 | 5/7/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 504 | 13873 | CORK DR | WICKLOW LN | BELFAST LN | E | AC | 3 | 260 | 36 | 9,072 | 1/3/25 | 94 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 614 | 14057 | DOREMERE DR | GEMFALL LN | FELCLIFF LN | E | AC | 7 | 215 | 36 | 8,490 | 4/20/26 | 94 | 53 | 47 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 734 | 13000 | FIFTEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 380 | 46 | 17,480 | 6/22/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 893 | 13929 | HARDING LN | HAMDEN LN | GRANT DR | E | AAC | 7 | 314 | 37 | 11,618 | 4/14/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1016 | 13260 | JERSEY CIR | NORMANDY LN | CDS | E | AC | 3 | 238 | 32 | 8,866 | 4/6/26 | 94 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 1161 | 15362 | LIBRA CIR | CDS | CDS | E | AAC | 7 | 529 | 34 | 20,870 | 4/14/26 | 94 | 0 | 82 | 18 | Overlay - AC Structural | 11/28/19 |
| 1291 | 13774 | MELBOURNE DR | HANOVER LN | END | E | AC | 1 | 433 | 36 | 17,388 | 12/18/24 | 94 | 0 | 75 | 25 | New Construction | 1/1/80 |
| 1337 | 13882 | MOONBEAM DR | SUNFLOWER LN | SUNBURST LN | E | AC | 3 | 254 | 36 | 11,144 | 12/20/24 | 94 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 136 | 15720 | APPLEBY DR | CARNABY LN | HUNTINGTON ST | E | AAC | 4 | 519 | 36 | 19,684 | 4/14/26 | 94 | 0 | 85 | 15 | Overlay - AC Structural | 11/28/19 |
| 137 | 15043 | AQUARIUS DR | VIM LN | RASCAL LN | E | AAC | 2 | 731 | 36 | 26,316 | 5/7/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1402 | 15255 | NIMROD DR | MASHIE CIR | LUCERO LN | E | AAC | 3 | 658 | 36 | 25,188 | 5/20/24 | 94 | 0 | 70 | 30 | Overlay - AC Structural | 10/1/12 |
| 1541 | 15911 | PLUM TREE LN | GARFIELD AVE | WINDLASS DR | E | AC | 7 | 438 | 36 | 16,018 | 4/15/26 | 94 | 0 | 77 | 23 | Surface Treatment - Slurry Seal | 7/14/21 |
| 1567 | 13916 | PRESTWICK CIR | COLSHESTER LN | CDS | E | AAC | 7 | 250 | 32 | 11,850 | 4/15/26 | 94 | 0 | 84 | 16 | Overlay - AC Structural | 11/28/19 |
| 1968 | 15756 | TERRY DR | HERITAGE LN | MONTCLAIR LN | E | AC | 4 | 788 | 36 | 28,368 | 4/6/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2050 | 13909 | VALLEY CIR | GARFIELD AVE | CDS | E | AAC | 7 | 549 | 34 | 19,916 | 4/14/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2174 | 15413 | WINDWARD LN | YORKTOWN AVE | ANCHORAGE DR | E | AC | 7 | 432 | 36 | 15,552 | 4/20/26 | 94 | 0 | 81 | 19 | Surface Treatment - Slurry Seal | 7/15/21 |
| 224 | 15347 | BELFAST LN | GLEN DR | CARLOW DR | E | AC | 3 | 900 | 36 | 32,400 | 1/3/25 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 276 | 13737 | BOLSA PARK LN | CORNELL DR. | TYNDALL DR | E | AC | 1 | 274 | 36 | 9,864 | 12/18/24 | 94 | 39 | 61 | 0 | New Construction - Initial | 1/1/80 |
| 435 | 14955 | CHINOOK AVE | SPRINGDALE ST | CADCADE ST | E | AC | 1 | 827 | 32 | 26,464 | 4/8/22 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 447 | 15646 | CLANCY LN | GARRETT CIR | CDS | E | AC | 8 | 402 | 36 | 16,822 | 3/7/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 489 | 13920 | CONGRESS CIR | GRANT DR | CDS | E | AAC | 7 | 107 | 31 | 6,467 | 4/14/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 522 | 13272 | CRAIG LN | WALTON DR | LENNOX DR | E | AC | 3 | 712 | 36 | 25,344 | 12/19/24 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 802 | 14517 | GATESHEAD DR | HARWICH LN | CDS | E | AC | 9 | 130 | 36 | 6,480 | 4/17/24 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 852 | 15815 | GREEN ST | RUDDER DR | PEARCE ST | E | AAC | 2 | 747 | 36 | 26,892 | 5/21/24 | 94 | 0 | 81 | 19 | Overlay - AC Structural | 12/1/17 |
| 949 | 14404 | HOLLYWOOD LN | MEADOWLARK DR | CALIENTE DR | E | AC | 2 | 863 | 36 | 31,818 | 3/23/22 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1217 | 15022 | MADDOX DR | GOLDENWEST ST | ALLEY GOLDENWEST ST | E | AC | 3 | 181 | 36 | 6,516 | 3/18/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1286 | 13867 | MEATH CIR | TULLOW LN | END | E | AC | 3 | 294 | 32 | 11,208 | 4/27/26 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1295 | 14436 | MELVILLE CIR | MARIANA CIR | CDS | E | AAC | 2 | 367 | 32 | 13,244 | 5/6/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1401 | 13168 | NIMBLE CIR | SUNDANCER LN | CDS | E | AAC | 2 | 194 | 32 | 7,708 | 5/7/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1505 | 13105 | PECAN AVE | SEVENTEENTH ST | TWENTIETH ST | E | AC | 6 | 820 | 36 | 29,520 | 6/23/21 | 94 | 0 | 97 | 3 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2197 | 13800 | YORKSHIRE LN | BRUNSWICK DR | MELBOURNE DR | E | AC | 1 | 228 | 36 | 8,208 | 12/12/24 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 419 | 13296 | CHARLENE CIR | GREEN ST | CDS | E | AAC | 2 | 273 | 36 | 11,078 | 5/21/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 5000 | 60010 | NORTH PACIFIC | 5TH ST | 7TH ST | E | AC | 2 | 470 | 25 | 11,750 | 5/6/24 | 94 | 0 | 86 | 14 | New Construction - Initial | 1/1/80 |
| 7 | 14456 | ACCESSWAY | BEACH BLVD | BEACH BLVD | E | AC | 9 | 102 | 28 | 2,856 | 8/24/23 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1168 | 15343 | LIMERICK DR | WICKLOW LN | END | E | AC | 3 | 557 | 36 | 21,552 | 1/3/25 | 94 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 1488 | 13030 | PARK ST | ADAMS AVE | SPRINGFIELD AVE | E | AC | 6 | 645 | 37 | 23,865 | 7/8/21 | 94 | 0 | 70 | 30 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2061 | 13041 | VEERING CIR | SEVENTEENTH ST | CDS | E | AC | 6 | 286 | 36 | 12,435 | 7/8/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2107 | 13159 | WALRUS LN | AQUARIUS DR | VENTURE DR | E | AAC | 2 | 677 | 36 | 25,122 | 5/7/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 2118 | 14068 | WATERBURY LN | YORKTOWN AVE | GREENWICH DR | E | AC | 7 | 172 | 36 | 6,192 | 4/16/26 | 94 | 0 | 60 | 40 | Surface Treatment - Slurry Seal | 7/15/21 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 215 | 13890 | BEACON HILL LN | SUMMIT DR | LAWN HAVEN DR | E | AAC | 5 | 219 | 36 | 6,684 | 4/30/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 469 | 14744 | COENSON CIR | CLAY AVE | CDS | E | AAC | 7 | 394 | 34 | 15,396 | 4/15/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 495 | 13157 | CONTENT CIR | AQUARIUS DR | CDS | E | AAC | 2 | 204 | 32 | 6,528 | 5/7/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 738 | 13060 | FINDLEY CIR | GOLDENWEST ST | CDS | E | AC | 5 | 410 | 36 | 16,965 | 7/8/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 787 | 14333 | FRY CIR | KNOLL LN | END | E | AC | 9 | 168 | 32 | 6,876 | 8/30/23 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1145 | 13553 | LEE CIR | FORD DR | END | E | AAC | 3 | 350 | 32 | 12,700 | 5/28/24 | 94 | 0 | 87 | 13 | Overlay - AC Structural | 10/1/12 |
| 1497 | 15285 | PATTERSON LN | FORELLE DR | CDS | E | AAC | 4 | 252 | 32 | 9,564 | 4/13/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1891 | 14753 | STEWART ST | ERNEST AVE | GARFIELD AVE | E | AAC | 4 | 1,055 | 40 | 42,200 | 5/4/26 | 94 | 0 | 33 | 67 | Overlay - AC Structural | 11/28/19 |
| 2024 | 14074 | TUCKAHOE CIR | INNSBRUCK DR | CDS | E | AC | 8 | 365 | 32 | 13,180 | 3/9/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 2030 | 16027 | TWELFTH ST | ORANGE AVE | PECAN AVE | E | AC | 6 | 365 | 46 | 16,790 | 6/22/21 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 570 | 13215 | DAVENPORT DR | BARUNA LN | EDGEWATER LN | E | AC | 2 | 679 | 60 | 37,140 | 4/5/22 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 638 | 15348 | DUNDALK LN | SHANNON DR | END | E | AC | 3 | 1,070 | 36 | 41,020 | 12/12/24 | 94 | 0 | 98 | 2 | New Construction | 1/1/80 |
| 799 | 13877 | GAS LIGHT DR | OAKSHIRE LN | DAWSON LN | E | AC | 3 | 640 | 36 | 23,790 | 12/19/24 | 94 | 0 | 86 | 14 | New Construction | 1/1/80 |
| 1069 | 13734 | KIMBERLY DR | CAPETOWN LN | KINGSTON LN | E | AC | 1 | 270 | 36 | 10,470 | 12/26/24 | 94 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 1739 | 13163 | SCENARIO DR | FANTASIA LN | OPERA LN | E | AC | 2 | 1,060 | 36 | 38,660 | 3/24/22 | 94 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 1915 | 15349 | SUNBURST LN | BLUEBONNET DR | END | E | AC | 3 | 647 | 36 | 25,092 | 12/20/24 | 94 | 0 | 88 | 12 | New Construction - Initial | 1/1/80 |
| 2197 | 15321 | YORKSHIRE LN | CUMBERLAND DR | BRUNSWICK DR | E | AC | 1 | 552 | 36 | 19,872 | 12/12/24 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 914 | 13921 | HAYES CIR | HARDING LN | CDS | E | AAC | 7 | 520 | 37 | 22,860 | 4/14/26 | 94 | 0 | 89 | 11 | Overlay - AC Structural | 11/28/19 |
| 1466 | 13769 | OXFORD DR | HANOVER LN | END | E | AC | 1 | 433 | 36 | 15,588 | 12/12/24 | 94 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1921 | 13913 | SUNKIST CIR | FLAGSTAFF LN | CDS | E | AAC | 7 | 231 | 32 | 11,192 | 4/6/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 5 | 12879 | ACACIA AVE | EIGHTH ST | ELEVENTH ST | E | AC | 6 | 930 | 36 | 33,480 | 6/23/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1173 | 13654 | LISA LN | TAYLOR DR | FORELLE DR | E | AAC | 4 | 533 | 33 | 17,325 | 4/13/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/21/19 |
| 1458 | 15769 | ORION AVE | SANDRA LEE LN | SIMS ST | E | AAC | 2 | 330 | 36 | 11,592 | 5/21/24 | 94 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1615 | 14781 | REDONDO CIR | TALBERT AVE | KOVACS LN | E | AAC | 4 | 718 | 40 | 28,720 | 4/13/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1715 | 13039 | SAN NICOLAS CIR | LOMA AVE | CDS | E | AC | 6 | 258 | 54 | 17,890 | 6/30/21 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/9/21 |
| 245 | 14181 | BIG BEND LN | LASSEN CIR | YELLOWSTONE DR | E | AC | 8 | 252 | 36 | 9,072 | 3/1/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/13/23 |
| 327 | 14850 | BRUSH DR | IRBY LN | ALLEY NEWLAND ST | E | AC | 4 | 140 | 36 | 5,040 | 4/6/22 | 94 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 568 | 15366 | DARTMOOR DR | SHERBORNE LN | CDS | E | AAC | 7 | 540 | 36 | 23,749 | 4/14/26 | 94 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 867 | 14397 | GULSTRAND CIR | STARFIRE LN | CDS | E | AAC | 9 | 355 | 32 | 13,160 | 4/17/24 | 94 | 0 | 90 | 10 | Overlay - AC Structural | 5/11/18 |
| 2103 | 15041 | WAIKIKI LN | HILO CIR | SCENARIO DR | E | AAC | 2 | 816 | 36 | 29,376 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 327 | 15761 | BRUSH DR | TRIPP CIR | IRBY LN | E | AC | 4 | 550 | 36 | 19,800 | 4/6/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1760 | 15548 | SEAFORTH LN | ST AUGUSTINE DR | SANDY HOOK DR | E | AC | 9 | 1,025 | 36 | 36,900 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2148 | 14316 | WHITE HORSE LN | MARTINIQUE DR | SABLE DR | E | AC | 9 | 1,022 | 36 | 36,792 | 8/30/23 | 95 | 0 | 90 | 10 | New Construction - Initial | 1/1/80 |
| 2183 | 15823 | WOODLAWN DR | BUSHARD ST | TIBBETT LN | E | AC | 8 | 1,199 | 36 | 42,943 | 3/9/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 368 | 13554 | CANNA CIR | FORD DR | END | E | AAC | 3 | 350 | 32 | 12,700 | 5/28/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 414 | 14438 | CHANNEL LN | BOUNTY CIR | ADMIRALTY DR | E | AC | 2 | 376 | 32 | 11,832 | 4/9/22 | 95 | 0 | 82 | 18 | New Construction | 1/1/80 |
| 645 | 13198 | EASTER CIR | CHANNEL LN | CDS | E | AC | 2 | 246 | 32 | 9,372 | 4/9/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 734 | 12998 | FIFTEENTH ST | WALNUT AVE | OLIVE AVE | E | AC | 6 | 365 | 46 | 16,790 | 6/22/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 824 | 15344 | GLEN DR | DAWSON LN | WICKLOW LN | E | AC | 3 | 1,287 | 36 | 46,044 | 12/12/24 | 95 | 0 | 93 | 7 | New Construction | 1/1/80 |
| 824 | 13870 | GLEN DR | WICKLOW LN | TULLOW LN | E | AC | 3 | 258 | 36 | 9,000 | 1/6/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1379 | 14387 | NEOLANI DR | ZAMORA LN | CDS | E | AC | 9 | 235 | 32 | 9,320 | 4/24/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1723 | 14863 | SANDRA LEE LN | WARNER AVE | SANDRA LEE LN | E | AAC | 2 | 201 | 36 | 7,236 | 5/13/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1733 | 13177 | SARATOGA LN | MEADOWLARK DR | CALIENTE DR | E | AC | 2 | 860 | 36 | 32,460 | 3/23/22 | 95 | 0 | 76 | 24 | New Construction | 1/1/80 |
| 23 | 13840 | ALDEN LN | END | WINSLOW DR | E | AC | 1 | 339 | 36 | 13,454 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 705 | 13891 | EVENING HILL DR | LAWN HAVEN DR | HARBOR KEY CIR | E | AAC | 5 | 272 | 36 | 9,792 | 4/30/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 705 | 15355 | EVENING HILL DR | HARBOR KEY CIR | MANOR POINT CIR | E | AAC | 5 | 500 | 36 | 18,000 | 4/30/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 734 | 12997 | FIFTEENTH ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 365 | 46 | 16,790 | 6/22/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 757 | 13790 | FLORENCE CIR | MELBOURNE DR | END | E | AC | 1 | 410 | 36 | 16,560 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 899 | 50500 | HARRIET WIEDER REG | GARFIELD AVE | OVERLOOK DR | E | AC | 5 | 2,193 | 24 | 52,632 | 5/7/24 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 4/1/17 |
| 1043 | 13911 | KATHERINE DR | CAROLYN LN | LISTER LN | E | AAC | 7 | 236 | 36 | 9,436 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/1/19 |
| 1071 | 17030 | KINER AVE | HARTLUND ST | CDS | E | AAC | 4 | 126 | 33 | 3,894 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1077 | 13733 | KINGSTON LN | DOVER DR | KIMBERLY DR | E | AC | 1 | 578 | 36 | 22,308 | 12/26/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1130 | 13046 | MAIN ST | LOMA AVE | ADAMS AVE | E | AAC | 6 | 349 | 30 | 3,468 | 6/29/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 12860 | MAIN ST | SIXTH ST | ACACIA AVE | E | AAC | 6 | 320 | 45 | 12,850 | 6/29/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 13053 | MAIN ST | OLIVE AVE | ORANGE AVE | E | AAC | 6 | 415 | 38 | 15,655 | 6/29/21 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 6/1/16 |
| 1130 | 13054 | MAIN ST | PCH | OLIVE AVE | E | AAC | 6 | 790 | 33 | 29,160 | 6/29/21 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 6/1/16 |
| 1130 | 17004 | MAIN ST | ADAMS AVE | LOMA AVE | E | AAC | 6 | 349 | 33 | 11,517 | 6/30/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 13059 | MAIN ST | TWELTH ST | LOMA AVE | E | AAC | 6 | 845 | 45 | 44,486 | 6/29/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 13052 | MAIN ST | ORANGE AVE | SIXTH ST | E | AAC | 6 | 695 | 43 | 37,605 | 6/29/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1130 | 13057 | MAIN ST | CREST AVE | TWELTH ST | E | AAC | 6 | 1,015 | 45 | 45,675 | 6/29/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1189 | 13858 | LONGFORD CIR | CARRIE LN | END | E | AC | 1 | 419 | 36 | 16,334 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1203 | 15817 | LUCERO LN | NIMROD DR | SLATER AVE | E | AAC | 3 | 314 | 32 | 10,048 | 5/20/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/12 |
| 1233 | 13940 | MANDEVILLE DR | DALEHURST CIR | SUMMERFIELD LN | E | AAC | 7 | 401 | 36 | 15,414 | 4/15/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/21/19 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1245 | 14520 | MARBLEHEAD LN | BANNING AVE | PORT CLYDE DR | E | AC | 9 | 167 | 36 | 6,012 | 4/17/24 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1252 | 15020 | MARINA VIEW PL | ORION AVE | LOS PATOS AVE | E | AAC | 2 | 686 | 36 | 24,696 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1260 | 15537 | MARTINIQUE DR | SHEPHERD LN | WHITE HORSE LN | E | AC | 9 | 504 | 36 | 18,894 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1260 | 14313 | MARTINIQUE DR | WHITE HORSE LN | MIRAMAR LN | E | AC | 9 | 253 | 36 | 9,108 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1313 | 13612 | MILO ST | HOSKINS ST | GREEN ST | E | AAC | 2 | 330 | 36 | 11,664 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 137 | 13144 | AQUARIUS DR | WALRUS LN | SPARTAN CIR | E | AAC | 2 | 248 | 36 | 9,678 | 5/7/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 137 | 15042 | AQUARIUS DR | SPARTAN CIR | VIM LN | E | AAC | 2 | 407 | 36 | 14,652 | 5/7/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1387 | 13042 | NEWFOUNDLAND CIR | PALM AVE | CDS | E | AC | 6 | 195 | 36 | 9,045 | 6/22/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1400 | 13520 | NILE CIR | RHINE DR | CDS | E | AC | 4 | 166 | 32 | 6,812 | 3/31/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1403 | 13013 | NINETEENTH ST | OLIVE AVE | ORANGE AVE | E | AC | 6 | 395 | 46 | 18,170 | 6/23/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 1425 | 13153 | OAHU DR | WAIKIKI LN | BOLSA CHICA ST | E | AAC | 2 | 670 | 36 | 24,120 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 1446 | 12924 | OLIVE AVE | MAIN ST | FIFTH ST | E | AC | 6 | 310 | 36 | 10,195 | 6/23/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1458 | 14870 | ORION AVE | MARINA VIEW PL | SANDRA LEE LN | E | AAC | 2 | 256 | 36 | 9,216 | 5/13/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1496 | 15136 | PATRICIA LN | HEIL AVE | RUTH DR | E | AC | 3 | 610 | 36 | 22,660 | 3/18/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1588 | 14764 | QUEBEC DR | HUNTINGTON ST | MANITOBA LN | E | AAC | 4 | 617 | 36 | 21,924 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1591 | 13154 | QUICKSTEP CIR | SPARTAN CIR | CDS | E | AAC | 2 | 182 | 32 | 7,624 | 5/7/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1602 | 14485 | RAMBLER DR | BUSHARD ST | OCEANVIEW LN | E | AC | 9 | 167 | 36 | 5,724 | 3/26/24 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/19 |
| 1624 | 13196 | REMORA DR | BAY VIEW DR | INTREPID LN | E | AAC | 2 | 103 | 28 | 2,884 | 5/13/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1650 | 13653 | ROBERTA CIR | TAYLOR DR | CDS | E | AAC | 4 | 232 | 32 | 8,924 | 4/13/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1670 | 50260 | SEVENTEENTH ST | MAIN ST | UTICA AVE | E | AC | 0 | 170 | 25 | 4,250 | 3/13/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1691 | 15539 | SABLE DR | CHELSEA LN | MIRAMAR LN | E | AC | 9 | 640 | 36 | 23,040 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1691 | 14318 | SABLE DR | SHEPHERD LN | CHELSEA LN | E | AC | 9 | 117 | 36 | 4,962 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1692 | 15819 | SABOT LN | SUNLIGHT DR | HEIL AVE | E | AC | 3 | 312 | 36 | 11,232 | 3/18/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1732 | 13641 | SANTANA CIR | GULF LN | CDS | E | AAC | 4 | 233 | 32 | 8,956 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1739 | 13167 | SCENARIO DR | WAIKIKI LN | CDS | E | AC | 2 | 535 | 36 | 20,760 | 3/24/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1760 | 14331 | SEAFORTH LN | SANDY HOOK DR | HAMILTON AVE | E | AC | 9 | 175 | 36 | 6,300 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1797 | 14314 | SHEPHERD LN | MARTINIQUE DR | SABLE DR | E | AC | 9 | 1,022 | 36 | 38,292 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1800 | 13918 | SHERBORNE LN | DARTMOOR DR | FALMOUTH DR | E | AAC | 7 | 254 | 36 | 11,462 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1817 | 13491 | SILVER LN | ALHAMBRA AVE | HEIL AVE | E | AC | 4 | 165 | 36 | 5,940 | 3/18/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 1837 | 13908 | SMOKEWOOD CIR | CONSTANTINE DR | CDS | E | AAC | 7 | 273 | 34 | 9,282 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1896 | 13831 | STONE CIR | AULNAY LN | END | E | AC | 1 | 397 | 36 | 15,542 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 190 | 13619 | BARDON LN | LA MANCHA CIR | CORSICAN DR | E | AC | 3 | 269 | 36 | 10,434 | 4/7/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1918 | 15049 | SUNDANCER LN | REBEL CIR | VENTURE DR | E | AAC | 2 | 506 | 36 | 18,216 | 5/7/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 1925 | 14613 | SUNRISE DR | SEABREEZE DR | BEACH BLVD | E | AC | 9 | 380 | 22 | 11,181 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1943 | 15345 | SWEETBRIAR LN | SKYVIEW DR | GLEN DR | E | AC | 3 | 492 | 36 | 17,424 | 12/12/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1961 | 14384 | TEAKWOOD LN | ALOHA DR | BANNING AVE | E | AC | 9 | 168 | 36 | 6,048 | 3/27/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1978 | 14495 | TIDE LN | HIGHTIDE DR | BANNING AVE | E | AAC | 9 | 167 | 36 | 6,012 | 5/5/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 5/11/19 |
| 2004 | 13640 | TRADEWIND CIR | GULF LN | CDS | E | AAC | 4 | 233 | 32 | 8,956 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2006 | 13725 | TRANSISTOR LN | ENGINEER DR | MACHINE DR | E | AC | 1 | 1,141 | 40 | 45,640 | 4/8/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2026 | 15021 | TULLOW LN | STARSHINE DR | GLEN DR | E | AC | 3 | 254 | 36 | 9,144 | 4/7/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2032 | 13020 | TWENTY-FIRST ST | PECAN AVE | ACACIA AVE | E | AC | 6 | 410 | 46 | 18,860 | 6/30/21 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 2088 | 14403 | VIM LN | SAGAMORE DR | AQUARIUS DR | E | AAC | 2 | 257 | 36 | 9,252 | 5/7/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 21 | 14765 | ALBERTA DR | HUNTINGTON ST | MANITOBA LN | E | AAC | 4 | 574 | 36 | 20,076 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2103 | 15035 | WAIKIKI LN | KONA DR | HILO CIR | E | AAC | 2 | 272 | 36 | 9,792 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 2142 | 15916 | WEYMOUTH LN | FALMOUTH DR | BURNHAM CIR | E | AAC | 7 | 926 | 36 | 33,336 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 2288 | 50320 | ADAMS AVE FRONTAGE | RANGER LN | PICCADILLY LN | E | AC | 8 | 479 | 25 | 11,975 | 3/3/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 23 | 13842 | ALDEN LN | WINSLOW DR | ALBION DR | E | AC | 1 | 260 | 36 | 9,860 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2300 | 60770 | PATCH DR | HANSEN LN | CDS | E | AC | 8 | 550 | 36 | 20,842 | 3/2/22 | 95 | 0 | 100 | 0 | New Construction - AC | 1/1/15 |
| 2301 | 60780 | HANSEN LN | PATCH DR | THOMPSON DR | E | AC | 8 | 531 | 36 | 19,116 | 3/2/22 | 95 | 0 | 100 | 0 | New Construction - AC | 1/1/15 |
| 2302 | 60790 | THOMPSON DR | HANSEN LN | LAMB LN | E | AC | 8 | 400 | 36 | 14,400 | 3/2/22 | 95 | 0 | 100 | 0 | New Construction - AC | 1/1/15 |
| 2303 | 60800 | SNOWDON LN | PATCH DR | THOMPSON DR | E | AC | 8 | 480 | 36 | 17,280 | 3/2/22 | 95 | 0 | 100 | 0 | New Construction - AC | 1/1/15 |
| 240 | 14088 | BROOKHURST ST | CUTTY SARK DR | FORRESTAL DR | E | AC | 8 | 1,444 | 28 | 40,432 | 2/25/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 2/8/23 |
| 240 | 14616 | BROOKHURST ST | CUTTY SARK DR | END | E | AC | 8 | 116 | 26 | 3,016 | 2/25/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 25 | 13775 | ALEXANDRIA DR | EDWARDS ST | HANOVER LN | E | AC | 1 | 536 | 36 | 19,008 | 4/8/26 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 25 | 15320 | ALEXANDRIA DR | VICTORIA LN. | SUSSEX CIR | E | AC | 1 | 536 | 36 | 19,796 | 4/8/26 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 263 | 13883 | BLUEBONNET DR | SUNBURST LN | GOLDENWEST ST | E | AC | 3 | 182 | 36 | 6,552 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 308 | 13879 | BRIARWOOD DR | DAWSON LN | SUNFLOWER LN | E | AC | 3 | 257 | 36 | 8,676 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 353 | 13833 | CALVIN CIR | AULNAY LN | END | E | AC | 1 | 396 | 36 | 15,506 | 12/18/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 377 | 13919 | CAPITOL CIR | GRANT DR | CDS | E | AAC | 7 | 107 | 31 | 6,467 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 378 | 13789 | CAPRI CIR | MELBOURNE DR | END | E | AC | 1 | 410 | 36 | 16,560 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 409 | 13859 | CAVAN CIR | CARRIE LN | END | E | AC | 1 | 419 | 36 | 16,334 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 426 | 14324 | CHELSEA LN | SABLE DR | ST AUGUSTINE DR | E | AC | 9 | 253 | 36 | 9,108 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 452 | 14748 | CLAY AVE | HUNTINGTON ST | DELAWARE ST | E | AAC | 7 | 660 | 36 | 23,760 | 4/9/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 4/1/17 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 452 | 14750 | CLAY AVE | SEVENTEENTH ST | FLORIDA ST | E | AAC | 7 | 418 | 36 | 15,048 | 4/9/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 4/1/17 |
| 452 | 14749 | CLAY AVE | DELAWARE ST | SEVENTEENTH ST | E | AAC | 7 | 242 | 36 | 8,712 | 4/9/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 4/1/17 |
| 463 | 13589 | CLUBHOUSE LN | EDINGER AVE | ALLEY EDINGER AVE | E | AAC | 3 | 161 | 36 | 5,796 | 5/9/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 10/1/16 |
| 481 | 13744 | COLUMBIA LN | HARVARD CIR | CORNELL DR | E | AC | 1 | 260 | 36 | 9,360 | 12/20/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 491 | 14967 | CONSTANTINE DR | HOYT CIR | LISTER LN | E | AAC | 7 | 826 | 36 | 29,736 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 491 | 15363 | CONSTANTINE DR | BEACH BLVD | HOYT CIR | E | AAC | 7 | 660 | 36 | 23,760 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 493 | 14089 | CONSTITUTION LN | BROOKHURST ST | BROOKHURST ST | E | AC | 8 | 76 | 58 | 4,408 | 3/9/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 5310 | 60470 | 12TH ST | PCH | PACIFIC N | E | AC | 2 | 207 | 25 | 5,175 | 4/23/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5330 | 60500 | 14TH ST | PCH | PACIFIC N | E | AC | 2 | 156 | 28 | 4,368 | 4/23/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5340 | 60520 | 15TH ST | PCH | PACIFIC N | E | AC | 2 | 160 | 29 | 4,640 | 4/23/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5350 | 60545 | 16TH ST | PACIFIC AVE N | END | E | AC | 2 | 188 | 24 | 4,950 | 5/21/20 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5420 | 60640 | 23RD ST | PCH | PACIFIC N | E | AC | 2 | 207 | 30 | 6,210 | 4/23/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5440 | 60685 | 25TH ST | PACIFIC AVE N | END | E | AC | 2 | 215 | 22 | 4,730 | 5/21/20 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 555 | 13939 | DALEHURST CIR | MANDEVILLE DR | CDS | E | AAC | 7 | 145 | 36 | 10,326 | 4/15/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 565 | 13933 | DAREN CIR | HAMDEN LN | CDS | E | AAC | 7 | 198 | 32 | 10,197 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 570 | 13218 | DAVENPORT DR | BEDFORD LN | SAYBROOK LN | E | AAC | 2 | 537 | 60 | 32,220 | 5/10/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 570 | 15939 | DAVENPORT DR | EDGEWATER LN | BEDFORD LN | E | AAC | 2 | 871 | 60 | 52,260 | 5/10/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 618 | 13732 | DOVER DR | CAPETOWN LN | KINGSTON LN | E | AC | 1 | 270 | 36 | 10,220 | 12/26/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 649 | 14826 | EDAM CIR | HAGUE LN | CDS | E | AC | 4 | 89 | 40 | 4,810 | 3/31/22 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 7 | 14072 | ACCESSWAY | BUSHARD ST | BUSHARD ST FRONTAGE | E | AC | 7 | 54 | 55 | 2,970 | 4/6/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 7 | 14445 | ACCESSWAY | SHOREWOOD CIR | ADAMS AVE | E | AC | 7 | 77 | 45 | 3,465 | 4/6/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 703 | 13950 | GARFIELD AVE | LINDSAY LN | END | E | AAC | 7 | 423 | 26 | 10,998 | 3/5/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/15/21 |
| 703 | 14601 | GARFIELD AVE | SEAPOINT AVE | END | E | AC | 5 | 788 | 26 | 20,488 | 3/28/22 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 810 | 14676 | GEORGIA ST | JOILET AVE | KNOXVILLE AVE | E | AC | 6 | 330 | 37 | 11,988 | 8/15/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 85 | 14246 | ATLANTA AVE | END | BASTIA LN | E | AC | 9 | 350 | 26 | 9,100 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 852 | 15019 | GREEN ST | WARNER AVE | KING CIR | E | AAC | 2 | 505 | 36 | 18,180 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Fabric | 12/1/17 |
| 852 | 14983 | GREEN ST | HEIL AVE | RUDDER DR | E | AAC | 2 | 589 | 36 | 21,204 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 853 | 14315 | GREENBORO LN | MARTINIQUE DR | SABLE DR | E | AC | 9 | 1,022 | 36 | 36,792 | 8/30/23 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 877 | 15929 | HALIFAX DR | HANOVER LN | VICTORIA LN | E | AC | 1 | 780 | 36 | 27,792 | 12/18/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 884 | 13777 | HANOVER LN | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 4/8/26 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 9 | 13118 | ADAMS AVE | LAKE ST | PARK ST | E | AAC | 0 | 650 | 37 | 24,050 | 4/3/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/27/22 |
| 9 | 13117 | ADAMS AVE | PARK ST | MAIN ST | E | AAC | 0 | 365 | 37 | 13,505 | 4/3/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/27/22 |
| 940 | 14899 | HILLSIDE CIR | LOS PATOS AVE | CDS | E | AC | 2 | 80 | 25 | 2,000 | 3/22/22 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 958 | 13295 | HOSKINS ST | PEARCE ST | MILO ST | E | AAC | 2 | 660 | 36 | 23,760 | 5/21/24 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/1/17 |
| 962 | 14990 | HOYT CIR | LINDENWOOD DR | CONSTANTINE DR | E | AAC | 7 | 330 | 36 | 11,880 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 969 | 14609 | HUNTINGTON ST | PCH | PACIFIC VIEW | E | AAC | 9 | 450 | 50 | 21,445 | 8/24/23 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 7/1/10 |
| 969 | 14768 | HUNTINGTON ST | TAYLOR DR | ONTARIO DR | E | AAC | 4 | 260 | 36 | 9,360 | 4/14/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1429 | 13876 | OAKSHIRE LN | RED COACH DR | GAS LIGHT DR | E | AC | 3 | 253 | 36 | 10,108 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1538 | 13865 | PLACID CIR | RED COACH DR | END | E | AC | 3 | 227 | 32 | 8,764 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1611 | 13860 | RED COACH DR | WHITEOAK LN | WILD CHERRY CIR | E | AC | 3 | 399 | 36 | 15,364 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1799 | 13885 | SHERBECK LN | BREELAND DR | EDINGER AVE | E | AC | 3 | 670 | 36 | 23,842 | 12/12/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1816 | 15358 | SILVER BEACH CIR | SUMMER BREEZE LN | CDS | E | AAC | 5 | 564 | 36 | 22,104 | 4/30/26 | 95 | 0 | 94 | 6 | Overlay - AC Structural | 11/28/19 |
| 2158 | 13863 | WILD CHERRY CIR | RED COACH DR | END | E | AC | 3 | 227 | 32 | 8,764 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2159 | 13864 | WILD PLUM CIR | RED COACH DR | END | E | AC | 3 | 227 | 32 | 9,064 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1287 | 13767 | MEDFORD DR | BAYSIDE LN | HOLIDAY LN | E | AC | 1 | 523 | 36 | 19,578 | 12/18/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1611 | 15341 | RED COACH DR | WILD CHERRY CIR | OAKSHIRE LN | E | AC | 3 | 746 | 36 | 26,856 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1799 | 15352 | SHERBECK LN | SHANNON DR | BREELAND DR | E | AC | 3 | 521 | 36 | 18,478 | 12/12/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1885 | 15342 | STARSHINE DR | EDWARDS ST | TULLOW LN | E | AC | 3 | 412 | 36 | 14,544 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2149 | 16012 | WHITEOAK LN | RED COACH DR | STARSHINE DR | E | AC | 3 | 776 | 36 | 28,686 | 12/19/24 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 383 | 13875 | CARLOW DR | BELFAST LN | DUNDALK LN | E | AC | 3 | 264 | 36 | 9,216 | 12/12/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 946 | 13768 | HOLIDAY LN | MEDFORD DR | MC FADDEN AVE | E | AC | 1 | 179 | 36 | 6,444 | 12/18/24 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1451 | 14804 | OPAL CIR | VAN BUREN ST | CDS | E | AAC | 4 | 190 | 32 | 7,580 | 4/13/26 | 95 | 0 | 100 | 0 | Overlay - AC Structural | 12/5/19 |
| 204 | 14537 | BAY VIEW DR | ALLEY BAY VIEW 2 | ALLEY BAY VIEW 1 | E | AC | 2 | 233 | 27 | 6,291 | 4/9/22 | 95 | 0 | 50 | 50 | New Construction | 1/1/80 |
| 1407 | 14904 | NORCON CIR | TILBURG DR | CDS | E | AC | 5 | 128 | 36 | 5,858 | 4/2/26 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 5350 | 60540 | 16TH ST | PCH | PACIFIC AVE N | E | AC | 2 | 158 | 22 | 3,476 | 4/23/26 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 1288 | 14144 | MEDITERRANEAN DR | SWANSEA LN | MAGNOLIA ST | E | AC | 7 | 179 | 36 | 6,444 | 4/21/26 | 95 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 195 | 60850 | BOLSA CHICA ST | LOS PATOS AVE | BRIGHTWATER DR | E | AC | 2 | 860 | 49 | 34,940 | 4/1/26 | 96 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 1196 | 15897 | LOTUS LN | PIONEER DR | ADAMS AVE | E | AC | 7 | 803 | 36 | 29,808 | 4/20/26 | 96 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1305 | 15092 | MIDDLECOFF DR | EAGLE LN | CLUBHOUSE LN | E | AC | 3 | 1,087 | 36 | 39,132 | 3/23/22 | 96 | 0 | 90 | 10 | New Construction | 1/1/80 |
| 1795 | 14161 | SHELTER LN | NAUTILUS DR | CANDLEWOOD DR | E | AC | 7 | 258 | 36 | 9,288 | 4/21/26 | 96 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 653 | 12859 | FIRST ST | PCH | END | E | AC | 6 | 100 | 65 | 7,145 | 7/8/21 | 96 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1076 | 13914 | KINGSPORT DR | FLAGSTAFF LN | NEWLAND ST | E | AAC | 7 | 176 | 33 | 4,848 | 4/6/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 857 | 15121 | GREENVIEW LN | LANGPORT CIR | TREETOP CIR | E | AC | 3 | 259 | 36 | 10,074 | 4/2/26 | 96 | 0 | 100 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1267 | 15889 | MASTERS DR | NORCROFT LN | NEWBY LN | E | AC | 7 | 1,033 | 36 | 37,938 | 4/16/26 | 96 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 513 | 13473 | COTTONWOOD CIR | ETNA CIR | END | E | AC | 4 | 570 | 36 | 25,020 | 5/13/24 | 96 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 801 | 13894 | GATE HILL CIR | EVENING HILL DR | CDS | E | AAC | 5 | 313 | 36 | 14,518 | 4/30/26 | 96 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1440 | 12852 | OFELIA LN | MORNING TIDE DR | PALM AVE | E | AC | 5 | 202 | 36 | 6,555 | 6/30/21 | 96 | 0 | 19 | 81 | Surface Treatment - Slurry Seal | 7/27/22 |
| 5440 | 60680 | 25TH ST | PCH | PACIFIC AVE N | E | AC | 2 | 215 | 22 | 4,730 | 4/23/26 | 96 | 55 | 0 | 45 | New Construction - Initial | 1/1/80 |
| 1505 | 15846 | PECAN AVE | MAIN ST | LAKE ST | E | AC | 6 | 265 | 36 | 9,540 | 7/8/21 | 97 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1249 | 15139 | MARIE LN | PAULA CIR | MARILYN DR | E | AC | 3 | 827 | 36 | 29,772 | 3/18/22 | 97 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/29/20 |
| 2288 | 50380 | ADAMS AVE FRONTAGE | CROWN REEF LN | MAYPORT LN | E | AC | 7 | 683 | 30 | 20,490 | 4/20/26 | 97 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 1184 | 13119 | LOMA AVE | SAN NICHOLAS CIR | MAIN ST | E | AC | 6 | 255 | 36 | 9,535 | 6/30/21 | 97 | 0 | 46 | 54 | Surface Treatment - Slurry Seal | 5/3/21 |
| 1866 | 14365 | SPYGLASS LN | PEPPERTREE DR | HAMILTON AVE | E | AC | 8 | 177 | 36 | 6,150 | 5/20/24 | 97 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 5/11/18 |
| 2043 | 14720 | UTICA AVE | MAIN ST | END | E | AC | 6 | 185 | 36 | 6,660 | 7/8/21 | 97 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 6/1/21 |
| 824 | 13866 | GLEN DR | TULLOW LN | END | E | AC | 3 | 315 | 32 | 11,580 | 4/7/26 | 97 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1138 | 15353 | LAWN HAVEN DR | EVENING HILL DR | CDS | E | AAC | 5 | 226 | 32 | 9,032 | 4/30/26 | 98 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 212 | 17029 | BEACH BLVD FRONTAGE | STERLING | TAYLOR | E | AAC | 4 | 665 | 28 | 18,620 | 5/9/24 | 98 | 0 | 100 | 0 | Overlay - AC Structural | 4/1/17 |
| 1459 | 13414 | ORKNEY CIR | BRAEMAR DR | CDS | E | AC | 5 | 125 | 36 | 6,750 | 5/20/24 | 98 | 0 | 24 | 76 | New Construction | 1/1/80 |
| 1285 | 14145 | MEANDER LN | RATH CIR | CHARFORD DR | E | AC | 7 | 593 | 36 | 21,348 | 4/16/26 | 98 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 616 | 14906 | DORITA DR | WILD ROSE LN | SPRINGDALE ST | E | AC | 5 | 177 | 36 | 6,372 | 4/2/26 | 98 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1745 | 13413 | SCOTIA CIR | BALMORAL DR | CDS | E | AC | 5 | 350 | 36 | 14,100 | 5/20/24 | 98 | 0 | 40 | 60 | New Construction | 1/1/80 |
| 1932 | 17100 | SURFDALE LN | GARDEN CIR | SILVERBEACH CIR | E | AC | 5 | 700 | 36 | 25,200 | 5/6/24 | 98 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 1674 | 14034 | ROTHERT LN | FLAXMAN DR | NEW BRITAIN LN | E | AAC | 7 | 465 | 36 | 16,740 | 4/21/26 | 99 | 0 | 100 | 0 | Overlay - AC Structural | 3/1/11 |
| 346 | 13412 | CALEDONIA CIR | BALMORAL DR | CDS | E | AC | 5 | 350 | 36 | 14,100 | 5/20/24 | 99 | 0 | 35 | 65 | New Construction | 1/1/80 |
| 517 | 13893 | COUNTRY CIR | EVENING HILL DR | CDS | E | AAC | 5 | 203 | 36 | 9,308 | 4/30/26 | 99 | 0 | 100 | 0 | Overlay - AC Structural | 11/28/19 |
| 1130 | 17005 | MAIN ST | SEVENTEENTH ST | ADAMS AVE | E | AAC | 6 | 1,191 | 28 | 33,348 | 6/30/21 | 99 | 0 | 2 | 98 | Surface Treatment - Slurry Seal | 5/1/21 |
| 182 | 15981 | BALMORAL DR | EDWARDS ST | END | E | AC | 5 | 1,200 | 36 | 44,700 | 5/20/24 | 99 | 0 | 34 | 66 | New Construction | 1/1/80 |
| 2133 | 14437 | WELLINGTON DR | MARIANA CIR | PEALE LN | E | AC | 2 | 198 | 32 | 6,336 | 4/9/22 | 99 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 292 | 15179 | BRAEMAR DR | ORKNEY CIR | SKYE LN | E | AC | 5 | 580 | 36 | 22,130 | 5/20/24 | 100 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 932 | 15180 | HIGHLAND LN | BRAEMAR DR | VARSITY DR | E | AC | 5 | 280 | 36 | 10,080 | 5/20/24 | 100 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1830 | 13635 | SKYE LN | BALMORAL DR | BRAEMAR DR | E | AC | 5 | 236 | 36 | 8,996 | 5/20/24 | 100 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 1008 | 14731 | JAY CIR | FLORIDA ST | CDS | E | AAC | 6 | 210 | 32 | 8,785 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1010 | 15730 | JEFFERSON LN | GUILDER DR | SLATER AVE | E | AAC | 4 | 920 | 36 | 33,370 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1011 | 14838 | JEFFREY CIR | TERRY DR | CDS | E | AAC | 4 | 197 | 32 | 7,554 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1020 | 14202 | JILL DR | VIVA CIR | LAWSON LN | E | AAC | 8 | 264 | 34 | 8,976 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1035 | 14002 | KAIMU DR | KIPAHULU DR | TONGA LN | E | AAC | 8 | 670 | 36 | 24,120 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1038 | 15905 | KAMUELA DR | BROOKHURST ST | MAUNA LN | E | AAC | 8 | 592 | 36 | 21,312 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1038 | 15400 | KAMUELA DR | PITCAIM LN | CDS | E | AAC | 8 | 877 | 36 | 33,372 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1038 | 14010 | KAMUELA DR | MAUNA LN | PITCAIM LN | E | AAC | 8 | 1,080 | 36 | 38,880 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1042 | 13982 | KAREN CIR | JOICE LN | CDS | E | AAC | 8 | 246 | 32 | 9,672 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1046 | 13944 | KEEL DR | YACHT LN | LOOKOUT LN | E | AAC | 7 | 461 | 36 | 16,596 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1053 | 14252 | KELVINGROVE LN | INDIANAPOLIS AVE | COLBREGGAN DR | E | AAC | 9 | 371 | 32 | 11,872 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1057 | 14555 | KENSINGTON DR | SHEFFIELD LN | BURNLEY LN | E | AAC | 8 | 202 | 24 | 4,648 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1057 | 14557 | KENSINGTON DR | DERBYSHIRE LN | VERMONT LN | E | AAC | 8 | 390 | 24 | 9,160 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1057 | 14556 | KENSINGTON DR | SIDCUP LN | LURES LN | E | AAC | 8 | 202 | 24 | 4,848 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1058 | 13547 | KENT CIR | ROSS LN | CDS | E | AAC | 4 | 199 | 32 | 7,618 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1060 | 14210 | KENWORTH CIR | CRAILET DR | CDS | E | AAC | 8 | 245 | 32 | 9,640 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1064 | 15636 | KESWICK LN | ABERDEEN DR | CORNWALL DR | E | AAC | 8 | 495 | 24 | 11,880 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1064 | 14568 | KESWICK LN | CORNWALL DR | CHASING CROSS DR | E | AAC | 8 | 320 | 24 | 7,680 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1064 | 14569 | KESWICK LN | ARGYLE DR | ABERDEEN DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 107 | 15887 | ALLPORT LN | MARVALE DR | CDS | E | AAC | 7 | 798 | 36 | 30,978 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1078 | 15645 | KINGSWOOD LN | ARGYLE DR | CONTINENTAL DR | E | AAC | 8 | 383 | 24 | 9,192 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1078 | 14588 | KINGSWOOD LN | CONTINENTAL DR | DEVONSHIRE DR | E | AAC | 8 | 115 | 24 | 2,760 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1078 | 14589 | KINGSWOOD LN | DEVONSHIRE DR | CORNWALL DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1080 | 15396 | KIPAHULU DR | KAIMU DR | KUKUI DR | E | AAC | 8 | 801 | 36 | 28,836 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1080 | 13998 | KIPAHULU DR | GARFIELD AVE | KAIMU DR | E | AAC | 8 | 187 | 36 | 6,732 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1096 | 14014 | KUKUI DR | MOOREA LN | BIKINI LN | E | AAC | 8 | 693 | 36 | 25,698 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1096 | 13999 | KUKUI DR | BROOKHURST ST | KIPAHULU DR | E | AAC | 8 | 682 | 36 | 24,552 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1096 | 14000 | KUKUI DR | KIPAHULU DR | MOOREA LN | E | AAC | 8 | 1,101 | 36 | 39,636 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1100 | 13509 | LA MANCHA CIR | ALLEY BARDON LN | CDS | E | AAC | 3 | 258 | 36 | 11,538 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1100 | 13510 | LA MANCHA CIR | BARDON LN | ALLEY BARDON LN | E | AAC | 3 | 136 | 36 | 4,896 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1103 | 15229 | LA PAZ DR | MALAGA LN | ALLEY VILLA YORBA | E | AAC | 4 | 219 | 36 | 9,368 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1113 | 14846 | LAMBERT DR | MONROE LN | IRBY LN | E | AAC | 4 | 1,116 | 36 | 40,176 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1113 | 14845 | LAMBERT DR | MONROE LN | CDS | E | AAC | 4 | 380 | 32 | 13,410 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1115 | 13951 | LANARK CIR | LINDSAY LN | CDS | E | AAC | 7 | 419 | 36 | 16,334 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1116 | 15758 | LANCASTER DR | HERITAGE LN | MONTCLAIR LN | E | AAC | 4 | 788 | 36 | 28,718 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 112 | 15858 | ALSUNA LN | AHSANTE DR | UTICA AVE | E | AAC | 6 | 565 | 36 | 20,340 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 112 | 15704 | ALSUNA LN | ARIANA CIR | AHSANTE DR | E | AAC | 6 | 500 | 36 | 18,250 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1129 | 15421 | LARKPORT DR | BRIARLY LN | FELCLIFF LN | E | AAC | 7 | 1,027 | 36 | 36,972 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1132 | 16024 | LARTHORN DR | NORCROFT LN | MEANDER LN | E | AAC | 7 | 1,236 | 36 | 45,246 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1133 | 14180 | LASSEN CIR | BIG BEND LN | CDS | E | AAC | 8 | 504 | 36 | 19,944 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1134 | 13952 | LAUDER CIR | LINDSAY LN | CDS | E | AAC | 7 | 419 | 36 | 16,334 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1137 | 15526 | LAVONNE LN | CYNTHIA DR | EDYE DR | E | AAC | 8 | 776 | 36 | 28,936 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1139 | 14199 | LAWSON LN | ADAMS AVE | NIAGARA DR | E | AAC | 8 | 546 | 35 | 19,110 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 114 | 15860 | ALTAMAR DR | ALSUNA LN | FLORIDA ST | E | AAC | 6 | 293 | 36 | 11,348 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1143 | 14844 | LEAFWOOD CIR | TERRY DR | CDS | E | AAC | 4 | 520 | 36 | 19,975 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1149 | 14566 | LEIGHTON LN | CORNWALL DR | END | E | AAC | 8 | 227 | 24 | 5,448 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1152 | 13343 | LENIS CIR | MARIE LN | CDS | E | AAC | 3 | 229 | 36 | 9,844 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1159 | 14096 | LEXINGTON LN | SHANGRI LA DR | LURLINE DR | E | AAC | 8 | 780 | 36 | 29,080 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1165 | 15235 | LILAC LN | TOULOUSE DR | ELK CIR | E | AAC | 3 | 280 | 36 | 10,830 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1167 | 13349 | LIMELIGHT CIR | SUN DR | CDS | E | AAC | 3 | 220 | 36 | 9,920 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1172 | 15909 | LINDSAY LN | GARFIELD AVE | LUSS DR | E | AAC | 7 | 998 | 36 | 36,178 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1181 | 13526 | LOIRE CIR | RHINE DR | CDS | E | AAC | 4 | 465 | 36 | 18,240 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1184 | 13121 | LOMA AVE | LAKE ST | PARK ST | E | AAC | 6 | 590 | 37 | 21,830 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1191 | 13484 | LORGE CIR | GOTHARD ST | END | E | AAC | 3 | 404 | 36 | 16,044 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1204 | 13537 | LUCIA LN | HOWARD CIR | ARNETT DR | E | AAC | 4 | 298 | 36 | 10,728 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1204 | 15246 | LUCIA LN | LOIS CIR | JUDY CIR | E | AAC | 4 | 512 | 36 | 18,432 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1204 | 13536 | LUCIA LN | HEIL AVE | LOIS CIR | E | AAC | 4 | 161 | 36 | 5,796 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1204 | 15247 | LUCIA LN | JUDY CIR | HOWARD CIR | E | AAC | 4 | 797 | 36 | 28,692 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1207 | 14560 | LURES LN | CORNWALL DR | END | E | AAC | 8 | 174 | 24 | 4,176 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1207 | 14559 | LURES LN | RALEIGH DR | KENSINGTON DR | E | AAC | 8 | 269 | 24 | 6,456 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1208 | 15437 | LURLINE DR | CANBERRA LN | LEXINGTON LN | E | AAC | 8 | 520 | 36 | 19,720 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1209 | 15378 | LUSS DR | LINDSAY LN | CDS | E | AAC | 7 | 949 | 36 | 35,414 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 121 | 14147 | AMBY DR | BRENTSTONE LN | MANSARD LN | E | AAC | 7 | 254 | 36 | 9,144 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 122 | 15741 | AMSTERDAM DR | ROTTERDAM LN | HAGUE LN | E | AAC | 4 | 353 | 36 | 12,708 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 122 | 14822 | AMSTERDAM DR | HAGUE LN | VAN DYKE LN | E | AAC | 4 | 358 | 36 | 13,388 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1223 | 14001 | MAIKAI DR | KIPAHULU DR | TONGA LN | E | AAC | 8 | 671 | 36 | 24,156 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1225 | 15228 | MALAGA LN | SAN ANGELO DR | LA PAZ DR | E | AAC | 4 | 819 | 36 | 31,234 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1235 | 14367 | MANESSA CIR | DANA DR | END | E | AAC | 8 | 322 | 32 | 10,304 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1250 | 15133 | MARILYN DR | DIANE LN | COOPER LN | E | AAC | 3 | 919 | 36 | 33,084 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1250 | 13336 | MARILYN DR | COOPER LN | CDS | E | AAC | 3 | 428 | 36 | 17,008 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1250 | 15995 | MARILYN DR | DIANE LN | CDS | E | AAC | 3 | 1,071 | 36 | 40,056 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1256 | 15736 | MARKEN LN | FRIESLAND DR | HOLLAND DR | E | AAC | 4 | 520 | 36 | 18,970 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1256 | 14815 | MARKEN LN | HOLLAND DR | SLATER AVE | E | AAC | 4 | 660 | 36 | 23,760 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1262 | 14133 | MARVALE DR | ALLPORT LN | CAMFIELD LN | E | AAC | 7 | 737 | 36 | 27,282 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1269 | 13976 | MATTHEW CIR | LITCHFIELD DR | CDS | E | AAC | 8 | 510 | 36 | 20,160 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1270 | 15438 | MATSONIA LN | CONSTITUTION DR | CUTTY SARK DR | E | AAC | 8 | 520 | 36 | 18,720 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1272 | 15821 | MAUNA LN | KAMUELA DR | YORKTOWN AVE | E | AAC | 8 | 1,188 | 36 | 42,768 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1273 | 14097 | MAURETANIA CIR | CARMANIA LN | CDS | E | AAC | 8 | 303 | 32 | 11,696 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1276 | 15460 | MAYPORT LN | ADAMS AVE | MIDBURY DR | E | AAC | 7 | 746 | 36 | 26,856 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1278 | 14179 | MC KINLEY LN | ROCKY MOUNTAIN DR | YELLOWSTONE DR | E | AAC | 8 | 872 | 36 | 32,142 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1280 | 15386 | MC LAREN LN | BRABHAM DR | CDS | E | AAC | 8 | 759 | 36 | 29,124 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1299 | 13538 | MERLE CIR | BRESSEL LN | CDS | E | AAC | 4 | 420 | 36 | 16,620 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 13 | 14120 | AFTON CIR | CDS | VINTAGE LN | E | AAC | 7 | 435 | 32 | 15,720 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1304 | 15461 | MIDBURY DR | TRANQUIL LN | ASTOR LN | E | AAC | 7 | 732 | 36 | 27,102 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1307 | 15488 | MIDLAND LN | MEREDITH DR | CDS | E | AAC | 8 | 872 | 32 | 30,654 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1329 | 15864 | MONROE LN | BRUSH DR | TERRY DR | E | AAC | 4 | 786 | 36 | 28,296 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1329 | 14852 | MONROE LN | HEIL AVE | BRUSH DR | E | AAC | 4 | 526 | 36 | 18,936 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1332 | 14840 | MONTCLAIR LN | TERRY DR | LANCASTER DR | E | AAC | 4 | 465 | 36 | 16,990 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1340 | 13603 | MOONGLOW LN | BLUESAILS DR | STONEWOOD DR | E | AAC | 3 | 260 | 36 | 10,860 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1344 | 14083 | MOORE CIR | EDUCATION LN | CDS | E | AAC | 8 | 472 | 36 | 18,792 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1346 | 13972 | MOORPARK DR | SEAHURST DR | MC LAREN LN | E | AAC | 8 | 180 | 36 | 6,480 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1352 | 13047 | MORNING TIDE DR | ISLAND BAY LN | OCEAN BLUFF CIR | E | AAC | 5 | 1,284 | 36 | 46,556 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1357 | 14060 | MOSSFORD DR | BRIARLY LN | FELCLIFF LN | E | AAC | 7 | 1,027 | 36 | 36,972 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1362 | 14140 | MURAL CIR | BELLSHIRE DR | CDS | E | AAC | 7 | 449 | 32 | 15,868 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1363 | 14859 | MURDY CIR | GOTHARD ST | CDS | E | AAC | 3 | 435 | 36 | 17,460 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1372 | 15375 | NAPLES DR | NEWLAND ST | LOOKOUT LN | E | AAC | 7 | 641 | 36 | 23,326 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 138 | 15950 | AQUATIC LN | CLIFF DR | EL CAPITAN DR | E | AAC | 8 | 730 | 36 | 27,530 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1384 | 14132 | NEWBY LN | MASTERS DR | LARTHORN DR | E | AAC | 7 | 238 | 36 | 9,318 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1385 | 13110 | PALM AVE | FOURTEENTH ST | SEVENTEENTH ST | E | AAC | 6 | 955 | 40 | 38,200 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1396 | 16019 | NIAGARA DR | LAWSON LN | MIDLAND LN | E | AAC | 8 | 756 | 36 | 27,216 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 14 | 15859 | AHSANTE DR | DELAWARE ST | ALSUNA LN | E | AAC | 6 | 285 | 36 | 11,517 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 140 | 14100 | ARAGON CIR | SHANGRI LA DR | CDS | E | AAC | 8 | 346 | 36 | 15,456 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1403 | 13095 | NINETEENTH ST | ORANGE AVE | PECAN AVE | E | AAC | 6 | 395 | 46 | 18,170 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1403 | 13009 | NINETEENTH ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 390 | 46 | 17,940 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1403 | 13010 | NINETEENTH ST | PECAN AVE | ACACIA AVE | E | AAC | 6 | 405 | 46 | 18,630 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1404 | 12961 | NINTH ST | ORANGE AVE | PECAN AVE | E | AAC | 6 | 375 | 48 | 18,000 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1404 | 12960 | NINTH ST | PECAN AVE | ACACIA AVE | E | AAC | 6 | 375 | 46 | 17,250 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1404 | 12963 | NINTH ST | WALNUT AVE | OLIVE AVE | E | AAC | 6 | 395 | 48 | 18,960 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1404 | 12964 | NINTH ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 375 | 46 | 17,250 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1404 | 12959 | NINTH ST | OLIVE AVE | ORANGE AVE | E | AAC | 6 | 395 | 48 | 18,960 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1408 | 15456 | NORCROFT LN | KELSO DR | LARTHORN DR | E | AAC | 7 | 534 | 36 | 19,974 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1419 | 13962 | NORTHSTAR LN | CLIFFSIDE DR | SAILPORT DR | E | AAC | 7 | 253 | 36 | 9,358 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1432 | 12851 | OCEAN BLUFF CIR | MORNING TIDE DR | CDS | E | AAC | 5 | 232 | 36 | 11,360 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1442 | 14011 | OLANA LN | KAMUELA DR | YORKTOWN AVE | E | AAC | 8 | 1,132 | 36 | 40,752 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1446 | 13107 | OLIVE AVE | SEVENTEENTH ST | NINETEENTH ST | E | AAC | 6 | 610 | 36 | 21,960 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/17/21 |
| 1446 | 13106 | OLIVE AVE | NINETEENTH ST | TWENTY-SECOND ST | E | AAC | 6 | 825 | 36 | 29,700 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 1446 | 12911 | OLIVE AVE | EIGHTH ST | ELEVENTH ST | E | AAC | 6 | 930 | 37 | 34,410 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1447 | 15480 | OLYMPIC DR | BIG BEND LN | INTERIOR LN | E | AAC | 8 | 1,006 | 36 | 36,966 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 145 | 14577 | ARGYLE DR | CLAREMONT LN | CAMBRIDGE LN | E | AAC | 8 | 204 | 24 | 4,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 145 | 14578 | ARGYLE DR | INVERNESS LN | KINGSWOOD LN | E | AAC | 8 | 170 | 24 | 4,080 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 145 | 14576 | ARGYLE DR | KESWICK LN | COVENTRY LN | E | AAC | 8 | 204 | 24 | 4,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1461 | 14098 | ORONSAY CIR | CARMANIA LN | CDS | E | AAC | 8 | 295 | 32 | 11,440 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1466 | 15319 | OXFORD DR | VICTORIA LN | GOLDENWEST ST | E | AC | 1 | 1,334 | 36 | 48,024 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 1467 | 14122 | OXLEY CIR | VINTAGE LN | CDS | E | AAC | 7 | 435 | 32 | 15,420 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1468 | 14301 | OYSTER BED LN | EDYE DR | CLIFF DR | E | AAC | 8 | 254 | 36 | 9,144 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 147 | 14729 | ARIANA CIR | ALSUNA LN | CDS (W) | E | AAC | 6 | 180 | 32 | 8,015 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1476 | 14020 | PAGO PAGO CIR | TOBAGO LN | END | E | AAC | 8 | 358 | 32 | 13,256 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1478 | 13954 | PALERMO DR | CDS | LOMBARDY LN | E | AAC | 7 | 585 | 32 | 19,970 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1478 | 13956 | PALERMO DR | LOMBARDY LN | CDS | E | AAC | 7 | 221 | 32 | 8,322 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1484 | 14004 | PAPUA LN | MAIKAI DR | PUA DR | E | AAC | 8 | 259 | 36 | 9,324 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1488 | 13099 | PARK ST | TWELTH ST | THIRTEENTH ST | E | AAC | 6 | 450 | 36 | 16,200 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1498 | 13345 | PAULA CIR | MARIE LN | CDS | E | AAC | 3 | 229 | 36 | 9,844 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 150 | 14836 | ARNETT DR | NEWLAND ST | LUCIA LN | E | AAC | 4 | 522 | 36 | 19,292 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 150 | 14835 | ARNETT DR | ALLEY NEWLAND ST | NEWLAND ST | E | AAC | 4 | 160 | 36 | 5,760 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 150 | 15752 | ARNETT DR | GLENHAVEN LN | ALLEY NEWLAND ST | E | AAC | 4 | 621 | 36 | 22,606 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1505 | 12901 | PECAN AVE | PECAN AVE | EIGHTH ST | E | AAC | 6 | 540 | 36 | 19,440 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1505 | 12889 | PECAN AVE | ELEVENTH ST | FOURTEENTH ST | E | AAC | 6 | 880 | 36 | 31,680 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1517 | 15586 | PETTSWOOD DR | BUSHARD ST | BROMLEY LN | E | AAC | 8 | 1,190 | 36 | 43,590 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1520 | 15412 | PHOENIX LN | PIERRE DR | BOISE DR | E | AAC | 7 | 757 | 36 | 27,752 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1524 | 14039 | PIERRE DR | SACRAMENTO LN | PHOENIX LN | E | AAC | 7 | 253 | 36 | 9,358 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1535 | 15966 | PISMO LN | CRESCENT DR | BAYWOOD DR | E | AAC | 7 | 498 | 36 | 17,928 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1536 | 14021 | PITCAIRN LN | CHRISTMAS DR | YORKTOWN AVE | E | AAC | 8 | 170 | 36 | 6,120 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1536 | 15399 | PITCAIRN LN | KAMUELA DR | CHRISTMAS DR | E | AAC | 8 | 1,019 | 36 | 36,684 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1547 | 13991 | POLLACK DR | WEAKFISH LN | SALMON LN | E | AAC | 8 | 1,019 | 36 | 36,684 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1550 | 14160 | PORT CIR | ADAMS AVE FRONTAGE | CDS | E | AAC | 7 | 559 | 36 | 21,624 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1557 | 14448 | PORTSMOUTH DR | WATERBURY LN | BUSHARD ST | E | AAC | 7 | 1,068 | 36 | 38,448 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1559 | 15426 | POTOMAC LN | CAPE COD DR | ADAMS AVE | E | AAC | 7 | 1,336 | 36 | 48,096 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1560 | 14854 | POTTER CIR | BRUSH DR | CDS | E | AAC | 4 | 424 | 32 | 14,818 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 159 | 14141 | ASTOR LN | MIDBURY DR | GALLANT DR | E | AAC | 7 | 252 | 36 | 9,822 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1592 | 15361 | QUIET BAY LN | BAR HARBOR LN | DEEP HARBOR LN | E | AAC | 5 | 805 | 36 | 30,069 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1592 | 13903 | QUIET BAY LN | DEEP HARBOR DR | CDS | E | AAC | 5 | 290 | 36 | 12,380 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1593 | 12857 | QUIET SURF CIR | SCENIC BAY LN | CDS | E | AAC | 5 | 177 | 32 | 7,630 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 16 | 15675 | ALABAMA ST | SPRINGFIELD AVE | UTICA AVE | E | AAC | 6 | 660 | 36 | 23,625 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 16 | 15676 | ALABAMA ST | ADAMS AVE | SPRINGFIELD AVE | E | AAC | 6 | 618 | 35 | 22,355 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1601 | 15633 | RALEIGH DR | SHEFFIELD LN | BURNLEY LN | E | AAC | 8 | 202 | 24 | 4,848 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1601 | 15632 | RALEIGH DR | SIDCUP LN | LURES LN | E | AAC | 8 | 202 | 24 | 4,848 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1603 | 14163 | RAMONA LN | CANDLEWOOD DR | HAZELBROOK DR | E | AAC | 7 | 743 | 36 | 26,748 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1604 | 15908 | RANDI LN | GARFIELD AVE | HYDE PARK DR | E | AAC | 8 | 995 | 34 | 33,830 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1608 | 14137 | RATH CIR | MEANDER LN | CDS | E | AAC | 7 | 76 | 63 | 6,288 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1616 | 14195 | REDWOOD LN | BIG SUR DR | VICKSBURG DR | E | AAC | 8 | 252 | 36 | 9,822 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1618 | 14135 | REGAL CIR | TRUXTON DR | CDS | E | AAC | 7 | 411 | 32 | 13,152 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1631 | 14443 | SAYBROOK LN | HEIL AVE | ALLEY SEABROOK LN | E | AAC | 2 | 193 | 36 | 6,948 | 5/10/24 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/1/17 |
| 1635 | 13528 | RHINE CIR | RHINE DR | CDS | E | AAC | 4 | 129 | 32 | 5,628 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1638 | 15222 | RHONE LN | KIM LN | HEIL AVE | E | AAC | 4 | 1,062 | 36 | 38,232 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1653 | 15857 | ROCHESTER AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 288 | 36 | 10,368 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1653 | 15703 | ROCHESTER AVE | CALIFORNIA ST | DELAWARE ST | E | AAC | 6 | 270 | 36 | 9,720 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 1653 | 15856 | ROCHESTER AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 435 | 36 | 15,660 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1660 | 15483 | ROCKY MOUNTAIN DR | BIG BEND LN | MC KINLEY LN | E | AAC | 8 | 753 | 36 | 27,858 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 1661 | 14063 | RODERICK LN | VERONICA DR | MADELINE DR | E | AAC | 7 | 828 | 36 | 30,558 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1673 | 13549 | ROSS LN | HEIL AVE | HASTINGS CIR | E | AAC | 4 | 159 | 36 | 5,724 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1673 | 15251 | ROSS LN | ROYAL DR | SALEM CIR | E | AAC | 4 | 414 | 36 | 14,904 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1673 | 15252 | ROSS LN | SALEM CIR | WARNER AVE | E | AAC | 4 | 936 | 36 | 33,696 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1673 | 15249 | ROSS LN | HASTINGS CIR | ROYER CIR | E | AAC | 4 | 516 | 36 | 18,576 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1673 | 15250 | ROSS LN | ROYER CIR | ROYAL DR | E | AAC | 4 | 615 | 36 | 22,140 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1675 | 14820 | ROTTERDAM DR | VALENCIA DR | FRIESLAND DR | E | AAC | 4 | 261 | 36 | 9,396 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1675 | 15738 | ROTTERDAM DR | WARNER AVE | VALENCIA DR | E | AAC | 4 | 1,200 | 36 | 43,200 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1684 | 14065 | RUMSEY LN | WARFIELD DR | ELVA CIR | E | AAC | 7 | 311 | 36 | 11,946 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1692 | 13500 | SABOT LN | HEIL AVE | ALLEY HEIL AVE | E | AAC | 3 | 165 | 36 | 5,940 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1692 | 13501 | SABOT LN | ALLEY HEIL AVE | MADDOX DR | E | AAC | 3 | 365 | 36 | 13,140 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1694 | 15971 | SACRAMENTO LN | SALT LAKE DR | BOISE DR | E | AAC | 7 | 1,021 | 36 | 37,256 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1703 | 13546 | SALEM CIR | ROSS LN | CDS | E | AAC | 4 | 199 | 32 | 7,618 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1706 | 13990 | SALMON LN | FLOUNDER DR | POLLACK DR | E | AAC | 8 | 260 | 36 | 9,360 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1706 | 15394 | SALMON LN | POLLACK DR | YORKTOWN AVE | E | AAC | 8 | 929 | 36 | 33,444 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1708 | 15411 | SALT LAKE DR | SACRAMENTO LN | TOPEKA LN | E | AAC | 7 | 537 | 36 | 19,582 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1708 | 14037 | SALT LAKE DR | TOPEKA LN | CDS | E | AAC | 7 | 231 | 36 | 9,566 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1710 | 14007 | SAMOA DR | SUVA LN | END | E | AAC | 8 | 196 | 32 | 8,072 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1710 | 14013 | SAMOA DR | BIKINI LN | SUVA LN | E | AAC | 8 | 675 | 36 | 24,300 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1712 | 15227 | SAN ANGELO DR | MALAGA LN | ALLEY SAN ANGELO DR | E | AAC | 4 | 227 | 36 | 9,922 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1720 | 14064 | SANDERSON LN | WARFIELD DR | MADELINE DR | E | AAC | 7 | 568 | 36 | 21,198 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1734 | 14834 | SARU CIR | MINORU LN | ALLEY SARU CIR | E | AAC | 4 | 223 | 22 | 5,406 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1738 | 13550 | SAVOY CIR | LANDAU LN | CDS | E | AAC | 4 | 270 | 36 | 10,970 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1740 | 13049 | SCENIC BAY LN | ISLAND BAY LN | CDS | E | AAC | 5 | 860 | 36 | 32,580 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1746 | 14841 | SCOTSDALE CIR | LANCASTER DR | CDS | E | AAC | 4 | 213 | 32 | 8,066 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1750 | 13617 | SCULPIN DR | SUN DR | WARNER AVE | E | AAC | 3 | 199 | 36 | 7,164 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 176 | 15469 | BAINFORD DR | MANSARD LN | CDS | E | AAC | 7 | 446 | 32 | 16,272 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1762 | 13967 | SEAHURST DR | CORALWOOD LN | MAGNOLIA AVE | E | AAC | 7 | 182 | 33 | 5,276 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1769 | 13965 | SEASPRAY DR | PISMO LN | SAILWIND LN | E | AAC | 7 | 872 | 36 | 31,642 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1771 | 13902 | SEAWAY CIR | QUIET BAY LN | CDS | E | AAC | 5 | 132 | 30 | 6,245 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1772 | 12943 | SECOND ST | OLIVE AVE | ORANGE AVE | E | AAC | 6 | 385 | 36 | 14,365 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1772 | 13067 | SECOND ST | PCH | WALNUT AVE | E | AAC | 6 | 355 | 36 | 12,780 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1777 | 15216 | SERENADE LN | STONEWOOD DR | SUNLIGHT DR | E | AAC | 3 | 1,300 | 36 | 46,800 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1780 | 12950 | SEVENTH ST | WALNUT AVE | OLIVE AVE | E | AAC | 6 | 390 | 48 | 18,720 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1785 | 15443 | SHALOM DR | LEXINGTON LN | CDS | E | AAC | 8 | 590 | 36 | 23,040 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1792 | 14561 | SHEFFIELD LN | RALEIGH DR | KENSINGTON DR | E | AAC | 8 | 269 | 24 | 6,456 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1798 | 15220 | SHER LN | ALLEY RHONE LN | JULIETTE LOW DR | E | AAC | 4 | 660 | 36 | 23,560 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1798 | 15218 | SHER LN | ALLEY VOLGA DR | ALLEY AMAZON DR | E | AAC | 4 | 308 | 36 | 11,088 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1798 | 15219 | SHER LN | ALLEY AMAZON DR | ALLEY RHONE LN | E | AAC | 4 | 308 | 36 | 11,088 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1798 | 13485 | SHER LN | EDINGER AVE | ALLEY VOLGA DR | E | AAC | 4 | 670 | 36 | 24,120 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1802 | 13968 | SHERRY CIR | RANDI LN | CDS | E | AAC | 8 | 330 | 32 | 12,360 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1807 | 14044 | SHORE CIR | WESTWINDS LN | CDS | E | AAC | 7 | 232 | 36 | 8,352 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1813 | 14554 | SIDCUP LN | CORNWALL DR | RALEIGH DR | E | AAC | 8 | 125 | 24 | 3,000 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1813 | 14553 | SIDCUP LN | CORNWALL DR | END | E | AAC | 8 | 176 | 24 | 4,224 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1813 | 15631 | SIDCUP LN | RALEIGH DR | ADAMS AVE FRONTAGE | E | AAC | 8 | 378 | 24 | 9,072 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1814 | 14304 | SIGNET CIR | AQUATIC LN | END | E | AAC | 8 | 448 | 36 | 18,128 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1817 | 15272 | SILVER LN | JULIETTE LOW DR | ALHAMBRA AVE | E | AAC | 4 | 530 | 36 | 19,080 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1821 | 15138 | SIMMONE LN | SYLVIA DR | CDS | E | AAC | 3 | 758 | 36 | 28,658 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1828 | 14051 | SKIFF CIR | WESTWINDS LN | CDS | E | AAC | 7 | 232 | 36 | 9,602 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1852 | 14979 | SPAR CIR | BROOKHURST ST | END | E | AAC | 8 | 579 | 36 | 20,844 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1859 | 15530 | SPINDRIFT LN | CLIFF DR | CDS | E | AAC | 8 | 1,179 | 36 | 45,444 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1862 | 15850 | SPRINGFIELD AVE | LAKE ST | ALABAMA ST | E | AAC | 6 | 315 | 36 | 11,340 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1862 | 15701 | SPRINGFIELD AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 287 | 36 | 10,332 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1862 | 15855 | SPRINGFIELD AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 436 | 36 | 15,696 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1865 | 15584 | SPRIT CIR | BROOKHURST ST | END | E | AAC | 8 | 501 | 36 | 18,036 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 187 | 12858 | BAR HARBOR LN | QUIET BAY LN | SCENIC BAY LN | E | AAC | 5 | 348 | 36 | 13,108 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1870 | 14842 | ST CLOUD CIR | LANCASTER DR | CDS | E | AAC | 4 | 213 | 32 | 8,066 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1877 | 13762 | STANFORD LN | CITADEL DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/21/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 1879 | 14305 | STARBOARD CIR | SURGE LN | CDS | E | AAC | 8 | 199 | 36 | 8,664 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1882 | 9002 | STARK ST | BEACH BLVD | MALAGA LN | E | AAC | 4 | 738 | 78 | 56,064 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1882 | 13497 | STARK ST | ALLEY MALAGA LN | MALAGA LN | E | AC | 4 | 150 | 36 | 150 | 4/9/22 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 1882 | 14963 | STARK ST | PARKSIDE LN | BEACH BLVD | E | AAC | 4 | 660 | 36 | 23,760 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1883 | 13478 | STARLIGHT CIR | WISHINGWELL LN | CDS | E | AAC | 3 | 486 | 36 | 19,296 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1898 | 13474 | STONEWOOD DR | GOLDENWEST ST | BRIDGE LN | E | AAC | 3 | 180 | 36 | 6,480 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1898 | 15214 | STONEWOOD DR | BRIDGE LN | MOONGLOW LN | E | AAC | 3 | 995 | 36 | 36,570 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1901 | 14156 | STRATHCONA DR | KELVINGROVE LN | HARBOR ISLE LN | E | AAC | 7 | 243 | 36 | 9,498 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 1903 | 15949 | SUBURBIA LN | EDYE DR | CDS | E | AAC | 8 | 918 | 36 | 35,548 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1904 | 15213 | SUGAR AVE | SHASTA LN | MC FADDEN AVE | E | AAC | 4 | 678 | 32 | 21,696 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1913 | 15140 | SUN DR | COD CIR | LIMELIGHT CIR | E | AAC | 3 | 350 | 36 | 12,600 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1928 | 14303 | SUNTAN CIR | AQUATIC LN | END | E | AAC | 8 | 510 | 36 | 20,360 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1929 | 13125 | SUNVIEW DR | SWEETBRIAR LN | DAWSON LN | E | AC | 3 | 603 | 36 | 21,132 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 193 | 13502 | BARTLETT LN | MADDOX DR | ALLEY NORMA DR | E | AAC | 3 | 682 | 36 | 24,552 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 193 | 13503 | BARTLETT LN | ALLEY NORMA DR | NORMA DR | E | AAC | 3 | 105 | 36 | 3,780 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1935 | 15531 | SURGE LN | EL CAPITAN DR | ATLANTA AVE | E | AAC | 8 | 624 | 36 | 22,464 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1938 | 13796 | SUSSEX CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 17,260 | 4/8/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 1939 | 15836 | SUTTON LN | ADAMS AVE | CHASING CROSS DR | E | AAC | 8 | 215 | 24 | 5,160 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1952 | 15751 | TAMARU DR | MINORU LN | NEWLAND ST | E | AAC | 4 | 505 | 36 | 18,180 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 1954 | 14015 | TANA DR | BIKINI LN | WARD ST | E | AAC | 8 | 170 | 36 | 6,120 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1965 | 16031 | TENTH ST | ORANGE AVE | PECAN AVE | E | AAC | 6 | 380 | 46 | 17,480 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 1965 | 12968 | TENTH ST | PECAN AVE | ACACIA AVE | E | AAC | 6 | 376 | 46 | 17,296 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 1968 | 9001 | TERRY DR | VIEWPOINT LN | BEACH BLVD | E | AAC | 4 | 530 | 40 | 21,200 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1968 | 14995 | TERRY DR | BEACH BLVD | LEAFWOOD CIR | E | AAC | 4 | 445 | 36 | 16,020 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 1970 | 14300 | THESEUS DR | SUBURBIA LN | LAVONNE LN | E | AAC | 8 | 962 | 36 | 34,632 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 1972 | 12985 | THIRTEENTH ST | CREST AVE | MAIN ST | E | AAC | 6 | 465 | 42 | 19,530 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1972 | 12979 | THIRTEENTH ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 390 | 46 | 17,940 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1972 | 13123 | THIRTEENTH ST | PARK ST | LAKE ST | E | AAC | 6 | 625 | 37 | 23,125 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1972 | 50000 | THIRTEENTH ST | MAIN ST | PARK ST | E | AAC | 6 | 350 | 37 | 12,950 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 1976 | 14077 | TIBBETT LN | INNSBRUCK DR | WOODLAWN DR | E | AAC | 8 | 245 | 36 | 9,570 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1989 | 15402 | TOBAGO LN | SUNDAY DR | CHRISTMAS DR | E | AAC | 8 | 765 | 36 | 27,540 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1989 | 14016 | TOBAGO LN | KAMUELA DR | SUNDAY DR | E | AAC | 8 | 254 | 36 | 9,144 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1992 | 14003 | TONGA LN | KAIMU DR | MAIKAI DR | E | AAC | 8 | 270 | 36 | 9,720 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 1994 | 13109 | WALNUT AVE | SEVENTEENTH ST | TWENTIETH ST | E | AAC | 6 | 875 | 36 | 31,500 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1994 | 12933 | WALNUT AVE | EIGHTH ST | ELEVENTH ST | E | AAC | 6 | 880 | 38 | 33,440 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 1994 | 13108 | WALNUT AVE | TWENTIETH ST | GOLDENWEST ST | E | AAC | 6 | 915 | 36 | 32,940 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 1996 | 13945 | TOPSIDE CIR | LOOKOUT LN | CDS | E | AAC | 7 | 543 | 32 | 17,376 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2000 | 15700 | TORONTO AVE | HUNTINGTON ST | CALIFORNIA ST | E | AAC | 6 | 298 | 36 | 9,896 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2000 | 14722 | TORONTO AVE | CALIFORNIA ST | DELAWARE ST | E | AAC | 6 | 285 | 36 | 9,479 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2000 | 15854 | TORONTO AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 450 | 36 | 15,435 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2001 | 15236 | TOULOUSE DR | GOTHARD ST | ALLEY GOTHARD ST | E | AAC | 3 | 151 | 36 | 5,436 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2001 | 15234 | TOULOUSE DR | ALLEY GOTHARD ST | CDS | E | AAC | 3 | 378 | 36 | 16,908 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2005 | 15459 | TRANQUIL LN | ADAMS AVE | GALLANT DR | E | AAC | 7 | 990 | 36 | 36,390 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2008 | 14123 | TREASURE CIR | ADAMS AVE | CDS | E | AAC | 7 | 116 | 34 | 5,444 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2014 | 14857 | TRIPP CIR | BRUSH DR | CDS | E | AAC | 4 | 424 | 32 | 14,818 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2022 | 15886 | TRUXTON DR | ALLPORT LN | CAMFIELD LN | E | AAC | 7 | 764 | 36 | 27,504 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2026 | 16008 | TULLOW LN | GLEN DR | LIMERICK DR | E | AC | 3 | 1,030 | 36 | 36,792 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 203 | 15948 | BAY MEADOW DR | BUSHARD ST | GRAYSTONE LN | E | AAC | 8 | 1,195 | 36 | 43,020 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2030 | 13083 | TWELFTH ST | MAIN ST | LAKE ST | E | AAC | 6 | 885 | 47 | 41,595 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 2030 | 12977 | TWELFTH ST | PECAN AVE | ACACIA AVE | E | AAC | 6 | 375 | 46 | 17,250 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/17/21 |
| 2032 | 13022 | TWENTY-FIRST ST | PCH | WALNUT AVE | E | AAC | 6 | 370 | 50 | 18,500 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 2033 | 13026 | TWENTY-SECOND ST | WALNUT AVE | OLIVE AVE | E | AAC | 6 | 395 | 46 | 18,860 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 2037 | 13746 | TYNDALL DR | FIELDSTONE LN | BOLSA PARK LN | E | AC | 1 | 769 | 36 | 28,184 | 4/27/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2037 | 13738 | TYNDALL DR | BOLSA PARK LN | END | E | AC | 1 | 294 | 36 | 12,084 | 4/27/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2043 | 14721 | UTICA AVE | ALABAMA ST | CDS | E | AAC | 6 | 133 | 36 | 4,348 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2043 | 15853 | UTICA AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 465 | 36 | 16,740 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2043 | 14716 | UTICA AVE | FLORIDA ST | BEACH BLVD | E | AAC | 6 | 625 | 36 | 22,500 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2043 | 15697 | UTICA AVE | HUNTINGTON ST | DELAWARE ST | E | AAC | 6 | 620 | 36 | 22,320 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2043 | 14715 | UTICA AVE | DELAWARE ST | FLORIDA ST | E | AAC | 6 | 625 | 36 | 22,500 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2045 | 14134 | VAIL DR | NEWLAND ST | ALLPORT LN | E | AAC | 7 | 173 | 36 | 6,228 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2046 | 15739 | VALENCIA DR | GRANADA LN | ROTTERDAM LN | E | AAC | 4 | 1,020 | 36 | 36,970 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2046 | 14821 | VALENCIA DR | HAGUE LN | CDS | E | AAC | 4 | 553 | 36 | 21,158 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2046 | 15740 | VALENCIA DR | ROTTERDAM LN | HAGUE LN | E | AAC | 4 | 535 | 36 | 19,260 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2047 | 13480 | VALENTINE DR | GOLDENWEST ST | WISHINGWELL LN | E | AAC | 3 | 671 | 36 | 24,156 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2056 | 15239 | VANTAGE DR | RHONE LN | CDS | E | AAC | 4 | 682 | 36 | 27,052 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 206 | 13741 | BAYLOR CIR | ALEXANDRIA DR | END | E | AC | 1 | 410 | 36 | 16,260 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 2067 | 14169 | VENUS CIR | CLOUDHAVEN DR | CDS | E | AAC | 7 | 342 | 32 | 12,444 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2068 | 14190 | VERDANT DR | GRAYSTONE LN | EVERGLADES LN | E | AAC | 8 | 269 | 36 | 10,184 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2069 | 13344 | VERLENE CIR | MARIE LN | CDS | E | AAC | 3 | 229 | 36 | 9,934 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 207 | 13955 | BAYONNE DR | CDS | LOMBARDY LN | E | AAC | 7 | 586 | 34 | 21,174 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 207 | 13957 | BAYONNE DR | LOMBARDY LN | CDS | E | AAC | 7 | 220 | 32 | 8,540 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2070 | 15635 | VERMONT LN | KENISINGTON DR | CORNWALL DR | E | AAC | 8 | 338 | 24 | 8,112 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 2070 | 14567 | VERMONT LN | CORNWALL DR | END | E | AAC | 8 | 228 | 24 | 5,472 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 2071 | 15422 | VERONICA DR | RODERICK LN | OCCIDENTAL LN | E | AAC | 7 | 941 | 36 | 35,376 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2078 | 13548 | VICEROY CIR | ROSS LN | CDS | E | AAC | 4 | 205 | 32 | 7,810 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2079 | 14196 | VICKSBURG DR | EVERGLADES LN | REDWOOD LN | E | AAC | 8 | 753 | 36 | 27,858 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2080 | 15318 | VICTORIA LN | OXFORD DR | CUMBERLAND DR | E | AC | 1 | 520 | 36 | 18,720 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2080 | 13788 | VICTORIA LN | CUMBERLAND DR | HALIFAX DR | E | AC | 1 | 520 | 36 | 18,720 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2080 | 13805 | VICTORIA LN | HALIFAX DR | MELBOURNE DR | E | AC | 1 | 260 | 36 | 9,072 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2091 | 14124 | VINTAGE DR | ADAMS AVE | AFTON CIR | E | AC | 7 | 105 | 36 | 3,780 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2091 | 15455 | VINTAGE DR | AFTON CIR | KELSO DR | E | AC | 7 | 750 | 36 | 27,750 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2092 | 14126 | VISCOUNT DR | IMPERIAL COVE LN | CROWN REEK LN | E | AC | 7 | 250 | 36 | 9,750 | 4/20/26 | 100 | 0 | 0 | 0 | Surface Treament- Single Chip Seal | 7/15/21 |
| 2095 | 15490 | VIVA CIR | CDS (S) | CDS (N) | E | AAC | 8 | 237 | 32 | 11,584 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2101 | 13541 | WAGERS CIR | ROSS LN | CDS | E | AAC | 4 | 244 | 32 | 9,058 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2104 | 14853 | WAITE LN | HEIL AVE | BRUSH DR | E | AAC | 4 | 526 | 36 | 19,436 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 211 | 15384 | BAYWOOD DR | PISMO LN | CORALWOOD LN | E | AAC | 7 | 1,130 | 36 | 40,930 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2110 | 13340 | WANDA CIR | MARILYN DR | END | E | AAC | 3 | 320 | 36 | 13,070 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2115 | 14217 | WARWICK DR | CRAIMER LN | RAVENWOOD LN | E | AAC | 8 | 254 | 36 | 9,144 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 2121 | 13941 | WAVE CIR | PLUM TREE LN | CDS | E | AAC | 7 | 434 | 32 | 15,138 | 7/14/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/14/21 |
| 2125 | 15392 | WEAKFISH LN | POLLACK DR | CDS | E | AAC | 8 | 830 | 32 | 26,560 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 2125 | 13985 | WEAKFISH LN | FLOUNDER DR | POLLACK DR | E | AAC | 8 | 260 | 36 | 9,072 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 2136 | 14203 | WESLEY CIR | LAWSON LN | CDS | E | AAC | 8 | 410 | 32 | 15,120 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2141 | 14052 | WESTWINDS LN | SKIFF CIR | CLIPPER DR | E | AAC | 7 | 260 | 36 | 9,360 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2144 | 14856 | WHEELER CIR | BRUSH DR | CDS | E | AAC | 4 | 424 | 32 | 14,818 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 2150 | 13943 | WHITESAILS DR | YACHT LN | CDS | E | AAC | 7 | 439 | 32 | 15,298 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2151 | 15707 | WHITESANDS DR | YORKTOWN AVE | END | E | AAC | 6 | 345 | 36 | 13,120 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2156 | 15699 | WICHITA AVE | ALABAMA ST | HUNTINGTON ST | E | AAC | 6 | 450 | 36 | 16,200 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 2157 | 15346 | WICKLOW LN | GLEN DR | LIMERICK DR | E | AC | 3 | 1,039 | 36 | 37,404 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2157 | 13872 | WICKLOW LN | LIMERICK DR | END | E | AC | 3 | 291 | 36 | 12,276 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2169 | 15105 | WINDEMEIR LN | WALTON DR | LAURELHURST DR | E | AC | 3 | 1,010 | 36 | 36,072 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2171 | 13942 | WINDLASS DR | YACHT LN | PLUM TREE LN | E | AAC | 7 | 366 | 36 | 13,426 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2178 | 13476 | WISHINGWELL LN | VALENTINE DR | SUNLIGHT DR | E | AAC | 3 | 260 | 36 | 9,360 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2178 | 15215 | WISHINGWELL LN | CANDLELIGHT CIR | VALENTINE DR | E | AAC | 3 | 780 | 36 | 28,080 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 2178 | 13475 | WISHINGWELL LN | STONEWOOD DR | CANDLELIGHT CIR | E | AAC | 3 | 260 | 36 | 9,360 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 218 | 14201 | BEAUMONT CIR | NIAGARA DR | CDS | E | AAC | 8 | 356 | 32 | 13,392 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2186 | 13862 | WOODSIDE CIR | WHITEOAK LN | END | E | AC | 3 | 213 | 32 | 8,316 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2193 | 15373 | YACHT LN | WINDLASS DR | KEEL DR | E | AAC | 7 | 509 | 36 | 18,574 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2194 | 13757 | YALE CIR | COLUMBIA LN | END | E | AC | 1 | 543 | 36 | 21,048 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 2196 | 15484 | YELLOWSTONE DR | BIG BEND LN | INTERIOR LN | E | AAC | 8 | 1,012 | 36 | 36,932 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 2196 | 14182 | YELLOWSTONE DR | BUSHARD ST | BIG BEND LN | E | AAC | 8 | 167 | 42 | 6,794 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 224 | 13874 | BELFAST LN | CARLOW DR | EDINGER AVE | E | AC | 3 | 549 | 36 | 19,764 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 2287 | 17017 | MAGNOLIA ST FRONTAGE | SUNSHINE DR | VILLAGE DR | E | AAC | 7 | 655 | 26 | 17,030 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2287 | 17016 | MAGNOLIA ST FRONTAGE | PIONEER DR | GETTYSBURG DR | E | AAC | 7 | 260 | 26 | 6,760 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2288 | 17021 | ADAMS AVE FRONTAGE | SUTTON LN | DERBYSHIRE LN | E | AAC | 8 | 663 | 28 | 18,564 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 2288 | 50360 | ADAMS AVE FRONTAGE | ISTHMUS LN | FELCLIFF LN | E | AAC | 7 | 674 | 30 | 20,220 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2288 | 17019 | ADAMS AVE FRONTAGE | MARINA LN | BUSHARD ST FRONTAGE | E | AAC | 7 | 1,050 | 28 | 29,400 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2288 | 17023 | ADAMS AVE FRONTAGE | SHOREWOOD CIR | HAPPY ISLE LN | E | AAC | 7 | 260 | 28 | 7,280 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2288 | 50350 | ADAMS AVE FRONTAGE | GLOUCESTER LN | CHESAPEAKE LN | E | AAC | 7 | 530 | 30 | 15,900 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2288 | 50340 | ADAMS AVE FRONTAGE | BUSHARD ST FRONTAGE | GLOUCESTER LN | E | AAC | 7 | 506 | 30 | 15,180 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2294 | 15630 | BUSHARD ST FRONTAGE | TELHAN DR | PETTSWOOD DR | E | AAC | 8 | 519 | 27 | 14,013 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 2294 | 14158 | BUSHARD ST FRONTAGE | ADAM AVE FRONTAGE | NAUTILUS DR | E | AAC | 7 | 809 | 28 | 22,652 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 2295 | 60720 | WARDLOW LN | PIONEER DR | SHERIDAN DR | E | AC | 7 | 480 | 36 | 17,280 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - AC | 1/1/14 |
| 2296 | 60730 | SHERIDAN DR | SLAYBACK LN | CDS | E | AC | 7 | 438 | 36 | 16,810 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - AC | 1/1/14 |
| 2297 | 60740 | SLAYBACK LN | SHERIDAN DR | LANDERS DR | E | AC | 7 | 277 | 36 | 9,972 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - AC | 1/1/14 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2298 | 60750 | LANDERS DR | SLAYBACK LN | WARDLOW LN | E | AC | 7 | 262 | 36 | 9,432 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction - AC | 1/1/14 |
| 235 | 14592 | BERKSHIRE DR | DEVONSHIRE DR | CORNWALL DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 24 | 13494 | ALDRICH ST | PARKSIDE LN | BEACH BLVD | E | AAC | 4 | 665 | 36 | 23,940 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 240 | 14204 | BROOKHURST ST | END | MEREDITH DR | E | AAC | 8 | 242 | 27 | 6,534 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 240 | 15491 | BROOKHURST ST | JON DAY DR | CRAILET DR | E | AAC | 8 | 790 | 27 | 21,330 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 240 | 14209 | BROOKHURST ST | MEREDITH DR | JON DAY DR | E | AAC | 8 | 270 | 27 | 7,290 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 243 | 14299 | BEVERLY DR | SUBURBIA LN | LAVONNE LN | E | AAC | 8 | 1,027 | 36 | 36,972 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 249 | 14213 | BIRCHWOOD DR | BROOKHURST ST | CRAIMER LN | E | AAC | 8 | 1,176 | 36 | 42,336 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 25 | 15310 | ALEXANDRIA DR | DRAKE LN | COLUMBIA LN | E | AC | 1 | 520 | 36 | 19,220 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 256 | 13981 | BLANE CIR | JOICE LN | CDS | E | AAC | 8 | 245 | 32 | 9,640 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 258 | 15428 | BUSHARD ST | CAPE COD DR | ADAMS AVE | E | AAC | 7 | 1,334 | 28 | 37,352 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 268 | 13602 | BLUESAILS DR | BRIDGE LN | MOONGLOW LN | E | AAC | 3 | 995 | 36 | 37,320 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 270 | 14172 | BLUFFWATER CIR | COASTLAND DR | CDS | E | AAC | 7 | 226 | 32 | 8,732 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 273 | 14040 | BOISE DR | SACRAMENTO LN | PHOENIX LN | E | AAC | 7 | 253 | 36 | 9,608 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 284 | 14049 | BOSUN CIR | WESTWINDS LN | CDS | E | AAC | 7 | 232 | 36 | 9,602 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 286 | 13604 | BOUQUET DR | SERENADE LN | MAGELLAN LN | E | AAC | 3 | 260 | 36 | 10,110 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 290 | 13334 | BRAD DR | EDWARDS ST | COOPER LN | E | AAC | 3 | 530 | 36 | 19,080 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 297 | 14047 | BREAKERS DR | TRIDENT LN | WESTWINDS LN | E | AAC | 7 | 492 | 36 | 17,712 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 3 | 15643 | ABERDEEN DR | KESWICK LN | COVENTRY LN | E | AAC | 8 | 258 | 24 | 6,012 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 3 | 15644 | ABERDEEN DR | CLAREMONT LN | CAMBRIDGE LN | E | AAC | 8 | 204 | 24 | 4,716 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 3 | 14587 | ABERDEEN DR | INVERNESS LN | KINGSWOOD LN | E | AAC | 8 | 170 | 24 | 4,080 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 309 | 13601 | BRIDGE LN | BLUESAILS DR | STONEWOOD DR | E | AAC | 3 | 260 | 36 | 10,110 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 31 | 14191 | ALISA LN | BAY MEADOW DR | INDIANAPOLIS AVE | E | AAC | 8 | 534 | 36 | 18,936 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 3100 | 20100 | KELSO DR | NEWLAND ST | VINTAGE DR | E | AAC | 7 | 490 | 36 | 18,390 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 313 | 13996 | BRIGANTINE LN | FAIR TIDE CR | YORKTOWN AVE | E | AAC | 8 | 148 | 36 | 5,040 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 319 | 14080 | BROMLEY LN | BICKLEY DR | PETTSWOOD DR | E | AAC | 8 | 259 | 36 | 10,824 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 326 | 13801 | BRUNSWICK DR | YORKSHIRE LN | GOLDENWEST ST | E | AC | 1 | 550 | 36 | 19,512 | 4/8/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 328 | 14847 | BRYANT DR | MONROE LN | CDS | E | AAC | 4 | 380 | 32 | 13,410 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 328 | 14848 | BRYANT DR | IRBY LN | MONROE LN | E | AAC | 4 | 1,115 | 36 | 40,140 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 336 | 14563 | BURNLEY LN | RALEIGH DR | KENSINGTON DR | E | AAC | 8 | 269 | 24 | 6,456 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 349 | 14727 | CALIFORNIA ST | ROCHESTER AVE | SPRINGFIELD AVE | E | AAC | 6 | 330 | 36 | 11,880 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 349 | 14724 | CALIFORNIA ST | UTICA AVE | CDS | E | AAC | 6 | 305 | 36 | 13,845 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 349 | 14725 | CALIFORNIA ST | TORONTO AVE | UTICA AVE | E | AAC | 6 | 310 | 36 | 11,160 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 349 | 14726 | CALIFORNIA ST | SPRINGFIELD AVE | TORONTO AVE | E | AAC | 6 | 330 | 36 | 11,880 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 349 | 14728 | CALIFORNIA ST | ADAMS AVE | ROCHESTER AVE | E | AAC | 6 | 285 | 36 | 10,260 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 355 | 13905 | CAMBRIA COVE CIR | GOLDENWEST ST | CDS | E | AC | 5 | 205 | 36 | 8,973 | 6/30/21 | 100 | 0 | 100 | 0 | Surface Treatment - Slurry Seal | 7/27/22 |
| 356 | 14583 | CAMBRIDGE LN | CONTINENTAL DR | ABERDEEN DR | E | AAC | 8 | 116 | 24 | 2,784 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 356 | 14581 | CAMBRIDGE LN | DEVONSHIRE DR | CORNWALL DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 356 | 14584 | CAMBRIDGE LN | CONTINENTAL DR | DEVONSHIRE DR | E | AAC | 8 | 116 | 24 | 2,784 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 356 | 14582 | CAMBRIDGE LN | ARGYLE DR | ABERDEEN DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 361 | 15888 | CAMFIELD LN | LARTHORN DR | CHARFORD DR | E | AAC | 7 | 867 | 36 | 31,212 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 363 | 15436 | CANBERRA LN | MONITOR DR | CONSTITUTION DR | E | AAC | 8 | 780 | 36 | 28,080 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 363 | 14092 | CANBERRA LN | CONSTITUTION DR | LURLINE DR | E | AAC | 8 | 260 | 36 | 9,360 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 363 | 14091 | CANBERRA LN | YORKTOWN AVE | MONITOR DR | E | AAC | 8 | 170 | 36 | 6,120 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 365 | 13477 | CANDLELIGHT CIR | WISHINGWELL LN | CDS | E | AAC | 3 | 486 | 36 | 19,296 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 366 | 15476 | CANDLEWOOD DR | RAMONA LN | DEERVALE LN | E | AAC | 7 | 960 | 36 | 34,560 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 370 | 15965 | CAPE COD DR | WATERBURY LN | BUSHARD ST | E | AAC | 7 | 1,066 | 36 | 39,126 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 382 | 13346 | CARLA CIR | MARIE LN | CDS | E | AAC | 3 | 229 | 36 | 11,544 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 395 | 15209 | CASCADE LN | SHASTA LN | END | E | AAC | 4 | 1,373 | 36 | 49,284 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 402 | 14194 | CASTLE ROCK CIR | BAY MEADOW DR | END | E | AAC | 8 | 426 | 34 | 16,284 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 4030 | 50200 | HART CIR | BRUSH DR | CDS | E | AAC | 4 | 425 | 35 | 16,120 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 417 | 14146 | CHARFORD DR | IVES LN | BRENTSTONE LN | E | AAC | 7 | 391 | 36 | 14,826 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 418 | 15637 | CHARING CROSS DR | KESWICK LN | COVERNTRY LN | E | AAC | 8 | 185 | 24 | 4,240 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 432 | 13880 | CHESTNUT DR | SUNFLOWER LN | SUNBURST LN | E | AC | 3 | 254 | 36 | 10,144 | 4/27/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 439 | 15904 | CHRISTMAS DR | PITCAIRN LN | END | E | AAC | 8 | 878 | 32 | 29,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 441 | 14605 | CHRYSLER CIR | VIEWPORT LN | BEACH BLVD | E | AAC | 4 | 530 | 60 | 31,800 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 449 | 14579 | CLAREMONT LN | DEVONSHIRE DR | CORWALL DR | E | AAC | 8 | 263 | 24 | 6,312 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 449 | 14580 | CLAREMONT LN | ARGYLE DR | ABERDEEN DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 457 | 15528 | CLIFF DR | BROOKHURST ST | OYSTER BED LN | E | AAC | 8 | 708 | 36 | 25,488 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 457 | 14302 | CLIFF DR | OYSTER BED LN | SPINDRIFT LN | E | AAC | 8 | 311 | 36 | 11,196 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 458 | 15381 | CLIFFSIDE DR | BAYWATER LN | NORTHSTAR LN | E | AAC | 7 | 1,126 | 36 | 41,036 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 461 | 15419 | CLIPPER DR | ISTHMUS LN | WESTWINDS LN | E | AAC | 7 | 752 | 36 | 27,072 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 461 | 14056 | CLIPPER DR | WESTWINDS LN | MAGNOLIA ST | E | AAC | 7 | 180 | 36 | 6,480 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 465 | 15479 | COASTLAND DR | TIDELAND LN | BUSHARD ST | E | AAC | 7 | 403 | 36 | 14,508 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 474 | 14200 | COLGATE CIR | NIAGARA DR | CDS | E | AAC | 8 | 355 | 32 | 13,360 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 481 | 13763 | COLUMBIA LN | CITADEL DR | END | E | AC | 1 | 410 | 36 | 16,560 | 4/21/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 481 | 15312 | COLUMBIA LN | ALEXANDRIA DR | HARVARD CIR | E | AC | 1 | 520 | 36 | 18,720 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 493 | 15435 | CONSTITUTION LN | BROOKHURST ST | CANBERRA LN | E | AAC | 8 | 1,156 | 36 | 41,616 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 496 | 15642 | CONTINENTAL DR | COVENTRY LN | CAMBRIDGE LN | E | AAC | 8 | 483 | 36 | 17,388 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 496 | 15641 | CONTINENTAL DR | CAMBRIDGE LN | BROOKHURST ST | E | AAC | 8 | 617 | 36 | 20,712 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 497 | 14019 | COOK CIR | TOBAGO LN | CDS | E | AAC | 8 | 358 | 32 | 13,256 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 5 | 16030 | ACACIA AVE | SEVENTH ST. | EIGHTH ST | E | AAC | 6 | 280 | 38 | 10,640 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 5 | 12882 | ACACIA AVE | PECAN AVE | SEVENTH ST | E | AAC | 6 | 315 | 35 | 11,025 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 505 | 13745 | CORNELL DR | STANFORD LN | COLUMBIA N | E | AC | 1 | 260 | 36 | 9,360 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 507 | 14565 | CORNWALL DR | BERKSHIRE LN | KINGSWOOD LN | E | AAC | 8 | 204 | 24 | 4,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 507 | 14564 | CORNWALL DR | CAMBRIDGE LN | INVERNESS LN | E | AAC | 8 | 204 | 24 | 4,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 507 | 15898 | CORNWALL DR | BUSHARD ST | DERBYSHIRE LN | E | AAC | 8 | 819 | 36 | 29,032 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 507 | 15899 | CORNWALL DR | DERBYSHIRE LN | CLAREMONT LN | E | AAC | 8 | 926 | 24 | 21,998 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 510 | 13511 | CORSICAN DR | GOTHARD ST | ALLEY BARDON LN | E | AAC | 3 | 258 | 36 | 9,288 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 510 | 15233 | CORSICAN DR | ALLEY BARDON LN | CDS | E | AAC | 3 | 330 | 36 | 13,380 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 520 | 14574 | COVENTRY LN | ARGYLE DR | ABERDEEN DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 520 | 14575 | COVENTRY LN | DEVONSHIRE DR | CORNWALL DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 520 | 15638 | COVENTRY LN | ABERDEEN DR | DEVONSHIRE DR | E | AAC | 8 | 232 | 20 | 4,640 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 520 | 14573 | COVENTRY LN | CORNWALL DR | CHASING CROSS DR | E | AAC | 8 | 320 | 24 | 7,680 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 523 | 15492 | CRAILET DR | BROOKHURST ST | KENWORTH CIR | E | AAC | 8 | 205 | 36 | 7,380 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 524 | 15493 | CRAIMER LN | STONEYBROOK DR | WARWICK DR | E | AAC | 8 | 931 | 36 | 33,516 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 524 | 14215 | CRAIMER LN | JON DAY DR | STONEYBROOK DR | E | AAC | 8 | 262 | 36 | 9,432 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 524 | 14208 | CRAIMER LN | MEREDITH DR | JON DAY DR | E | AAC | 8 | 260 | 36 | 9,360 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 528 | 14067 | CRAWFORD CIR | LOTUS LN | CDS | E | AAC | 7 | 382 | 36 | 15,252 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 536 | 14143 | CROFT LN | GALLANT DR | BURLCREST DR | E | AAC | 7 | 254 | 36 | 9,144 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 5400 | 60620 | 21ST ST | PCH | PACIFIC N | E | AC | 2 | 106 | 25 | 2,650 | 4/23/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 541 | 15458 | CROWN REFF LN | PRINCESS CIR | MASTERS DR | E | AAC | 7 | 763 | 36 | 27,468 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 541 | 16023 | CROWN REFF LN | FELCLIFF LN | PRINCESS CIR | E | AAC | 7 | 584 | 36 | 21,024 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 5420 | 60650 | 23RD ST | PACIFIC S | END | E | AC | 2 | 27 | 22 | 594 | 4/23/26 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 543 | 15322 | CUMBERLAND DR | VICTORIA LN | YORKSHIRE LN | E | AC | 1 | 780 | 36 | 27,792 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 543 | 13803 | CUMBERLAND DR | YORKSHIRE LN | END | E | AC | 1 | 440 | 36 | 17,340 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 547 | 15439 | CUTTY SARK DR | BROOKHURST ST | RANGER LN | E | AAC | 8 | 1,370 | 36 | 49,320 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 547 | 14094 | CUTTY SARK DR | RANGER LN | LEXINGTON LN | E | AAC | 8 | 260 | 36 | 9,134 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 548 | 14306 | CYNTHIA DR | SUBURBIA LN | LAVONNE LN | E | AAC | 8 | 1,063 | 36 | 38,268 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 557 | 14957 | DAMASK DR | VIEWPOINT LN | BEACH BLVD | E | AAC | 4 | 537 | 36 | 19,832 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 559 | 15563 | DANA DR | BROOKHURST ST | GALBAR CR | E | AAC | 8 | 555 | 36 | 21,230 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 572 | 15919 | DAWSON LN | SKYVIEW DR | SHANNON DR | E | AC | 3 | 764 | 36 | 27,216 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 577 | 13339 | DEBRA CIR | MARILYN DR | CDS | E | AAC | 3 | 316 | 36 | 12,926 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 579 | 13904 | DEEP HARBOR DR | QUIET BY LN | GOLDENWEST ST | E | AAC | 5 | 130 | 35 | 4,550 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/27/22 |
| 594 | 15835 | DERBYSHIRE LN | ADAMS AVE | KENSINGTON DR | E | AAC | 8 | 198 | 36 | 7,128 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 594 | 14173 | DERBYSHIRE LN | ADAMS AVE | OLYMPIC DR | E | AAC | 8 | 187 | 45 | 7,609 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 594 | 15634 | DERBYSHIRE LN | CORNWALL DR | KENSINGTON DR | E | AAC | 8 | 393 | 36 | 14,148 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 598 | 14585 | DEVONSHIRE DR | KESWICK LN | COVENTRY LN | E | AAC | 8 | 187 | 20 | 3,740 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 598 | 14586 | DEVONSHIRE DR | COVENTRY LN | CLAREMONT LN | E | AAC | 8 | 204 | 24 | 4,896 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 598 | 15639 | DEVONSHIRE DR | KINGSWOOD LN | BERKSHIRE LN | E | AAC | 8 | 203 | 24 | 4,872 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 598 | 15640 | DEVONSHIRE DR | CAMBRIDGE LN | INVERNESS LN | E | AAC | 8 | 206 | 24 | 4,944 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 600 | 13341 | DIANE LN | SYLVIA DR | MARILYN DR | E | AAC | 3 | 547 | 36 | 20,392 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 607 | 14053 | DOLPHIN DR | ESTUARY LN | TRIDENT LN | E | AAC | 7 | 520 | 36 | 19,470 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 607 | 15417 | DOLPHIN DR | TOPEKA LN | ESTUARY LN | E | AAC | 7 | 781 | 36 | 28,116 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 624 | 13802 | DRESDEN CIR | YORKSHIRE LN | END | E | AC | 1 | 440 | 36 | 17,340 | 4/8/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 625 | 14136 | DREW CIR | TRUXTON DR | CDS | E | AAC | 7 | 413 | 32 | 14,716 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 642 | 14558 | DURHAM DR | DERBYSHIRE LN | VERMONT LN | E | AAC | 8 | 390 | 24 | 9,360 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 646 | 14166 | EASTWOOD CIR | HAZELBROOK DR | CDS | E | AAC | 7 | 496 | 36 | 19,356 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 658 | 15527 | EDYE DR | SUBURBIA LN | LAVONNE LN | E | AAC | 8 | 897 | 36 | 34,792 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 661 | 13094 | EIGHTEENTH ST | ORANGE AVE | PECAN AVE | E | AAC | 6 | 395 | 46 | 18,170 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 661 | 13005 | EIGHTEENTH ST | PECAN AVE | ACACIA AVE | E | AAC | 6 | 410 | 46 | 18,860 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 661 | 13004 | EIGHTEENTH ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 390 | 46 | 17,940 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 661 | 13007 | EIGHTEENTH ST | PCH | WALNUT AVE | E | AAC | 6 | 375 | 50 | 17,880 | 7/27/22 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/27/22 |
| 662 | 13071 | EIGHTH ST | PCH | WALNUT AVE | E | AAC | 6 | 390 | 50 | 19,785 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 665 | 15529 | EL CAPITAN DR | AQUATIC LN | SPINDRIFT LN | E | AAC | 8 | 645 | 36 | 24,470 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 672 | 13076 | ELEVENTH ST | OLIVE AVE | ORANGE AVE | E | AAC | 6 | 395 | 47 | 18,565 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 672 | 12971 | ELEVENTH ST | WALNUT AVE | OLIVE AVE | E | AAC | 6 | 390 | 47 | 18,330 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/17/21 |
| 672 | 12973 | ELEVENTH ST | ACACIA AVE | PALM AVE | E | AAC | 6 | 390 | 46 | 17,940 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/17/21 |
| 672 | 12970 | ELEVENTH ST | PCH | WALNUT AVE | E | AAC | 6 | 345 | 47 | 16,215 | 12/17/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/17/21 |
| 673 | 13953 | ELGIN CIR | LINDSAY LN | CDS | E | AAC | 7 | 419 | 36 | 16,334 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 676 | 13512 | ELK CIR | LILAC LN | CDS | E | AAC | 3 | 237 | 32 | 9,834 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 682 | 14079 | ELMSFORD LN | WARBURTON DR | TELHAN DR | E | AAC | 8 | 239 | 36 | 9,354 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 684 | 14066 | ELVA CIR | RUMSEY LN | CDS | E | AAC | 7 | 161 | 36 | 8,346 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 691 | 15706 | ENGLAND ST | END | YORKTOWN AVE | E | AAC | 7 | 540 | 36 | 19,440 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 701 | 13472 | ETNA CIR | RUSHMOOR LN | COTTONWOOD CIR | E | AAC | 4 | 156 | 32 | 5,892 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 705 | 13898 | EVENING HILL DR | SHADY HARBOR CIR | SURFDALE LN | E | AC | 5 | 389 | 36 | 14,004 | 5/6/24 | 100 | 0 | 0 | 0 | Surface Treatment - Slurry Seal | 11/28/19 |
| 706 | 13471 | EVEREST CIR | RUSHMOOR LN | END | E | AAC | 4 | 368 | 32 | 15,376 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 709 | 15395 | FAIR TIDE CIR | END | END | E | AAC | 8 | 404 | 32 | 16,528 | 4/8/24 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 723 | 14148 | FAUST CIR | DENSMORE LN | CDS | E | AAC | 7 | 91 | 42 | 4,822 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 729 | 13544 | FERGUSON CIR | ROSS LN | CDS | E | AAC | 4 | 244 | 32 | 9,058 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 735 | 16028 | FIFTH ST | PCH | WALNUT AVE | E | PCC | 6 | 365 | 34 | 9,835 | 6/22/21 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 737 | 14017 | FIJI LN | KAMUELA DR | CHRISTMAS SR | E | AAC | 8 | 1,019 | 36 | 36,684 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 750 | 14128 | FLAX CIR | MASTERS DR | CDS | E | AAC | 7 | 105 | 26 | 2,730 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 758 | 15694 | FLORIDA ST | ADAMS AVE | UTICA AVE | E | AAC | 6 | 1,260 | 36 | 45,360 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 758 | 15695 | FLORIDA ST | UTICA AVE | YORKTOWN AVE | E | AAC | 6 | 1,260 | 36 | 45,360 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 759 | 15388 | FLOUNDER DR | BUSHARD ST | SALMON LN | E | AAC | 8 | 1,189 | 36 | 42,804 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 759 | 13989 | FLOUNDER DR | SALMON LN | END | E | AAC | 8 | 130 | 36 | 4,680 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 773 | 13949 | FRANCISCAN CIR | HOMESTEAD LN | CDS | E | AAC | 7 | 279 | 36 | 11,294 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 779 | 14082 | FREDERICK CIR | EDUCATION LN | CDS | E | AAC | 8 | 472 | 36 | 18,792 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 783 | 14813 | FRIESLAND DR | MARKEN LN | ROTTERDAM LN | E | AAC | 4 | 660 | 36 | 24,010 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 783 | 14812 | FRIESLAND DR | ROTTERDAM LN | ZEIDER LN | E | AAC | 4 | 898 | 36 | 32,328 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 783 | 15735 | FRIESLAND DR | ZEIDER LN | NEWLAND ST | E | AAC | 4 | 291 | 36 | 10,476 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 790 | 14366 | GALBAR CIR | DANA DR | END | E | AAC | 8 | 331 | 36 | 13,916 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 793 | 15465 | GALLANT DR | TRANQUIL LN | ASTOR LN | E | AAC | 7 | 741 | 36 | 27,426 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 793 | 14142 | GALLANT DR | ASTOR LN | SWANSEA LN | E | AAC | 7 | 255 | 36 | 9,180 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 804 | 14054 | GEMFALL LN | DOLPHIN DR | DOREMERE DR | E | AAC | 7 | 258 | 36 | 9,288 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 820 | 14178 | GLACIER CIR | ROCKY MOUNTAIN DR | CDS | E | AAC | 8 | 364 | 36 | 14,604 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 822 | 13539 | GLASGOW CIR | BRESSEL LN | CDS | E | AAC | 4 | 420 | 32 | 14,690 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 825 | 13483 | HEIL AVE | SABOT LN | CDS | E | AAC | 3 | 355 | 26 | 9,126 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 825 | 13482 | HEIL AVE | CDS | SABOT LN | E | AAC | 3 | 654 | 26 | 17,004 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 834 | 15833 | GLOUCESTER LN | CAPE COD DR | END | E | AAC | 7 | 1,414 | 36 | 50,904 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 841 | 14139 | GOTHIC CIR | BELLSHIRE DR | CDS | E | AAC | 7 | 456 | 32 | 16,092 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 845 | 15745 | GRANADA LN | BLAYLOCK DR | VALENCIA DR | E | AAC | 4 | 530 | 36 | 19,330 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 85 | 780 | ATLANTA AVE | BROOKHURST ST | END | E | AC | 8 | 532 | 40 | 21,280 | 2/25/22 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 85 | 785 | ATLANTA AVE | END | BROOKHURST | E | AC | 8 | 532 | 40 | 21,280 | 2/25/22 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 862 | 14420 | GRIMSBY DR | TALBERT AVE | BELLFIELD LN | E | AC | 5 | 160 | 36 | 4,760 | 3/31/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 863 | 14070 | GROTON DR | CHESAPEAKE LN | POTOMAC LN | E | AAC | 7 | 270 | 36 | 10,720 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 870 | 15471 | GUSS DR | HARBOR ISLE LN | CDS | E | AAC | 7 | 550 | 32 | 19,950 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 877 | 13773 | HALIFAX DR | EDWARDS ST | HANOVER LN | E | AC | 1 | 535 | 36 | 18,972 | 4/7/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 906 | 13758 | HARVARD CIR | COLUMBIA LN | END | E | AC | 1 | 543 | 36 | 21,048 | 4/20/26 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 908 | 13540 | HASTINGS CIR | ROSS LN | CDS | E | AAC | 4 | 244 | 32 | 9,058 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 913 | 14121 | HAXTON CIR | VINTAGE LN | CDS | E | AAC | 7 | 435 | 32 | 15,420 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 916 | 13970 | HEATHERTON CIR | RANDI LN | CDS | E | AAC | 8 | 400 | 32 | 14,600 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 918 | 14042 | HELENA CIR | ANCHORAGE DR | END | E | AAC | 7 | 341 | 36 | 13,526 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 924 | 14298 | HERCULES DR | BROOKHURST ST | SUBURBUA LN | E | AAC | 8 | 185 | 36 | 6,660 | 2/14/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/14/23 |
| 927 | 13519 | HERMIT CIR | VANTAGE DR | CDS | E | AAC | 4 | 131 | 32 | 5,692 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 929 | 15705 | HESS CIR | UTICA AVE | END | E | AAC | 6 | 307 | 34 | 12,845 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 12/20/21 |
| 931 | 14858 | HIGGINS CIR | BRUSH DR | CDS | E | AAC | 4 | 424 | 32 | 14,818 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 951 | 15910 | HOMESTEAD LN | LUSS DR | END | E | AAC | 7 | 732 | 32 | 24,674 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 955 | 13958 | HOPEBAY LN | CLIFFSIDE DR | SAILPORT DR | E | AAC | 7 | 250 | 36 | 9,000 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 960 | 13534 | HOWARD CIR | LUCIA LN | CDS | E | AAC | 4 | 420 | 32 | 14,690 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/29/20 |
| 969 | 15693 | HUNTINGTON ST | UTICA AVE | YORKTOWN AVE | E | AAC | 6 | 1,153 | 36 | 41,508 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 969 | 14712 | HUNTINGTON ST | ADAMS AVE | SPRINGFIELD AVE | E | AAC | 6 | 615 | 36 | 21,526 | 12/20/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 12/20/21 |
| 973 | 15385 | HYDE PARK DR | MAGNOLIA ST | HICKORY LN | E | AAC | 8 | 1,162 | 36 | 42,832 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 975 | 14127 | IMPERIAL COVE LN | VISCOUNT DR | MASTER DR | E | AC | 7 | 904 | 36 | 33,294 | 4/20/26 | 100 | 0 | 0 | 0 | Surface Treatment - Slurry Seal | 7/15/21 |
| 976 | 15445 | INDEPENDENCE LN | YORKTOWN AVE | SHANGRI LA DR | E | AAC | 8 | 442 | 36 | 15,912 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 984 | 15896 | INTERIOR LN | OLYMPIC DR | YELLOWSTONE DR | E | AAC | 8 | 1,129 | 36 | 41,144 | 2/13/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/13/23 |
| 986 | 14591 | INVERNESS LN | DEVONSHIRE DR | CORNWALL DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |
| 986 | 14590 | INVERNESS LN | ARGYLE DR | ABERDEEN DR | E | AAC | 8 | 267 | 24 | 6,408 | 2/8/23 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 2/8/23 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 989 | 15753 | IRBY LN | LAMBERT DR | ARNETT DR | E | AAC | 4 | 727 | 36 | 26,172 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 989 | 15755 | IRBY LN | BRUSH DR | LAMBERT DR | E | AAC | 4 | 524 | 36 | 18,864 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 989 | 15754 | IRBY LN | HEIL AVE | BRUSH DR | E | AAC | 4 | 526 | 36 | 18,936 | 7/29/20 | 100 | 0 | 0 | 0 | Overlay - AC Fabric | 7/29/20 |
| 995 | 15418 | ISTHMUS LN | CUTTER DR | ADAMS AVE | E | AAC | 7 | 1,113 | 36 | 40,568 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| 996 | 14149 | IVES LN | CHARFORD DR | INDIANAPOLIS AVE | E | AAC | 7 | 170 | 36 | 6,120 | 7/15/21 | 100 | 0 | 0 | 0 | Overlay - AC Structural | 7/15/21 |
| | | | | | | | | **318.6** | | ######### | | | | | | | |
| | | ***Alleys*** | | | | | | | | | | | | | | | |
| 63 | 10090 | ALLEY INDIANAPOLIS AVE | END | FARNSWORTH LN | O | AC | 9 | 721 | 20 | 14,420 | 1/31/25 | 3 | 11 | 56 | 33 | New Construction | 1/1/80 |
| 67 | 10546 | ALLEY LIBERTY AVE | LIBERTY AVE | LIBERTY AVE | O | AC | 4 | 611 | 20 | 14,664 | 1/30/25 | 6 | 35 | 65 | 0 | New Construction | 1/1/80 |
| 61 | 10017 | ALLEY HEIL AVE | END | ALLEY GOLDENWEST ST | O | AC | 3 | 54 | 20 | 864 | 3/20/25 | 9 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 2255 | 10222 | ALLEY NINETEENETH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 7,200 | 5/30/25 | 9 | 37 | 14 | 49 | New Construction | 1/1/80 |
| 87 | 10538 | ALLEY RONALD RD | TRAVELWAY | ALLEY BELL CIR WEST | O | AC | 4 | 99 | 20 | 1,584 | 1/30/25 | 10 | 31 | 69 | 0 | New Construction | 1/1/80 |
| 89 | 10146 | ALLEY SAN ANGELO DR | ALLEY SAN ANGELO DR | ALLEY SAN ANGELO DR | O | AC | 4 | 184 | 20 | 2,944 | 3/28/25 | 10 | 35 | 6 | 59 | New Construction | 1/1/80 |
| 2271 | 10226 | ALLEY SIXTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 7,473 | 6/4/25 | 11 | 40 | 10 | 50 | New Construction | 1/1/80 |
| 2269 | 10219 | ALLEY SEVENTEENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 6,688 | 6/4/25 | 11 | 32 | 17 | 51 | New Construction | 1/1/80 |
| 63 | 10092 | ALLEY INDIANAPOLIS AVE | SANDPIPER LN | END | O | AC | 9 | 265 | 20 | 5,300 | 1/31/25 | 11 | 21 | 67 | 12 | New Construction | 1/1/80 |
| 2261 | 10062 | ALLEY PATTERSON LN | PATTERSON LN | PATTERSON LN | O | AC | 4 | 486 | 20 | 9,720 | 1/30/25 | 12 | 34 | 66 | 0 | New Construction | 1/1/80 |
| 57 | 10120 | ALLEY GOTHARD ST | LILAC LN | ALLEY GOTHARD ST | O | AC | 3 | 136 | 20 | 2,176 | 3/20/25 | 12 | 42 | 20 | 38 | New Construction | 1/1/80 |
| 2261 | 10063 | ALLEY PATTERSON LN | PATTERSON LN | FORELLE DR | O | AC | 4 | 636 | 20 | 10,176 | 1/30/25 | 14 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 74 | 10086 | ALLEY MALLOY DR | YVONNE DR | KILKENNY LN | O | AC | 9 | 790 | 20 | 15,800 | 1/31/25 | 15 | 35 | 56 | 9 | New Construction | 1/1/80 |
| 87 | 10539 | ALLEY RONALD RD | ALLEY BELL CIR WEST | ALLEY BELL CIR EAST | O | AC | 4 | 287 | 20 | 4,592 | 1/30/25 | 15 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 2280 | 10213 | ALLEY TWENTIETH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 8,160 | 5/30/25 | 16 | 37 | 17 | 46 | New Construction | 1/1/80 |
| 34 | 10485 | ALLEY ALABAMA ST | ALLEY TORONTO AVE | TORONTO AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 16 | 34 | 19 | 47 | New Construction | 1/1/80 |
| 2278 | 10116 | ALLEY TOULOUSE DR | ALLEY LILAC LN | ALLEY TOULOUSE DR | O | AC | 3 | 536 | 20 | 8,576 | 3/19/25 | 16 | 52 | 42 | 6 | New Construction | 1/1/80 |
| 2225 | 10283 | ALLEY ELEVENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/30/25 | 16 | 48 | 21 | 31 | New Construction | 1/1/80 |
| 62 | 10420 | ALLEY HUNTINGTON ST | NASHVILLE AVE | OSWEGO AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/6/25 | 17 | 36 | 30 | 34 | New Construction | 1/1/80 |
| 96 | 10490 | ALLEY SPRINGFIELD AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 5,168 | 6/12/25 | 17 | 32 | 7 | 61 | New Construction | 1/1/80 |
| 50 | 10501 | ALLEY ENGLAND ST | YORKTOWN AVE | END | O | AC | 6 | 430 | 20 | 8,600 | 6/9/25 | 17 | 44 | 8 | 48 | New Construction | 1/1/80 |
| 75 | 10065 | ALLEY MC FADDEN AVE | ANDAMAN LN | END | O | AC | 1 | 537 | 20 | 8,592 | 2/6/25 | 18 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 34 | 10425 | ALLEY ALABAMA ST | PORTLAND AVE | ALLEY ADAMS AVE | O | AC | 6 | 140 | 20 | 2,240 | 6/12/25 | 18 | 60 | 18 | 22 | New Construction | 1/1/80 |
| 2281 | 10212 | ALLEY TWENTY-FIRST | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/3/25 | 20 | 41 | 18 | 41 | New Construction | 1/1/80 |
| 2235 | 10262 | ALLEY FOURTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 20 | 48 | 18 | 34 | New Construction | 1/1/80 |
| 34 | 10492 | ALLEY ALABAMA ST | ALLEY SPRINGFIELD AVE | SPRINGFIELD AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 20 | 46 | 24 | 30 | New Construction | 1/1/80 |
| 2278 | 10117 | ALLEY TOULOUSE DR | ALLEY TOULOUSE DR | TOULOUSE DR | O | AC | 3 | 141 | 20 | 2,256 | 3/20/25 | 20 | 29 | 22 | 49 | New Construction | 1/1/80 |
| 2247 | 10526 | ALLEY LAKE ST | UTICA AVE | SPRINGFIELD AVE | O | AC | 6 | 705 | 20 | 11,280 | 2/7/25 | 20 | 34 | 62 | 4 | New Construction | 1/1/80 |
| 49 | 10002 | ALLEY EDINGER AVE | BOLSA CHICA ST | WARREN LN | O | AC | 2 | 1,200 | 20 | 16,800 | 3/21/25 | 20 | 46 | 9 | 45 | New Construction | 1/1/80 |
| 61 | 10003 | ALLEY HEIL AVE | ALLEY OSLO | DEL MAR LN | O | AC | 2 | 894 | 20 | 14,304 | 3/21/25 | 20 | 48 | 9 | 43 | New Construction | 1/1/80 |
| 87 | 10537 | ALLEY RONALD RD | TRAVELWAY | TRAVELWAY | O | AC | 4 | 269 | 20 | 4,304 | 1/30/25 | 20 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 2231 | 10258 | ALLEY FIFTEENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/4/25 | 21 | 27 | 14 | 59 | New Construction | 1/1/80 |
| 2254 | 10553 | ALLEY MINORU LN | ALLEY SARU CIR | WARNER AVE | O | AC | 4 | 644 | 20 | 10,304 | 6/13/25 | 21 | 72 | 12 | 16 | New Construction | 1/1/80 |
| 34 | 10478 | ALLEY ALABAMA ST | UTICA AVE | ALLEY VENICE AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 21 | 53 | 17 | 30 | New Construction | 1/1/80 |
| 2282 | 10196 | ALLEY TWENTY-SECOND | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 6/3/25 | 21 | 16 | 18 | 66 | New Construction | 1/1/80 |
| 2266 | 10491 | ALLEY ROCHESTER AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 322 | 20 | 5,152 | 6/12/25 | 21 | 37 | 11 | 52 | New Construction | 1/1/80 |
| 45 | 10488 | ALLEY CALIFORNIA ST | TORONTO AVE | UTICA AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/9/25 | 21 | 32 | 8 | 60 | New Construction | 1/1/80 |
| 75 | 10066 | ALLEY MC FADDEN AVE | ANDAMAN LN | CAMBAY LN | O | AC | 1 | 520 | 20 | 8,320 | 2/6/25 | 21 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 49 | 10001 | ALLEY EDINGER AVE | LILES LN | END | O | AC | 2 | 586 | 20 | 9,376 | 3/21/25 | 22 | 48 | 12 | 40 | New Construction | 1/1/80 |
| 2226 | 10119 | ALLEY ELK CIR | ALLEY LILAC LN | LILAC LN | O | AC | 3 | 363 | 20 | 5,808 | 3/20/25 | 22 | 44 | 27 | 29 | New Construction | 1/1/80 |
| 2269 | 10243 | ALLEY SEVENTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 7,800 | 6/2/25 | 22 | 23 | 16 | 61 | New Construction | 1/1/80 |
| 83 | 10519 | ALLEY PINE ST | LOMA AVE | ALLEY ADAMS AVE | O | AC | 6 | 188 | 20 | 3,760 | 2/7/25 | 22 | 10 | 76 | 14 | New Construction | 1/1/80 |
| 2223 | 10207 | ALLEY EIGHTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/2/25 | 22 | 15 | 30 | 55 | New Construction | 1/1/80 |
| 49 | 10000 | ALLEY EDINGER AVE | END | LILES LN | O | AC | 2 | 681 | 20 | 10,896 | 3/21/25 | 22 | 58 | 7 | 35 | New Construction | 1/1/80 |
| 2245 | 10027 | ALLEY SATURN DR | GOTHARD ST | ALLEY BARDON LN | O | AC | 3 | 339 | 20 | 5,424 | 3/20/25 | 22 | 57 | 24 | 19 | New Construction | 1/1/80 |
| 2283 | 10480 | ALLEY VENICE AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 322 | 20 | 5,152 | 6/12/25 | 23 | 50 | 19 | 31 | New Construction | 1/1/80 |
| 34 | 10421 | ALLEY ALABAMA ST | ALLEY OSWEGO AVE | OSWEGO AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/13/25 | 23 | 52 | 23 | 25 | New Construction | 1/1/80 |
| 87 | 10536 | ALLEY RONALD RD | ALLEY RONALD RD | TRAVELWAY | O | AC | 4 | 325 | 20 | 5,200 | 1/30/25 | 23 | 52 | 48 | 0 | New Construction | 1/1/80 |
| 57 | 10118 | ALLEY GOTHARD ST | TOULOUSE DR | ALLEY GOTHARD ST | O | AC | 3 | 255 | 20 | 4,080 | 3/20/25 | 23 | 78 | 14 | 8 | New Construction | 1/1/80 |
| 2271 | 10227 | ALLEY SIXTEENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/4/25 | 24 | 19 | 5 | 76 | New Construction | 1/1/80 |
| 34 | 10496 | ALLEY ALABAMA ST | ADAMS AVE | ALLEY ROCHESTER AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 24 | 56 | 8 | 36 | New Construction | 1/1/80 |
| 2231 | 10244 | ALLEY FIFTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 24 | 21 | 23 | 56 | New Construction | 1/1/80 |
| 2309 | 60970 | ALLEY WAIKIKI LN | ALLEY KONA DR | WAIKIKI LN | O | AC | 2 | 537 | 20 | 10,740 | 2/6/25 | 24 | 66 | 34 | 0 | New Construction - AC | 1/1/80 |
| 73 | 10142 | ALLEY MALAGA LN | ALLEY LA PAZ DR | STARK ST | O | AC | 4 | 409 | 20 | 6,544 | 3/28/25 | 24 | 31 | 22 | 47 | New Construction | 1/1/80 |
| 2235 | 10264 | ALLEY FOURTEENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 5/30/25 | 25 | 35 | 13 | 52 | New Construction | 1/1/80 |
| 2286 | 10474 | ALLEY YORKTOWN AVE | ENGLAND ST | END | O | AC | 6 | 224 | 20 | 3,680 | 6/9/25 | 25 | 25 | 22 | 53 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2275 | 10269 | ALLEY THIRTEENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 6,688 | 5/29/25 | 25 | 59 | 17 | 24 | New Construction | 1/1/80 |
| 2258 | 10097 | ALLEY OSLO | ALLEY HEIL AVE | HEIL AVE | O | AC | 2 | 152 | 20 | 2,432 | 3/21/25 | 25 | 69 | 9 | 22 | New Construction | 1/1/80 |
| 2243 | 10023 | ALLEY KELLOG CIR | ALLEY HEIL AVE | MADDOX DR | O | AC | 3 | 363 | 20 | 5,808 | 3/20/25 | 25 | 22 | 20 | 58 | New Construction | 1/1/80 |
| 2272 | 10093 | ALLEY SNOWBIRD DR | SCHOONER LN | END | O | AC | 9 | 176 | 20 | 2,816 | 3/19/25 | 25 | 26 | 40 | 34 | New Construction | 1/1/80 |
| 101 | 10144 | ALLEY VILLA YORBA | SAN ANDGELO DR | LA PAZ DR | O | AC | 4 | 764 | 20 | 12,224 | 3/28/25 | 25 | 65 | 23 | 12 | New Construction | 1/1/80 |
| 77 | 10548 | ALLEY NEWLAND ST | FRIESLAND DR | SLATER AVE | O | AC | 4 | 1,180 | 20 | 18,880 | 3/19/25 | 26 | 20 | 20 | 60 | New Construction | 1/1/80 |
| 65 | 10434 | ALLEY KNOXVILLE AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 6,460 | 6/6/25 | 26 | 40 | 17 | 43 | New Construction | 1/1/80 |
| 2271 | 10203 | ALLEY SIXTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 26 | 0 | 8 | 92 | New Construction | 1/1/80 |
| 2235 | 10261 | ALLEY FOURTEENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,760 | 6/4/25 | 27 | 36 | 8 | 56 | New Construction | 1/1/80 |
| 34 | 10477 | ALLEY ALABAMA ST | ALLEY VENICE AVE | VENICE AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 27 | 57 | 34 | 9 | New Construction | 1/1/80 |
| 75 | 10067 | ALLEY MC FADDEN AVE | BOLSA CHICA ST | PELICAN LN | O | AC | 1 | 520 | 20 | 8,320 | 2/6/25 | 28 | 56 | 28 | 16 | New Construction | 1/1/80 |
| 32 | 50470 | ALLEY BEACH BLVD | HEIL AVE | CDS | O | AC | 4 | 657 | 20 | 10,512 | 3/19/25 | 28 | 65 | 5 | 30 | New Construction | 1/1/80 |
| 39 | 10054 | ALLEY BARDON LN | CORSICAN DR | ALLEY LA MANCHA CIR | O | AC | 3 | 135 | 20 | 2,160 | 3/20/25 | 28 | 49 | 23 | 28 | New Construction | 1/1/80 |
| 77 | 10559 | ALLEY NEWLAND ST | BRUSH DR | ARNETT DR | O | AC | 4 | 1,250 | 20 | 20,000 | 3/19/25 | 28 | 26 | 53 | 21 | New Construction | 1/1/80 |
| 2274 | 10291 | ALLEY TENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/29/25 | 29 | 29 | 17 | 54 | New Construction | 1/1/80 |
| 2280 | 10210 | ALLEY TWENTIETH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/3/25 | 29 | 23 | 21 | 56 | New Construction | 1/1/80 |
| 53 | 10055 | ALLEY GANGES LN | ALLEY VOLGA DR | ALLEY RHONE LN | O | AC | 4 | 662 | 20 | 10,592 | 3/21/25 | 29 | 13 | 76 | 11 | New Construction | 1/1/80 |
| 84 | 10589 | ALLEY PINEHURST LN | ALLEY WARNER AVE | SUMMERDALE DR | O | AC | 5 | 381 | 20 | 6,096 | 3/21/25 | 29 | 47 | 32 | 21 | New Construction | 1/1/80 |
| 2241 | 10547 | ALLEY JACQUELYN LN | SPEER AVE | LIBERTY AVE | O | AC | 4 | 330 | 20 | 5,280 | 1/30/25 | 29 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 62 | 10495 | ALLEY HUNTINGTON ST | ROCHESTER AVE | SPRINGFIELD AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/9/25 | 29 | 46 | 39 | 15 | New Construction | 1/1/80 |
| 2281 | 10209 | ALLEY TWENTY-FIRST | ORANGE AVE | PECAN AVE | O | AC | 6 | 417 | 20 | 8,340 | 6/3/25 | 29 | 24 | 11 | 65 | New Construction | 1/1/80 |
| 74 | 10085 | ALLEY MALLOY DR | YVONNE DR | END | O | AC | 9 | 421 | 20 | 8,420 | 1/31/25 | 29 | 24 | 76 | 0 | New Construction | 1/1/80 |
| 2259 | 10423 | ALLEY OSWEGO AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 5,168 | 6/9/25 | 30 | 39 | 13 | 48 | New Construction | 1/1/80 |
| 2251 | 10166 | ALLEY LOCHLEA LN | LOCHLEA LN | END | O | AC | 9 | 488 | 20 | 7,808 | 3/19/25 | 30 | 55 | 37 | 8 | New Construction | 1/1/80 |
| 2279 | 10276 | ALLEY TWELFTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,140 | 5/29/25 | 30 | 23 | 26 | 51 | New Construction | 1/1/80 |
| 62 | 10497 | ALLEY HUNTINGTON ST | ADAMS AVE | ROCHESTER AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/9/25 | 30 | 59 | 14 | 27 | New Construction | 1/1/80 |
| 80 | 10360 | ALLEY PALM AVE. | ALLEY CREST AVE | TENTH ST | O | AC | 6 | 354 | 20 | 7,080 | 5/30/25 | 30 | 36 | 15 | 49 | New Construction | 1/1/80 |
| 2256 | 10297 | ALLEY NINTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 30 | 31 | 23 | 46 | New Construction | 1/1/80 |
| 34 | 10422 | ALLEY ALABAMA ST | NASHVILLE AVE | ALLEY OSWEGO AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/13/25 | 30 | 44 | 26 | 30 | New Construction | 1/1/80 |
| 2307 | 60950 | ALLEY HILO CIR | WAIKIKI LN | KONA DR | O | AC | 2 | 587 | 20 | 11,740 | 2/6/25 | 31 | 50 | 50 | 0 | New Construction - AC | 1/1/80 |
| 2281 | 10217 | ALLEY TWENTY-FIRST | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 6,560 | 6/3/25 | 31 | 32 | 12 | 56 | New Construction | 1/1/80 |
| 2276 | 10529 | ALLEY TIMBER CIR | ALLEY TIMBER CIR | END | O | AC | 4 | 76 | 33 | 2,508 | 1/30/25 | 31 | 48 | 52 | 0 | New Construction | 1/1/80 |
| 2263 | 10428 | ALLEY PORTLAND AVE | ALABAMBA ST | ALLEY ALABAMA ST | O | AC | 6 | 322 | 20 | 5,152 | 6/13/25 | 31 | 59 | 10 | 31 | New Construction | 1/1/80 |
| 69 | 10095 | ALLEY LOMOND DR | LOCHLEA LN | NEWLAND ST | O | AC | 9 | 660 | 20 | 10,560 | 3/19/25 | 31 | 51 | 22 | 27 | New Construction | 1/1/80 |
| 104 | 10567 | ALLEY WARNER AVE | ALLEY PINEHURST LN | ALLEY GROVE CIR | O | AC | 5 | 257 | 20 | 4,112 | 3/28/25 | 32 | 49 | 31 | 20 | New Construction | 1/1/80 |
| 2280 | 10218 | ALLEY TWENTIETH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 32 | 24 | 25 | 51 | New Construction | 1/1/80 |
| 40 | 10049 | ALLEY BARTLETT LN | MADDOX DR | ALLEY NORMA DR | O | AC | 3 | 682 | 20 | 10,912 | 3/20/25 | 32 | 53 | 21 | 26 | New Construction - Initial | 1/1/80 |
| 62 | 10401 | ALLEY HUNTINGTON ST | HARTFORD AVE | INDIANAPOLIS AVE | O | AC | 9 | 329 | 20 | 6,580 | 1/31/25 | 32 | 29 | 33 | 38 | New Construction | 1/1/80 |
| 35 | 10466 | ALLEY ALSUNA LN | ALLEY ARIANA CIR | ARIANA CIR | O | AC | 6 | 167 | 20 | 2,672 | 5/27/25 | 32 | 47 | 24 | 29 | New Construction | 1/1/80 |
| 2223 | 10200 | ALLEY EIGHTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 8,180 | 6/2/25 | 32 | 26 | 27 | 47 | New Construction | 1/1/80 |
| 2255 | 10214 | ALLEY NINETEENETH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 8,360 | 5/30/25 | 32 | 21 | 28 | 51 | New Construction | 1/1/80 |
| 2281 | 10197 | ALLEY TWENTY-FIRST | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 8,180 | 6/3/25 | 32 | 0 | 19 | 81 | New Construction | 1/1/80 |
| 2234 | 10061 | ALLEY FORELLE DR | FORELLE DR | FORELLE DR | O | AC | 4 | 781 | 20 | 12,496 | 1/30/25 | 33 | 68 | 32 | 0 | New Construction | 1/1/80 |
| 48 | 10094 | ALLEY DONCASTER DR | LOCHELA LN | NEWLAND ST | O | AC | 9 | 660 | 20 | 10,560 | 3/19/25 | 33 | 57 | 14 | 29 | New Construction | 1/1/80 |
| 33 | 10424 | ALLEY ADAMS AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 345 | 20 | 5,520 | 6/12/25 | 33 | 50 | 25 | 25 | New Construction | 1/1/80 |
| 82 | 10516 | ALLEY PARK ST | LOMA AVE | ALLEY ADAMS AVE | O | AC | 6 | 188 | 20 | 3,760 | 2/7/25 | 33 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 2267 | 10586 | ALLEY SANDRA LEE LN | ORION AVE | END | O | AC | 2 | 575 | 20 | 9,200 | 3/21/25 | 33 | 44 | 29 | 27 | New Construction | 1/1/80 |
| 88 | 10024 | ALLEY SABOT LN | ALLEY HEIL AVE | MADDOX DR | O | AC | 3 | 363 | 20 | 5,808 | 3/28/25 | 33 | 67 | 11 | 22 | New Construction | 1/1/80 |
| 61 | 10019 | ALLEY HEIL AVE | ALLEY BARTLETT LN | ALLEY KELLOG CIR | O | AC | 3 | 300 | 20 | 4,800 | 3/28/25 | 34 | 63 | 20 | 17 | New Construction | 1/1/80 |
| 104 | 10123 | ALLEY WARNER AVE | ALLEY LILAC LN | LILAC LN | O | AC | 3 | 385 | 20 | 6,160 | 3/19/25 | 34 | 59 | 39 | 2 | New Construction | 1/1/80 |
| 2285 | 10472 | ALLEY WHITESANDS DR | ALLEY YORKTOWN AVE | END | O | AC | 6 | 76 | 20 | 1,216 | 6/13/25 | 34 | 68 | 10 | 22 | New Construction | 1/1/80 |
| 34 | 10484 | ALLEY ALABAMA ST | TORONTO AVE | ALLEY UTICA AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 34 | 49 | 28 | 23 | New Construction | 1/1/80 |
| 49 | 10006 | ALLEY EDINGER AVE | GRAHAM ST | CLUBHOUSE LN | O | AC | 3 | 1,212 | 20 | 19,392 | 3/20/25 | 34 | 30 | 16 | 54 | New Construction | 1/1/80 |
| 45 | 10419 | ALLEY CALIFORNIA ST | NASHVILLE AVE | OSWEGO AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/6/25 | 34 | 34 | 25 | 41 | New Construction | 1/1/80 |
| 2276 | 10528 | ALLEY TIMBER CIR | TIMBER CIR | ALLEY TIMBER CIR | O | AC | 4 | 160 | 20 | 2,560 | 1/30/25 | 34 | 58 | 42 | 0 | New Construction | 1/1/80 |
| 56 | 10022 | ALLEY GOLDENWEST ST | ALLEY HEIL AVE | MADDOX DR | O | AC | 3 | 368 | 20 | 5,888 | 3/20/25 | 34 | 60 | 24 | 16 | New Construction | 1/1/80 |
| 2308 | 60960 | ALLEY KONA DR | WAIKIKI LN | KONA DR | O | AC | 2 | 605 | 20 | 12,100 | 2/6/25 | 34 | 53 | 47 | 0 | New Construction - AC | 1/1/80 |
| 2233 | 10458 | ALLEY FLORIDA ST | INDIANAPOLIS AVE | JOILET AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 34 | 44 | 31 | 25 | New Construction | 1/1/80 |
| 34 | 10493 | ALLEY ALABAMA ST | ROCHESTER AVE | ALLEY SPRINGFIELD AVE | O | AC | 6 | 164 | 20 | 2,624 | 6/12/25 | 34 | 2 | 20 | 78 | New Construction | 1/1/80 |
| 36 | 10015 | ALLEY AMAZON DR | GANGES LN | SHER LN | O | AC | 4 | 837 | 20 | 13,392 | 3/28/25 | 34 | 48 | 25 | 27 | New Construction | 1/1/80 |
| 39 | 10053 | ALLEY BARDON LN | ALLEY CORSICAN DR | CORSICAN DR | O | AC | 3 | 137 | 20 | 2,192 | 3/20/25 | 35 | 11 | 31 | 58 | New Construction | 1/1/80 |
| 53 | 10014 | ALLEY GANGES LN | AMAZONE DR | ALLEY RHONE LN | O | AC | 4 | 195 | 20 | 3,120 | 3/21/25 | 35 | 39 | 43 | 18 | New Construction | 1/1/80 |
| 86 | 10056 | ALLEY RHONE LN | ALLEY GANGES LN | ALLEY GANGES LN | O | AC | 4 | 177 | 20 | 2,832 | 3/21/25 | 35 | 5 | 76 | 19 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2264 | 10610 | ALLEY QUEENS LN | ALLEY SLATER AVE | ALLEY BARTON DR | O | AC | 4 | 501 | 20 | 8,016 | 1/30/25 | 35 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 62 | 10375 | ALLEY HUNTINGTON ST | ELMIRA AVE | FRANKFORT AVE | O | AC | 9 | 329 | 20 | 6,364 | 1/31/25 | 35 | 33 | 48 | 19 | New Construction | 1/1/80 |
| 87 | 10535 | ALLEY RONALD RD | RONALD RD | ALLEY RONALD RD | O | AC | 4 | 210 | 20 | 3,360 | 1/30/25 | 35 | 43 | 57 | 0 | New Construction | 1/1/80 |
| 49 | 10007 | ALLEY EDINGER AVE | CLUBHOUSE LN | END | O | AC | 3 | 423 | 20 | 6,768 | 3/20/25 | 36 | 36 | 8 | 56 | New Construction | 1/1/80 |
| 2231 | 10246 | ALLEY FIFTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 36 | 19 | 19 | 62 | New Construction | 1/1/80 |
| 104 | 10566 | ALLEY WARNER AVE | PINEHURST LN | ALLEY PINEHURST LN | O | AC | 5 | 131 | 20 | 2,096 | 3/28/25 | 36 | 54 | 19 | 27 | New Construction | 1/1/80 |
| 2220 | 10046 | ALLEY DELTON CIR | ALLEY HEIL AVE | ALLEY MADDOX DR | O | AC | 3 | 353 | 20 | 5,648 | 3/20/25 | 36 | 50 | 38 | 12 | New Construction | 1/1/80 |
| 34 | 10483 | ALLEY ALABAMA ST | ALLEY UTICA AVE | UTICA AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 36 | 63 | 27 | 10 | New Construction | 1/1/80 |
| 2246 | 10147 | ALLEY LA PAZ DR | ALLEY LA PAZ DR | ALLEY MALAGA LN | O | AC | 4 | 187 | 20 | 2,956 | 3/28/25 | 36 | 57 | 29 | 14 | New Construction | 1/1/80 |
| 72 | 10364 | ALLEY MAIN ST | PALM AVE | CREST AVE | O | AC | 6 | 805 | 20 | 15,900 | 2/7/25 | 36 | 52 | 21 | 27 | New Construction | 1/1/80 |
| 2216 | 10031 | ALLEY CORSICAN DR | ALLEY BARDON LN | END | O | AC | 3 | 323 | 20 | 5,168 | 3/20/25 | 37 | 48 | 37 | 15 | New Construction | 1/1/80 |
| 2235 | 10245 | ALLEY FOURTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 37 | 23 | 25 | 52 | New Construction | 1/1/80 |
| 61 | 10018 | ALLEY HEIL AVE | ALLEY GOLDENWEST ST | ALLEY BARTLETT LN | O | AC | 3 | 232 | 20 | 3,712 | 3/20/25 | 37 | 54 | 23 | 23 | New Construction | 1/1/80 |
| 100 | 10481 | ALLEY UTICA AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 5,168 | 6/12/25 | 37 | 70 | 24 | 6 | New Construction | 1/1/80 |
| 2285 | 10473 | ALLEY WHITESANDS DR | END | ALLEY YORKTOWN AVE | O | AC | 6 | 200 | 20 | 3,200 | 5/27/25 | 37 | 86 | 7 | 7 | New Construction | 1/1/80 |
| 77 | 10083 | ALLEY NEWLAND ST | NEWLAND ST | BRIDGEPORT DR | O | AC | 7 | 1,223 | 20 | 19,568 | 1/31/25 | 37 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 90 | 10558 | ALLEY SARU CIR | ALLEY MINORU LN | MINORU LN | O | AC | 4 | 148 | 20 | 2,368 | 6/12/25 | 37 | 79 | 13 | 8 | New Construction | 1/1/80 |
| 2274 | 10290 | ALLEY TENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 37 | 30 | 21 | 49 | New Construction | 1/1/80 |
| 2275 | 10270 | ALLEY THIRTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/29/25 | 37 | 52 | 13 | 35 | New Construction | 1/1/80 |
| 78 | 10050 | ALLEY NORMA DR | ALLEY BARTLETT LN | BARTLETT LN | O | AC | 3 | 157 | 20 | 2,512 | 3/28/25 | 37 | 37 | 10 | 53 | New Construction | 1/1/80 |
| 2225 | 10284 | ALLEY ELEVENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 5/30/25 | 37 | 27 | 13 | 60 | New Construction | 1/1/80 |
| 2282 | 10195 | ALLEY TWENTY-SECOND | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/3/25 | 37 | 30 | 22 | 48 | New Construction | 1/1/80 |
| 2228 | 10371 | ALLEY ELMIRA AVE | ALABAMA ST | HUNTINGTON ST | O | AC | 9 | 485 | 20 | 9,700 | 6/6/25 | 38 | 39 | 15 | 46 | New Construction | 1/1/80 |
| 34 | 10476 | ALLEY ALABAMA ST | VENICE AVE | ALLEY WITCHITA AVE | O | AC | 6 | 165 | 20 | 2,700 | 6/12/25 | 38 | 33 | 43 | 24 | New Construction | 1/1/80 |
| 61 | 10020 | ALLEY HEIL AVE | ALLEY KELLOG CIR | SABOT LN | O | AC | 3 | 135 | 20 | 2,160 | 3/28/25 | 38 | 58 | 10 | 32 | New Construction | 1/1/80 |
| 2216 | 10029 | ALLEY CORSICAN DR | END | ALLEY BARDON LN | O | AC | 3 | 337 | 20 | 5,392 | 3/20/25 | 39 | 57 | 20 | 23 | New Construction | 1/1/80 |
| 2275 | 10351 | ALLEY THIRTEENTH | PALM AVE | CREST AVE | O | AC | 6 | 453 | 20 | 9,060 | 5/29/25 | 39 | 47 | 10 | 43 | New Construction | 1/1/80 |
| 44 | 10096 | ALLEY BUSHARD ST | MOKIHANA DR | RAMBLER DR | O | AC | 9 | 655 | 20 | 10,480 | 3/19/25 | 39 | 30 | 27 | 43 | New Construction | 1/1/80 |
| 2279 | 10268 | ALLEY TWELFTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 39 | 31 | 14 | 55 | New Construction | 1/1/80 |
| 4010 | 40070 | ALLEY WALNUT AVE | THIRTEENTH ST | FOURTEENTH ST | O | AC | 6 | 318 | 20 | 6,360 | 6/4/25 | 39 | 39 | 14 | 47 | New Construction - Initial | 1/1/80 |
| 2274 | 10315 | ALLEY TENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 40 | 39 | 26 | 35 | New Construction | 1/1/80 |
| 34 | 10426 | ALLEY ALABAMA ST | ALLEY PORTLAND AVE | PORTLAND AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/13/25 | 40 | 49 | 34 | 17 | New Construction | 1/1/80 |
| 2231 | 10255 | ALLEY FIFTEENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,008 | 6/4/25 | 40 | 15 | 24 | 61 | New Construction | 1/1/80 |
| 47 | 10404 | ALLEY DELAWARE ST | HARTFORD AVE | ALLEY INDIANAPOLIS AVE | O | AC | 9 | 165 | 20 | 3,300 | 1/31/25 | 40 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 72 | 10345 | ALLEY MAIN ST | ALLEY TENTH ST | TENTH ST | O | AC | 6 | 212 | 20 | 4,240 | 2/7/25 | 40 | 44 | 54 | 2 | New Construction | 1/1/80 |
| 2269 | 10250 | ALLEY SEVENTEENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 186 | 20 | 2,976 | 6/2/25 | 40 | 29 | 22 | 49 | New Construction | 1/1/80 |
| 34 | 10494 | ALLEY ALABAMA ST | ALLEY ROCHESTER AVE | ROCHESTER AVE | O | AC | 6 | 166 | 20 | 2,656 | 6/12/25 | 40 | 54 | 11 | 35 | New Construction | 1/1/80 |
| 34 | 10486 | ALLEY ALABAMA ST | SPRINGFIELD AVE | ALLEY TORONTO AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/12/25 | 40 | 46 | 28 | 26 | New Construction | 1/1/80 |
| 77 | 10560 | ALLEY NEWLAND ST | IRBY LN | BRUSH DR | O | AC | 4 | 491 | 20 | 7,856 | 3/19/25 | 40 | 27 | 56 | 17 | New Construction | 1/1/80 |
| 2225 | 10286 | ALLEY ELEVENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 41 | 24 | 29 | 47 | New Construction | 1/1/80 |
| 2231 | 10256 | ALLEY FIFTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 41 | 29 | 14 | 57 | New Construction | 1/1/80 |
| 63 | 10382 | ALLEY INDIANAPOLIS AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 323 | 20 | 6,460 | 6/6/25 | 41 | 12 | 21 | 67 | New Construction | 1/1/80 |
| 72 | 10363 | ALLEY MAIN ST | TWELTH ST | THIRTEENTH ST | O | AC | 6 | 532 | 20 | 10,640 | 2/7/25 | 41 | 81 | 18 | 1 | New Construction | 1/1/80 |
| 2250 | 10075 | ALLEY LINDENWOOD DR | ALLEY LIBRA CIR | DEMION LN | O | AC | 7 | 157 | 20 | 2,512 | 1/30/25 | 41 | 47 | 53 | 0 | New Construction | 1/1/80 |
| 2227 | 10071 | ALLEY ELLIS AVE | DEMION LN | ALLEY DEMION LN | O | AC | 7 | 153 | 20 | 2,448 | 1/30/25 | 41 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 34 | 10389 | ALLEY ALABAMA ST | ATLANTA AVE | ALLEY BALTIMORE AVE | O | AC | 9 | 169 | 20 | 3,380 | 6/6/25 | 41 | 43 | 16 | 41 | New Construction | 1/1/80 |
| 41 | 10609 | ALLEY BARTON DR | ALLEY QUEENS LN | QUEENS LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 41 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 2223 | 10224 | ALLEY EIGHTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 6,688 | 6/17/25 | 42 | 31 | 21 | 48 | New Construction | 1/1/80 |
| 62 | 10377 | ALLEY HUNTINGTON ST | DETROIT AVE | ELMIRA AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 42 | 31 | 13 | 56 | New Construction | 1/1/80 |
| 2280 | 10205 | ALLEY TWENTIETH | PECAN AVE | ACACIA AVE | O | ACT | 6 | 410 | 20 | 8,200 | 6/3/25 | 42 | 19 | 12 | 69 | New Construction | 1/1/80 |
| 38 | 10374 | ALLEY BALTIMORE AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 322 | 20 | 6,440 | 6/6/25 | 42 | 45 | 7 | 48 | New Construction | 1/1/80 |
| 2256 | 10316 | ALLEY NINTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 42 | 28 | 26 | 46 | New Construction | 1/1/80 |
| 2231 | 10257 | ALLEY FIFTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 6/4/25 | 42 | 46 | 14 | 40 | New Construction | 1/1/80 |
| 2271 | 10251 | ALLEY SIXTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 42 | 27 | 15 | 58 | New Construction | 1/1/80 |
| 2227 | 10531 | ALLEY ELLIS AVE | DELAWARE ST | STEEP LN | O | AC | 4 | 759 | 20 | 12,144 | 1/30/25 | 43 | 46 | 51 | 3 | New Construction | 1/1/80 |
| 34 | 10400 | ALLEY ALABAMA ST | FRANFORT AVE | ALLEY GENEVA AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/17/25 | 43 | 17 | 34 | 49 | New Construction | 1/1/80 |
| 41 | 10044 | ALLEY BARTON DR | KEELSON LN | KEELSON LN | O | AC | 4 | 615 | 20 | 12,300 | 1/30/25 | 43 | 42 | 58 | 0 | New Construction | 1/1/80 |
| 2249 | 10122 | ALLEY LILAC LN | ALLEY ELK CIR | ALLEY WARNER AVE | O | AC | 3 | 277 | 20 | 4,432 | 3/19/25 | 43 | 53 | 24 | 23 | New Construction | 1/1/80 |
| 2310 | 60980 | ALLEY PACIFIC COAST HWY | PARK AVE | END | O | AC | 2 | 120 | 13 | 1,560 | 2/6/25 | 43 | 55 | 45 | 0 | New Construction - AC | 1/1/80 |
| 62 | 10440 | ALLEY HUNTINGTON ST | LINCOLN AVE | MEMPHIS AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 43 | 26 | 46 | 28 | New Construction | 1/1/80 |
| 83 | 10520 | ALLEY PINE ST | THIRTEENTH ST | LOMA AVE | O | AC | 6 | 335 | 20 | 6,700 | 6/19/25 | 43 | 45 | 6 | 49 | New Construction | 1/1/80 |
| 2240 | 10500 | ALLEY HESS CIR | ALLEY HESS CIR | HESS CIR | O | AC | 6 | 145 | 20 | 2,900 | 6/12/25 | 43 | 38 | 54 | 8 | New Construction | 1/1/80 |
| 2247 | 10413 | ALLEY LAKE ST | ADAMS AVE | SPRINGFIELD AVE | O | AC | 6 | 661 | 20 | 13,220 | 2/7/25 | 43 | 79 | 21 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2230 | 10591 | ALLEY EVERGREEN CIR | ALLEY WARNER AVE | SUMMERDALE DR | O | AC | 5 | 381 | 20 | 9,144 | 3/21/25 | 43 | 74 | 15 | 11 | New Construction | 1/1/80 |
| 82 | 10506 | ALLEY PARK ST | SPRINGFIELD AVE | UTICA AVE | O | AC | 6 | 660 | 20 | 13,200 | 2/7/25 | 43 | 57 | 43 | 0 | New Construction | 1/1/80 |
| 95 | 10545 | ALLEY SLATER AVE | VAN BUREN ST | END | O | AC | 4 | 275 | 20 | 4,400 | 3/19/25 | 43 | 21 | 51 | 28 | New Construction | 1/1/80 |
| 102 | 10011 | ALLEY VOLGA DR | ALLEY GANGES LN | ALLEY GANGES LN | O | AC | 4 | 174 | 20 | 2,784 | 3/28/25 | 43 | 72 | 28 | 0 | New Construction | 1/1/80 |
| 2245 | 10028 | ALLEY SATURN DR | ALLEY BARDON LN | END | O | AC | 3 | 321 | 20 | 5,136 | 3/20/25 | 43 | 12 | 88 | 0 | New Construction | 1/1/80 |
| 105 | 10479 | ALLEY WITCHITA AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 322 | 20 | 5,152 | 6/12/25 | 43 | 44 | 50 | 6 | New Construction | 1/1/80 |
| 95 | 10602 | ALLEY SLATER AVE | JAQUELYN LN | ALLEY DAIRYVIEW CIR | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 44 | 36 | 64 | 0 | New Construction | 1/1/80 |
| 2255 | 10199 | ALLEY NINETEENETH | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 8,180 | 6/3/25 | 44 | 16 | 39 | 45 | New Construction | 1/1/80 |
| 2279 | 10278 | ALLEY TWELFTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 44 | 18 | 19 | 63 | New Construction | 1/1/80 |
| 102 | 10012 | ALLEY VOLGA DR | ALLEY GANGES LN | TRAVELWAY | O | AC | 4 | 817 | 20 | 13,072 | 3/28/25 | 44 | 36 | 35 | 29 | New Construction | 1/1/80 |
| 71 | 10026 | ALLEY MADDOX DR | DELTON CIR | ALLEY DELTON CIR | O | AC | 3 | 150 | 20 | 2,400 | 3/20/25 | 44 | 9 | 63 | 28 | New Construction | 1/1/80 |
| 39 | 10051 | ALLEY BARDON LN | ALLEY LA MANCHA CIR | LA MANCHA CIR | O | AC | 3 | 140 | 20 | 2,240 | 3/20/25 | 44 | 51 | 19 | 30 | New Construction | 1/1/80 |
| 2219 | 10081 | ALLEY DAMION LN | ALLEY DAMION LN | END | O | AC | 7 | 26 | 20 | 416 | 1/30/25 | 44 | 43 | 57 | 0 | New Construction | 1/1/80 |
| 60 | 10383 | ALLEY HARTFORD AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 323 | 20 | 6,460 | 6/6/25 | 44 | 25 | 21 | 54 | New Construction | 1/1/80 |
| 2216 | 10030 | ALLEY CORSICAN DR | GOTHARD ST | ALLEY BARDON LN | O | AC | 3 | 337 | 20 | 5,392 | 3/20/25 | 45 | 22 | 51 | 27 | New Construction | 1/1/80 |
| 2271 | 50390 | ALLEY SIXTEENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 187 | 20 | 3,740 | 6/4/25 | 45 | 49 | 22 | 29 | New Construction - Initial | 1/1/80 |
| 2219 | 10073 | ALLEY DAMION LN | ALLEY ELLIS AVE | ALLEY LINDENWOOD DR | O | AC | 7 | 781 | 20 | 12,496 | 1/30/25 | 45 | 81 | 19 | 0 | New Construction | 1/1/80 |
| 60 | 10386 | ALLEY HARTFORD AVE | ALLEY DELAWARE ST | GENEVA AVE | O | AC | 9 | 297 | 20 | 5,940 | 1/31/25 | 45 | 37 | 39 | 24 | New Construction | 1/1/80 |
| 62 | 10487 | ALLEY HUNTINGTON ST | TORONTO AVE | UTIICA AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/9/25 | 45 | 53 | 39 | 8 | New Construction | 1/1/80 |
| 83 | 10508 | ALLEY PINE ST | ADAMS AVE | SPRINGFIELD AVE | O | AC | 6 | 661 | 20 | 13,220 | 2/7/25 | 45 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 32 | 10550 | ALLEY BEACH BLVD | WARNER AVE | BLAYLOCK DR | O | AC | 4 | 660 | 20 | 10,560 | 1/30/25 | 46 | 24 | 76 | 0 | New Construction | 1/1/80 |
| 34 | 10427 | ALLEY ALABAMA ST | OSWEGO AVE | ALLEY PORTLAND AVE | O | AC | 6 | 165 | 20 | 2,640 | 6/13/25 | 46 | 56 | 28 | 16 | New Construction | 1/1/80 |
| 35 | 10467 | ALLEY ALSUNA LN | ALTAMAR DR | ALLEY UTICA AVE | O | AC | 6 | 595 | 20 | 9,520 | 5/27/25 | 46 | 35 | 34 | 31 | New Construction | 1/1/80 |
| 62 | 10454 | ALLEY HUNTINGTON ST | INDIANAPOLIS AVE | JOLIET AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 46 | 0 | 72 | 28 | New Construction | 1/1/80 |
| 45 | 10376 | ALLEY CALIFORNIA ST | ELMIRA AVE | FRANKFORT AVE | O | AC | 9 | 329 | 20 | 6,580 | 1/31/25 | 46 | 34 | 37 | 29 | New Construction | 1/1/80 |
| 2210 | 10064 | ALLEY ASPEN CIR | ROYAL OAK DR | END | O | AC | 1 | 127 | 20 | 2,032 | 2/6/25 | 47 | 91 | 9 | 0 | New Construction | 1/1/80 |
| 95 | 10544 | ALLEY SLATER AVE | END | VAN BUREN ST | O | AC | 4 | 325 | 20 | 5,200 | 3/19/25 | 47 | 21 | 62 | 17 | New Construction | 1/1/80 |
| 2282 | 10216 | ALLEY TWENTY-SECOND | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,100 | 5/27/25 | 47 | 27 | 35 | 38 | New Construction | 1/1/80 |
| 62 | 10381 | ALLEY HUNTINGTON ST | BALTIMORE AVE | CHICAGO AVE | O | AC | 9 | 339 | 20 | 6,780 | 1/31/25 | 47 | 75 | 8 | 17 | New Construction | 1/1/80 |
| 62 | 10442 | ALLEY HUNTINGTON ST | KNOXVILLE AVE | LINCOLN AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 47 | 0 | 73 | 27 | New Construction | 1/1/80 |
| 46 | 10357 | ALLEY CREST AVE | TWELTH ST | ALLEY THIRTEENTH ST | O | AC | 6 | 148 | 20 | 2,960 | 6/9/25 | 47 | 32 | 29 | 39 | New Construction | 1/1/80 |
| 2256 | 10296 | ALLEY NINTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 220 | 20 | 4,400 | 5/29/25 | 47 | 46 | 19 | 35 | New Construction | 1/1/80 |
| 59 | 10590 | ALLEY GROVE CIR | ALLEY WARNER AVE | SUMMERDALE DR | O | AC | 5 | 381 | 20 | 6,096 | 3/21/25 | 47 | 48 | 35 | 17 | New Construction | 1/1/80 |
| 2237 | 10069 | ALLEY GRAHAM ST | ALLEY RESEARCH DR | ALLEY CROSS DR | O | AC | 1 | 262 | 20 | 4,192 | 3/21/25 | 47 | 29 | 71 | 0 | New Construction | 1/1/80 |
| 100 | 10464 | ALLEY UTICA AVE | ALLEY DELAWARE ST | ALSUNA LN | O | AC | 6 | 162 | 20 | 2,592 | 6/12/25 | 48 | 49 | 31 | 20 | New Construction | 1/1/80 |
| 2246 | 10148 | ALLEY LA PAZ DR | ALLEY LA PAZ DR | ALLEY VILLA YORBA | O | AC | 4 | 178 | 20 | 2,848 | 3/28/25 | 48 | 43 | 24 | 33 | New Construction | 1/1/80 |
| 89 | 10141 | ALLEY SAN ANGELO DR | SAN ANGELO DR | ALLEY SAN ANGELO DR | O | AC | 4 | 150 | 20 | 2,400 | 3/28/25 | 48 | 49 | 15 | 36 | New Construction | 1/1/80 |
| 2219 | 10077 | ALLEY DAMION LN | ALLEY LINDENWOOD DR | ALLEY DAMION LN | O | AC | 7 | 275 | 20 | 4,400 | 1/30/25 | 48 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2248 | 10072 | ALLEY LIBRA CIR | ALLEY ELLIS AVE | ALLEY LINDENWOOD DR | O | AC | 7 | 781 | 20 | 12,496 | 1/30/25 | 48 | 0 | 93 | 7 | New Construction | 1/1/80 |
| 34 | 10475 | ALLEY ALABAMA ST | ALLEY WITCHITA AVE | WITCHITA AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/12/25 | 48 | 51 | 31 | 18 | New Construction | 1/1/80 |
| 47 | 10456 | ALLEY DELAWARE ST | INDIANAPOLIS AVE | JOILET AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 48 | 47 | 19 | 34 | New Construction | 1/1/80 |
| 72 | 10341 | ALLEY MAIN ST | TENTH ST | ALLEY ELEVENTH ST | O | AC | 6 | 212 | 20 | 4,240 | 2/7/25 | 48 | 27 | 44 | 29 | New Construction | 1/1/80 |
| 87 | 10540 | ALLEY RONALD RD | ALLEY RONALD RD | RONALD RD | O | AC | 4 | 218 | 20 | 3,488 | 1/30/25 | 48 | 32 | 57 | 11 | New Construction | 1/1/80 |
| 2249 | 10121 | ALLEY LILAC LN | ALLEY TOULOUSE DR | ALLEY ELK CIR | O | AC | 3 | 273 | 20 | 4,488 | 3/19/25 | 49 | 41 | 51 | 8 | New Construction | 1/1/80 |
| 39 | 10052 | ALLEY BARDON LN | LA MANCHA CIR | ALLEY SATUM DR | O | AC | 3 | 139 | 20 | 2,224 | 3/20/25 | 49 | 37 | 24 | 39 | New Construction | 1/1/80 |
| 56 | 10221 | ALLEY GOLDENWEST ST | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,008 | 5/27/25 | 49 | 67 | 16 | 17 | New Construction | 1/1/80 |
| 100 | 10469 | ALLEY UTICA AVE | ALSUNA LN | ALLEY ALSUNA LN | O | AC | 6 | 162 | 20 | 2,592 | 5/27/25 | 49 | 34 | 43 | 23 | New Construction | 1/1/80 |
| 2229 | 10033 | ALLEY EMERALD LN | FIR DR | CYPRESS AVE | O | AC | 4 | 669 | 20 | 13,380 | 1/30/25 | 49 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 2281 | 10229 | ALLEY TWENTY-FIRST | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,008 | 5/27/25 | 49 | 41 | 47 | 12 | New Construction | 1/1/80 |
| 2240 | 10499 | ALLEY HESS CIR | ALLEY HESS CIR | END | O | AC | 6 | 99 | 20 | 1,584 | 6/12/25 | 49 | 33 | 47 | 20 | New Construction | 1/1/80 |
| 62 | 10409 | ALLEY HUNTINGTON ST | FRANKFORT AVE | GENEVA AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 49 | 34 | 44 | 22 | New Construction | 1/1/80 |
| 2225 | 10285 | ALLEY ELEVENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 49 | 26 | 29 | 45 | New Construction | 1/1/80 |
| 2236 | 10527 | ALLEY GARFIELD AVE | HOLLY ST | END | O | AC | 7 | 300 | 20 | 7,200 | 1/30/25 | 50 | 44 | 56 | 0 | New Construction | 1/1/80 |
| 45 | 10406 | ALLEY CALIFORNIA ST | GENEVA AVE | HARTFORD AVE | O | AC | 9 | 331 | 20 | 6,620 | 1/31/25 | 50 | 51 | 49 | 0 | New Construction | 1/1/80 |
| 2252 | 10513 | ALLEY LOMA AVE | FOURTEENTH ST | LOMA AVE | O | AC | 6 | 567 | 20 | 9,072 | 6/9/25 | 50 | 53 | 35 | 12 | New Construction | 1/1/80 |
| 68 | 10433 | ALLEY LINCOLN AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 6,460 | 6/6/25 | 50 | 16 | 6 | 78 | New Construction | 1/1/80 |
| 33 | 10524 | ALLEY ADAMS AVE | ALLEY PARK ST | PARK ST | O | AC | 6 | 180 | 20 | 3,600 | 2/7/25 | 50 | 30 | 38 | 32 | New Construction | 1/1/80 |
| 61 | 10021 | ALLEY HEIL AVE | SABOT LN | ALLEY SABOT LN | O | AC | 3 | 169 | 20 | 2,704 | 3/28/25 | 51 | 52 | 25 | 23 | New Construction | 1/1/80 |
| 62 | 10379 | ALLEY HUNTINGTON ST | CHICAGO AVE | DETROIT AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 51 | 0 | 96 | 4 | New Construction | 1/1/80 |
| 78 | 10048 | ALLEY NORMA DR | ALLEY GOLDENWEST ST | BARTLETT LN | O | AC | 3 | 157 | 20 | 2,512 | 3/20/25 | 51 | 49 | 24 | 27 | New Construction | 1/1/80 |
| 97 | 10614 | ALLEY TAFT LN | ALLEY RESEARCH DR | CROSS DR | O | AC | 1 | 434 | 20 | 6,944 | 3/21/25 | 51 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 34 | 10395 | ALLEY ALABAMA ST | ALLEY INDIANAPOLIS AVE | INDIANAPOLIS AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 51 | 14 | 29 | 57 | New Construction | 1/1/80 |
| 2275 | 10369 | ALLEY THIRTEENTH | PARK ST | LAKE ST | O | AC | 6 | 615 | 20 | 12,300 | 2/7/25 | 51 | 44 | 53 | 3 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2275 | 10266 | ALLEY THIRTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 51 | 17 | 16 | 67 | New Construction | 1/1/80 |
| 2279 | 10277 | ALLEY TWELFTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 5/29/25 | 52 | 29 | 13 | 58 | New Construction | 1/1/80 |
| 2211 | 10549 | ALLEY B ST | ROBIDOUX ST | WARNER AVE | O | AC | 4 | 651 | 20 | 12,220 | 1/30/25 | 52 | 40 | 60 | 0 | New Construction | 1/1/80 |
| 47 | 10450 | ALLEY DELAWARE ST | JOILET AVE | KNOXVILLE AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 52 | 30 | 32 | 38 | New Construction | 1/1/80 |
| 2248 | 10078 | ALLEY LIBRA CIR | ALLEY LIBRA CIR | END | O | AC | 7 | 23 | 20 | 460 | 1/30/25 | 52 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 4010 | 40140 | ALLEY WALNUT AVE | TWENTIETH ST | TWENTY-FIRST ST | O | AC | 6 | 318 | 20 | 6,360 | 6/3/25 | 53 | 0 | 46 | 54 | New Construction - Initial | 1/1/80 |
| 2224 | 10317 | ALLEY EIGHTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 2/7/25 | 53 | 37 | 45 | 18 | New Construction | 1/1/80 |
| 2265 | 10068 | ALLEY RESEARCH DR | ALLEY GRAHAM ST | ALLEY TAFT LN | O | AC | 1 | 383 | 20 | 6,128 | 3/21/25 | 53 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 34 | 10437 | ALLEY ALABAMA ST | ALLEY KNOXVILLE AVE | KNOXVILLE AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 53 | 28 | 33 | 39 | New Construction | 1/1/80 |
| 34 | 10438 | ALLEY ALABAMA ST | JOILET AVE | ALLEY KNOXVILLE AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 53 | 27 | 19 | 54 | New Construction | 1/1/80 |
| 2217 | 10615 | ALLEY CROSS DR | END | TAFT LN | O | AC | 1 | 295 | 20 | 4,720 | 3/21/25 | 53 | 29 | 57 | 14 | New Construction | 1/1/80 |
| 2221 | 10372 | ALLEY DETRIOT AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 322 | 20 | 6,440 | 6/6/25 | 53 | 67 | 11 | 22 | New Construction | 1/1/80 |
| 2274 | 10292 | ALLEY TENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 5/29/25 | 53 | 33 | 33 | 34 | New Construction | 1/1/80 |
| 52 | 10370 | ALLEY FRANKFORT AVE | ALABAMA ST | HUNTINGTON ST | O | AC | 9 | 485 | 20 | 9,700 | 6/6/25 | 54 | 49 | 17 | 34 | New Construction | 1/1/80 |
| 56 | 10047 | ALLEY GOLDENWEST ST | MADDOX DR | ALLEY NORMA DR | O | AC | 3 | 682 | 20 | 10,912 | 3/28/25 | 54 | 13 | 30 | 57 | New Construction | 1/1/80 |
| 98 | 10058 | ALLEY TALBERT AVE | GULF LN | ALLEY NEWLAND ST | O | AC | 4 | 378 | 20 | 6,048 | 1/30/25 | 54 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 2227 | 10070 | ALLEY ELLIS AVE | ALLEY LIBRA CIR | DEMION LN | O | AC | 7 | 157 | 20 | 2,512 | 1/30/25 | 55 | 30 | 70 | 0 | New Construction | 1/1/80 |
| 2279 | 10354 | ALLEY TWELFTH | PALM AVE | ALLEY PALM AVE | O | AC | 6 | 209 | 20 | 4,180 | 5/29/25 | 55 | 25 | 17 | 58 | New Construction | 1/1/80 |
| 2279 | 10275 | ALLEY TWELFTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 55 | 50 | 12 | 38 | New Construction | 1/1/80 |
| 81 | 10352 | ALLEY PALM AVE | ALLEY TWELTH ST | TWELTH ST | O | AC | 6 | 162 | 20 | 3,240 | 5/29/25 | 55 | 40 | 15 | 45 | New Construction | 1/1/80 |
| 2208 | 10149 | ALLEY AMBERLEAF CIR | ALLEY PARK MEADOW LN | DELAWARE ST | O | AC | 4 | 660 | 20 | 10,560 | 1/30/25 | 55 | 55 | 45 | 0 | New Construction | 1/1/80 |
| 2262 | 10082 | ALLEY POLK CIR | HARDING LN | END | O | AC | 7 | 672 | 20 | 10,752 | 1/31/25 | 55 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 83 | 10507 | ALLEY PINE ST | SPRINGFIELD AVE | UTICA AVE | O | AC | 6 | 660 | 20 | 13,200 | 2/7/25 | 55 | 35 | 44 | 21 | New Construction | 1/1/80 |
| 37 | 10035 | ALLEY CYPRESS DR | OAK LN | ASH ST | O | AC | 4 | 447 | 20 | 7,152 | 1/30/25 | 55 | 36 | 64 | 0 | New Construction | 1/1/80 |
| 40 | 10025 | ALLEY BARTLETT LN | ALLEY HEIL AVE | MADDOX DR | O | AC | 3 | 368 | 20 | 5,888 | 3/20/25 | 55 | 43 | 27 | 30 | New Construction - Initial | 1/1/80 |
| 2280 | 10198 | ALLEY TWENTIETH | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 8,180 | 6/3/25 | 56 | 66 | 13 | 21 | New Construction | 1/1/80 |
| 2253 | 10043 | ALLEY MANDRELL DR | KOLEDO LN | END | O | AC | 4 | 275 | 20 | 4,400 | 1/30/25 | 56 | 30 | 70 | 0 | New Construction | 1/1/80 |
| 84 | 10583 | ALLEY PINEHURST LN | WARNER AVE | PINEHURST LN | O | AC | 5 | 585 | 20 | 9,360 | 3/21/25 | 56 | 42 | 36 | 22 | New Construction | 1/1/80 |
| 61 | 10045 | ALLEY HEIL AVE | ALLEY SABOT LN | ALLEY DELTON CIR | O | AC | 3 | 300 | 20 | 4,800 | 3/28/25 | 56 | 32 | 21 | 47 | New Construction | 1/1/80 |
| 2227 | 10532 | ALLEY ELLIS AVE | ALLEY ELLIS AVE | END | O | AC | 4 | 148 | 20 | 2,368 | 1/30/25 | 56 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 56 | 10032 | ALLEY GOLDENWEST ST | END | FORD DR | O | AC | 3 | 382 | 20 | 6,112 | 3/21/25 | 56 | 45 | 10 | 45 | New Construction | 1/1/80 |
| 2286 | 10471 | ALLEY YORKTOWN AVE | WHITESANDS DR | ALLEY WHITESANDS DR | O | AC | 6 | 162 | 20 | 2,592 | 5/27/25 | 56 | 87 | 13 | 0 | New Construction | 1/1/80 |
| 72 | 10514 | ALLEY MAIN ST | ALLEY ADAMS AVE | ADAMS AVE | O | AC | 6 | 162 | 20 | 3,240 | 2/7/25 | 56 | 39 | 22 | 39 | New Construction | 1/1/80 |
| 86 | 10016 | ALLEY RHONE LN | ALLEY GANGES LN | SHER LN | O | AC | 4 | 821 | 20 | 13,136 | 3/21/25 | 56 | 28 | 33 | 39 | New Construction | 1/1/80 |
| 34 | 10393 | ALLEY ALABAMA ST | CHICAGO AVE | ALLEY DETROIT AVE | O | AC | 9 | 166 | 20 | 3,320 | 6/6/25 | 56 | 95 | 5 | 0 | New Construction | 1/1/80 |
| 2233 | 10459 | ALLEY FLORIDA ST | JOLIET AVE | KNOXVILLE AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 57 | 47 | 20 | 33 | New Construction | 1/1/80 |
| 2218 | 10601 | ALLEY DAIRYVIEW CIR | ALLEY SLATER AVE | ALLEY BARTON DR | O | AC | 4 | 500 | 20 | 8,000 | 1/30/25 | 57 | 26 | 74 | 0 | New Construction | 1/1/80 |
| 2255 | 10211 | ALLEY NINETEENETH | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 8,360 | 6/3/25 | 57 | 27 | 20 | 53 | New Construction | 1/1/80 |
| 95 | 10603 | ALLEY SLATER AVE | KOLEDO LN | ALLEY JACQUELYN LN | O | AC | 4 | 175 | 20 | 2,800 | 1/30/25 | 57 | 39 | 61 | 0 | New Construction | 1/1/80 |
| 47 | 10462 | ALLEY DELAWARE ST | AHSANTE DR | ALLEY UTICA AVE | O | AC | 6 | 415 | 20 | 6,640 | 5/27/25 | 57 | 20 | 51 | 29 | New Construction | 1/1/80 |
| 62 | 10405 | ALLEY HUNTINGTON ST | GENEVA AVE | HARTFORD AVE | O | AC | 9 | 331 | 20 | 6,620 | 1/31/25 | 57 | 0 | 70 | 30 | New Construction | 1/1/80 |
| 2275 | 10358 | ALLEY THIRTEENTH | CREST AVE | ALLEY CREST AVE | O | AC | 6 | 232 | 20 | 4,640 | 6/9/25 | 58 | 47 | 18 | 35 | New Construction | 1/1/80 |
| 2225 | 10280 | ALLEY ELEVENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 212 | 20 | 3,392 | 5/29/25 | 58 | 41 | 15 | 44 | New Construction | 1/1/80 |
| 4000 | 10150 | ALLEY WHITEWATER DR | ALLEY PARK MEADOW LN | DELAWARE ST | O | AC | 4 | 660 | 20 | 10,560 | 1/30/25 | 58 | 54 | 43 | 3 | New Construction - Initial | 1/1/80 |
| 2248 | 10076 | ALLEY LIBRA CIR | ALLEY LINDENWOOD DR | ALLEY LIBRA CIR | O | AC | 7 | 275 | 20 | 4,400 | 1/30/25 | 58 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 34 | 10399 | ALLEY ALABAMA ST | ALLEY GENEVA AVE | GENEVA AVE | O | AC | 9 | 164 | 20 | 3,280 | 6/6/25 | 58 | 15 | 30 | 55 | New Construction | 1/1/80 |
| 63 | 10385 | ALLEY INDIANAPOLIS AVE | ALLEY DELAWARE ST | FLORIDA ST | O | AC | 9 | 491 | 20 | 9,820 | 1/31/25 | 58 | 38 | 62 | 0 | New Construction | 1/1/80 |
| 66 | 10010 | ALLEY LE GRAND LN | ALLEY SELL CIR | PRAIRIE DR | O | AC | 2 | 491 | 20 | 7,856 | 3/21/25 | 58 | 34 | 34 | 32 | New Construction | 1/1/80 |
| 33 | 10521 | ALLEY ADAMS AVE | LAKE ST | ALLEY PINE ST | O | AC | 6 | 170 | 20 | 3,400 | 2/7/25 | 59 | 40 | 60 | 0 | New Construction | 1/1/80 |
| 2248 | 10079 | ALLEY LIBRA CIR | ALLEY LIBRA CIR | END | O | AC | 7 | 21 | 20 | 420 | 1/30/25 | 59 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2238 | 10621 | ALLEY GREENLEAF LN | END | END | O | AC | 2 | 352 | 20 | 5,632 | 4/1/26 | 59 | 53 | 47 | 0 | New Construction | 1/1/80 |
| 2268 | 10009 | ALLEY SELL CIR | SELL CIR | ALLEY LE GRAND LN | O | AC | 2 | 267 | 20 | 4,272 | 3/21/25 | 60 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 2271 | 10202 | ALLEY SIXTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 6/4/25 | 60 | 37 | 11 | 52 | New Construction | 1/1/80 |
| 47 | 10444 | ALLEY DELAWARE ST | KNOXVILLE AVE | LINCOLN AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 60 | 28 | 20 | 52 | New Construction | 1/1/80 |
| 55 | 10084 | ALLEY GILFORD CIR | NEWHAVEN LN | END | O | AC | 7 | 400 | 20 | 6,400 | 1/31/25 | 60 | 48 | 18 | 34 | New Construction | 1/1/80 |
| 46 | 10362 | ALLEY CREST AVE | PALM AVE | ALLEY PALM AVE | O | AC | 6 | 443 | 20 | 7,088 | 5/30/25 | 60 | 22 | 22 | 56 | New Construction | 1/1/80 |
| 2256 | 10299 | ALLEY NINTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 60 | 31 | 27 | 42 | New Construction | 1/1/80 |
| 101 | 10143 | ALLEY VILLA YORBA | TRAVELWAY | ALLEY LA PAZ DR | O | AC | 4 | 150 | 20 | 2,400 | 3/28/25 | 60 | 37 | 28 | 35 | New Construction | 1/1/80 |
| 45 | 10410 | ALLEY CALIFORNIA ST | FRANKFORT AVE | GENEVA AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 60 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 98 | 10057 | ALLEY TALBERT AVE | HARTLUND ST | END | O | AC | 4 | 523 | 20 | 10,460 | 1/30/25 | 60 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2242 | 10452 | ALLEY JOLIET AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 6,460 | 6/6/25 | 60 | 18 | 32 | 50 | New Construction | 1/1/80 |
| 57 | 8 | ALLEY GOTHARD ST | CORSICAN DR | ALLEY SATURN DR | O | AC | 3 | 373 | 26 | 9,698 | 3/20/25 | 60 | 37 | 59 | 4 | New Construction - AC | 1/1/80 |
| 2211 | 10551 | ALLEY B ST | WARNER AVE | BLAYLOCK DR | O | AC | 4 | 660 | 20 | 10,560 | 1/30/25 | 60 | 20 | 80 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2225 | 10281 | ALLEY ELEVENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 60 | 79 | 7 | 14 | New Construction | 1/1/80 |
| 100 | 10463 | ALLEY UTICA AVE | ALLEY DELAWARE ST | END | O | AC | 6 | 64 | 20 | 1,024 | 6/12/25 | 61 | 17 | 31 | 52 | New Construction | 1/1/80 |
| 104 | 10568 | ALLEY WARNER AVE | ALLEY GROVE CIR | ALLEY EVERGREEN CIR | O | AC | 5 | 257 | 20 | 4,112 | 3/28/25 | 61 | 36 | 47 | 17 | New Construction | 1/1/80 |
| 2222 | 10592 | ALLEY DUNBAR AVE | HARBOR BLUFFS CIR | END | O | AC | 2 | 351 | 20 | 5,616 | 4/1/26 | 61 | 56 | 31 | 13 | New Construction | 1/1/80 |
| 2280 | 10230 | ALLEY TWENTIETH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,008 | 5/30/25 | 61 | 7 | 93 | 0 | New Construction | 1/1/80 |
| 34 | 10439 | ALLEY ALABAMA ST | ALLEY JOILET AVE | JOLIET AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 61 | 13 | 32 | 55 | New Construction | 1/1/80 |
| 41 | 10039 | ALLEY BARTON DR | ALLEY DAIRYVIEW CIR | JACQUELYN LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 61 | 45 | 55 | 0 | New Construction | 1/1/80 |
| 2235 | 10263 | ALLEY FOURTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/30/25 | 61 | 28 | 14 | 58 | New Construction | 1/1/80 |
| 81 | 10353 | ALLEY PALM AVE | ALLEY ELEVENTH ST | ALLEY TWELTH ST | O | AC | 6 | 163 | 20 | 3,260 | 5/29/25 | 62 | 23 | 23 | 54 | New Construction | 1/1/80 |
| 2277 | 10482 | ALLEY TORONTO AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 5,168 | 6/12/25 | 62 | 30 | 20 | 50 | New Construction | 1/1/80 |
| 2255 | 10206 | ALLEY NINETEENETH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 7,800 | 6/3/25 | 62 | 72 | 21 | 7 | New Construction | 1/1/80 |
| 95 | 10036 | ALLEY SLATER AVE | JACQUELYN LN | ALLEY JACQUELYN LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 62 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2214 | 10541 | ALLEY BELL CIR EAST | ALLEY RONALD RD | BELL CIR | O | AC | 4 | 579 | 20 | 9,264 | 1/30/25 | 63 | 91 | 9 | 0 | New Construction | 1/1/80 |
| 2224 | 10307 | ALLEY EIGHTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 2/7/25 | 63 | 27 | 40 | 33 | New Construction | 1/1/80 |
| 2275 | 10271 | ALLEY THIRTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 63 | 57 | 25 | 18 | New Construction | 1/1/80 |
| 2219 | 10080 | ALLEY DAMION LN | END | ALLEY DAMION LN | O | AC | 7 | 25 | 20 | 400 | 1/30/25 | 63 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2250 | 10074 | ALLEY LINDENWOOD DR | DEMION LN | ALLEY DEMION LN | O | AC | 7 | 153 | 20 | 2,448 | 1/30/25 | 63 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 35 | 10468 | ALLEY ALSUNA LN | ARIANA CIR | ALTAMAR DR | O | AC | 6 | 330 | 20 | 5,280 | 5/27/25 | 63 | 0 | 48 | 52 | New Construction | 1/1/80 |
| 77 | 10060 | ALLEY NEWLAND ST | ALLEY TALBERT AVE | END | O | AC | 4 | 499 | 20 | 7,984 | 1/30/25 | 63 | 72 | 28 | 0 | New Construction | 1/1/80 |
| 2279 | 10274 | ALLEY TWELFTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,008 | 5/29/25 | 64 | 50 | 12 | 38 | New Construction | 1/1/80 |
| 45 | 10402 | ALLEY CALIFORNIA ST | HARTFORD AVE | INDIANAPOLIS AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 64 | 32 | 44 | 24 | New Construction | 1/1/80 |
| 72 | 10600 | ALLEY MAIN ST | WALNUT AVE | END | O | AC | 6 | 204 | 20 | 3,264 | 6/13/25 | 64 | 38 | 23 | 39 | New Construction | 1/1/80 |
| 2224 | 10305 | ALLEY EIGHTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 2/7/25 | 64 | 0 | 50 | 50 | New Construction | 1/1/80 |
| 2281 | 10204 | ALLEY TWENTY-FIRST | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 6,560 | 6/3/25 | 64 | 69 | 17 | 14 | New Construction | 1/1/80 |
| 45 | 10489 | ALLEY CALIFORNIA ST | SPRINGFIELD AVE | TORONTO AVE | O | AC | 6 | 330 | 20 | 5,280 | 5/27/25 | 64 | 56 | 35 | 9 | New Construction | 1/1/80 |
| 73 | 10140 | ALLEY MALAGA LN | ALLEY SAN ANGELO DR | STARK ST | O | AC | 4 | 756 | 20 | 12,096 | 3/28/25 | 64 | 23 | 10 | 67 | New Construction | 1/1/80 |
| 82 | 10509 | ALLEY PARK ST | UTICA AVE | PARK ST | O | AC | 6 | 512 | 20 | 8,192 | 2/7/25 | 64 | 0 | 66 | 34 | New Construction | 1/1/80 |
| 2282 | 10193 | ALLEY TWENTY-SECOND | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 6,544 | 6/3/25 | 64 | 14 | 59 | 27 | New Construction | 1/1/80 |
| 33 | 10523 | ALLEY ADAMS AVE | PINE ST | ALLEY PARK ST | O | AC | 6 | 180 | 20 | 3,600 | 2/7/25 | 65 | 0 | 32 | 68 | New Construction | 1/1/80 |
| 34 | 10397 | ALLEY ALABAMA ST | ALLEY HARTFORD AVE | HARTFORD AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 65 | 27 | 30 | 43 | New Construction | 1/1/80 |
| 47 | 10407 | ALLEY DELAWARE ST | ALLEY HARTFORD AVE | HARTFORD AVE | O | AC | 9 | 164 | 20 | 3,280 | 1/31/25 | 65 | 0 | 31 | 69 | New Construction | 1/1/80 |
| 47 | 10408 | ALLEY DELAWARE ST | GENEVA AVE | ALLEY HARTFORD AVE | O | AC | 9 | 166 | 20 | 2,656 | 1/31/25 | 65 | 0 | 31 | 69 | New Construction | 1/1/80 |
| 34 | 10390 | ALLEY ALABAMA ST | ALLEY BALTIMORE AVE | BALTIMORE AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 65 | 0 | 35 | 65 | New Construction | 1/1/80 |
| 82 | 10518 | ALLEY PARK ST | THIRTEENTH ST | LOMA AVE | O | AC | 6 | 336 | 20 | 6,720 | 2/7/25 | 65 | 0 | 28 | 72 | New Construction | 1/1/80 |
| 47 | 10445 | ALLEY DELAWARE ST | LINCOLN AVE | MEMPHIS AVE | O | AC | 6 | 331 | 20 | 6,620 | 1/31/25 | 65 | 0 | 14 | 86 | New Construction | 1/1/80 |
| 2241 | 10606 | ALLEY JACQUELYN LN | ALLEY SLATER AVE | ALLEY BARTON DR | O | AC | 4 | 500 | 20 | 8,000 | 1/30/25 | 65 | 33 | 67 | 0 | New Construction | 1/1/80 |
| 2223 | 10232 | ALLEY EIGHTEENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 185 | 20 | 2,960 | 5/27/25 | 65 | 0 | 80 | 20 | New Construction | 1/1/80 |
| 4010 | 40090 | ALLEY WALNUT AVE | FIFTEENTH ST | ALLEY SIXTEENTH ST | O | AC | 6 | 162 | 20 | 2,592 | 6/4/25 | 66 | 4 | 30 | 66 | New Construction - Initial | 1/1/80 |
| 4010 | 40160 | ALLEY WALNUT AVE | TWENTY-SECOND ST | GOLDENWEST ST | O | AC | 6 | 318 | 20 | 5,088 | 6/4/25 | 66 | 45 | 17 | 38 | New Construction - Initial | 1/1/80 |
| 54 | 10384 | ALLEY GENEVA AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 323 | 20 | 6,460 | 6/6/25 | 66 | 0 | 44 | 56 | New Construction | 1/1/80 |
| 2224 | 10306 | ALLEY EIGHTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 417 | 20 | 8,340 | 2/7/25 | 66 | 23 | 40 | 37 | New Construction | 1/1/80 |
| 4010 | 40110 | ALLEY WALNUT AVE | SEVENTEETH ST | EIGHTEENTH ST | O | AC | 6 | 318 | 20 | 6,360 | 6/2/25 | 66 | 0 | 22 | 78 | New Construction - Initial | 1/1/80 |
| 34 | 10398 | ALLEY ALABAMA ST | GENEVA AVE | ALLEY HARTFORD AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 66 | 12 | 33 | 55 | New Construction | 1/1/80 |
| 4010 | 40040 | ALLEY WALNUT AVE | NINTH ST | TENTH ST | O | AC | 6 | 318 | 20 | 5,088 | 5/29/25 | 66 | 43 | 38 | 19 | New Construction - Initial | 1/1/80 |
| 2209 | 10460 | ALLEY ARIANA CIR | END | ALLEY ALSUNA LN | O | AC | 6 | 255 | 20 | 4,076 | 5/27/25 | 66 | 24 | 27 | 49 | New Construction | 1/1/80 |
| 2274 | 10293 | ALLEY TENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 7,800 | 5/30/25 | 66 | 6 | 54 | 40 | New Construction | 1/1/80 |
| 45 | 10378 | ALLEY CALIFORNIA ST | DETROIT AVE | ELMIRA AVE | O | AC | 9 | 330 | 20 | 6,600 | 1/31/25 | 66 | 33 | 27 | 40 | New Construction | 1/1/80 |
| 2224 | 10304 | ALLEY EIGHTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 8,200 | 2/7/25 | 67 | 0 | 33 | 67 | New Construction | 1/1/80 |
| 45 | 10498 | ALLEY CALIFORNIA ST | ADAMS AVE | ROCHESTER AVE | O | AC | 6 | 330 | 20 | 5,280 | 6/9/25 | 67 | 33 | 48 | 19 | New Construction | 1/1/80 |
| 93 | 10502 | ALLEY SHIPLEY ST | ADAMS AVE | SEVENTEENTH ST | O | AC | 6 | 926 | 20 | 14,816 | 3/28/25 | 67 | 64 | 33 | 3 | New Construction | 1/1/80 |
| 4010 | 40030 | ALLEY WALNUT AVE | EIGHTH ST | NINTH ST | O | AC | 6 | 318 | 20 | 7,632 | 5/29/25 | 67 | 24 | 33 | 43 | New Construction - Initial | 1/1/80 |
| 5060 | 60220 | ALLEY - BTWN 8th & 9th | PACIFIC N | PCH | O | AC | 2 | 167 | 14 | 2,338 | 2/6/25 | 67 | 86 | 14 | 0 | New Construction - Initial | 1/1/80 |
| 34 | 10453 | ALLEY ALABAMA ST | INDIANAPOLIS AVE | ALLEY JOILET AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 67 | 23 | 36 | 41 | New Construction | 1/1/80 |
| 62 | 10380 | ALLEY HUNTINGTON ST | ATLANTA AVE | BALTIMORE AVE | O | AC | 9 | 337 | 20 | 6,740 | 1/31/25 | 67 | 0 | 85 | 15 | New Construction | 1/1/80 |
| 80 | 10361 | ALLEY PALM AVE. | ALLEY CREST AVE | MAIN ST | O | AC | 6 | 195 | 20 | 3,900 | 5/30/25 | 68 | 39 | 36 | 25 | New Construction | 1/1/80 |
| 4010 | 40130 | ALLEY WALNUT AVE | NINTEENTH ST | TWENTIETH ST | O | AC | 6 | 318 | 20 | 5,088 | 5/27/25 | 68 | 0 | 91 | 9 | New Construction - Initial | 1/1/80 |
| 4010 | 40060 | ALLEY WALNUT AVE | ELEVENTH ST | TWELFTH ST | O | AC | 6 | 318 | 20 | 6,360 | 5/29/25 | 69 | 0 | 21 | 79 | New Construction - Initial | 1/1/80 |
| 4010 | 40080 | ALLEY WALNUT AVE | FOURTEENTH ST | FIFTEENTH ST | O | AC | 6 | 318 | 20 | 5,088 | 6/4/25 | 69 | 6 | 37 | 57 | New Construction - Initial | 1/1/80 |
| 41 | 10605 | ALLEY BARTON DR | ALLEY KOLEDO LN | KOLEDO LN | O | AC | 4 | 175 | 20 | 2,800 | 1/30/25 | 69 | 7 | 93 | 0 | New Construction | 1/1/80 |
| 41 | 10604 | ALLEY BARTON DR | ALLEY JACQUELYN LN | JACQUELYN LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 69 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 95 | 10038 | ALLEY SLATER AVE | QUEENS LN | ALLEY QUEENS LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 69 | 16 | 84 | 0 | New Construction | 1/1/80 |
| 2256 | 10300 | ALLEY NINTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/29/25 | 69 | 36 | 15 | 49 | New Construction | 1/1/80 |
| 79 | 10612 | ALLEY OAK LN | ALLEY BARTON DR | OAK LN | O | AC | 4 | 495 | 20 | 7,920 | 1/30/25 | 69 | 21 | 79 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 47 | 10465 | ALLEY DELAWARE ST | ARIANA CIR | AHSANTE DR | O | AC | 6 | 511 | 20 | 8,176 | 5/27/25 | 70 | 0 | 47 | 53 | New Construction | 1/1/80 |
| 95 | 10607 | ALLEY SLATER AVE | QUEENS LN | ALLEY KOLEDO LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 70 | 18 | 82 | 0 | New Construction | 1/1/80 |
| 41 | 10042 | ALLEY BARTON DR | ALLEY OAK LN | KOLEDO LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 71 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2244 | 10608 | ALLEY KOLEDO LN | ALLEY SLATER AVE | ALLEY BARTON DR | O | AC | 4 | 500 | 20 | 8,000 | 1/30/25 | 71 | 17 | 83 | 0 | New Construction | 1/1/80 |
| 95 | 10611 | ALLEY SLATER AVE | KEELSON LN | ALLEY QUEENS LN | O | AC | 4 | 177 | 20 | 2,832 | 1/30/25 | 71 | 17 | 83 | 0 | New Construction | 1/1/80 |
| 95 | 10037 | ALLEY SLATER AVE | KOLEDO LN | ALLEY KOLEDO LN | O | AC | 4 | 175 | 20 | 2,800 | 1/30/25 | 71 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 34 | 10396 | ALLEY ALABAMA ST | HARTFORD AVE. | ALLEY INDIANAPOLIS AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 72 | 0 | 21 | 79 | New Construction | 1/1/80 |
| 2260 | 10530 | ALLEY PARK MEADOW LN | ALLEY WHITEWATER DR | ALLEY AMBERLEAF CIR | O | AC | 4 | 295 | 20 | 5,900 | 1/30/25 | 73 | 20 | 53 | 27 | New Construction | 1/1/80 |
| 2224 | 10303 | ALLEY EIGHTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 262 | 20 | 5,240 | 2/7/25 | 73 | 0 | 64 | 36 | New Construction | 1/1/80 |
| 2235 | 10265 | ALLEY FOURTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 7,400 | 5/30/25 | 73 | 21 | 13 | 66 | New Construction | 1/1/80 |
| 34 | 10394 | ALLEY ALABAMA ST | ALLEY DETROIT AVE | DETROIT AVE | O | AC | 9 | 164 | 20 | 3,280 | 6/6/25 | 74 | 50 | 31 | 19 | New Construction | 1/1/80 |
| 72 | 60940 | ALLEY MAIN ST | UTICA AVE | PARK ST | O | AC | 6 | 495 | 20 | 7,340 | 2/7/25 | 74 | 0 | 100 | 0 | New Construction - AC | 1/1/80 |
| 45 | 10443 | ALLEY CALIFORNIA ST | KNOXVILLE AVE | LINCOLN AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 75 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 2209 | 10461 | ALLEY ARIANA CIR | ALLEY ALSUNA LN | END | O | AC | 6 | 255 | 20 | 4,076 | 5/27/25 | 75 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 53 | 10013 | ALLEY GANGES LN | ALLEY VOLGA DR | VOLGA DR | O | AC | 4 | 154 | 20 | 2,464 | 3/21/25 | 75 | 41 | 59 | 0 | New Construction | 1/1/80 |
| 45 | 10455 | ALLEY CALIFORNIA ST | INDIANAPOLIS AVE | JOILET AVE | O | AC | 6 | 330 | 20 | 5,280 | 1/31/25 | 75 | 0 | 73 | 27 | New Construction | 1/1/80 |
| 41 | 10041 | ALLEY BARTON DR | ALLEY JACQUELYN LN | ALLEY OAK LN | O | AC | 4 | 20 | 20 | 320 | 1/30/25 | 76 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 41 | 10040 | ALLEY BARTON DR | ALLEY KOLEDO LN | QUEENS LN | O | AC | 4 | 155 | 20 | 2,480 | 1/30/25 | 76 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 72 | 10503 | ALLEY MAIN ST | ADAMS AVE | SPRINGFIELD AVE | O | AC | 6 | 661 | 20 | 10,576 | 2/7/25 | 76 | 0 | 62 | 38 | New Construction | 1/1/80 |
| 45 | 10449 | ALLEY CALIFORNIA ST | JOILET AVE | KNOXVILLE AVE | O | AC | 6 | 330 | 20 | 5,280 | 1/31/25 | 76 | 0 | 87 | 13 | New Construction | 1/1/80 |
| 56 | 10190 | ALLEY GOLDENWEST ST | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 6,560 | 5/27/25 | 76 | 0 | 99 | 1 | New Construction | 1/1/80 |
| 2247 | 10512 | ALLEY LAKE ST | LAKE ST | ALLEY LAKE ST | O | AC | 6 | 207 | 20 | 3,312 | 2/7/25 | 77 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 72 | 10504 | ALLEY MAIN ST | SPRINGFIELD AVE | UTICA AVE | O | AC | 6 | 660 | 20 | 10,556 | 2/7/25 | 77 | 0 | 70 | 30 | New Construction | 1/1/80 |
| 56 | 10192 | ALLEY GOLDENWEST ST | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 6,688 | 5/27/25 | 77 | 0 | 97 | 3 | New Construction | 1/1/80 |
| 72 | 10517 | ALLEY MAIN ST | THIRTEENTH ST | LOMA AVE | O | AC | 6 | 336 | 20 | 6,720 | 2/7/25 | 77 | 0 | 46 | 54 | New Construction | 1/1/80 |
| 46 | 10348 | ALLEY CREST AVE | ALLEY FOURTEENTH ST | FOURTEENTH ST | O | AC | 6 | 214 | 20 | 4,280 | 6/9/25 | 77 | 0 | 33 | 67 | New Construction | 1/1/80 |
| 100 | 10470 | ALLEY UTICA AVE | ALLEY ALSUNA LN | END | O | AC | 6 | 64 | 20 | 1,024 | 5/27/25 | 77 | 0 | 40 | 60 | New Construction | 1/1/80 |
| 72 | 10515 | ALLEY MAIN ST | LOMA AVE | ALLEY ADAMS AVE | O | AC | 6 | 187 | 20 | 3,740 | 2/7/25 | 77 | 56 | 44 | 0 | New Construction | 1/1/80 |
| 56 | 10215 | ALLEY GOLDENWEST ST | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 6,560 | 5/27/25 | 77 | 0 | 79 | 21 | New Construction | 1/1/80 |
| 43 | 10108 | ALLEY BAY VIEW 2 | BAY VIEW DR | END | O | AC | 2 | 73 | 20 | 1,168 | 2/6/25 | 77 | 0 | 53 | 47 | New Construction | 1/1/80 |
| 62 | 10448 | ALLEY HUNTINGTON ST | JOLIET AVE | KNOXVILLE AVE | O | AC | 6 | 330 | 20 | 5,280 | 1/31/25 | 78 | 0 | 82 | 18 | New Construction | 1/1/80 |
| 94 | 10327 | ALLEY SIXTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 6,560 | 6/9/25 | 78 | 12 | 21 | 67 | New Construction | 1/1/80 |
| 56 | 10191 | ALLEY GOLDENWEST ST | ORANGE AVE | PECAN AVE | O | AC | 6 | 418 | 20 | 6,688 | 5/27/25 | 78 | 0 | 98 | 2 | New Construction | 1/1/80 |
| 45 | 10441 | ALLEY CALIFORNIA ST | LINCOLN AVE | MEMPHIS AVE | O | AC | 6 | 330 | 20 | 5,280 | 1/31/25 | 78 | 0 | 56 | 44 | New Construction | 1/1/80 |
| 83 | 10511 | ALLEY PINE ST | UTICA AVE | PARK ST | O | AC | 6 | 695 | 20 | 11,120 | 2/7/25 | 78 | 33 | 67 | 0 | New Construction | 1/1/80 |
| 2212 | 10110 | ALLEY BAY VIEW 3 | BAY VIEW DR | END | O | AC | 2 | 86 | 20 | 1,376 | 2/6/25 | 79 | 50 | 50 | 0 | New Construction | 1/1/80 |
| 2225 | 10355 | ALLEY ELEVENTH | PALM AVE | ELEVENTH ST | O | AC | 6 | 338 | 20 | 6,760 | 5/30/25 | 79 | 37 | 35 | 28 | New Construction | 1/1/80 |
| 2270 | 10313 | ALLEY SEVENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 2/7/25 | 79 | 0 | 46 | 54 | New Construction | 1/1/80 |
| 2270 | 10311 | ALLEY SEVENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 6,672 | 2/7/25 | 79 | 0 | 73 | 27 | New Construction | 1/1/80 |
| 72 | 10366 | ALLEY MAIN ST | SIXTH ST | ACACIA AVE | O | AC | 6 | 307 | 20 | 4,912 | 2/7/25 | 79 | 0 | 92 | 8 | New Construction | 1/1/80 |
| 42 | 10107 | ALLEY BAY VIEW 1 | BAY VIEW DR | END | O | AC | 2 | 83 | 20 | 1,328 | 2/6/25 | 79 | 23 | 57 | 20 | New Construction | 1/1/80 |
| 51 | 10333 | ALLEY FIFTH | FIFTH ST | WALNUT AVE | O | AC | 6 | 310 | 20 | 6,200 | 6/9/25 | 79 | 0 | 27 | 73 | New Construction | 1/1/80 |
| 99 | 10367 | ALLEY THIRD | LAKE ST | END | O | AC | 6 | 214 | 20 | 4,280 | 2/7/25 | 79 | 42 | 51 | 7 | New Construction | 1/1/80 |
| 4010 | 40100 | ALLEY WALNUT AVE | SIXTEENTH ST | SEVENTEENTH ST | O | AC | 6 | 318 | 20 | 5,724 | 6/2/25 | 80 | 0 | 50 | 50 | New Construction - Initial | 1/1/80 |
| 2247 | 60930 | ALLEY LAKE ST | ALLEY LAKE ST | UTICA AVE | O | AC | 6 | 672 | 20 | 13,440 | 2/7/25 | 80 | 0 | 96 | 4 | New Construction - AC | 1/1/80 |
| 2270 | 10309 | ALLEY SEVENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 263 | 20 | 4,208 | 2/7/25 | 80 | 0 | 92 | 8 | New Construction | 1/1/80 |
| 4010 | 40010 | ALLEY WALNUT AVE | SIXTH ST | SEVENTH ST | O | AC | 6 | 318 | 20 | 5,088 | 2/7/25 | 80 | 42 | 58 | 0 | New Construction - Initial | 1/1/80 |
| 2274 | 10346 | ALLEY TENTH | ALLEY MAIN ST | LAKE ST | O | AC | 6 | 431 | 20 | 6,896 | 2/7/25 | 80 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2239 | 10593 | ALLEY HARBOR BLUFFS CIR | HARBOR BLUFF CIR | ALLEY GREENLEAF LN | O | AC | 2 | 179 | 20 | 2,864 | 4/1/26 | 81 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 34 | 10392 | ALLEY ALABAMA ST | ALLEY CHICAGO AVE | CHICAGO AVE | O | AC | 9 | 164 | 20 | 3,280 | 6/6/25 | 81 | 67 | 24 | 9 | New Construction | 1/1/80 |
| 2270 | 10310 | ALLEY SEVENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 6,560 | 2/7/25 | 81 | 0 | 86 | 14 | New Construction | 1/1/80 |
| 104 | 10004 | ALLEY WARNER AVE | WEATHERLY LN | SCEPTRE LN | O | AC | 2 | 721 | 20 | 11,536 | 2/6/25 | 82 | 76 | 24 | 0 | New Construction | 1/1/80 |
| 2256 | 10298 | ALLEY NINTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 5/29/25 | 82 | 0 | 52 | 48 | New Construction | 1/1/80 |
| 34 | 10391 | ALLEY ALABAMA ST | BALTIMORE AVE | ALLEY CHICAGO AVE | O | AC | 9 | 165 | 20 | 3,300 | 6/6/25 | 82 | 32 | 60 | 8 | New Construction | 1/1/80 |
| 72 | 10323 | ALLEY MAIN ST | ORANGE AVE | ALLEY ORANGE AVE | O | AC | 6 | 267 | 20 | 5,340 | 2/7/25 | 82 | 0 | 68 | 32 | New Construction | 1/1/80 |
| 56 | 10189 | ALLEY GOLDENWEST ST | ACACIA AVE | PALM AVE | O | AC | 6 | 409 | 20 | 6,544 | 5/27/25 | 82 | 0 | 73 | 27 | New Construction | 1/1/80 |
| 4010 | 40020 | ALLEY WALNUT AVE | SEVENTH ST | EIGHTH ST | O | AC | 6 | 318 | 29 | 7,950 | 2/7/25 | 83 | 0 | 95 | 5 | New Construction - Initial | 1/1/80 |
| 2282 | 10194 | ALLEY TWENTY-SECOND | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 6,560 | 6/3/25 | 83 | 14 | 83 | 3 | New Construction | 1/1/80 |
| 47 | 10412 | ALLEY DELAWARE ST | FRANKFORT AVE | ALLEY GENEVA AVE | O | AC | 9 | 168 | 20 | 2,688 | 1/31/25 | 83 | 12 | 53 | 35 | New Construction | 1/1/80 |
| 2270 | 10340 | ALLEY SEVENTH | ACACIA AVE | SEVENTH ST | O | AC | 6 | 298 | 20 | 4,768 | 2/7/25 | 83 | 0 | 78 | 22 | New Construction | 1/1/80 |
| 2270 | 10312 | ALLEY SEVENTH | ORANGE AVE | PECAN AVE | O | AC | 6 | 417 | 20 | 8,340 | 2/7/25 | 83 | 0 | 95 | 5 | New Construction | 1/1/80 |
| 82 | 10505 | ALLEY PARK ST | ADAMS AVE | SPRINGFIELD AVE | O | AC | 6 | 661 | 20 | 13,220 | 2/7/25 | 83 | 67 | 33 | 0 | New Construction | 1/1/80 |
| 2215 | 10373 | ALLEY CHICAGO AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 9 | 322 | 20 | 6,440 | 6/6/25 | 84 | 0 | 74 | 26 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 72 | 10368 | ALLEY MAIN ST | PECAN AVE | SIXTH ST | O | AC | 6 | 239 | 20 | 4,780 | 2/7/25 | 85 | 0 | 58 | 42 | New Construction | 1/1/80 |
| 2213 | 10111 | ALLEY BAY VIEW 4 | BAY VIEW DR | END | O | AC | 2 | 86 | 20 | 1,376 | 2/6/25 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 72 | 10320 | ALLEY MAIN ST | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 6,672 | 2/7/25 | 85 | 35 | 31 | 34 | New Construction | 1/1/80 |
| 99 | 10321 | ALLEY THIRD | OLIVE AVE | ORANGE AVE | O | AC | 6 | 418 | 20 | 6,688 | 6/9/25 | 85 | 0 | 22 | 78 | New Construction | 1/1/80 |
| 72 | 10324 | ALLEY MAIN ST | ALLEY ORANGE AVE | PECAN AVE | O | AC | 6 | 343 | 20 | 6,860 | 2/7/25 | 85 | 0 | 63 | 37 | New Construction | 1/1/80 |
| 2269 | 10201 | ALLEY SEVENTEENTH | ACACIA AVE | PALM AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 85 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2269 | 10225 | ALLEY SEVENTEENTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 8,340 | 6/2/25 | 86 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2223 | 10223 | ALLEY EIGHTEENTH | WALNUT AVE | OLIVE AVE | O | AC | 6 | 410 | 20 | 7,550 | 6/17/25 | 86 | 0 | 41 | 59 | New Construction | 1/1/80 |
| 5100 | 60260 | ALLEY - BTWN 12th & BROADWAY | PACIFIC N | PCH | O | AC | 2 | 158 | 15 | 2,370 | 6/19/25 | 86 | 0 | 29 | 71 | New Construction - Initial | 1/1/80 |
| 2257 | 10325 | ALLEY ORANGE AVE | THIRD ST | ALLEY MAIN ST | O | AC | 6 | 149 | 20 | 2,980 | 2/7/25 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2269 | 10208 | ALLEY SEVENTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/30/25 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 42 | 10109 | ALLEY BAY VIEW 1 | BAY VIEW DR | END | O | AC | 2 | 58 | 20 | 928 | 2/6/25 | 87 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 50 | 10446 | ALLEY ENGLAND ST | LINCOLN AVE | MEMPHIS AVE | O | AC | 6 | 331 | 20 | 6,620 | 1/31/25 | 87 | 0 | 89 | 11 | New Construction | 1/1/80 |
| 4010 | 40050 | ALLEY WALNUT AVE | TENTH ST | ELEVENTH ST | O | AC | 6 | 318 | 20 | 5,088 | 5/29/25 | 87 | 0 | 68 | 32 | New Construction - Initial | 1/1/80 |
| 2274 | 10287 | ALLEY TENTH | ALLEY WALNUT AVE | WALNUT AVE | O | AC | 6 | 212 | 20 | 4,240 | 5/29/25 | 87 | 0 | 85 | 15 | New Construction | 1/1/80 |
| 94 | 10332 | ALLEY SIXTH | WALNUT AVE | END | O | AC | 6 | 263 | 20 | 5,260 | 6/9/25 | 87 | 0 | 51 | 49 | New Construction | 1/1/80 |
| 54 | 10388 | ALLEY GENEVA AVE | HILL ST | INDIANAPOLIS AVE | O | AC | 9 | 644 | 20 | 10,304 | 1/31/25 | 87 | 0 | 67 | 33 | New Construction | 1/1/80 |
| 72 | 10342 | ALLEY MAIN ST | ALLEY ELVENTH ST | ELEVENTH ST | O | AC | 6 | 212 | 20 | 3,392 | 2/7/25 | 87 | 0 | 90 | 10 | New Construction | 1/1/80 |
| 99 | 10329 | ALLEY THIRD | WALNUT AVE | OLIVE AVE | O | AC | 6 | 409 | 20 | 6,548 | 6/9/25 | 87 | 0 | 84 | 16 | New Construction | 1/1/80 |
| 2235 | 10350 | ALLEY FOURTEENTH | CREST AVE | ALLEY CREST AVE | O | AC | 6 | 391 | 20 | 6,256 | 3/28/25 | 88 | 0 | 38 | 62 | New Construction | 1/1/80 |
| 46 | 10356 | ALLEY CREST AVE | ALLEY THIRTEENTH ST | THIRTEENTH ST | O | AC | 6 | 171 | 20 | 3,420 | 6/9/25 | 88 | 0 | 34 | 66 | New Construction | 1/1/80 |
| 47 | 10403 | ALLEY DELAWARE ST | ALLEY INDIANAPOLIS AVE | INDIANAPOLIS AVE | O | AC | 9 | 165 | 20 | 3,300 | 1/31/25 | 88 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 54 | 10387 | ALLEY GENEVA AVE | ALLEY DELAWARE ST | HILL ST | O | AC | 9 | 644 | 20 | 10,304 | 1/31/25 | 88 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 94 | 10318 | ALLEY SIXTH | OLIVE AVE | ORANGE AVE | O | AC | 6 | 417 | 20 | 6,672 | 6/4/25 | 88 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 61 | 10562 | ALLEY HEIL AVE | CLUBHOUSE LN | ALLEY FIRE 8 | O | AC | 3 | 998 | 20 | 15,968 | 3/20/25 | 89 | 0 | 32 | 68 | New Construction | 1/1/80 |
| 47 | 10411 | ALLEY DELAWARE ST | ALLEY GENEVA AVE | GENEVA AVE | O | AC | 9 | 163 | 20 | 2,608 | 1/31/25 | 89 | 0 | 91 | 9 | New Construction | 1/1/80 |
| 72 | 10344 | ALLEY MAIN ST | CREST AVE | ALLEY TENTH ST | O | AC | 6 | 147 | 20 | 2,352 | 2/7/25 | 89 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2225 | 10343 | ALLEY ELEVENTH | ALLEY MAIN ST | LAKE ST | O | AC | 6 | 565 | 20 | 9,040 | 2/7/25 | 89 | 0 | 37 | 63 | New Construction | 1/1/80 |
| 51 | 10328 | ALLEY FIFTH | WALNUT AVE | OLIVE AVE | O | PCC | 6 | 410 | 20 | 8,200 | 6/13/25 | 89 | 73 | 27 | 0 | New Construction | 1/1/80 |
| 5020 | 60180 | ALLEY - BTWN 3rd & 4th | PACIFIC N | PCH | O | AC | 2 | 106 | 15 | 1,590 | 2/6/25 | 90 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 104 | 10034 | ALLEY WARNER AVE | OAK LN | END | O | PCC | 4 | 150 | 20 | 3,000 | 6/12/25 | 90 | 86 | 14 | 0 | New Construction | 1/1/80 |
| 46 | 10349 | ALLEY CREST AVE | THIRTEENTH ST | ALLEY FOURTEENTH ST | O | AC | 6 | 171 | 20 | 2,736 | 6/9/25 | 90 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2255 | 10231 | ALLEY NINETEENETH | ALLEY WALNUT | WALNUT AVE | O | AC | 6 | 188 | 20 | 3,760 | 5/27/25 | 91 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 51 | 10322 | ALLEY FIFTH | ORANGE AVE | END | O | AC | 6 | 260 | 20 | 4,160 | 6/4/25 | 91 | 0 | 50 | 50 | New Construction | 1/1/80 |
| 5160 | 60320 | ALLEY - BTWN 23rd & 24th | PACIFIC N | PCH | O | AC | 2 | 211 | 15 | 3,165 | 2/6/25 | 91 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2235 | 10347 | ALLEY FOURTEENTH | PALM AVE | CREST AVE | O | AC | 6 | 620 | 20 | 9,920 | 3/28/25 | 92 | 0 | 61 | 39 | New Construction | 1/1/80 |
| 5240 | 60390 | PASCHALLS LN | PACIFIC N | PCH | O | AC | 2 | 238 | 17 | 4,046 | 2/6/25 | 92 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5040 | 60200 | ALLEY - BTWN 6th & 7th | PACIFIC N | PCH | O | AC | 2 | 194 | 17 | 3,298 | 2/6/25 | 92 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5120 | 60280 | ALLEY - BTWN 14th & 15th | PACIFIC N | PCH | O | AC | 2 | 154 | 16 | 2,464 | 2/6/25 | 93 | 0 | 52 | 48 | New Construction - Initial | 1/1/80 |
| 4010 | 40120 | ALLEY WALNUT AVE | EIGHTEENTH ST | NINTEENTH ST | O | AC | 6 | 318 | 20 | 6,360 | 5/27/25 | 93 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5070 | 60230 | ALLEY - BTWN 9th & 10th | PACIFIC N | PCH | O | AC | 2 | 148 | 20 | 2,960 | 2/6/25 | 93 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5080 | 60240 | ALLEY - BTWN 10th & 11th | PACIFIC N | PCH | O | AC | 2 | 163 | 18 | 2,934 | 2/6/25 | 93 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 2232 | 10563 | ALLEY FIRE 8 | ALLEY HEIL AVE | HEIL AVE | O | AC | 3 | 155 | 20 | 2,480 | 3/20/25 | 93 | 27 | 73 | 0 | New Construction | 1/1/80 |
| 72 | 10365 | ALLEY MAIN ST | PALM AVE | ACACIA AVE | O | PCC | 6 | 553 | 20 | 11,060 | 6/19/25 | 93 | 50 | 48 | 2 | New Construction | 1/1/80 |
| 92 | 10326 | ALLEY SECOND ST | OLIVE AVE | END | O | PCC | 6 | 239 | 20 | 4,780 | 6/9/25 | 93 | 48 | 50 | 2 | New Construction | 1/1/80 |
| 5030 | 60190 | ALLEY - BTWN 4th & 5th | PACIFIC N | PCH | O | AC | 2 | 195 | 15 | 2,925 | 2/6/25 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5090 | 60250 | ALLEY - BTWN 11th & 12th | PACIFIC N | PCH | O | AC | 2 | 162 | 16 | 2,592 | 2/6/25 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5130 | 60290 | ALLEY - BTWN 15th & 16th | PACIFIC N | PCH | O | AC | 2 | 154 | 18 | 2,772 | 2/6/25 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 4010 | 40150 | ALLEY WALNUT AVE | TWENTY FIRST | TWENTY SECOND | O | PCC | 6 | 318 | 20 | 5,088 | 5/27/25 | 94 | 93 | 7 | 0 | New Construction - Initial | 1/1/80 |
| 4010 | 40000 | ALLEY WALNUT AVE | FIRST ST | SECOND ST | O | PCC | 6 | 318 | 20 | 6,360 | 6/9/25 | 94 | 34 | 66 | 0 | New Construction - Initial | 1/1/80 |
| 5150 | 60310 | ALLEY - BTWN 22nd & 23rd | PACIFIC N | PCH | O | AC | 2 | 207 | 16 | 3,312 | 2/6/25 | 94 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 92 | 10336 | ALLEY SECOND ST | WALNUT AVE | OLIVE AVE | O | PCC | 6 | 507 | 20 | 10,140 | 6/9/25 | 95 | 34 | 36 | 30 | New Construction | 1/1/80 |
| 33 | 10522 | ALLEY ADAMS AVE | ALLEY PINE ST | PINE ST | O | AC | 6 | 155 | 20 | 3,100 | 2/7/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 50 | 10457 | ALLEY ENGLAND ST | INDIANAPOLIS AVE | JOILET AVE | O | AC | 6 | 330 | 20 | 6,300 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 50 | 10447 | ALLEY ENGLAND ST | KNOXVILLE AVE | LINCOLN AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 50 | 10451 | ALLEY ENGLAND ST | JOILET AVE | KNOXVILLE AVE | O | AC | 6 | 330 | 20 | 6,600 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 5050 | 60210 | ALLEY - BTWN 7th & 8th | PACIFIC N | PCH | O | AC | 2 | 178 | 18 | 3,204 | 2/6/25 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5110 | 60270 | ALLEY - BTWN 14th & BROADWAY | PACIFIC N | PCH | O | AC | 2 | 165 | 15 | 2,475 | 2/6/25 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5180 | 60340 | ALLEY - BTWN 25th & 26th | PACIFIC N | PCH | O | AC | 2 | 227 | 19 | 4,313 | 2/6/25 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 5190 | 60355 | ALLEY - BTWN 26th & ANDERSON ST | PACIFIC N | PCH | O | AC | 2 | 233 | 18 | 4,194 | 2/6/25 | 95 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 61 | 10008 | ALLEY HEIL AVE | GRAHAM ST | CLUBHOUSE LN | O | AC | 3 | 1,257 | 20 | 20,112 | 3/20/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 74 | 10088 | ALLEY MALLOY DR | ALLEY NEWLAND ST | END | O | AC | 9 | 70 | 20 | 1,400 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 74 | 10087 | ALLEY MALLOY DR | KILKENNY LN | ALLEY NEWLAND ST | O | AC | 9 | 682 | 20 | 13,640 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |

| BranchID | Sec ID | Name | From | To | Rank | Surface Type | Zone | L | W | Area | Insp. Date | PCI | % Load | % Climate | % Other | Work History Type | Work Date |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 77 | 10089 | ALLEY NEWLAND ST | NEWLAND ST | ALLEY MALLOY DR | O | AC | 9 | 651 | 20 | 13,020 | 1/31/25 | 95 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 5140 | 60300 | ALLEY - BTWN 16th & 17th | PACIFIC N | PCH | O | AC | 2 | 154 | 15 | 2,310 | 2/6/25 | 96 | 0 | 100 | 0 | New Construction - Initial | 1/1/80 |
| 91 | 10622 | ALLEY SAYBROOK LN | FISHER DR | END | O | AC | 2 | 781 | 20 | 12,496 | 2/6/25 | 96 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 92 | 10337 | ALLEY SECOND ST | ALLEY WALNUT AVE | WALNUT AVE | O | PCC | 6 | 165 | 20 | 3,300 | 6/9/25 | 96 | 0 | 45 | 55 | New Construction - PCC | 1/1/80 |
| 61 | 10005 | ALLEY HEIL AVE | DEL MAR LN | GRAHAM ST | O | AC | 2 | 987 | 20 | 15,792 | 3/20/25 | 96 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2247 | 10599 | ALLEY LAKE ST | PECAN AVE | SIXTH ST | O | PCC | 9 | 347 | 20 | 6,940 | 6/6/25 | 97 | 60 | 40 | 0 | New Construction - PCC | 1/1/80 |
| 2282 | 10228 | ALLEY TWENTY-SECOND | ALLEY WALNUT AVE | WALNUT AVE | O | PCC | 6 | 188 | 20 | 3,760 | 5/27/25 | 97 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 104 | 10554 | ALLEY WARNER AVE | MINORU LN | END | O | AC | 4 | 311 | 20 | 4,976 | 3/19/25 | 99 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2275 | 10267 | ALLEY THIRTEENTH | PECAN AVE | ACACIA AVE | O | AC | 6 | 410 | 20 | 8,200 | 5/29/25 | 99 | 0 | 100 | 0 | New Construction | 1/1/80 |
| 2273 | 10552 | ALLEY TAMARU DR | MINORU LN | ALLEY NEWLAND ST | O | AC | 4 | 340 | 20 | 5,440 | 6/12/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 34 | 10431 | ALLEY ALABAMA ST | LINCOLN AVE | ALLEY MEMPHIS AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 34 | 10430 | ALLEY ALABAMA ST | ALLEY MEMPHIS AVE | MEMPHIS AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 34 | 10435 | ALLEY ALABAMA ST | ALLEY LINCOLN AVE | LINCOLN AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 34 | 10436 | ALLEY ALABAMA ST | KNOXVILLE AVE | ALLEY LINCOLN AVE | O | AC | 6 | 165 | 20 | 3,300 | 6/6/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 46 | 10359 | ALLEY CREST AVE | CREST AVE | ELEVENTH ST | O | AC | 6 | 452 | 20 | 9,040 | 3/28/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 5170 | 60330 | ALLEY - BTWN 24th & 25th | PACIFIC N | PCH | O | AC | 2 | 206 | 17 | 3,502 | 2/6/25 | 100 | 0 | 0 | 0 | New Construction - Initial | 1/1/80 |
| 63 | 10091 | ALLEY INDIANAPOLIS AVE | FARNSWORTH LN | SANDPIPER LN | O | AC | 9 | 801 | 20 | 16,020 | 1/31/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 76 | 10432 | ALLEY MEMPHIS AVE | ALABAMA ST | ALLEY ALABAMA ST | O | AC | 6 | 323 | 20 | 6,460 | 6/6/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 77 | 10059 | ALLEY NEWLAND ST | END | ALLEY TALBERT AVE. | O | AC | 4 | 30 | 20 | 480 | 1/30/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 77 | 10556 | ALLEY NEWLAND ST | ALLEY SARU CIR | ALLEY TAMARU DR | O | AC | 4 | 175 | 20 | 2,800 | 6/12/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 77 | 10555 | ALLEY NEWLAND ST | ALLEY TAMARU DR | TAMARU DR | O | AC | 4 | 163 | 20 | 2,608 | 6/12/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 89 | 10145 | ALLEY SAN ANGELO DR | ALLEY SAN ANGELO DR | ALLEY MALAGA LN | O | AC | 4 | 242 | 20 | 3,872 | 3/28/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| 90 | 10557 | ALLEY SARU CIR | SARU CIR | ALLEY NEWLAND ST | O | AC | 4 | 139 | 20 | 2,224 | 6/12/25 | 100 | 0 | 0 | 0 | New Construction | 1/1/80 |
| | | | | | | | | **34.2** | | **3,202,203** | | | | | | | |

# XIII. APPENDIX C – GIS DIGITAL DATA

## Introduction

The OCTA GIS Section maintains a spatial inventory of transportation infrastructure which mostly consists of major arterial streets, roads, and highways. A key component of road information is pavement condition. Maintaining an inventory of pavement condition will enhance OCTA's GIS visualization and analysis capabilities and assist in understanding the transportation investment needs throughout the region. Therefore, a GIS dataset in digital format should be included in this report.

## Structure of GIS Data

The GIS dataset must consist of linear geographic features that represent road/street segments. All segments that are part of the report should be included in the GIS dataset. The attribute information of each segment should generally follow the format of the Complete Listing of Current Street Conditions in Appendix B above.

The GIS data requirements are discussed below. Most commercial and open-source GIS software provide industry-standard tools to manage GIS data to meet these requirements.

### GIS Digital Data Format

The GIS data must be submitted in either one of the following formats:

- Esri Shapefile, or
- Esri File Geodatabase

### Metadata

The GIS data are required to have associated metadata. The minimum metadata items required are:

- Title of Dataset
- Tags (A set of words that can be used by GIS to search for the resource. For example: "pavement", "transportation", "roads")
- Summary (A brief purpose statement of the dataset)
- Description (A brief narrative of the dataset's content)
- Credits (A recognition of those who created or contributed to the resource)

### Spatial Geometry Type

The spatial geometry of the segment features must be lines that represent the roadway centerline as accurately as possible.

### Projection

The GIS data must have spatial reference information and have its coordinate system identified and

embedded in or associated with the data file(s). All GIS data submitted to OCTA should be in the following projected coordinate system:

- NAD 1983 State Plane California VI FIPS 0406 (US Feet) - More information about this system can be found at: https://spatialreference.org/ref/epsg/nad83-california-zone-6-ftus/

**GIS Feature Attributes**

The required segment attributes are:

- Street name
- Unique segment identifier (Segment ID from original source if available)
- Name of intersecting road at the beginning of a segment
- Name of intersecting road at the end of the segment
- Current pavement condition index (PCI)
- Current PCI inspection date
- Length of road segment in feet
- Width of road segment in feet
- Paved area of road segment in square feet or square yards
- Projected PCI at end of Seven-Year Road Maintenance and Rehabilitation Plan

Additional attributes such as number of through travel lanes, direction of travel and pavement surface type may be provided. An example of a GIS attribute table for road segments is shown below (Note that there are additional attributes such as surface, functional class, and number of travel lanes).

# XIV. APPENDIX D – QUALITY ASSURANCE / QUALITY CONTROL PLAN

**Introduction**

When performing data collection in any field, the need for quality control is paramount as it is essential for accurate planning, analysis and design. This is particularly true for collecting pavement distress data for a pavement management program.

The Quality Assurance / Quality Control (QA/QC) Plan establishes minimum quality standards for performance and procedures for update of the pavement management program.

**Objectives**

This document constitutes a formal QA/QC Plan for the City of Huntington Beach. It was prepared on March, 2018 and last revised in April, 2026.

Specifically, it is intended for the 2026 Pavement Management Plan Update. The focus is on the collection of network-level pavement distress data (defined by National Cooperative Highway Research Program (NCHRP) Synthesis 401 Quality Management of Pavement Data Collection, as "Network-level data collection involves collection of large quantities of pavement condition data, which is often converted to individual condition indices or aggregated into composite condition indices".

This document also addresses the QA/QC plan requirements of the Orange County Transportation Authority (OCTA)'s "Countywide Pavement Management Plan Guidelines" (Section 2.4), adopted in May 2010.

**Structure of QA/QC Plan**

The following components are addressed in this QA/QC Plan:

- Condition survey procedures used;
- Accuracy required for data collection;
- Inspector qualifications and experience; and
- Safety.

**Condition Survey Procedures**

The governing document in performing condition surveys for the City of Huntington Beach is ASTM D6433-18 "Standard Practice for Roads and Parking Lots Pavement Condition Index (PCI) Surveys." Both asphalt concrete (AC) and Portland cement concrete (PCC) pavements are included in this protocol. The following distresses are collected for each pavement type:

| Asphalt Concrete | Portland Cement Concrete (Jointed) |
|---|---|
| 1. Alligator (fatigue) cracking | 1. Blow-up/Buckling |
| 2. Bleeding | 2. Corner Breaks |
| 3. Block Cracking | 3. Divided Slab |
| 4. Bumps and sags | 4. Durability ("D") Cracking |
| 5. Corrugation | 5. Faulting |
| 6. Depression | 6. Joint Seal damage |
| 7. Edge Cracking | 7. Lane/Shoulder Drop-off |
| 8. Joint Reflection Cracking | 8. Linear Cracking |
| 9. Lane/Shoulder Drop-off | 9. Patching (large) and Utility Cuts |
| 10. Longitudinal & Transverse Cracking | 10. Patching (small) |
| 11. Patching and Utility Cut Patching | 11. Polished Aggregate |
| 12. Polished aggregate | 12. Popouts |
| 13. Potholes | 13. Pumping |
| 14. Railroad Crossing | 14. Punchout |
| 15. Rutting | 15. Railroad Crossing |
| 16. Shoving | 16. Scaling, map cracking and crazing |
| 17. Slippage Cracking | 17. Shrinkage Cracks |
| 18. Swell | 18. Spalling (corner) |
| 19. Weathering | 19. Spalling (joint) |
| 20. Raveling | |

As required by the Orange County Transportation Authority (OCTA), the City of Huntington Beach must prepare and implement a quality assurance / quality control (QA/QC) plan regarding pavement management inspection as they pertain to MicroPAVER. For the purposes of this report, Bucknam has demonstrated below how our project team implemented QA/QC procedures during the project.

Our QA/QC plan focuses on the how each pavement inspection is performed, what distresses are collected and ensures that it complies with the OCTA guidelines defined within the "Countywide Pavement Management Plan Guidelines (CPMPG)".

As shown within the OCTA (CPMPG), our staff followed and delivered on the requirements stated within Chapter 2, page 2-5 which require specific QA/QC data (Items A through G). Additionally, Chapter 3 requires numerous data/deliverables from local agencies for OC Go eligibility. All general PCI budgetary report submittals will follow the Chapter 3 guidelines.

In conjunction with the outlined items within the CPMPG Section 2 we have summarized our QA/QC procedures below:

a. **Descriptions of condition survey** - Our staff follows the required Condition Survey Protocols (CPMPG, Chapter 2); our staff assesses each pavement section for the minimum distresses outlined within Chapter 2, page 2-1. Additionally, based on the pavement conditions found, we collect all MicroPAVER/StreetSaver Army Corps of Engineers (ACOE) distresses, if found within the sample sections; for example, if slippage cracking, potholes, etc. are found our survey technicians record the proper information.

b. **How data was collected** - Our surveys follow the OCTA accepted walking requirements. All sections that our staff surveys are performed through the walking method, approximately 10% of all sections surveyed were complemented with windshield surveys based on unique conditions found. Our staff physically measures the width of every section as well as measure for any square footage adjustment that need to be added or taken away from a sections "true area" (i.e. cul-de-sac, bus pads, street width variances, etc.). Samples taken always include a minimum of 2,500 SF coverage unless specific section limits prohibit this. Arterial section samples utilize a 3,500 SF sample size due to the larger section area (this is within the ASTM D6433-18 sample size calculation. Field crews typically include one individual for residential pavement sections while Arterial (MPAH) routes utilize a two-person crew for safety, traffic control and increases quality control.

c. **Accuracy required for data collection** - We use a statistical sampling approach for measuring the quality of our field technician's work. In this manner, 10 percent of the original surveys are re-surveyed by a different survey crew than the original, supervised by a field supervisor, and the results are compared to the original surveys. Our QC process involves checking the field crews' work in a "blind study" fashion. Quality control checks are performed at the end of each survey week. This ensures that all field personnel are properly collecting section samples, distress types and distress severities for all street segments.

    - When QA/QC issues are found, our staff documents the issues within MicroPAVER's user interface. If distress types found are not within the 97% accuracy our QA/QC is expanded beyond our minimum 10% resurvey to 20% of the original survey

d. **Random and Systematic Re-Inspections** – As described above our staff re-inspects, as a minimum, 10% of the original survey (OCTA only requires 5%). Per the agencies requests, our staff will submit PCI reports to the agency as project status reports for their review. Agencies will typically review specific pavement sections for PCI accuracy based on recent overlay or slurry seal maintenance; this serves as an initial accuracy check on our surveys (outside Bucknam QC efforts). Additionally, our staff performs "ride-a-long" surveys with local agency staff to build consensus on how our MicroPAVER/StreetSaver ACOE surveys are performed, recorded and reported on.

    Random re-inspections will include a representative selection across the following categories:

    - Functional classed (i.e. MPAH, locals);
    - Surface types (e.g. AC or PCC);
    - Pavement conditions (e.g. good, fair, poor);
    - Inspectors;
    - Geographical areas, if applicable.

For systematic re-inspections, this could be due to noticed trends such as specific treatment types (e.g. open-graded mixed), a specific inspector or geographical area. In these cases Bucknam continues to utilize a 10% re-inspection policy.

e. **PCI Comparison with Past Surveys** - if previous inspection data is available, new PCI's calculated through the most recent inspections will be compared to previous PCI's. If the variance in PCI is greater than +/- 10 PCI points, these sections will be flagged for further investigation and/or re-inspection (In the cases that a PCI increases or decreases by 10 points follows the established CPMPG guidelines; Appendix A, page A-18).

f. **Schedule of data submittal** – Pending on the City's last major PMP submittal, Bucknam will assist the agency in submitting the following:

- Master Plan of Arterial Highways (MPAH) routes will be surveyed and reported on at least once every two years
- Local streets will be surveyed and reported on every six years
- Corresponding MPAH and local PCI reporting and budgetary reporting will be submitted every two years

g. **Inspector's Qualifications and Experience** – Bucknam staff have been trained on the use of MicroPAVER and the segment calibration/verification and inspection practices. Mr. Peter Bucknam (Project Manager) has completed the MicroPAVER Certification of Professional Development courses. All Bucknam field technicians are trained using the ASTM D6433 survey methodologies and have passed OCTA's prequalification testing every year since 2010. Bucknam Infrastructure Group inspectors have attended formal training on pavement condition distress surveys. This training was conducted prior to performing any work using the ASTM D6433 protocols, consistent with OCTA's requirements.

| Inspector Name | Role (Field Inspector or QA/QC Reviewer or Both) | Date of ASTM D6433 Training | Training Conducted By: | OCTA Pre-Qualification | | |
|---|---|---|---|---|---|---|
| | | | | Active (Y/N | Expiration Date | Certificate Provided with this Report (Y/N) |
| Cade Bucknam | Both | June, 2025 | Bucknam - Internal | Y | 6/30/27 | Y |
| Chris Campbell | Field Inspector | February, 2026 | Bucknam - Internal | Y | 6/30/28 | Y |
| Aaron Cohodas | Both | July, 2024 | Bucknam - Internal | Y | 7/30/26 | Y |
| Avery Brinkley | Field Inspector | June, 2025 | Bucknam - Internal | Y | 6/30/27 | Y |

**Attachments – Inspectors Certifications**


- Certificate of Prequalification – OCTA Pavement Inspector Prequalification Program (see below):







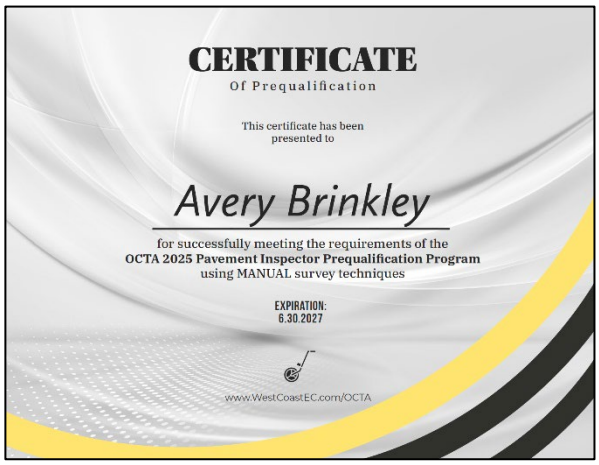


**h.** **Safety procedures** – Bucknam field survey techniques utilize the following procedures:

- All vehicles are properly marked or flagged with appropriate sign markings indicating that a "PAVEMENT SURVEY IS IN PROGRESS"
- All vehicles have the proper flashing amber light beacons placed on the top of the vehicle to allow for proper visibility and line-of-site warning
- Large MPAH routes are surveyed using two field technicians to increase traffic control warning and safety
- While parking or stopping along the survey route, vehicles legally park within the right-of-way or use a parking lot
- All field technicians wear ANSI – 105 Class II safety vests

# XV. APPENDIX E – PAVEMENT MANAGEMENT DATA FILES

The City of Huntington Beach MicroPAVER database (.e70 file) has been enclosed for City and OCTA use. This data and the associated reporting data includes:

- Street names and limits for the City's public streets
- Street identifiers (Branch ID, Section ID)
- Direction
- Begin and end of section
- Length, width and true areas
- Functional Classification (MPAH, Local)
- Number of travel lanes
- Pavement Condition Index (PCI) and date of inspection
- Type of recommended treatment
- Cost of recommended treatment

## XVI. APPENDIX F – GIS MAPS / CURRENT CONDITIONS

